

Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF



Installed Antenna

All dimensions are in mm / inches

Features:

- Wide bandwidth VHF
 - 132-174 MHz operation
- · Aesthetically pleasing:
 - 1.5mm (0.060 inch) thickness to ceiling
- VSWR < 2:1
- Optimized To Low-Frequency In-Building Environments
- 15 x 15 inch (380 x 380 mm)

Applications:

- In-building repeater systems
 - Bi-Directional Amplifier
- · Police, Fire, Government
- · Low profile ceiling mounting
- Enhanced for In-Building:
 - · Gain-set to IB environment
 - Multi-floor coverage
 - Avoids the nulls of traditional dipoles.



In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information: Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 3611 NE 112th Ave Vancouver, WA 98682 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



1



Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF

ELECTRICAL SPECIFICATIONS

Frequency	132-174 MHz
Nominal Impedance	50 Ω
VSWR	2:1
Power withstanding	6W
Connector type	N female
Cable type	Ø 4mm / 0.16"
Cable length	500mm / 19.7"

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



2



Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF

MECHANICAL SPECIFICATIONS		
Color	White	
Weight	550 g	
Cable retention: Pull off	30 N	
Fixing system	4pcs M6 hex slot bolt & nut	
ENVIRONMENTAL SPECIFICATIONS		
Operating temperature	0 - 60° C	
Storage temperature	MIL STD 801G: 24h at 85C and 24h at -40C	
Temperature shock	MIL STD 810G: Method 503.5, -40 for 1 hr to +85 C for 1 hr @ 15 deg.C/min rate of change; 3 cycles	
Humidity	MIL STD 810G: 24h at 60C and 95%RH	
Vibration	MIL STD 810G: 514.6 C-II	
Chemical resistance	MIL STD 810G	
Drop test	Top, bottom, side. 3 times/orientation, 40"	
Package drop	All faces & corners, 40"	

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF

MECHANICAL DRAWING

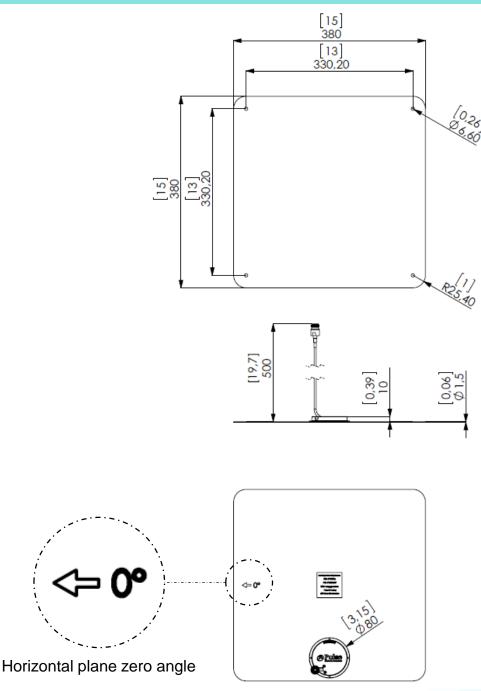

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4



Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF

CHARTS



Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5




Description: In Building Public Safety Antenna, 132-174MHz


Series: V-Thinity

PART NUMBER: PSIBVHF

CHARTS

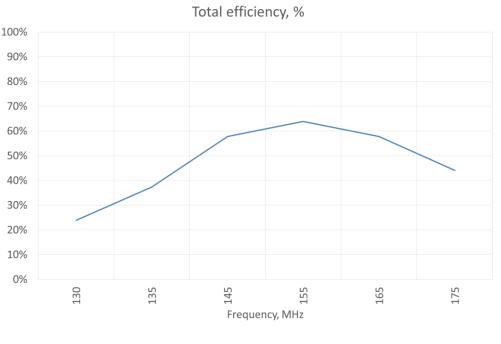

Antenna alignment in spherical coordinate system

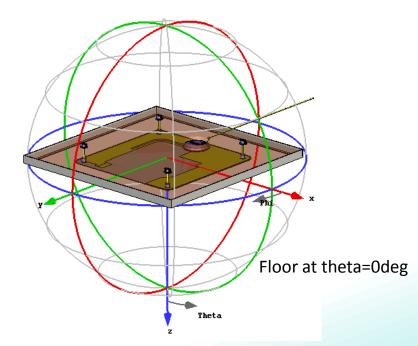

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6




Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF

CHARTS

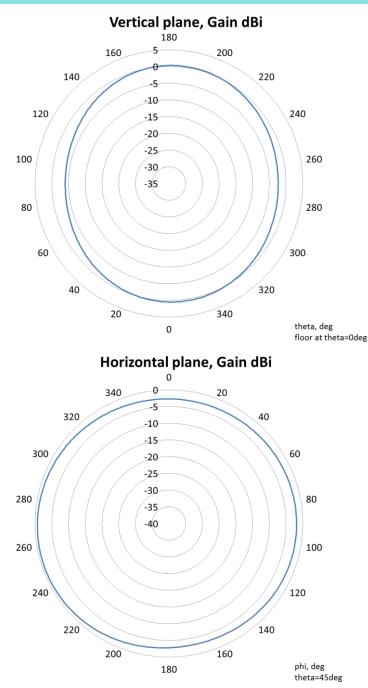

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



7




Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity

PART NUMBER: PSIBVHF


CHARTS

IBWAVE propagation simulation for VHF

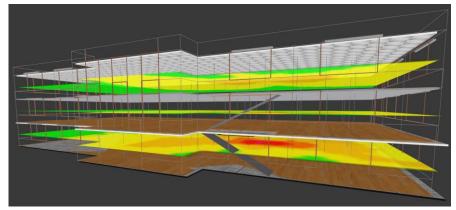

Outside wall material: Brick, attn 1.13dB Inside wall material: sheetrock, heavy, attn 1.79dB Material between floors:Concrete, light, attn 0.73dB Floor material: Wood, attn 0.5dB Ceiling material: plaster, attn 0.49dB, ceiling height h=3m Antenna placed on lowered ceiling, h=2.5m

Field strength in first floor

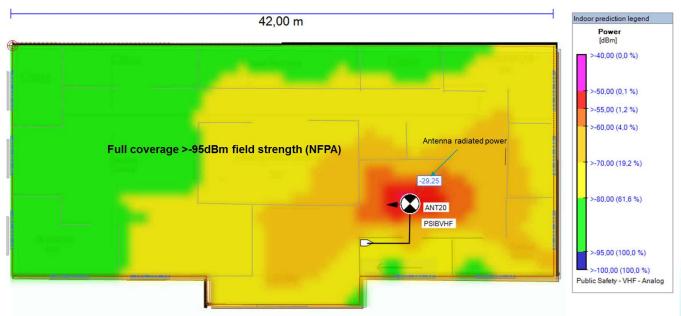

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8




Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity


PART NUMBER: PSIBVHF

CHARTS

Field strength in second floor

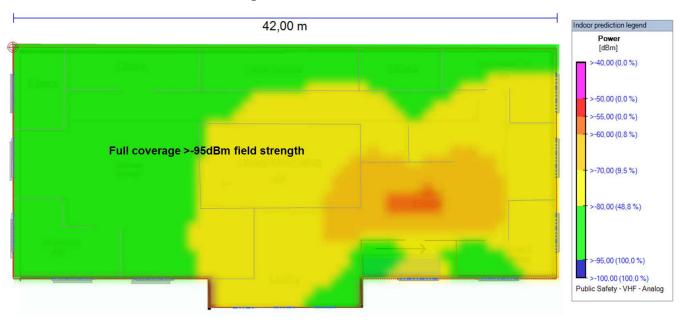

Field strength in 3rd floor

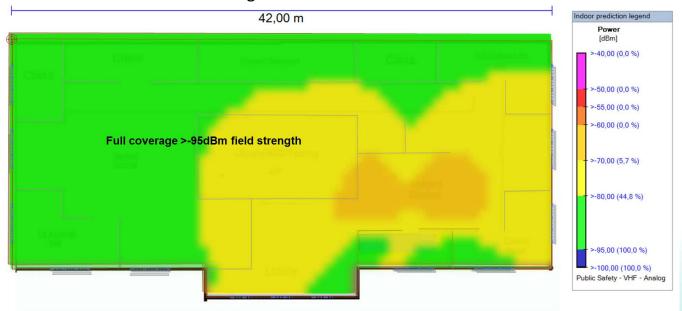

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9




Description: In Building Public Safety Antenna, 132-174MHz

Series: V-Thinity


PART NUMBER: PSIBVHF


PACKAGING

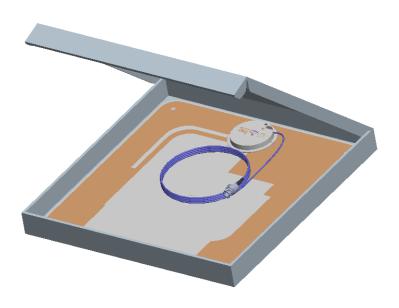

(15.75x15.75x1.57) inch (400x400x40) mm

ASSEMBLY

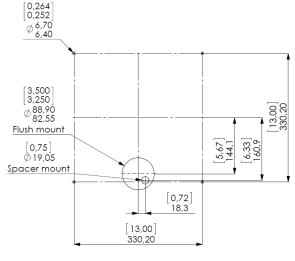

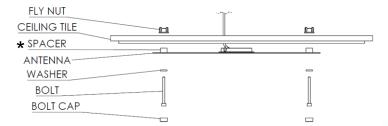

DRILL MAP

* Spacer to be used in gypsum & concrete installations

Issue: 1626

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

ROHS 10

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: