

NOTES:

1. MATERIAL: CONNECTOR

HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER(LCP) UL94V-0. BLACK. 25

TERMINALS: PHOS-BRONZE t=0.2mm.

OVERMOLDED TERMINAL HOUSING: GLASS FILLED LIQUID CRYSTAL POLYMER(LCP) UL94V-0. BLACK. (5) CAGE ASSEMBLY: COPPER-NICKEL-ZINC ALLOY t=0.25mm.

2. FINISH:

TERMINAL:

1)50u" MIN NICKEL PLATING OVER ALL.

2)30u" MIN GOLD PLATING ON MATING AREA.

3. PRESS FIT HOLES:

CONTACT:

1)HOLE DIAMETER AFTER PLATING: 0.41-0.51mm.

2)DRILLED HOLE: 0.535-0.585mm

ĆAGE:

1)HOLE DIAMETER AFTER PLATING: 1.00-1.10mm.

2)DRILLED HOLE: 1.125-1.175mm.

4. RÁTING:

1)VOLTAGE: 120V r.m.s

2)CURRENT RATING: 0.5Amp. MAXIMUM PER

INDIVIDUAL CONTACT.

3)OPERATING TEMPERATURE: -55°C TO 85°C

4)INSULATION RESISTANCE: 1000 mega-ohms Min.


PART NUMBER	DESCRIPTION	REV	GOLD PLATING
SFP005-03-L	WITH INNER/OUTER LIGHT PIPES, PULSE LAYOUT	F	30u''


	8.0 REF	
25.5		F
3.05	8.00 AB SIGNALS TYP	E


ED LISTS	→ MM (INCH) ►		рето <b>Roy</b>	DATE 01/14/2	014	(A)	Piil	<b>S</b> A	RoHS		۱n	anli	ant	Į
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE			Electro	nics			ווע	ιμп	um	\
	MM .0 ± 0.20	±	APPVL	DATE		TITLE			•					1
	.00 ± 0.15 .000 ± 0.075	± ±	MATERIAL :			SFP	2BY	6 C	AGE+C	CONN	ΕŒ	CTOF	R_P	,
	ANGLES ± 0.5*		QT'Y:		DRAWING NO. CSFP005-03-L SIZE					SIZE	REV	4		
	<b>*</b>		FINISH:		/PART			005 05 L 005-03-L A3			А3	5		
	THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING SHEET					1	OF	4		
	4													_

8

6

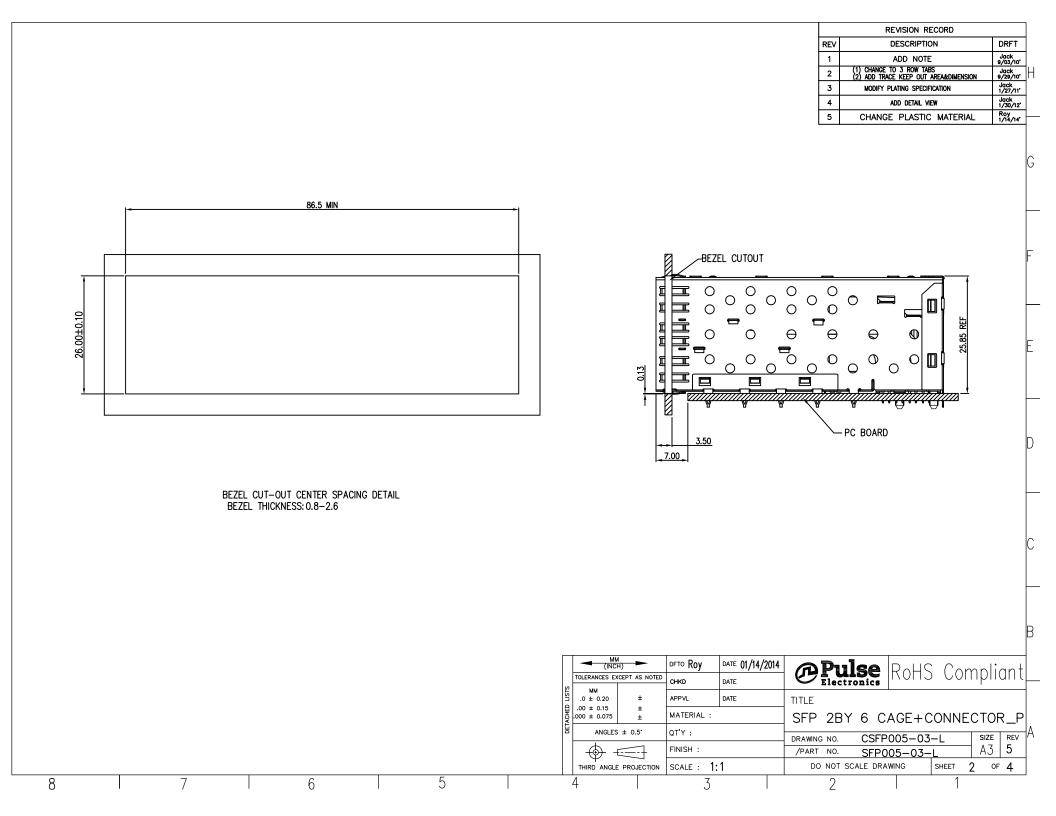

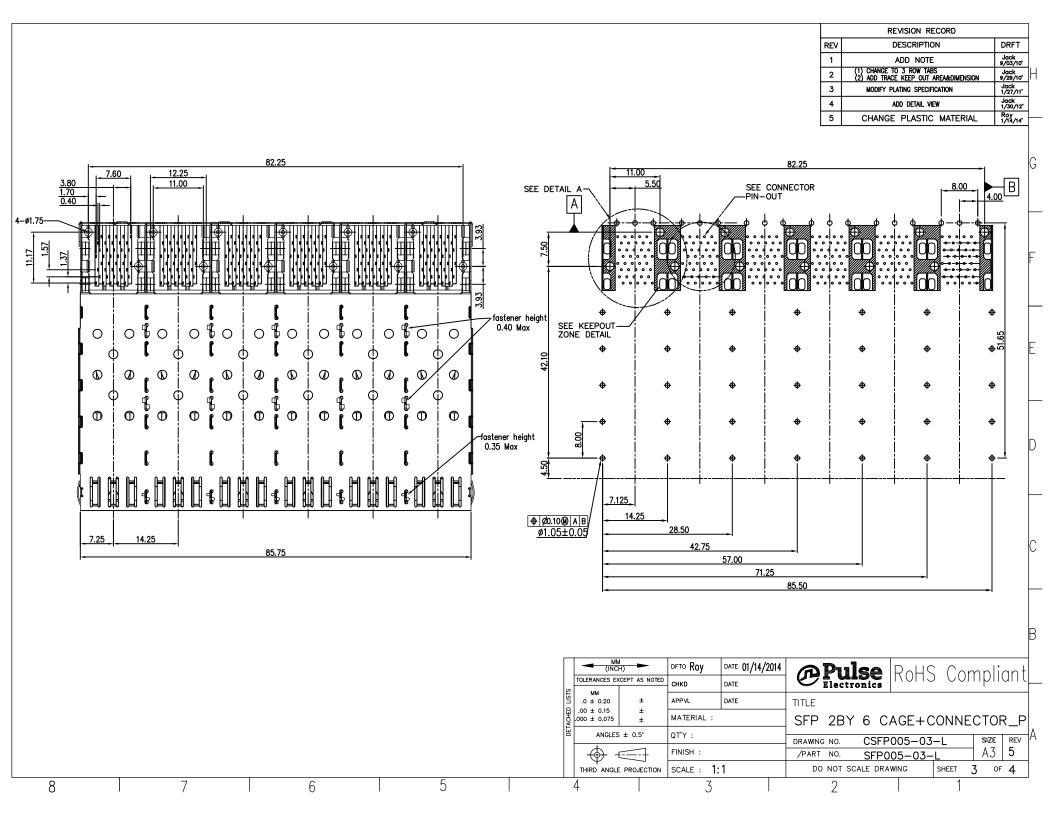

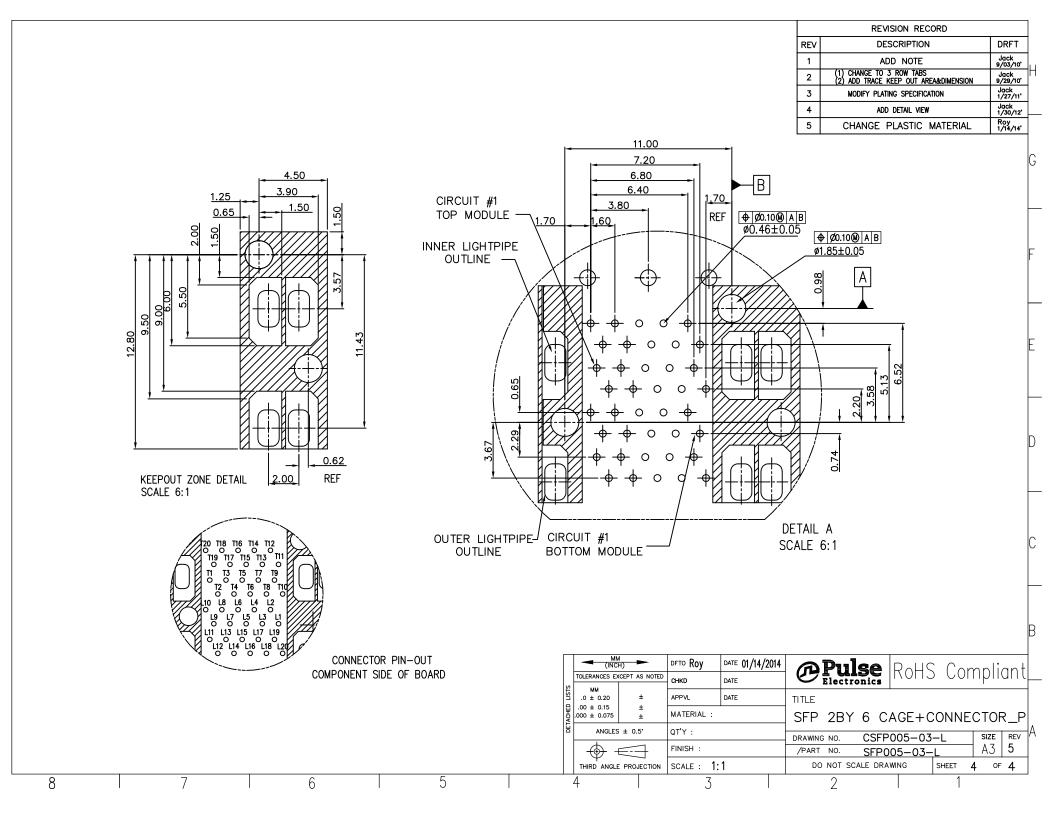

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

SFP005-03-L