
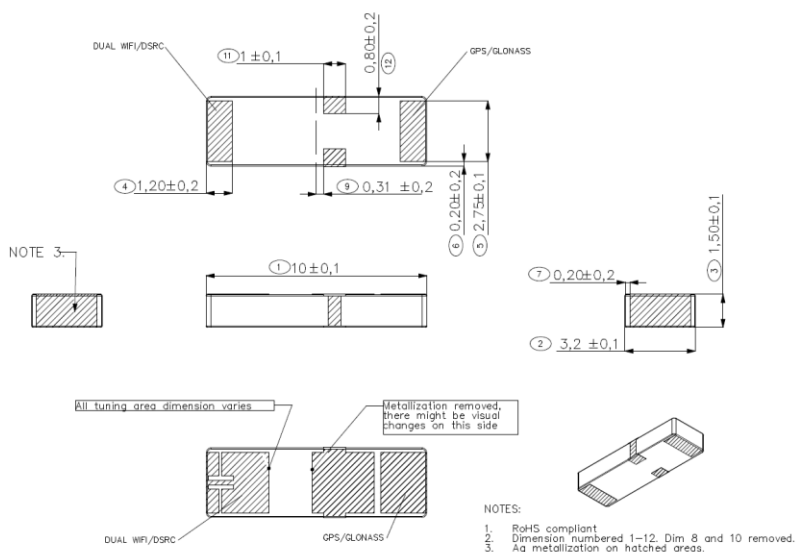


Features:

- 3 in 1 solution on a ceramic chip with two separate feeds.
- Need smaller antenna space on PCB to integrate GNSS, Dual WiFi and DSRC bands
- Compact Size (L x W x H)
10 x 3.2 x 1.5mm.
- Fully SMD compatible

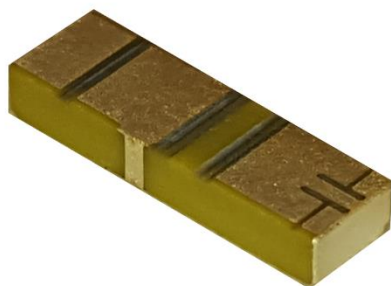

Applications:

- GNSS(1560-1610MHz)
- GPS, Glonass, Beidou
- IEEE 802.11 a/b/g/n compliant 2.4 and 5GHz.
(2400-2485/ 4900-5850MHz)
- DSRC (5850-5925MHz)
- Mobile navigation device

All dimensions are in mm / inches

Issue: 2042

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



ELECTRICAL SPECIFICATIONS

Frequency, Port 1	1.560-1.610 GHZ
Frequency, Port 2	2.4-2.485/ 4.9-5.925 GHz
Normal Impedance	50 Ohm
Return Loss, Port 1	<2.5:1
Return Loss, Port 1	<2:1at low band <2.8:1 at high band
Efficiency (Typ.), Port 1	65 %
Efficiency (Typ.), Port 2	70/ 55 %
Peak Gain, Port 1	1.5 dBi
Peak Gain, Port 2	1.5/ 3.5 dBi
Isolation (Min.) at 1.560-1.610 GHz	20 dB
Isolation (Min.) at 2.4-2.485 GHz	18 dB
Isolation (Min.) at 4.9-5.925 GHz	22 dB
Polarization	Linear
Interface	SMD Mount


Description: GNSS-DUAL WIFI-DSRC ANT**PART NUMBER: W3095****MECHANICAL SPECIFICATIONS**

Block material	Dielectric ceramic
Plating material	Ag
Weight	0.24 g
RoHS Compliant Product	
Tape and reel packing	
Lead free materials	
Lead free soldering compatible	
Vibration test	According to AEC-Q200-Rev-D MIL-STD-202 Method 204, 5g's for 20 min., 12 cycles each of 3 orientations. Note: USE 8" x 5" PCB .031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.
Moisture sensitivity level	MSL 1

ENVIRONMENTAL SPECIFICATIONS


Operating temperature	-30 to +80° C
-----------------------	---------------

MECHANICAL DRAWING

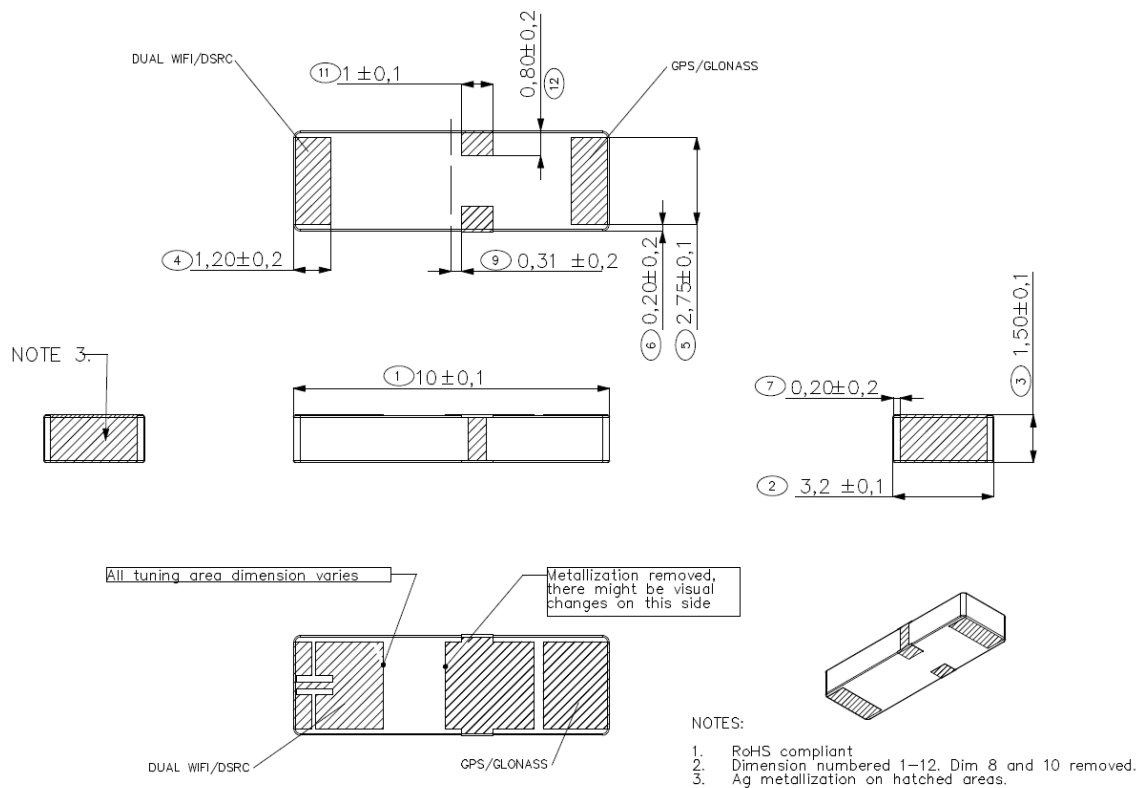

Dimensions: (mm)


Details of antenna pad dimension on the bottom in mm.

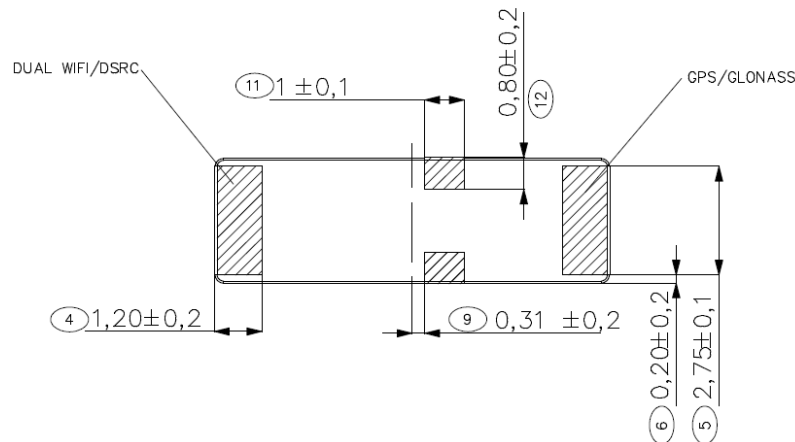

OTHER SPECIFICATIONS


PCB Layout Recommendation

Top Side

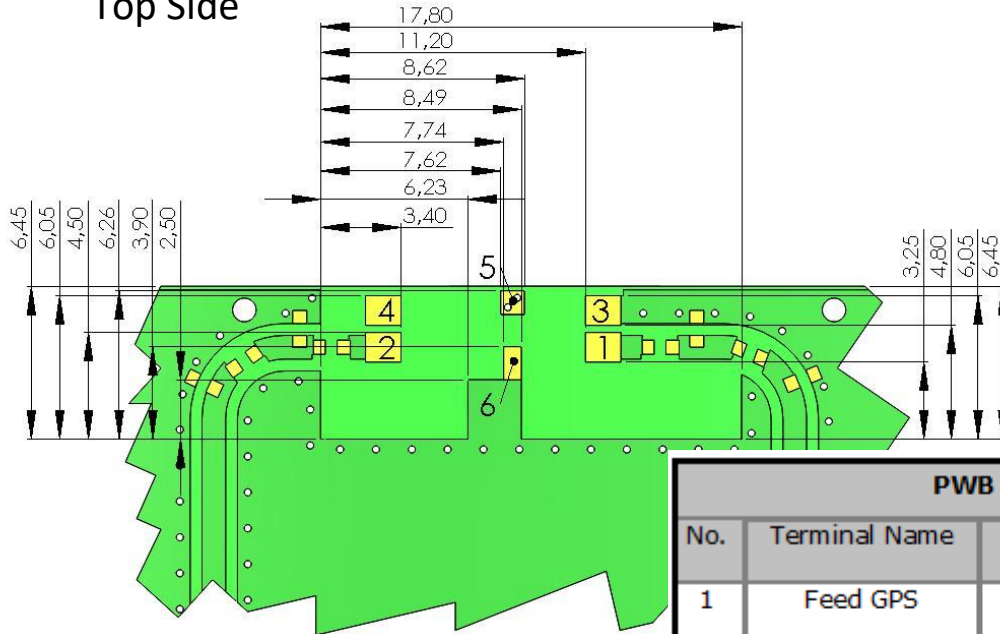

PWB features		
No.	Terminal Name	Terminal Dimensions
1	Feed GPS	1.25 x 1.50 mm
2	Feed 2,4-5,925GHZ	1.25 x 1.50 mm
3	GND	1.25 x 1.50 mm
4	Support pad	1.25 x 1.50 mm
5	GND	1.00 x 1.00 mm
6	GND	1.40x 0.75 mm

Bottom Side

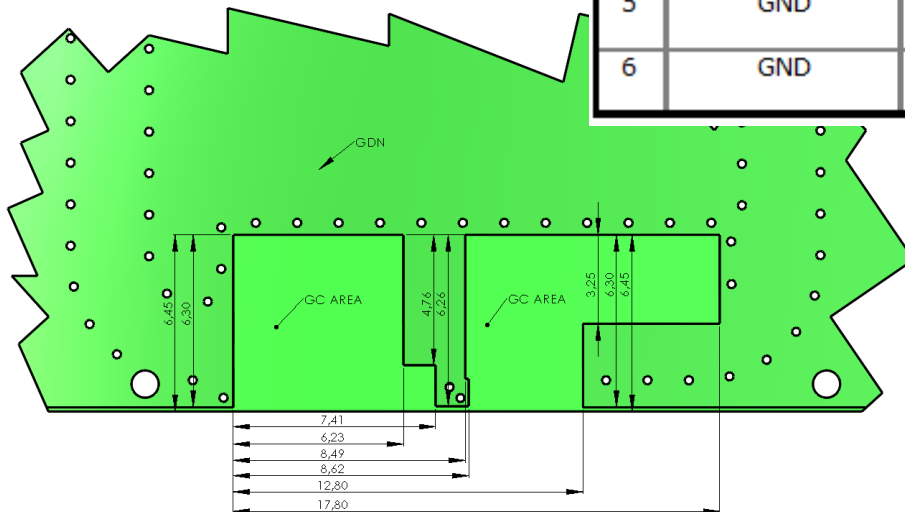

Issue: 2042



In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


OTHER SPECIFICATIONS

Antenna Alignment on PCB Layout

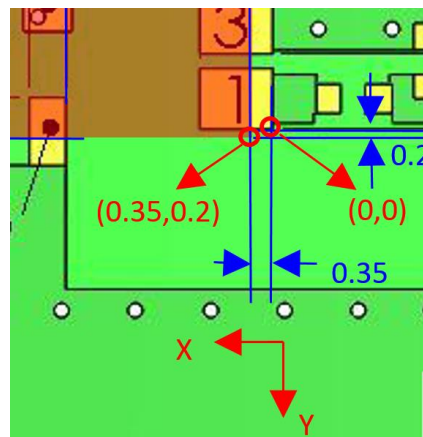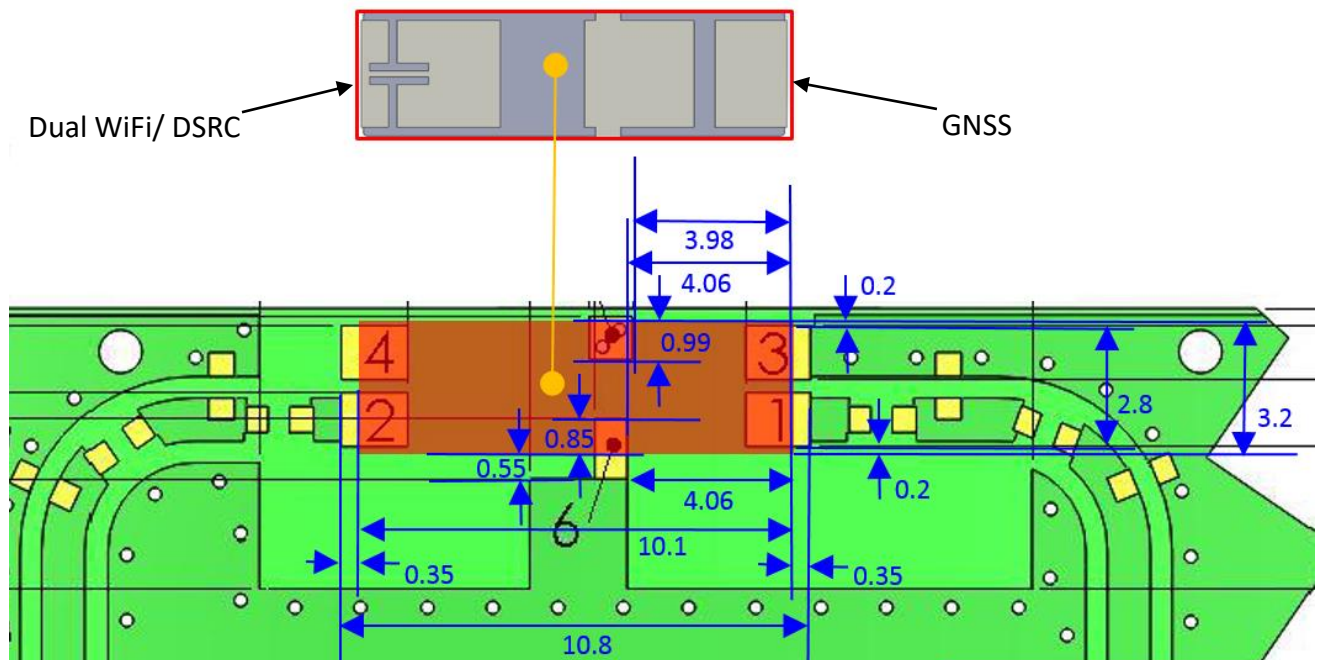

OTHER SPECIFICATIONS


Suggested Matching on PCB

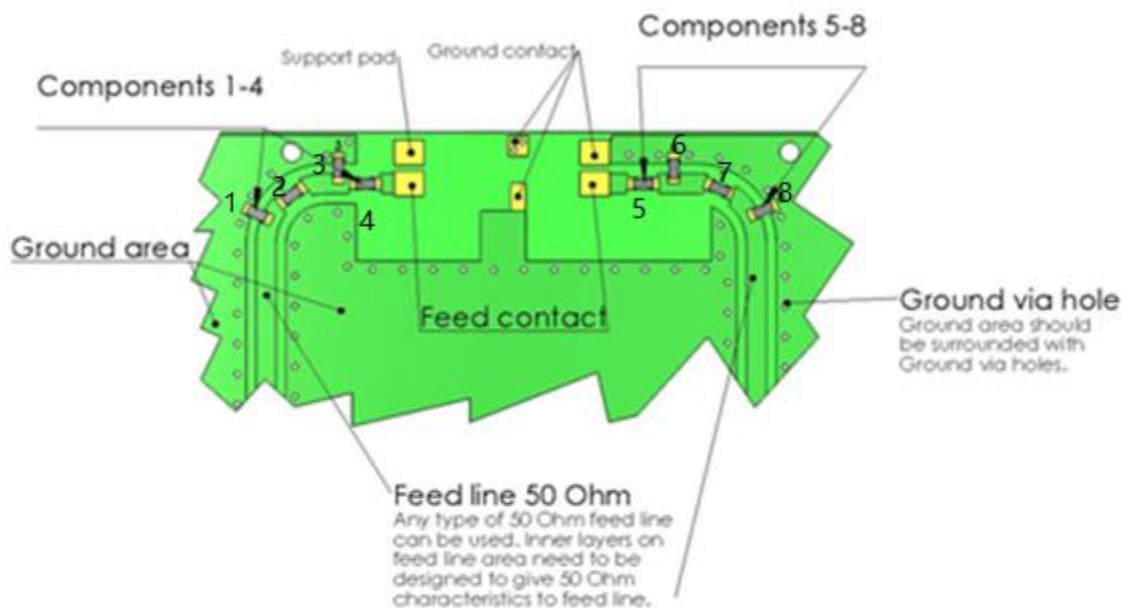


Antenna	Component NO.	Value
2,4-5,85GHz	1	Not in use
2,4-5,85GHz	2	0 Ohm
2,4-5,85GHz	3	2,2nH
2,4-5,85GHz	4	1,2pF
GNSS	5	0 Ohm
GNSS	6	1,8pF
GNSS	7	0 Ohm
GNSS	8	Not in use

CHARTS

Typical GNSS antenna Return Loss

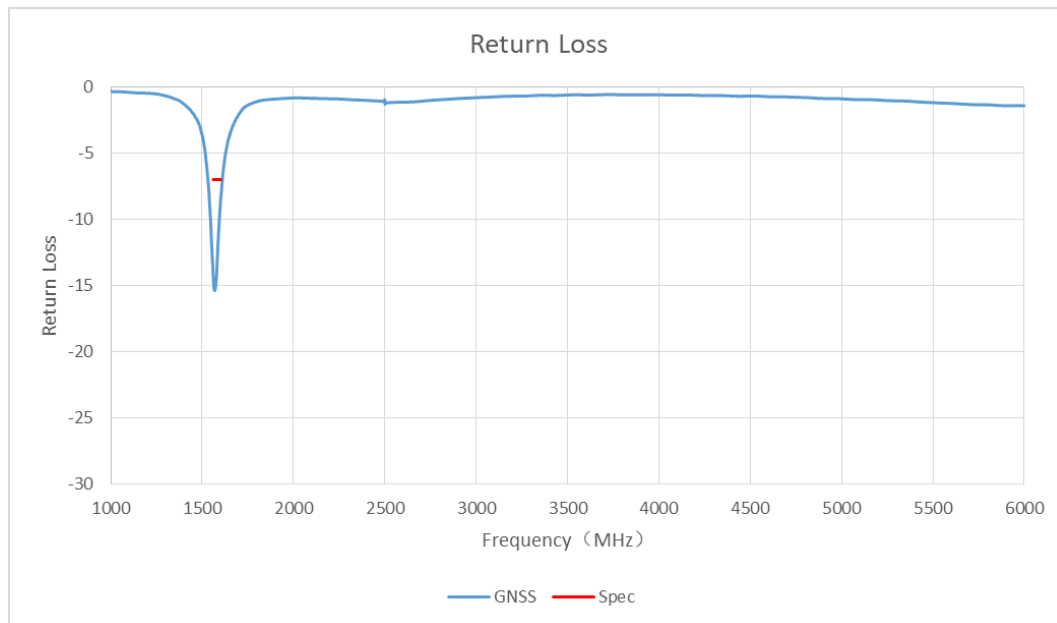

Typical WIFI antenna Return Loss

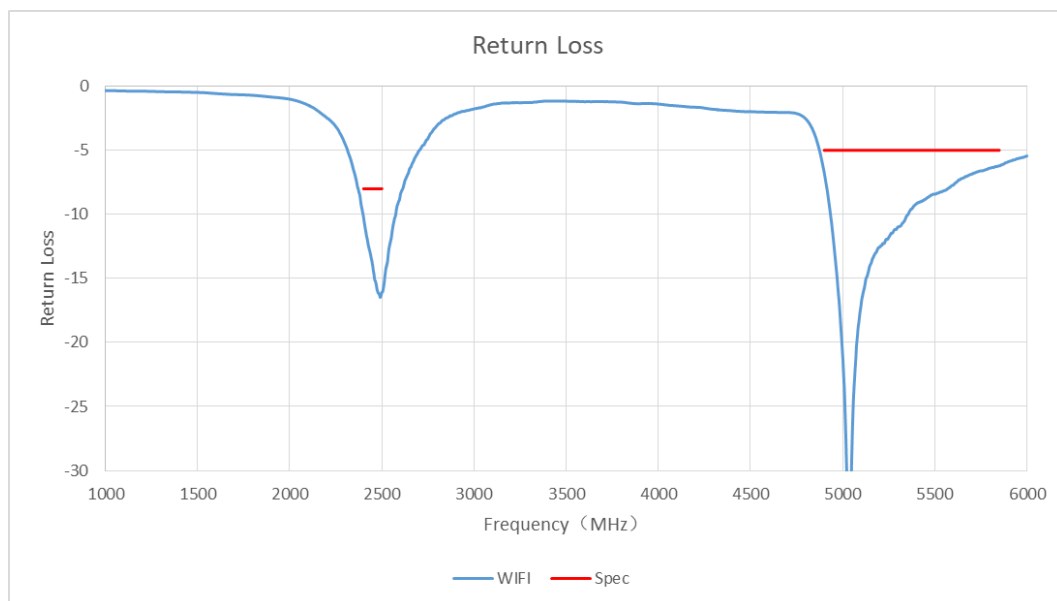

Issue: 2042


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


CHARTS

Typical Isolation

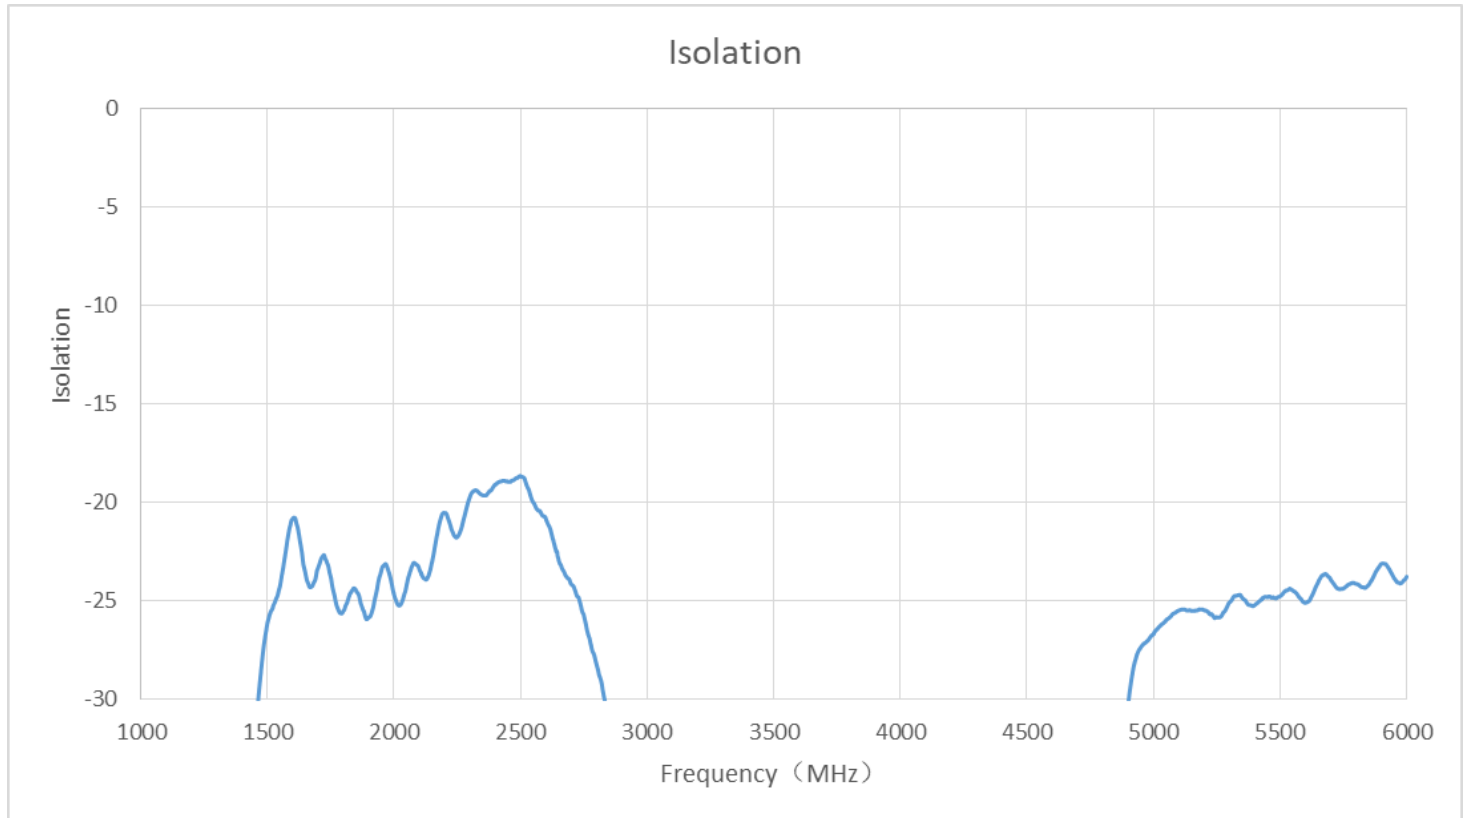


CHARTS

Typical Antenna Total Efficiency

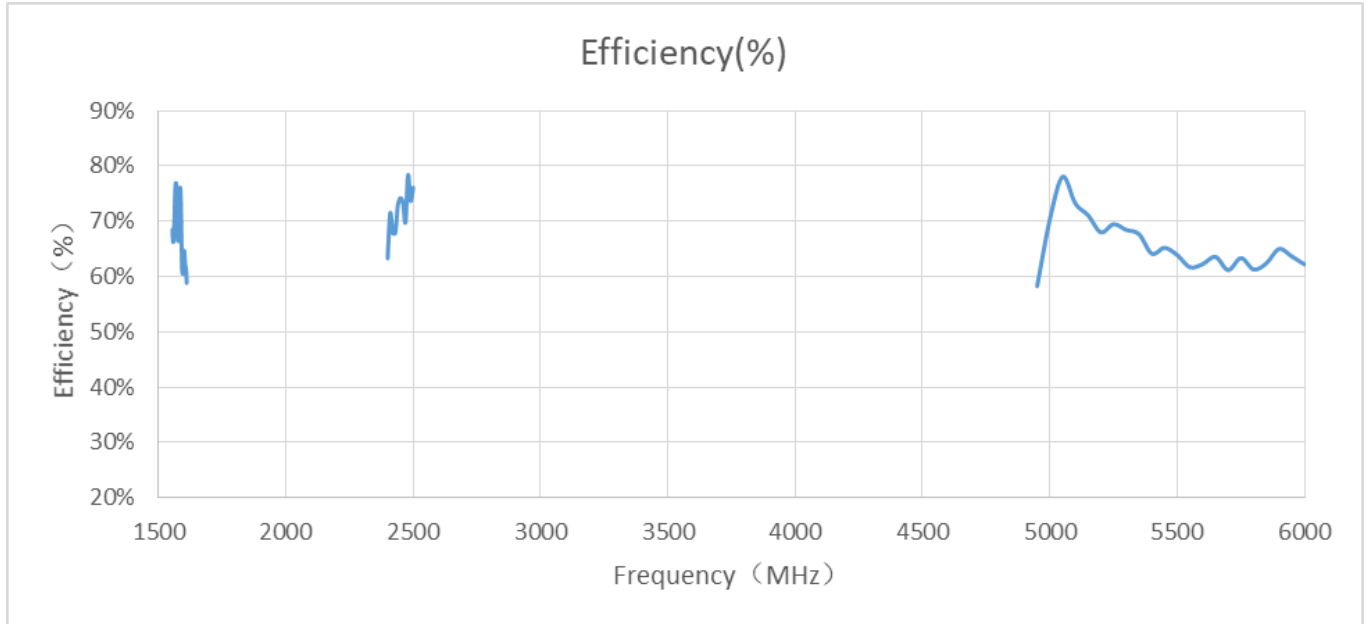


Typical Antenna Peak Gain

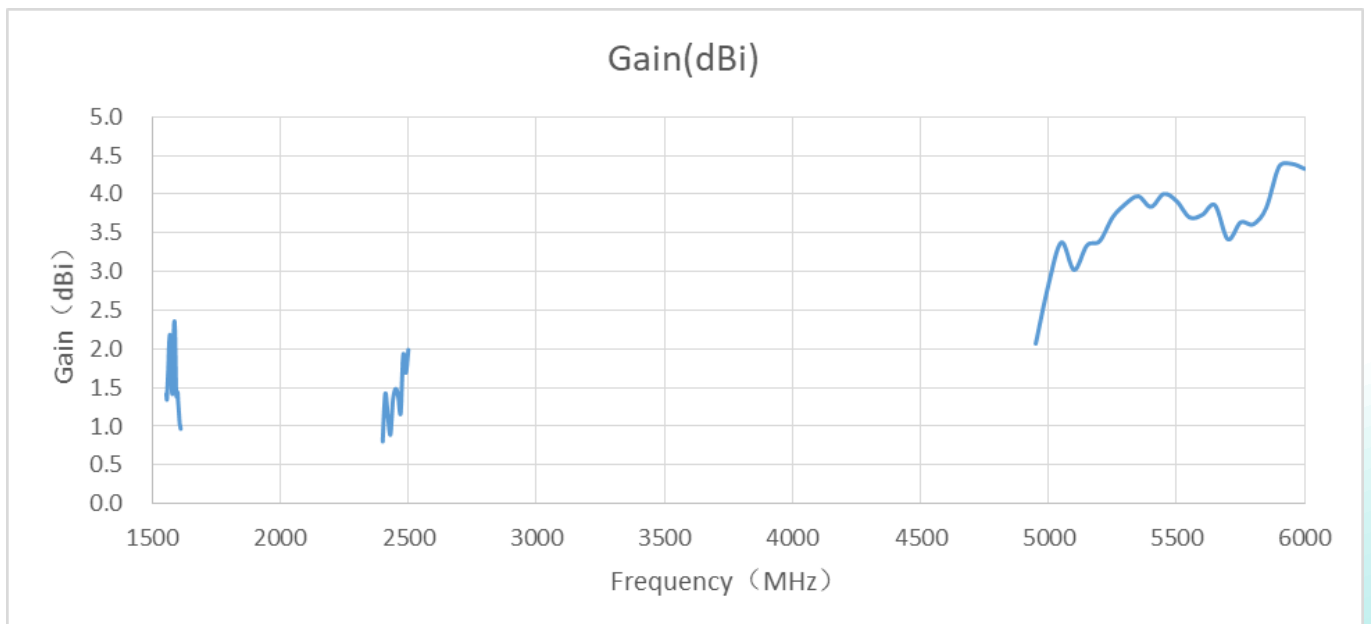


CHARTS

Typical free space radiation pattern—GNSS



XY Plane

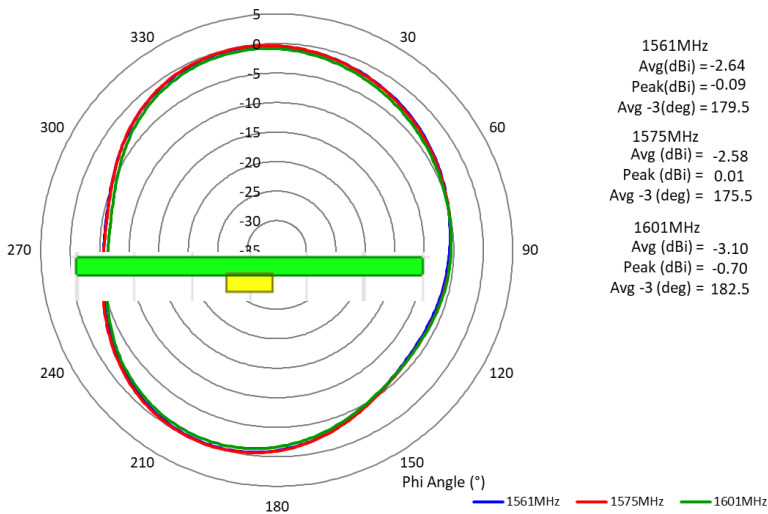

ZX Plane

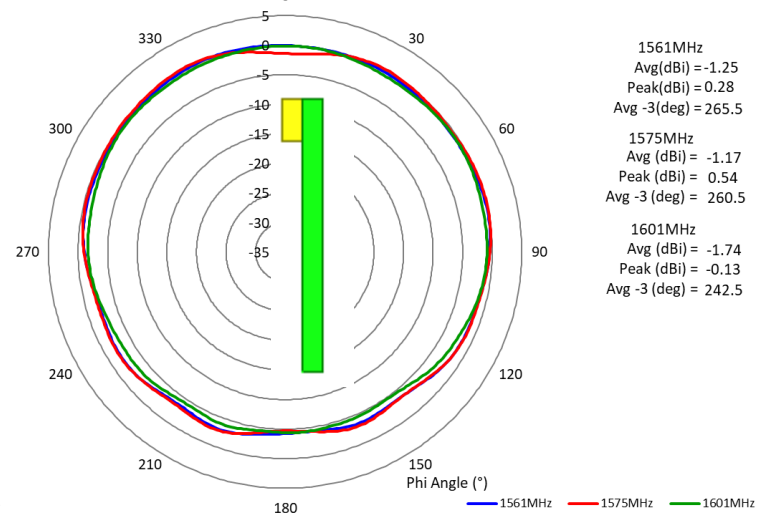

YZ Plane

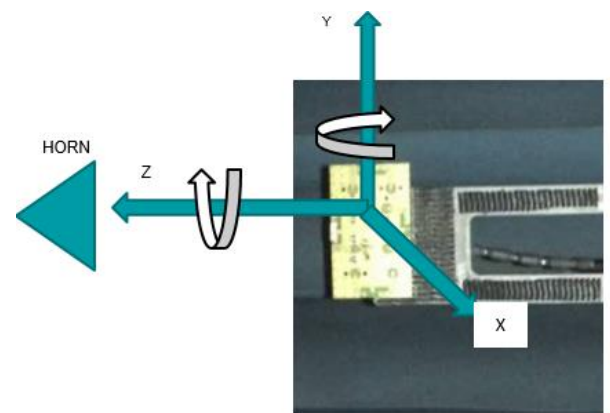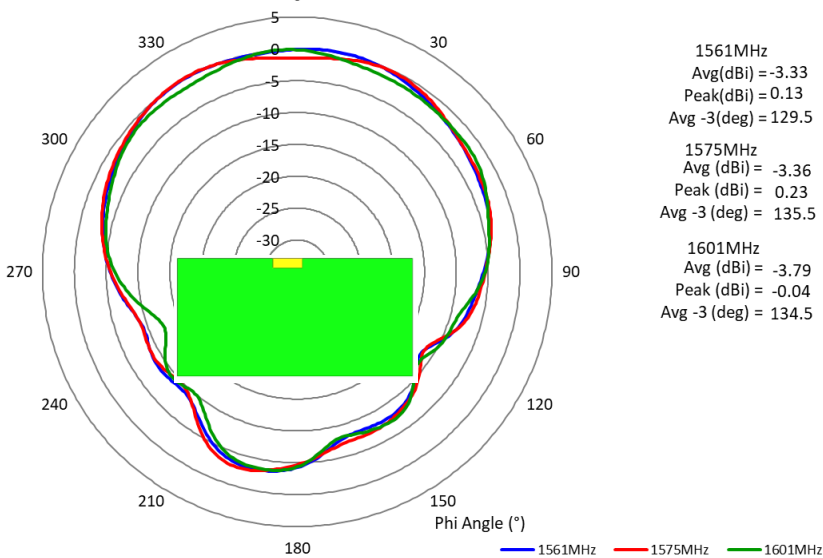

Issue: 2042


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Typical free space radiation pattern—2.4G

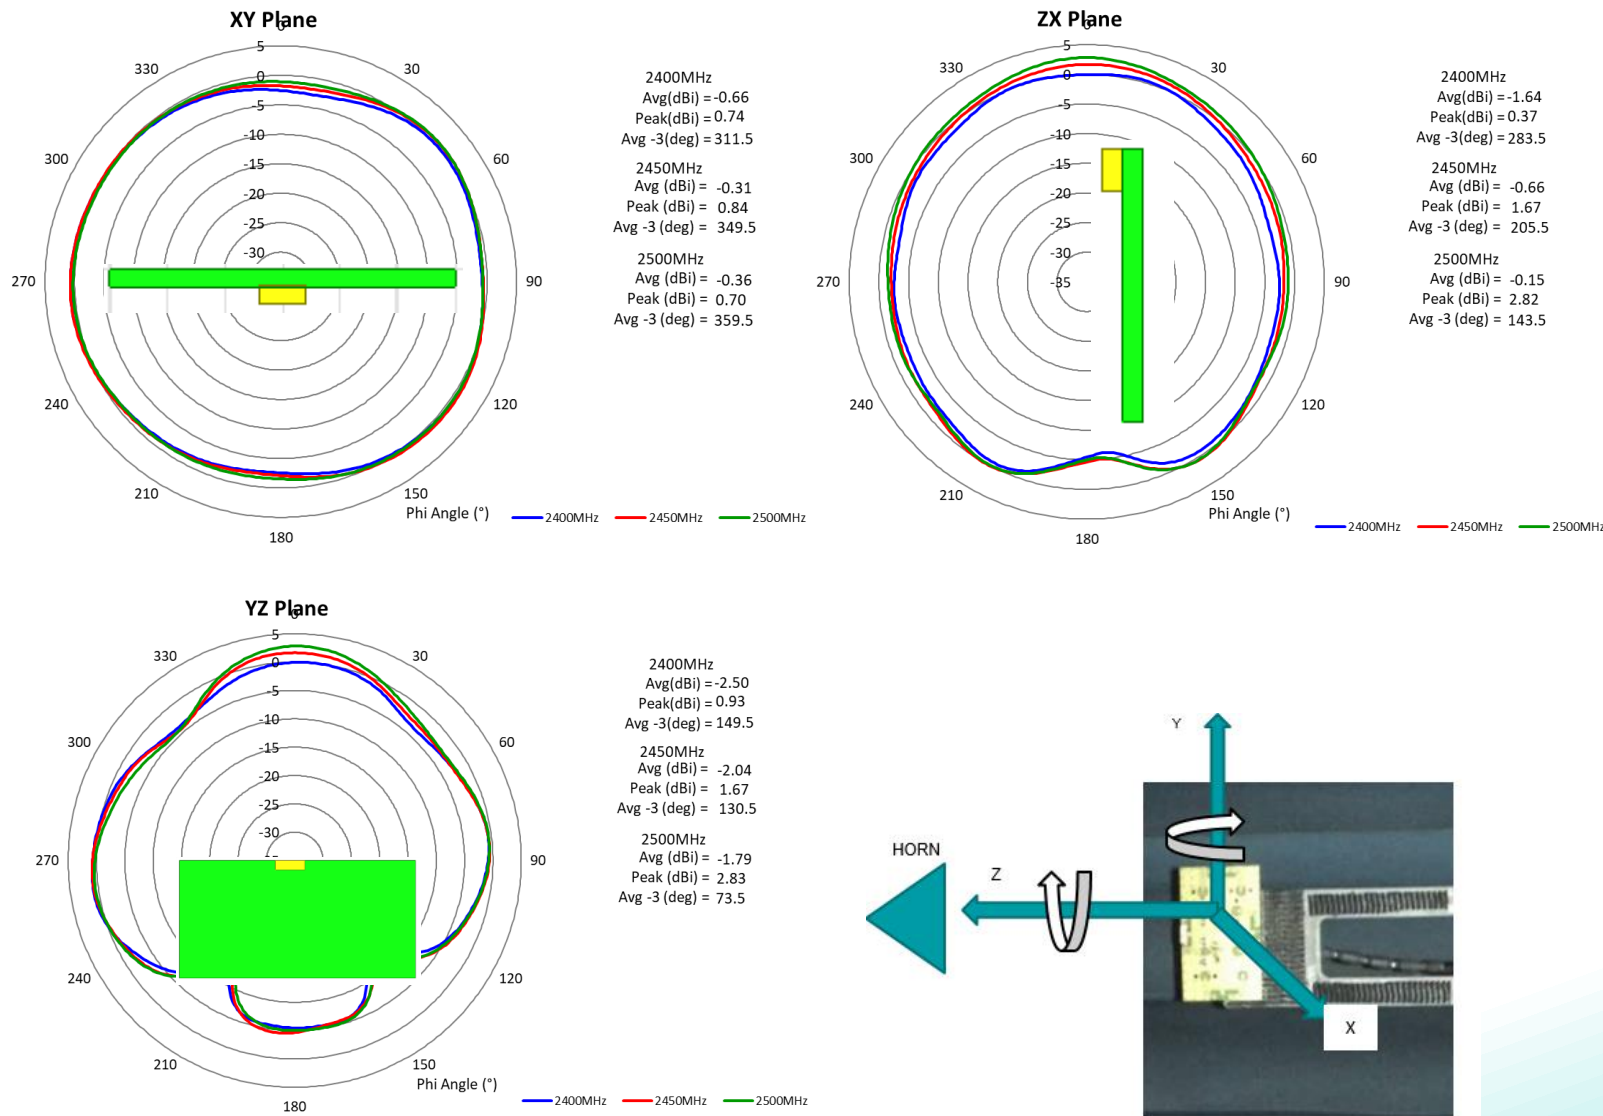

Issue: 2042


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Typical free space radiation pattern—5G

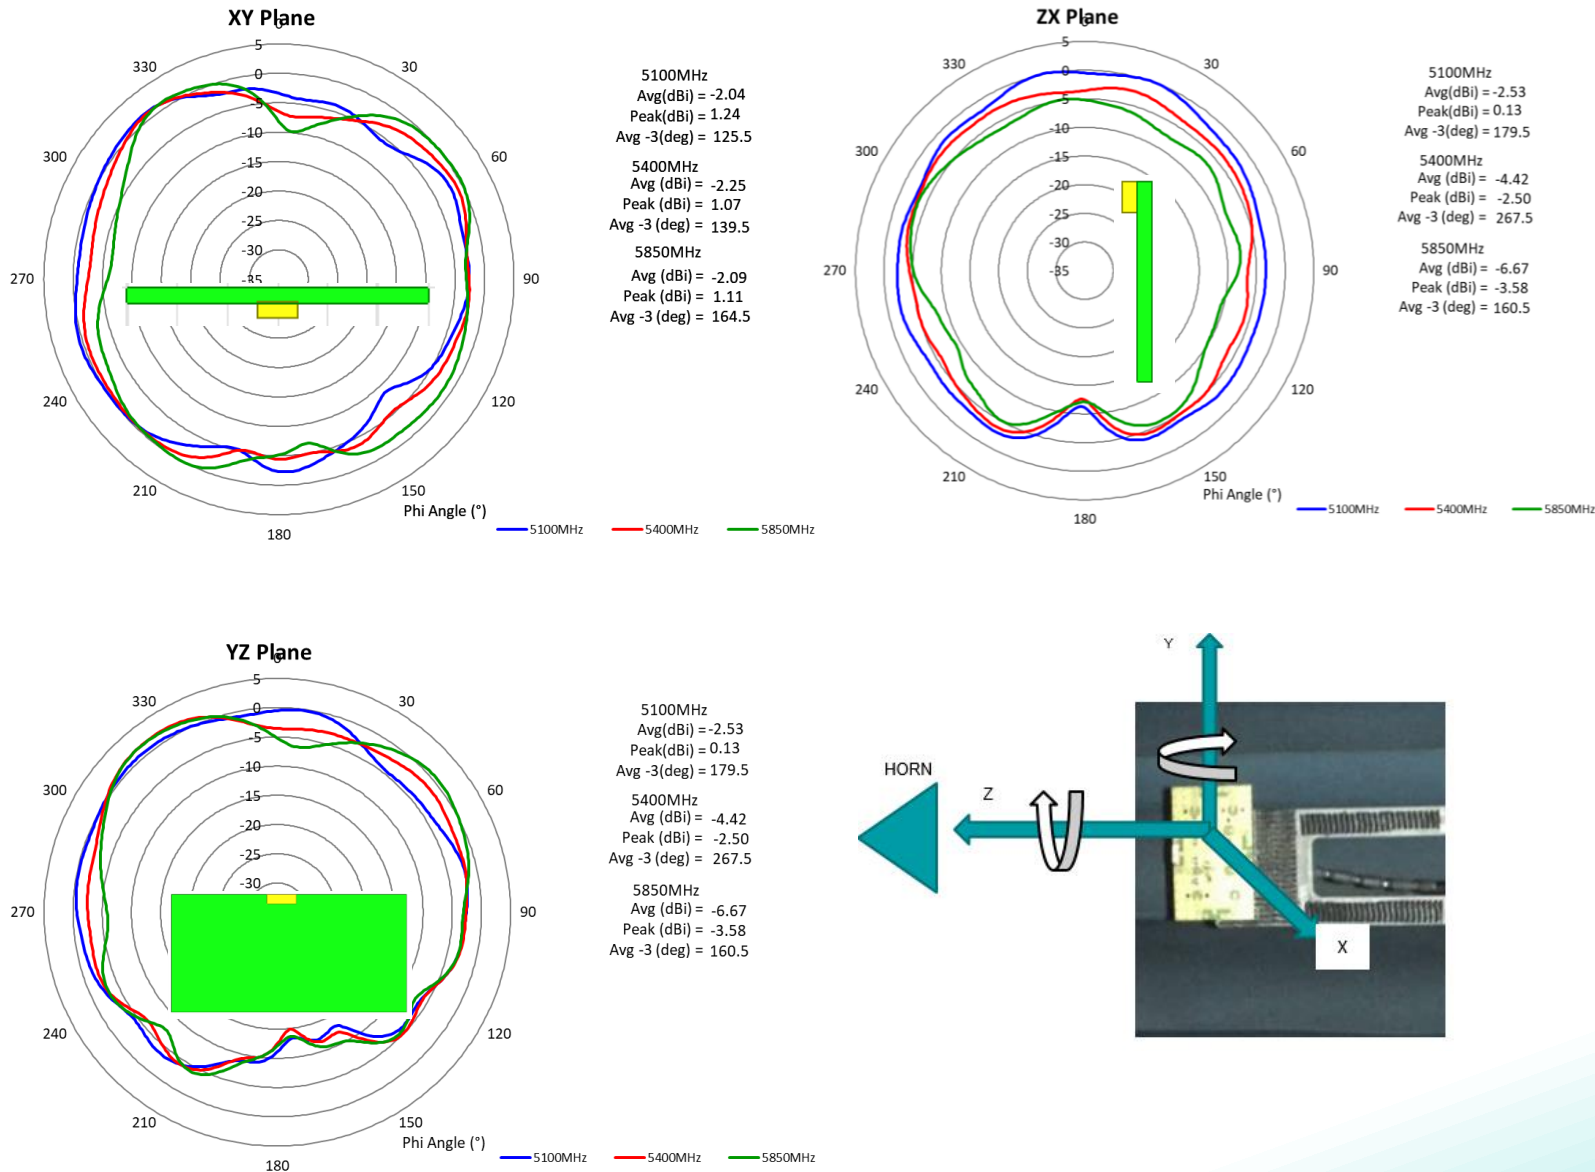


Issue: 2042

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

PACKAGING

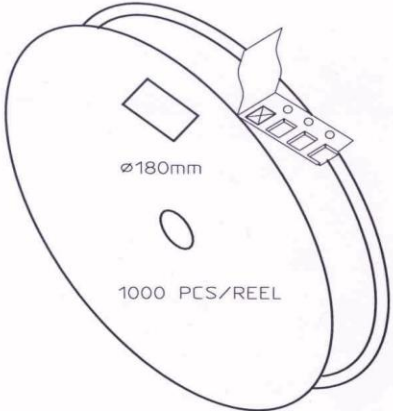


CARRIER TAPE H85-00188
width=24,00 depth=2.20
COVER TAPE H85-00159
width=21.20

LENGTH OF TAPE:



- Leader section: min 350 mm before component section
- Trailer section: min 40 mm after component section.

Empty part cavities at leader and trailer section of the tape must be sealed with top cover tape.

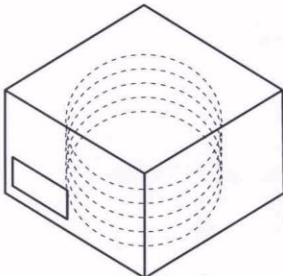

BOX H85-00128 1 pcs
(182x182x125)
- LABEL 1 pcs/BOX


REEL H85-00160 4 pcs
(D180, W28)
- REEL LABEL 1 pcs/REEL

MATERIAL			
HANDLINGS			
		RATIO	DRWN 160107 PeHa H
			DGNER
			CHKD
			APPRD
			APPRD BY
PRODUCT H90-OY113-F01P01			
DENOMINATION PACKING FORM			
		VERSION	MOD/DATE/NAME

Block Orientation

Antenna soldering pads facing down to the bottom of the carrier tape

Top view of the carrier tape

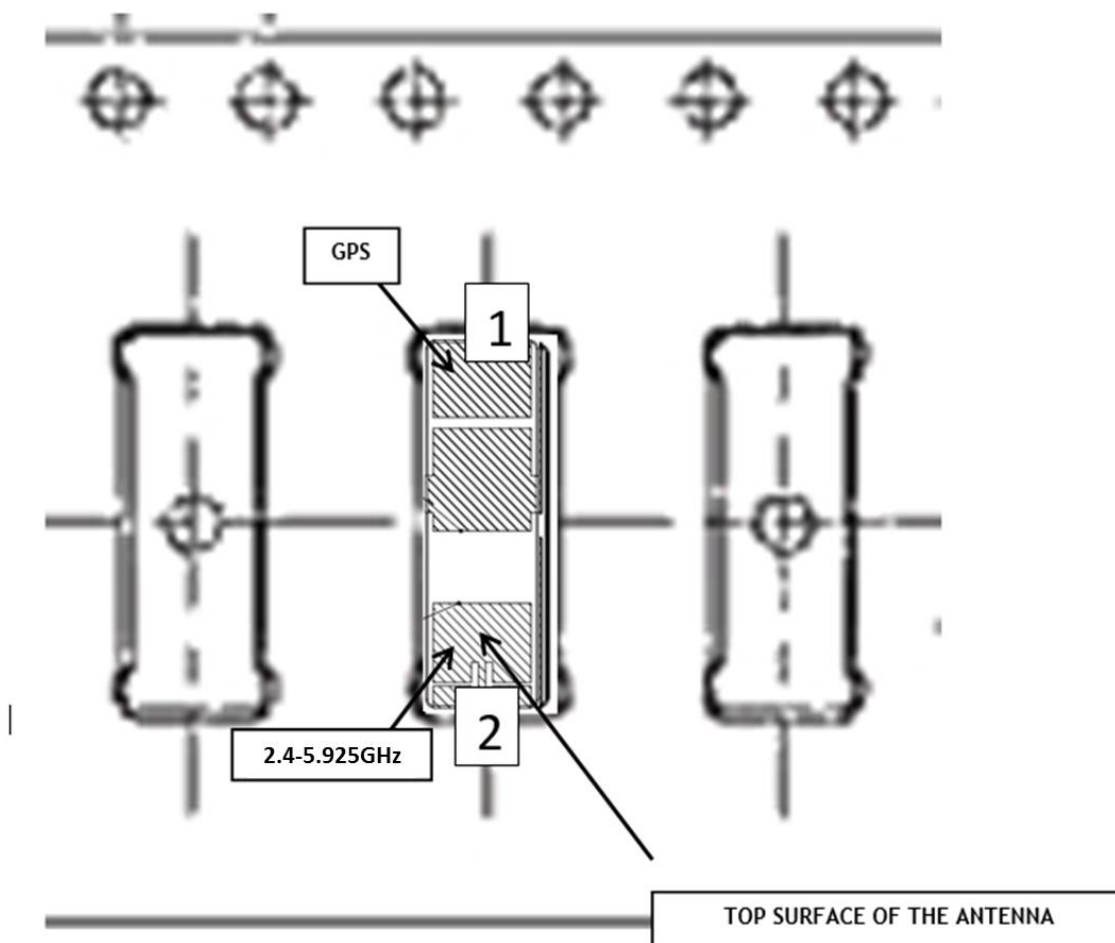

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[W3095](#) [W4000J197](#) [W3540](#)