

Series: Embedded NFC

#### **TECHNICAL DATA SHEET**

**Description**: 13.56MHz RFID/NFC SMD

Antenna

PART NUMBER: W3102



### Features:

- Antenna type coil on ferrite core
- Frequency 13.56MHz
- Inductance 4.7uH
- Read Distance 17mm
- Size 7.8 x 7 x 5 mm
- Fully SMD compatible
- RoHS Compliant
- MSL level 3

## **Applications:**

- RFID / NFC systems
- · Pairing, Sharing

All dimensions are in mm / inches

Issue: 1944

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description**: 13.56MHz RFID/NFC SMD

Antenna

PART NUMBER: W3102

Series: Embedded NFC

## **ELECTRICAL SPECIFICATIONS**

Antenna Type	coil
Frequency	13.56 MHz
Nominal Impedance	$50~\Omega/80\Omega$
Self inductance	4.7uH
resistance	$0.25\Omega$
read distance	17mm

### **MECHANICAL SPECIFICATIONS**

Size 7.8 X 7.0 X 5.0 mm

Weight 0.83 g

Antenna Material Core: 7.8 X 5.0(SH)DR B3.0

DR7.8 X 5.0 B3.0

Wire: 2UEW

## **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature  $-40 \sim +125^{\circ}$  C Storage Temperature  $-20 \sim +80^{\circ}$  C RoHS Compliant Yes






Description: 13.56MHz RFID/NFC SMD


Antenna


PART NUMBER: W3102

Series: Embedded NFC

## **MECHANICAL DRAWING**





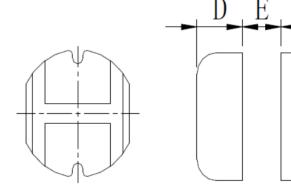

Recommend Solder Dimension

Dimension	АВ		С	D	E	F	G
Unit (mm/in)	7.0±0.3/0.28±0.01	7.8±0.3/0.31±0.01	5.0±0.35/0.20±0.01	2.5/0.10 Ref	2.7/0.11 Ref	2.5/0.10 Ref	7.5/0.30 Ref




**Description**: 13.56MHz RFID/NFC SMD

Antenna

PART NUMBER: W3102

Series: Embedded NFC

# Reflow Soldering Temperature Profile Recommendation

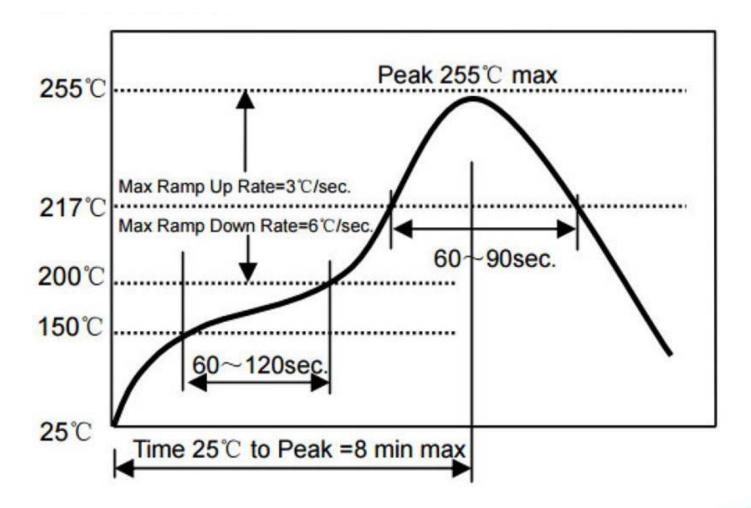







Series: Embedded NFC

#### **TECHNICAL DATA SHEET**

Description: 13.56MHz RFID/NFC SMD


Antenna

PART NUMBER: W3102

# **TEST SETUP**



ACR card reader

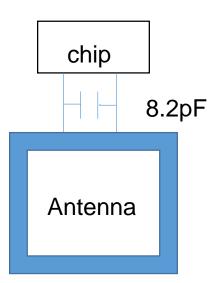

Matching circuit



**Description**: 13.56MHz RFID/NFC SMD


Antenna

PART NUMBER: W3102


Series: Embedded NFC

### **PACKAGING**

1. Tape and reel packing with plastic vacuum bag. 1000 PCS/ REEL, 3 Reels/ Small BOX, 3 Small Boxes/ Big Box

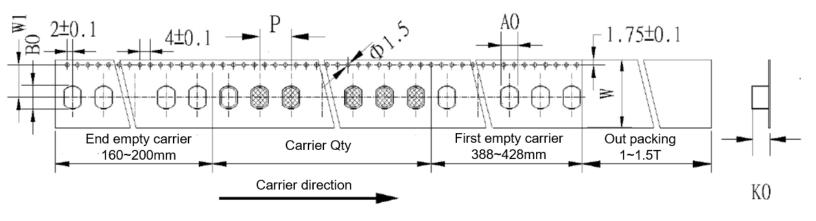

Туре	Carrier Size						
	W	W1	T	P	A0	ВО	КО
W3102	16	12.5	0.4	12	7.5	6. 1	9. 5

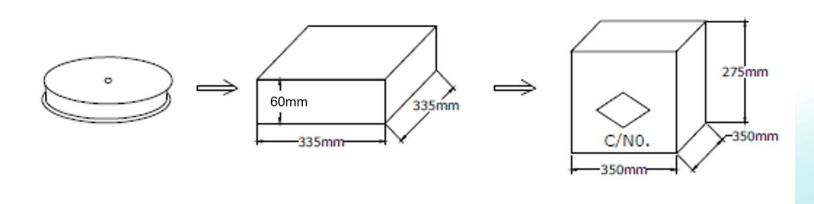

Issue: 1944



**Description**: 13.56MHz RFID/NFC SMD

Antenna

PART NUMBER: W3102

Series: Embedded NFC

2. MSL: Level 3

- 2.1 Calculated shelf life in sealed bag: 12 months at < 30°C and 60% relative humidity (RH)
  - 2.2 Peak temperature in reflow: 255 °C Max
- 2.3 After bag is opened, devices that will be subjected to reflow solder or other temperature process must:
  - a) Mount within: 168 hours of factory conditions ≤ 30 °C/60%
  - b) stored at < 20% RH
  - 2.4 Devices require bake, before mounting, if:
    - a) Humidity Indicator Card is > 20% when read at 23 ± 5 °C
    - b) 3a or 3b not met
  - 2.5 If baking is required, devices may be baked for 24 hours at 125~130 °C



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: W3102