

#### TECHNICAL DATA SHEET

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

## Features:

- 890-960 MHz
- Gain 11.1 dBi
- N connector
- 7 Elements
- All-Welded Aluminum
- Black Powder Coat
- Includes "U"-Bolt Bracket for maximum 3 in. diameter pole
- Wind loading 164 km/h = 100 MPH

# **Applications:**

- Harsh Environmental Conditions
- Highly Directional
- · Remote Monitoring / Scada
- Mining, Industrial
- Oil / Gas
- · Utility and SmartGrid
- · Wastewater, Irrigation
- Municipal / Transportation

All dimensions are in mm / inches

Issue: 1835

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



### **TECHNICAL DATA SHEET**

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

## **ELECTRICAL SPECIFICATIONS**

Antenna Type Yagi-Uda 890-960 MHz Frequency Nominal Impedance  $50 \Omega$ **VSWR** 2:1 Max Gain 11.1 dBi 54°/44° Horizontal / Vertical -3 dB Bandwidth Horizontal / Vertical Side Lobe Level -13 dB / -17 dB Front to Back Ratio -14 dB min Polarization Linear Power Withstanding 300 W

### **MECHANICAL SPECIFICATIONS**

Overall Length 762 mm Weight 704 g

Antenna Color Powder Coat Black

Antenna Material Aluminum

Connector type N Female

Fixing System Pole Clamp

Azimuth Adjustment 360 °





#### **TECHNICAL DATA SHEET**

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

### **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature -40 to +85 ° C
Storage Temperature -40 to +85 ° C

Cyclic -40 to +55 ° C (5 ° C/min)

Wind-loading 164 km/h / 100 mi/h

Humidity 93% @ +30 ° C

Cyclic 95% @ +30 ° C

Rain 15 mm/min (30 min)
Salt Mist 7 Davs

Salt Mist 7 Days
Industrial Atmosphere 4 Days

Sinusoidal Vibration Displacement 3 mm - 2/9 Hz

Sinusoidal Vibration Acceleration 10 m/s^2 - 9/200 Hz

Random Vibration Level (ASD) 1 m^2/s^2 - 10/200 Hz

0.3 m<sup>2</sup>/s<sup>3</sup> - 200/2000 Hz Shocks 100 m/s<sup>2</sup>

Drop Test 1.0 m

RoHS Compliant Yes





#### **TECHNICAL DATA SHEET**

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

# **MECHANICAL DRAWING**

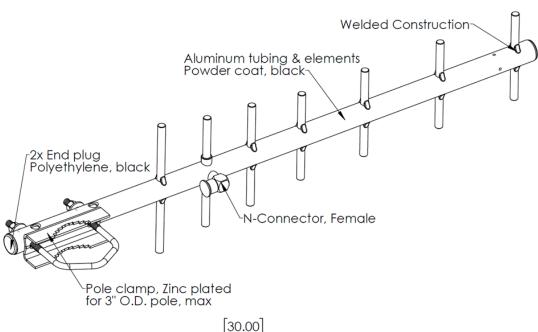

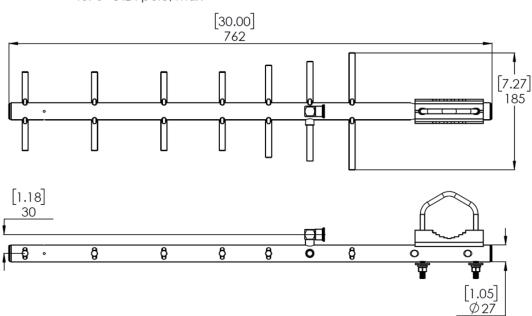

Unit: mm [in]








### **TECHNICAL DATA SHEET**

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

## **TEST SETUP**

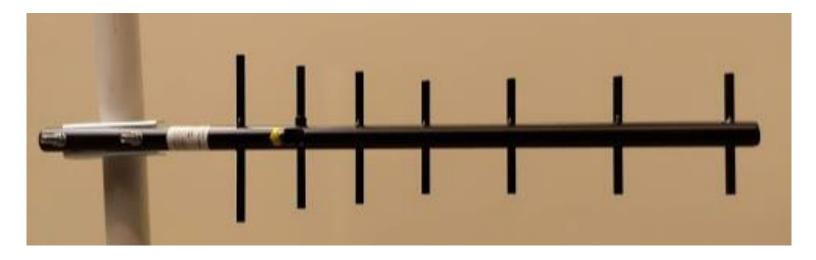

Antenna mounted vertically on post with insulator on driven element facing up






## TECHNICAL DATA SHEET


Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

Series: Yagi

# **CHARTS**

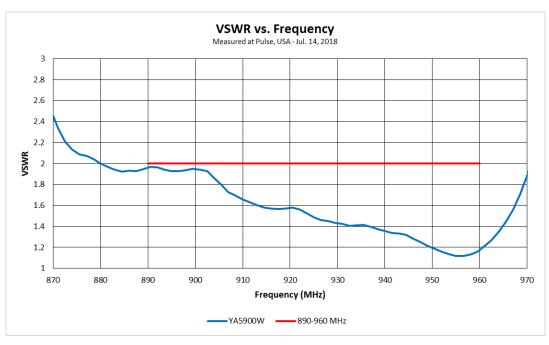

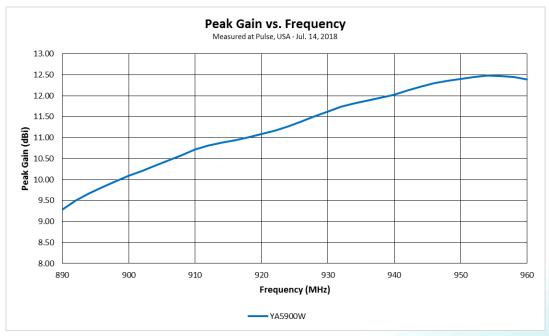






#### TECHNICAL DATA SHEET

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector


**PART NUMBER: YA5900W** 

### **CHARTS**

# Azimuth/Horizontal Plane

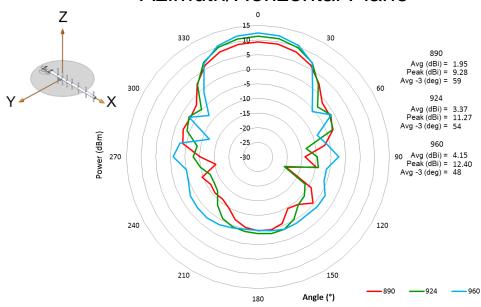

# Elevation/Vertical Plane

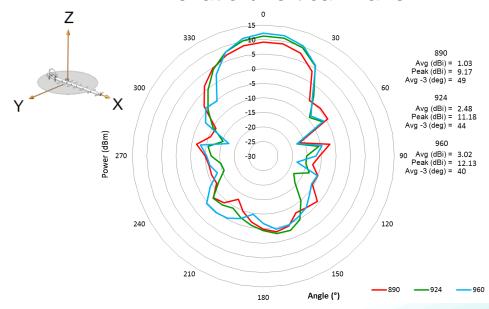



#### **TECHNICAL DATA SHEET**

Description: 890-960 MHz 11 dBi 7-Element Yagi, Black, All-Welded, N-female connector

**PART NUMBER: YA5900W** 

### **PACKAGING**

1 cardboard box containing:

- 1 antenna
- · 1 cardboard partition
- 1 plastic bag containing:
  - 1 bracket kit
  - 1 instructions for antenna installation
  - 1 warning regarding electrocution hazards
- 1 bag of air


1 label on cardboard box with part number, date code, characteristics

# **ASSEMBLY**


### INSTALLATION INSTRUCTIONS

### PRE-INSTALLATION

- Larsen Yagis are designed to mount vertically.
- YA3 Series (UHF): Gamma rod must be facing down for weather considerations (see Figure 1).



YA5 and YA6 Series: The insulated side of the driven element should be facing up (see Figure 2).



# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: