


# SMT Power Inductors

Power Beads - PGL6215.XXXHLT Series




- Ⓢ **Current Rating:** Over 125A<sub>pk</sub>
- Ⓢ **Inductance Range:** 105nH to 200nH
- Ⓢ **Height:** 12.0mm Max
- Ⓢ **Footprint:** 12.0mm x 6.0mm Max

## Electrical Specifications @ 25°C — Operating Temperature - 40°C to +130°C<sup>7</sup>

Part Number	Inductance <sup>1</sup> @ 0A <sub>DC</sub> (nH +/- 15%)	Inductance <sup>2</sup> @ I <sub>rated</sub> (nH TYP)	I <sub>rated</sub> <sup>3</sup> (ADC)	DCR (1-3) (+/- 10%)	DCR (1-3) (+ 10%/-20%)	Saturation Current <sup>5</sup> (A TYP)		Heating Current <sup>6</sup> (A TYP)
						25°C	100°C	
PGL6215.111HLT	105	105	77	0.125 mOhm	0.45 mOhm	125	106	77
PGL6215.121HLT	117	117	77			106	90	
PGL6215.131HLT	130	130	77			100	82	
PGL6215.151HLT	150	140	85			85	75	
PGL6215.171HLT	170	119	70			70	60	
PGL6215.201HLT	200	140	60			60	51	



### NOTES:

- Inductance measured at 100kHz, 100mVrms.
- Inductance at I<sub>rated</sub> is the value of the inductance at 25°C at the listed rated current.
- The rated current as listed is either the saturation current (25°C or 100°C) or the heating current depending on which value is lower.
- The nominal DCR is measured at point , as shown below on the mechanical drawing.
- The saturation current is the typical current which causes the inductance to drop by 20% at the stated ambient temperatures (25°C, 100°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current is the DC current which causes the part temperature to increase by approximately 40°C when used in a typical application.
- In high volt\*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. To determine the approximate total losses (or temperature rise) for a given application, the core loss and temperature rise curves can be used.
- Parts with the HLT suffix are sold in tape and reel packaging. Pulse complies to industry standard tape and reel specification EIA-481. The tape and reel for this product has a width (W=16mm), pitch (Po=12mm) and depth (Ko=6.8mm). Samples of these parts can be ordered by removing the HLT suffix and replacing with HL.
- The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
- Sample Value only. Guaranteed by Design and not tested in production

## Mechanical

## Schematic

### PGL6215.XXXHLT

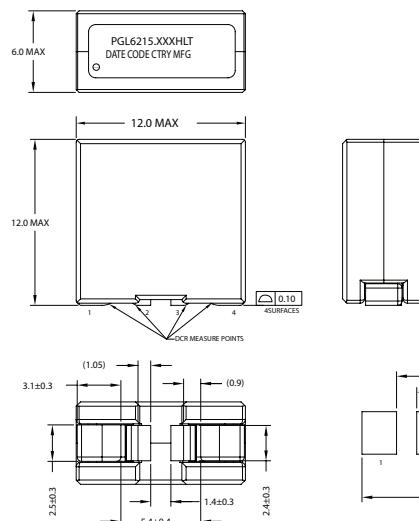


**Weight:** 2.74grms

**Tape & Reel:** 320/ Reel

**Dimensions:** mm


Unless otherwise specified, all tolerances are ± 0.25

## TAPE & REEL INFO

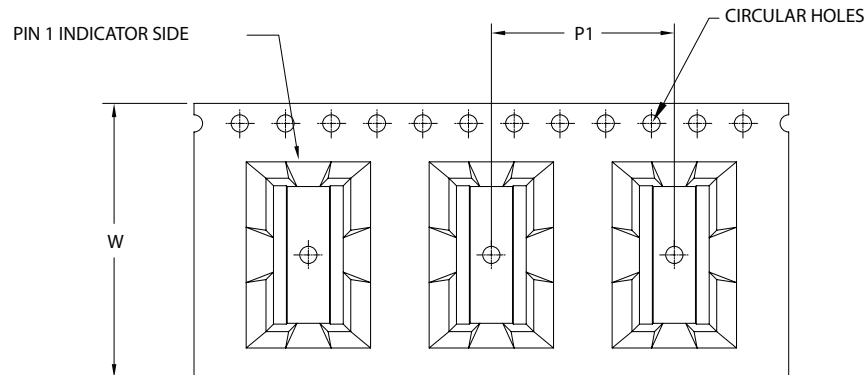


SURFACE MOUNTING TYPE, REEL/TAPE LIST			
TYPE	REEL SIZE (mm)		QTY
	$W \pm 0.30$	$P1 \pm 0.1$	PCS/REEL
PGL6215.XXXHLT	24.0	12.0	320


PGL6215.XXXHLT, L vs I, Curve 25°C

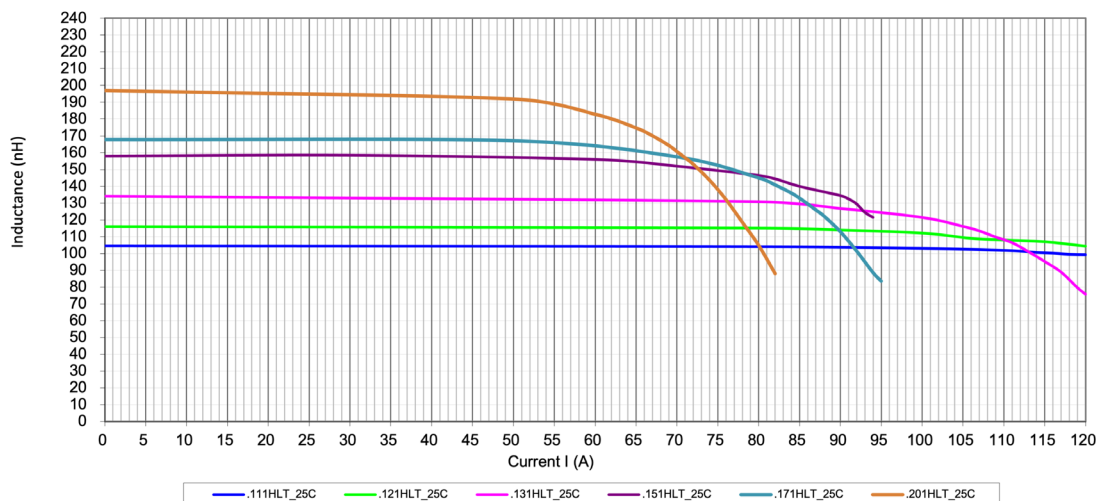

**PGL215.XXXHLT, L vs I, Curve 100°C**

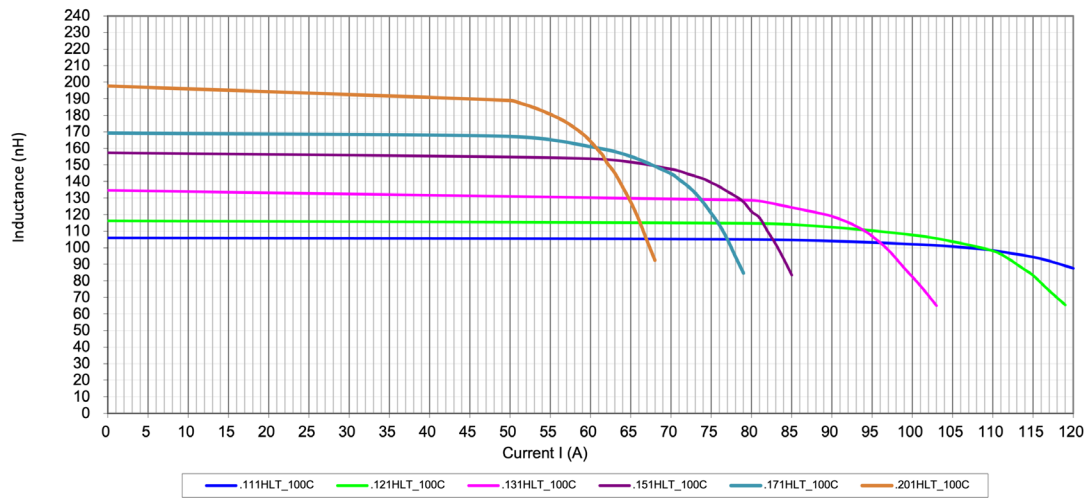

**PGL6215.XXXHLT, Core Loss**

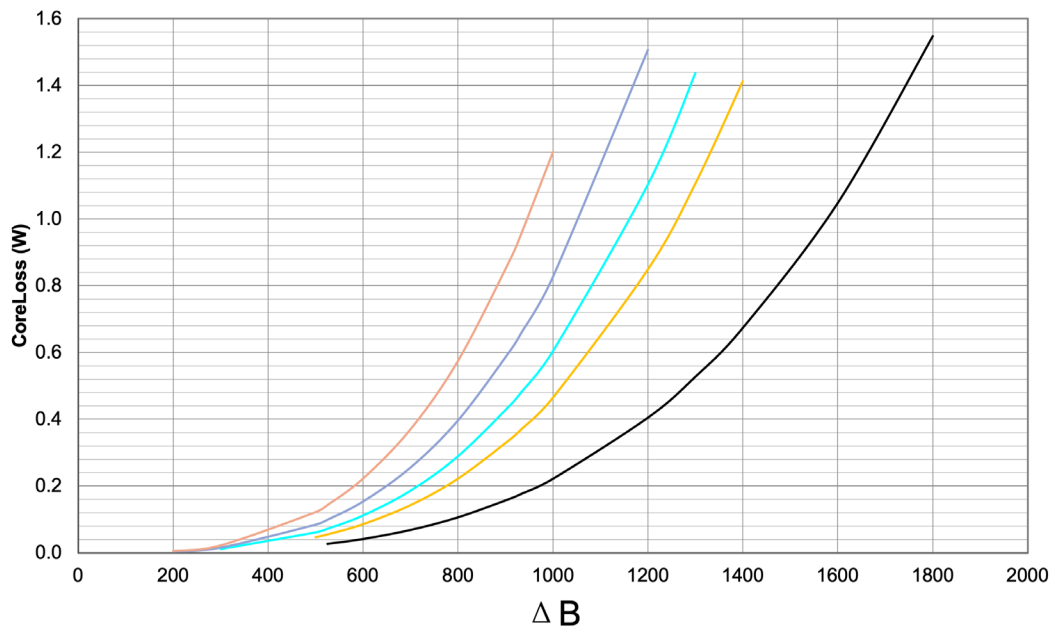


where  $\Delta B = 0.31 * L(nH) * \Delta I$

# SMT Power Inductors

Power Beads - PGL6215.XXXHLT Series

**PGL6215.XXHLT Temp Rise vs Power Dissipation**

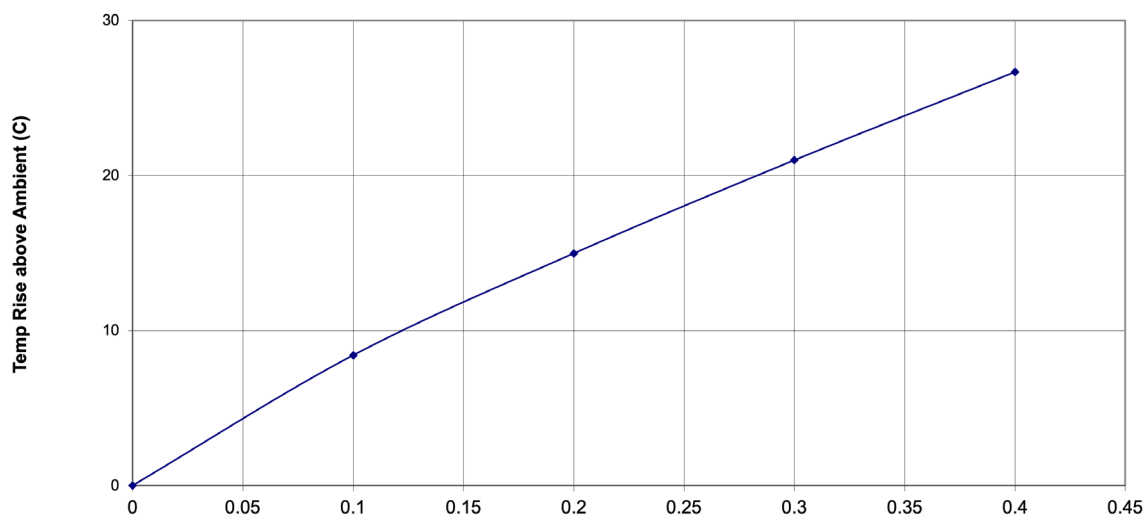

## For More Information:

**Americas** - [prodinfo\\_power@pulseelectronics.com](mailto:prodinfo_power@pulseelectronics.com) | **Europe** - [power-apps-europe@pulseelectronics.com](mailto:power-apps-europe@pulseelectronics.com) | **Asia** - [power-apps-asia@pulseelectronics.com](mailto:power-apps-asia@pulseelectronics.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2021. Pulse Electronics, Inc. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PGL6215.111HLT](#) [PGL6215.151HLT](#) [PGL6215.201HLT](#)