




## NOTES:

- 1. ROHS COMPLIANT
- 2. HEADER: PHENOLIC WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -20°C TO +125°C
- 4. COMPLIANCE TO J-STD:
  - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
  - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
  - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX
  TO THE PART NUMBER(i.e 23Z105SMFNL BECOMES 23Z105SMFNLT).







FINAL OUTLINE

## © Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CHK,SIN,10D,1:1,SM,TU	23Z105SMFNL-10	PS-2755.001-A	1 OF 3	23Z105SMFNL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia) PH


PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768





## ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED

PARAMETER	SPECIFICATIONS					
OPERATING TEMPERATURE	0°C – 70 °C					
POLARITY	PER SCHEMATIC					
TURNS RATIO	$(1-16):(2-15):(3-14):(4-13)=1 : 1 : 1 : 1 \pm 5\%$ $(5-12):(6-11):(7-10):(8-9)=1 : 1 : 1 : 1 \pm 5\%$					
ISOLATION RESISTANCE (IR AT 500 VDC)	10G OHM MIN.					
DC RESISTANCE	0.4 OHMS MAX					
LP	68 uH MIN (MEASURED AT 100 KHz, 20 mVRMS)					
LL	0.25 uH MAX(MEASURED AT 100 KHz, 20 mVRMS)					
BETWEEN CHANNEL ISOLATION	500 VAC MIN @ 60 SECONDS					
IMPENDANCE (1-16)&(8-9)	10-20 MHz	30 MHZ 70-100 MH				
	700 OHM MIN	600 OHM MIN	200 OHM MIN			



SCHEMATIC

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CHK,SIN,10D,1:1,SM,TU	23Z105SMFNL-10	PS-2755.001-A	2 OF 3	23Z105SMFNL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768





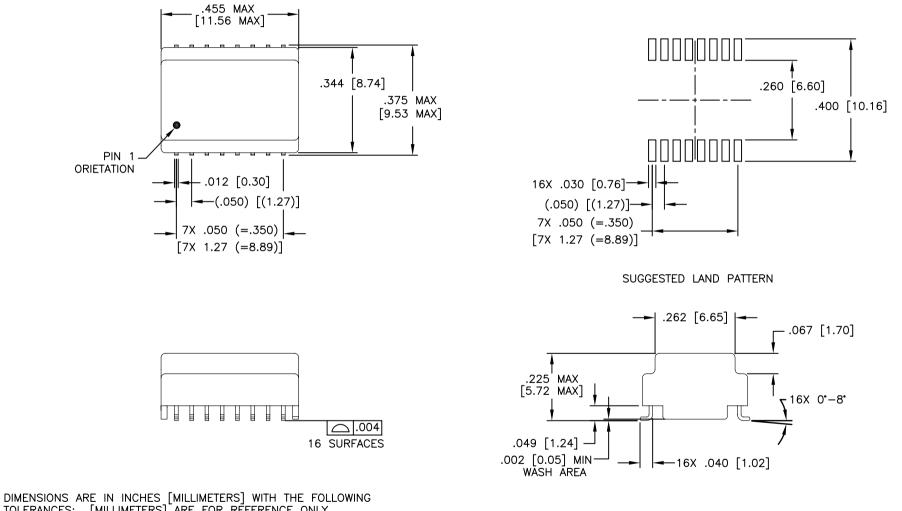

DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.  $XX = \pm.01$  [ $\pm 0.25$ ]  $XXX = \pm.005$  [ $\pm 0.13$ ]

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/14)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
CHK,SIN,10D,1:1,SM,TU	23Z105SMFNL-10	PS-2755.001-A	3 OF 3	23Z105SMFNL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: 23Z105SMFNLT 23Z105SMFNL