
Pulse Part Number WM5V



Features

- Plug-and-play electronics module design for fast end-product design and implementation.
- Qi compliant system, insuring seamless integration and high performance.
- Intended for use in consumerelectronics transmitter applications and with Qi-certified receivers
- Offers 5W charging with thermal relief in a small, flexible package
- Foreign Object Detection compliant with WPC Receivers (1.0, 1.1, and 1.2)







Pulse Part Number WM5V

Electrical specifications

Parameters	Typical	Min	Max	Unit
Vin	5.0	4.5	5.5	V
lin (at Pout = 0W)	0.1	0.09	0.11	Α
lin (at Pout = 5W)	1.55	1.45	1.65	А
Peak Efficiency (RX: IDT P9025)	74	72		%


Spatial Operating Specifications

Parameters	Typical	Min	Max	Unit
Operating separation Z distance(1)	3	2	9	mm
X/Y misalignment tolerance(2)	0	-10	10	mm
Ambient temperature	25	-20	60	$^{\circ}\!\mathbb{C}$
Storage temperature	25	-40	85	$^{\circ}\! \mathbb{C}$

• The operating Z distance is defined as the follow:




The X/Y misalignment is defined as the follow:





Pulse Part Number WM5V

Mechanical dimensions

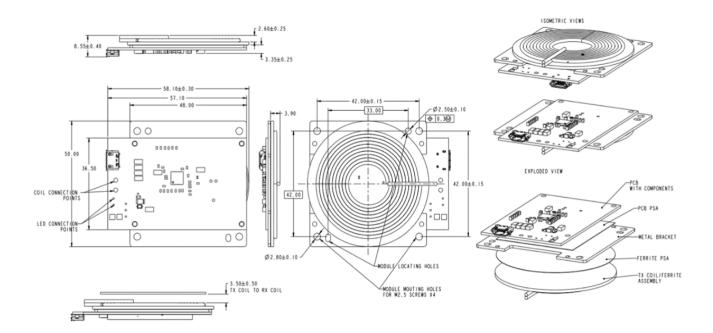

• All dimensions in mm



Pulse Part Number WM5V

Packing

- Put 1pc product in the poly bag, then add the info label.
- Align the finished goods into the tray.
- Cardboard sheet under and on the top of the tray stack in the tray stack. Every second tray must be rotated 180 degrees, binding of the stack-1 strap lengthwise and 2 stray crosswise.
- Add foam paper between two trays.
- First put down 1pc sheet board in box, then put binding tray in box, empty 1 pc on the top of the box.
- Binding of the carton: scaled with tape, 1 strap length wise and 2 strap crosswise.



Label content:


P/N:

Project Name:

Inductance:

- P/N, e.g. SWA1380
- Project Name, e.g. A6
- Wireless Charge Coil

Inductance, e.g. 12.5uH

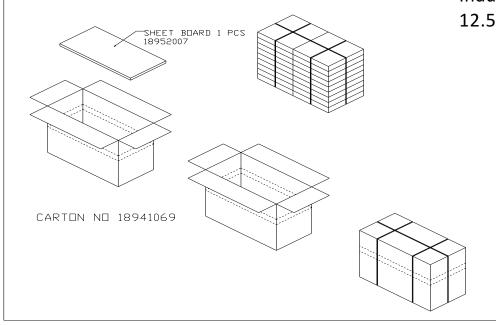



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: WM5V