
REV	CHANGE	DATE	DRN	СНК	
	Drawn		02/27/17	SJ	Т
		TOLET	ANOE DETAIL O		



	TOLERANCE DETAILS							
	1	D	+ 0.000 [ + 0.00] - 0.016 [-0.40]	6	SD	±0.006 [±0.15]		
	2	L	±0.020 [±0.50]	7	SL	$\pm 0.012  [\pm 0.30]$		
	3	W	+ 0.000 [+ 0.00] - 0.012 [-0.30]	8	TL	±0.012 [±0.30]		
	4	HD	±0.008 [±0.20]	9	WL	+0.000 [+0.00] -0.012 [-0.30]		
	5	HL	+ 0.000 [ + 0.00] - 0.016 [-0.40]					

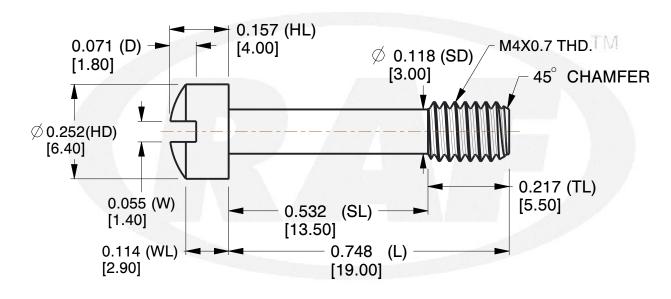

## **NOTES:**

- 1. Material: Stainless Steel
- 2. Finish:
- 3. ASME Y14.5-M 2009
- 4. All Drawing Dimensions are in Inches [mm]
- 5. Unless otherwise specified; Edge Breaks, Radii or Countersinks 0.005-0.015



95 Silvermine Rd., Seymour CT 06483 Tel: 203-888-2133, Fax: 203-888-9860 This Drawing is the Property of RAF. It contains confidential, proprietary information that is RAF property. Do not disclose to or duplicate for others except as authorized by RAF.

TOLERANCES
ALL DIMENSIONS ARE INCHES
(UNLESS OTHERWISE SPECIFIED)
METALLIC
LENGTHS </=: 6 INCHES ± 0.005
LENGTH >: 6 INCHES ± 0.010

LENGTH >: 6 INCHES ±0.010
DIAMETERS: ±0.005
NON-METALLIC
LENGTH: ±0.010 DIAMETERS: ±0

NON-METALLIC
LENGTH: ±0.010 DIAMETERS: ± 0.010
INTERNAL THREADS:
MINIMUM THREAD DEPTH

M0315-SS

COMPONENT

3.91

PANEL SCREW

**CAPTIVE PANEL SCREW STYLE 4** 

SHEET 1 of 1

SCALE

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RAF Electronic Hardware: