

Structure Silicon Monolithic Integrated Circuit

Product name Low voltage operation wide band 3-outputs video driver with LPF

Type **BH7606GU**

Function

- Built in 3-output video drivers for Y, PB and PR signal
- Built in 6dB AMP
- Built in standby function (0 μ A TYP)
- Built in LPF (Y : fc=27MHz, PB/PR : fc=15MHz)
- No output coupling capacitor required
- Small package 15-Bump WL-CSP(2.26x2.26x1.0[mm])

※ Radiation resistance is not included in the design.

■ Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit	Condition
CP_VCC Supply voltage	Vcp	3.55	V	CP_VCC - (CP_GND or V_GND)
V_VCC Supply voltage	Vv	3.55	V	V_VCC - (CP_GND or V_GND)
V_VCC to CP_VCC voltage	Vcc	-0.3~+0.3	V	V_VCC - CP_VCC
V_GND to CP_GND voltage	Vgg	0	V	V_GND - CP_GND
Input voltage 1	Vin1	-0.3~(V_VCC+0.3)	V	STBY
Input voltage 2	Vin2	(VEE_IN)-0.3 ~(V_VCC+0.3)	V	Y_IN, PB_IN, PR_IN
Power dissipation	Pd	920	mW	*
Storage temperature	Tstg	-55~+125	°C	

* In case mounting on a (110mm × 100mm × 1.6mm) grass-epoxy PCB.

* Reduced by 9.2 mW/°C at 25°C or higher.

■ Operating range (Ta=25°C)

Parameter	Symbol	Rating.	Unit
CP_VCC Supply voltage	Vcpo	2.85 ~ 3.45	V
V_VCC Supply voltage	Vvo	2.85 ~ 3.45	V
Operating temperature	Topr	-40 ~ +85	°C

■Electrical characteristics 【Unless otherwise noted, Ta=25°C, CP_VCC=V_VCC=3V】

Parameter		Symbol	Limits			Unit	conditions
			Min.	Typ.	Max.		
Circuit current	ACTIVE	I _{CC1}	50	70	90	mA	No signal
	STANDBY	I _{CC2}	—	0	2	μA	Standby mode
Y/PB/PR_OUT Voltage gain		G _V	5.5	6.0	6.5	dB	V _{in} =1.0V _{pp} , f=100kHz
Y/PB/PR_OUT Maximum output level		V _{omv}	3.2	4.0	—	V _{p-p}	THD=1%, f=10kHz
Y_OUT Frequency characteristics 1		G _{f1Y}	−4.5	−1.5	1.0	dB	V _{in} =1.0V _{pp} , f=27M/100kHz
PB_OUT Frequency characteristics 1		G _{f1PB}	−3.0	−1.0	1.0	dB	V _{in} =1.0V _{pp} , f=15M/100kHz
PR_OUT Frequency characteristics 1		G _{f1PR}	−3.0	−1.0	1.0	dB	V _{in} =1.0V _{pp} , f=15M/100kHz
Y_OUT Frequency characteristics 2		G _{f2Y}	—	−26	−15	dB	V _{in} =1.0V _{pp} , f=54M/100kHz
PB_OUT Frequency characteristics 2		G _{f2PB}	—	−35	−28	dB	V _{in} =1.0V _{pp} , f=54M/100kHz
PR_OUT Frequency characteristics 2		G _{f2PR}	—	−35	−28	dB	V _{in} =1.0V _{pp} , f=54M/100kHz
Cross talk		C _T	—	−70	−50	dB	V _{in} =1.0V _{pp} , f=4.43MHz
Y/PB/PR_IN Input impedance		R _{inV}	100	150	200	kΩ	Y/PB/PR_IN—V_GND
Y/PB/PR_OUT Output DC offset		V _{off}	−100	0	100	mV	Terminated 75Ω
STBY Input voltage H		V _{thH}	V_VCC −1.2	—	V_VCC	V	ACTIVE mode
STBY Input voltage L		V _{thL}	0.0	—	0.45	V	STANDBY mode
STBY Input impedance		R _{inST}	100	150	200	kΩ	STBY—V_GND

■Control pin settings

Parameter	Status	Operational mode
STANDBY (B3)	H	ACTIVE
	L	STANDBY
	OPEN	

■ Physical dimensions ▪ Block diagram

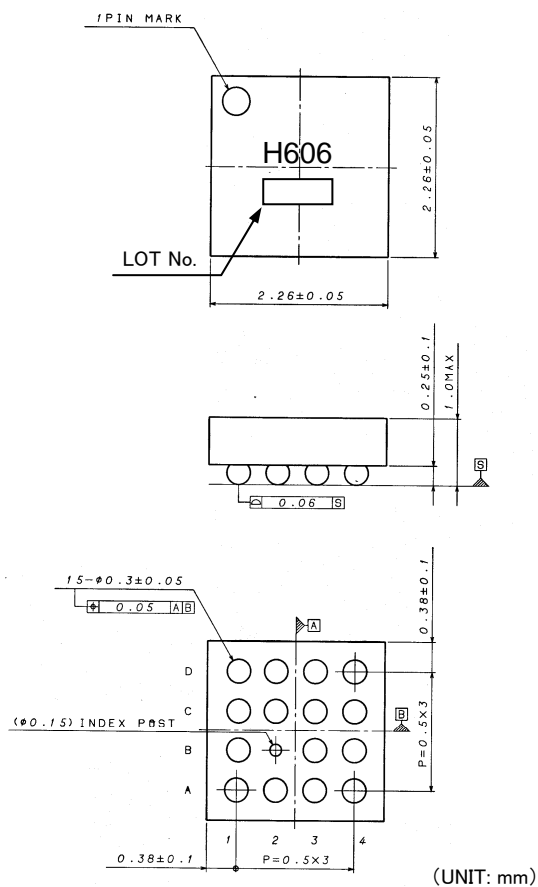


Fig.1. Physical dimensions (VCSP85H2)

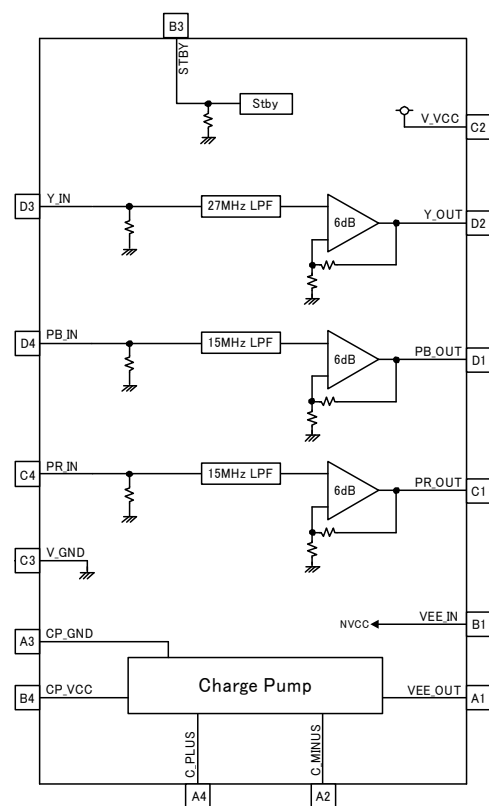


Fig.2. Block diagram

■ Pin assignment

Symbol	Pin name	Symbol	Pin name
A1	VEE_OUT	C1	PR_OUT
A2	C_MINUS	C2	V_VCC
A3	CP_GND	C3	V_GND
A4	C_PLUS	C4	PR_IN
B1	VEE_IN	D1	PB_OUT
–	–	D2	Y_OUT
B3	STBY	D3	Y_IN
B4	CP_VCC	D4	PB_IN

Table. 1. Pin assignment

■ Cautions on use**(1) Absolute maximum ratings**

If applied voltage, operating temperature range, or other absolute maximum ratings are exceeded, the LSI may be damaged. Do not apply voltages or temperatures that exceed the absolute maximum ratings. If you think of a case in which absolute maximum ratings are exceeded, enforce fuses or other physical safety measures and investigate how not to apply the conditions under which absolute maximum ratings are exceeded to LSI.

(2) VEE line

Connect VEE_IN(B1) and VEE_OUT(A1) as shortly as possible on a board.

(3) GND line

Connect CP_GND(A3) and V_GND(C3) to board's GND layer with thick line as shortly as possible. When every GND line's common impedance becomes large, the noise characteristic sometimes deteriorates.

(4) VCC line

Short CP_VCC(B4) and V_VCC(C2) on the board, and supply voltage from the identical power. At the same time, place decoupling capacitor near the VCC pins.

(5) Cross talk

Board layout affects the cross talk. Draw low impedance line such as the GND line in-between so the line will minimize interference among the video signals.

(6) The noise characteristic of video signal

Board layout affects the noise characteristic of video signal. Draw low impedance line such as the GND line in-between so the line will minimize interference among the video signals.

(7) Thermal design

Perform thermal design in which there are adequate margins by taking into account the allowable power dissipation in actual states of use.

(8) Shorts between pins and miss-installation

When mounting the LSI on a board, pay adequate attention to orientation and placement discrepancies of the LSI. If it is miss-installed and the power is turned on, the LSI may be damaged. It also may be damaged if it is shorted by a foreign substance coming between pins of the LSI or between a pin and a power supply or a pin and GND.

(9) Operation in strong magnetic fields

Adequately evaluate use in a strong magnetic field, since there is a possibility of malfunction.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[BH7606GU-E2](#)