




- Accepts Devices on 0.300 to 0.600 [7.62 to 15.24] Centers
- All Pin Count Sockets go into PCB with either 0.300 or 0.600 [7.62 or 15.24] Centers
- Contacts Normally-closed to Eliminate Dependence on Plastic to Sustain Contact Integrity
- Socket Handle Configured with Closed Contacts (on) when in the Up or Down Position, and Mounted on the Right- or Left-hand Side
- Sockets may be Soldered into PCBs or Plugged into Any Socket or Receptacle

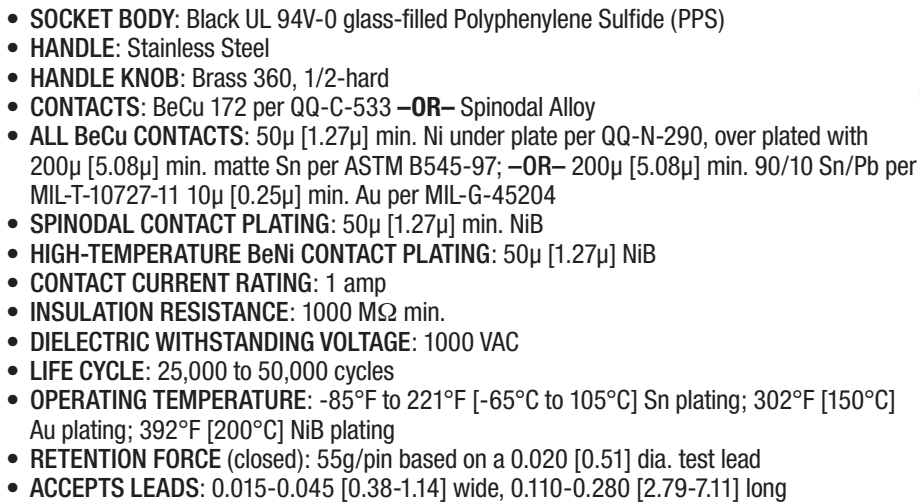

- **Plating**
  - 0 = Sn over Ni
  - OTL = Sn/Pb over Ni
  - 1 = Au over Ni
  - 6 = NiB (Spinodal only)
- **Termination**
  - 1 = Solder Pin Tail
- **Handle Options**
  - 1 = Left up is closed
  - 2 = Right up is closed
  - 3 = Left down is closed
  - 4 = Right down is closed (std)
- **Row-to-Row Spacing (btm)**
  - 3 = 0.300 [7.62]
  - 6 = 0.600 [15.24]
- **No. of Pins**
  - 24, 28, 32, 36, 40, 42, 44, 48

10001  
Rev. 2.0  
1 of 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Aries Electronics:

[1108254-48](#) [1107871-48](#) [1110729-24](#) [1109927-28](#) [1109906-48](#) [1109906-40](#) [1109927-48](#) [1109253](#) [1109741-48](#)  
[7410-101-10](#)