
## 9150 SERIES UNI-SEAL TOOL

Compression tool for RG 6/59, 7/11 & RCA connectors


Instructions for compression style connectors manufactured by Thomas & Betts (Snap-N-Seal), Gilbert (Ultra Seal) and PPC (EXXL)

## TO COMPRESS RG 6/59,7/11 AND RCA CONNECTORS


1) Open the compression chamber by activating the handle to the open position.



2) Push the slide up from the bottom until it clicks into the RG 6/59-RCA position or down for the RG 7/11 position.




RG 6/59-RCA position



RG 7/11 position

3) Install the un-compressed connector and cable by inserting the center conductor into the hole in the compression tip while rotating downward as shown.

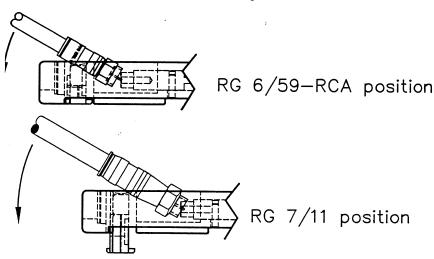


Manufactured by Rostra Tool Co., 30 East Industrial Road, Branford, Ct 06405 INS9150 (TEL) 203-488-8665 (FAX) 203-488-8665 or on the web @WWW.ROSTRATOOL.COM




Made in the U.S.A. Patent Pending


4) Press the cable into the saddle. The connector must be fully seated to assure a uniform compression.



5) With the cable/connector pre-assembly in place squeeze the tool handle to the closed position. A toggle action is evident as the handle approaches its full movement and the handles butt.



6) Release the handle to the open position and lift the cable in a radial motion up and out of the compression chamber.



04/05

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sargent Tools: 9150 US