

# 92S11D22D-12

Power relay, SE Relays, DPDT, 30A, 12 VDC, DIN rail and panel mount cover, class F insulation



## Main

Product Range	Legacy
Product Type	Power relay
Switch Function	DPDT
Contact Composition	2 C/O

## Complementary

Input Current	30 A NO 3 A NC
Contacts Material	Silver alloy contacts
Maximum Switching Capacity	7500 VA/700 W AC/DC 13 mm gap between two relays 6250 VA/700 W AC/DC relays side by side without a gap
Minimum Switching Capacity	170 mW 10 mA / 6 V NC 6000 mW 500 mA / 12 V NO
Coil Resistance	86 Ohm
Input voltage	12 V DC
Drop-out Voltage Threshold	$\geq 0.1 U_c$ DC $\geq 0.15 U_c$ AC
Rated Operational Current	30 A at 277 V AC (NO) conforming to UL 20 A at 28 V DC (NO) (on resistive load) conforming to UL 110 A at 240 V AC (NO) (full load) conforming to UL 10 A at 120 V AC (NO) (tungsten filament) conforming to UL 6 A at 250 V AC (NO) (tungsten filament) conforming to UL 3 A at 277 V AC (NC) (on resistive load) conforming to UL 3 A at 28 V DC (NC) (on resistive load) conforming to UL 30 A at 250 V AC-1 (NO) conforming to IEC 25 A at 28 V DC-1 (NO) conforming to IEC 3 A at 250 V AC-1 (NC) conforming to IEC 3 A at 28 V DC-1 (NC) conforming to IEC
Power consumption in W	1.36... 1.87 W DC
Voltage Range	0.8... 1.1 $U_n$ AC/DC
Maximum Switching Voltage	300 V AC/DC UL 250 V AC/DC IEC
Motor Power HP	1.0 Hp 120 V AC 50/60 Hz 3 hp 240 V AC 50/60 Hz
Electrical Insulation Class	Class F coil
Mounting	DIN rail Panel mounted
Product Weight	2.89 oz (82 g)

## Environment

Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Product Certifications	UL Listed CSA CE
Electrical Durability	100000 Cycles resistive 25000 cycles tungsten
Mechanical Durability	5000000 cycles
Dielectric Strength	4000 V AC between coil and contact 1500 V AC between contacts 2000 V AC between poles
Shock Resistance	10 gn in operation 30 gn not in operation
Vibration Resistance	+/- 1 mm 10...35 Hz) 3 gn 35...150 Hz)
Surge Withstand Duration	1.2/50 µs

## Ordering and shipping details

GTIN	3606480781865
Nbr. of units in pkg.	1
Package weight(Lbs)	2.89 oz (82.0 g)

## Packing Units


Unit Type of Package 1	PCE
Package 1 Height	2.70 in (6.85 cm)
Package 1 width	1.33 in (3.37 cm)
Package 1 Length	1.54 in (3.905 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Approximate Dimensions

DPDT (2 CO):

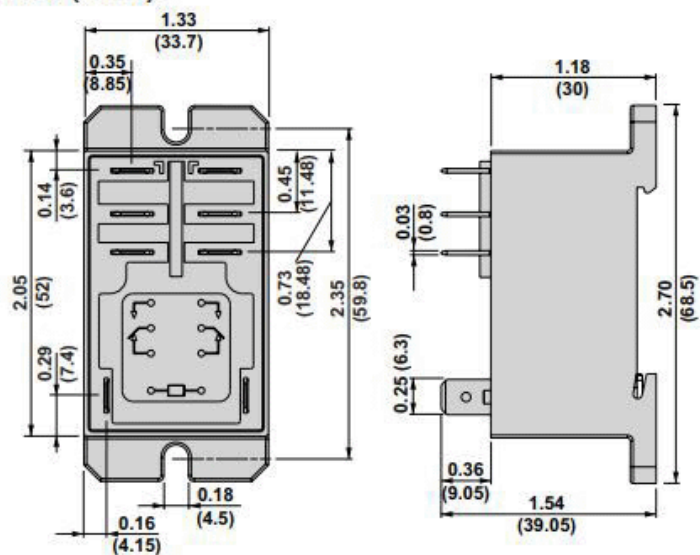


---

Connections and Wiring Diagrams

---

**DPDT (2 CO):**



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[92S11D22D-12](#)