70-784D14-1

Socket, Legacy general purpose relay accessory, 4PDT, 16A, 300 V, 14 pins, screw clamping terminal, 784 series





Main

Legacy
Socket
Relay 784XDX Suppressor module 70-ASMM Diode 70-ASMD Signalling device 70-ASMLG Suppressor module 70-ASMR
14
4PDT
4 NO + 4 NC

Complementary

Rated Current	16 A	
Trated Odificht		
Rated voltage	300 V	
Contact Terminal Arrangement	Mixed	
Connections Terminals	Output screw clamp terminalssolid	
	Output screw clamp terminalsstranded	
Tightening Torque	0.9 N.m	
Fixing Mode	By screw M3.5, M3.5 panel	
	Clip-on 35 x 15 mm symmetrical DIN rail	
Shape of Screw Head	Combination roundhead	
Product Weight	2.19 oz (62 g)	
Width	1.97 in (50 mm)	
Depth	3.13 in (79.6 mm)	

Environment

Ambient Air Temperature for Storage	-40221 °F (-40105 °C)
Ambient Air Temperature for Operation	-40131 °F (-4055 °C)
IP Degree of Protection	IP20
Flame Retardance	UL94-V0
Product Certifications	UL CSA CE RoHS


Ordering and shipping details

	11 0
GTIN	03606480278181

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	☑ REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EPEU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	€Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Approximate Dimensions

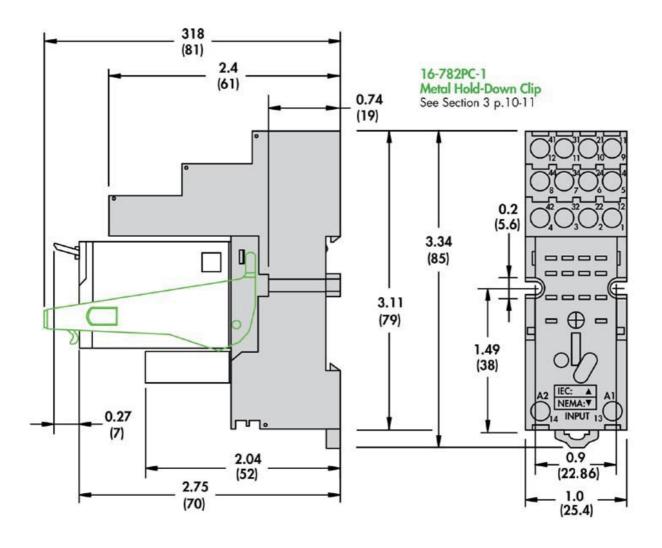

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schneider Electric: 70-784D14-1