TM171ARS232

Modicon M171 Performance Plug-in RS232 with relay

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Modicon M171	
Communication module	
Modbus RTU and ASCII RS232	
_	Communication module Modbus RTU and ASCII

Complementary

Integrated connection type	RS232 wire crimp - twisted pair	
Adjustment	Pitch 5 mm	
Electrical connection	3 removable screw terminal block	
Physical interface	90° insertion - 0 in² (2.5 mm²) cable DB9 connector	
Supply	Via base board EVD/EVC	
Product compatibility	Logic controller M171 performance Logic controller M172 performance	
Product weight	0.17 lb(US) (0.077 kg)	

Environment

Product certifications	CE	
	CSA	
	CURus	
	EAC	
Marking	CE	
IP degree of protection	IP20	
Ambient air temperature for operation	14131 °F (-1055 °C)	
Ambient air temperature for storage	-4185 °F (-2085 °C)	
Relative humidity	1090 % without condensation	

Ordering and shipping details

Category	22537 - M171 / M172 HVAC CONTROLLERS
Discount Schedule	PC12
GTIN	003606480752551
Nbr. of units in pkg.	1
Package weight(Lbs)	0.6500000000000002
Returnability	N
Country of origin	IT


Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 1429 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACh	Reference not containing SVHC above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including:
Substance 1	Lead and lead compounds which is known to the State of California to cause cancer and birth defects or other reproductive harm.
More information	For more information go to www.p65warnings.ca.gov

Product data sheet Dimensions Drawings

TM171ARS232

Dimensions





TM171ARS232

Mounting and Clearance


Clearance









Misplacement



Mounting on Controller

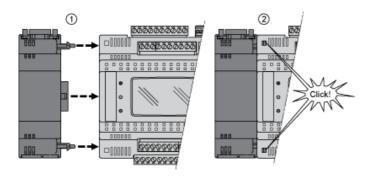

Dismounting





TM171ARS232

Connections and Schema

RS 232 Communication Module

TM171ARS232





NC: Normally Closed. NO: Normally Open.

B RS 232

N°	RS232	
1	GND	
2	DTR	
3	TXD	
4	RXD	
5	DCD	
6	RI	
7	CTS	
8	RTS	
9	DSR	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schneider Electric: TM171ARS232