


Product availability: Non-Stock - Not normally stocked in distribution facility

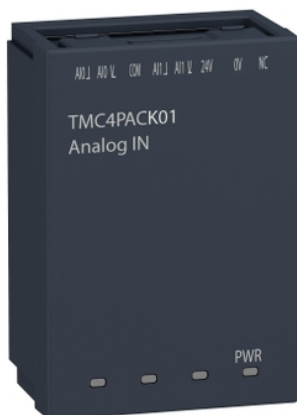

Main

Range of product	Modicon M241
Product or component type	Analogue input cartridge
Product specific application	Packaging
Product compatibility	Modicon M241C
Analogue input number	2

Complementary

Analogue input type	Current, input range: 4...20 mA Current, input range: 0...20 mA Voltage, input range: 0...10 V
Analogue input resolution	16 bits
LSB value	1 mV (voltage), output range: 0...10 V 2 µA (current), output range: 0...20 mA 2 µA (current), output range: 4...20 mA
Sampling duration	10 ms
Absolute accuracy error	+/- 0.2 % of full scale 25 °C
Temperature drift	+/- 0.006 %FS/°C
Repeat accuracy	+/- 0.2 %FS
Non-linearity	+/- 0.05 %FS
Cross talk	80 dB
Type of cable	Twisted shielded pairs cable
Electrical connection	1 spring terminal block (pitch 3.81 mm) 1.5 mm ² 1 for inputs and supply
Cable distance between devices	Twisted shielded pairs cable: 30 m for input
Insulation	Non-insulated between inputs Between input and internal logic 500 V DC
Supply voltage limits	20.4...28.8 V
Local signalling	1 LED green PWR
Height	1.97 in (50 mm)
Depth	0.83 in (21 mm)
Width	1.34 in (34 mm)
Product weight	0.12 lb(US) (0.055 kg)
Permissible continuous overload	40 mA (current) 30 V (voltage)
Input impedance	<= 250 Ohm current >= 1 MOhm voltage

Environment

Immunity to microbreaks	10 ms
-------------------------	-------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

Category	22533 - M2XX PLC & ACCESSORIES
Discount Schedule	MSX
GTIN	003606480649196
Nbr. of units in pkg.	1
Package weight(Lbs)	0.14000000000000001
Returnability	N
Country of origin	ID

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1350 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[TMC4PACK01](#)