

Product availability: Stock - Normally stocked in distribution facility



Main

Range of product	Advantys Telefast ABE7
Product or component type	Plug-in electromechanical relay
Control circuit type	DC
Quantity per set	Set of 4

Complementary

Width pitch dimension	0.39 in (10 mm)
Product compatibility	ABE7P16T210 ABE7P16T212 ABE7P16T214 ABE7P16T215 ABE7P16T230 ABE7P16T230E ABE7R16T210 ABE7R16T212
[Uc] control circuit voltage	24 V
[Ith] conventional free air thermal current	5 A
Contacts type and composition	1 NO
Threshold tripping voltage	19.7 V at 104 °F (40 °C)
Drop-out voltage	2.4 V at 68 °F (20 °C)
Drop-out current	1 mA at 68 °F (20 °C)
Power dissipation per pole	<= 0.36 W
Associated fuse rating	1 A fast blow
Maximum switching voltage	130 V DC conforming to IEC 60947-5-1 250 V AC 50/60 Hz conforming to IEC 60947-5-1
Electrical durability	500000 cycles, maximum switching current: 1500 mA at 230 V AC-12 500000 cycles, maximum switching current: 1500 mA at 24 V DC-12 500000 cycles, maximum switching current: 600 mA at 24 V DC-13 10 ms 500000 cycles, maximum switching current: 900 mA at 230 V AC-15
Minimum switching current	10 mA at >= 5 V
Electrical reliability	1e-008
Operating rate in Hz	10 Hz no load 0.5 Hz at Ie
Mechanical durability	20000000 cycles
[Uimp] rated impulse withstand voltage	2.5 kV conforming to IEC 60947-1
Product weight	0.02 lb(US) (0.008 kg)

Environment

Max immunity to microbreaks	<= 5 ms
Dielectric strength	2000 V conforming to IEC 60947-1

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

Category	22375 - INTERFACE MODULE(ABA,R,S)
Discount Schedule	CP2
GTIN	00785901546313
Nbr. of units in pkg.	4
Package weight(Lbs)	7.0000000000000007E-2
Returnability	Y
Country of origin	JP

Offer Sustainability

RoHS (date code: YYWW)	Compliant - since 0701 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov


Contractual warranty

Warranty period	18 months
-----------------	-----------

Electrical Durability (in Millions of Operating Cycles) Conforming to IEC 60947-5-1


DC Loads

DC12 curves

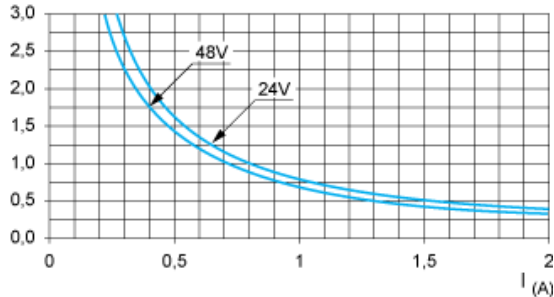

DC12 control of resistive loads and of solid state loads isolated by optocoupler, $I/R \leq 1$ ms.


DC13 curves

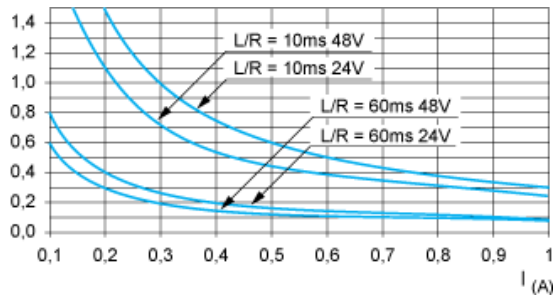

DC13 switching electromagnets, $L/R \leq 2 \times (U_e \times I_e)$ in ms, U_e : rated operational voltage, I_e : rated operational current (with a protective diode on the load, DC12 curves must be used with a coefficient of 0.9 applied to the number in millions of operating cycles)


AC Loads

AC12 curves

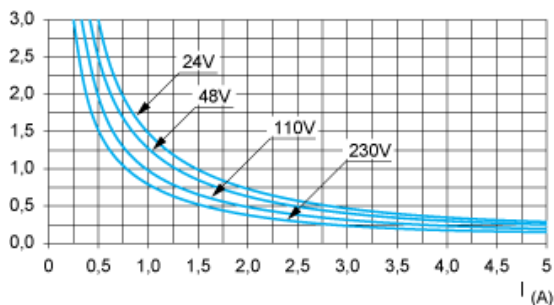


AC12 control of resistive loads and of solid state loads isolated by optocoupler, $\cos \phi \geq 0.9$.

AC14 curves

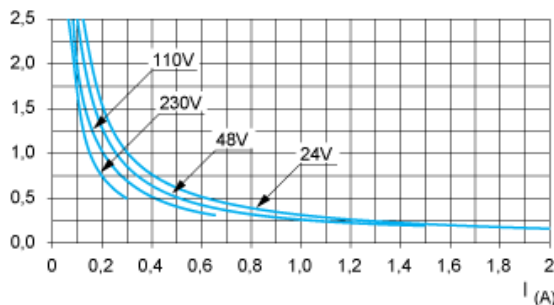

AC14 control of small electromagnetic loads ≤ 72 VA, make: $\cos \phi = 0.3$, break: $\cos \phi = 0.3$.

AC15 curves

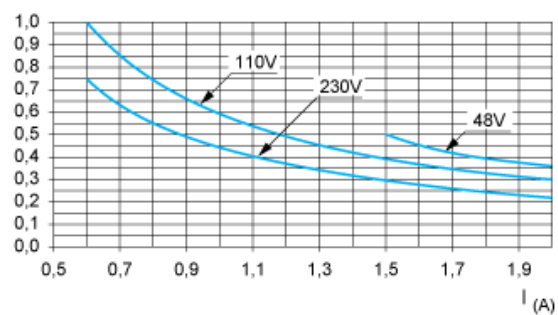

AC15control of electromagnetic loads > 72 VA, make: $\cos \phi = 0.7$, break: $\cos \phi = 0.4$.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[ABR7S21](#)