

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of product	OsiSense XG
Product or component type	Electronic tag
RFID electronic tag name	XGHB
RFID frequency	13.56 MHz
Design	Disc
Memory capacity	112 B
Associated smart antenna	XGCS
[Sn] nominal sensing distance	70 mm with XGCS49 + field expander XGFEC540 3.94 in (100 mm) with XGCS85 3.94 in (100 mm) with XGCS89 5.91 in (150 mm) with XGCS49 + field expander XGFEC2525 2.76 in (70 mm) with XGCS49
Outer dimension	Ø 50 x 3 mm
Quantity per set	Set of 10
Read time	12 + 0.825 x (number of 16-bit words) ms
Write time	12 + 5.6 x (number of 16-bit words) ms
IP degree of protection	IP68
Fixing mode	By screws

Complementary

Memory type	EEPROM
Memory operation	Read/write
Number of read cycles	Unlimited
Number of write cycles	100000 at -25...85 °C 2500000 at 86 °F (30 °C)
Maximum linear speed with "auto read/write function"	With XGCS49 (read a serial number) With XGCS49 (read a word) With XGCS49 (read or write 10 words) With XGCS89 (read a serial number) With XGCS89 (read a word) With XGCS89 (read or write 10 words) With XGCS85 (read a serial number) With XGCS85 (read a word) With XGCS85 (read or write 10 words)
Data retention time	10 yr
Material	PPA (polyphthalamide)
Product weight	0.03 lb(US) (0.015 kg)

Environment

Standards	ISO 15693
Ambient air temperature for operation	-25...85 °C 85...140 °C for 10 min maximum not during transmission
Ambient air temperature for storage	-40...194 °F (-40...90 °C)
Vibration resistance	2 mm (f = 5...29.5 Hz) conforming to EN 60068-2-6 7 gn (f = 29.5...150 Hz) conforming to EN 60068-2-6
Shock resistance	30 gn 11 ms conforming to EN 60068-2-27
IK degree of protection	IK02 conforming to EN 50102

Ordering and shipping details


Category	22491 - SENS,IDENTIFICATION DEVICE (XGK)
Discount Schedule	DS2
GTIN	003389119615082
Nbr. of units in pkg.	10
Package weight(Lbs)	0.01
Returnability	N
Country of origin	FR

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and
- - - - - Substance 2	Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov


Dimensions

Updatable Code Electronic Tags



Minimum Mounting Distances


Distance Between Tags



XGCS4901201 smart antenna (format 40)		XGCS8•• smart antennas (format 80)	
e1	e2	e1	e2
35	60	110	140

Minimum Mounting Distances in a Metal Structure



No metal parts within 15 mm of the tag



- (e) ≥ 15 mm.
- (1) Tightening torque ≤ 1 Nm/0.74 lb-ft
 - (2) Insulation material

Curves


Dialogue Zones for Field Expanders

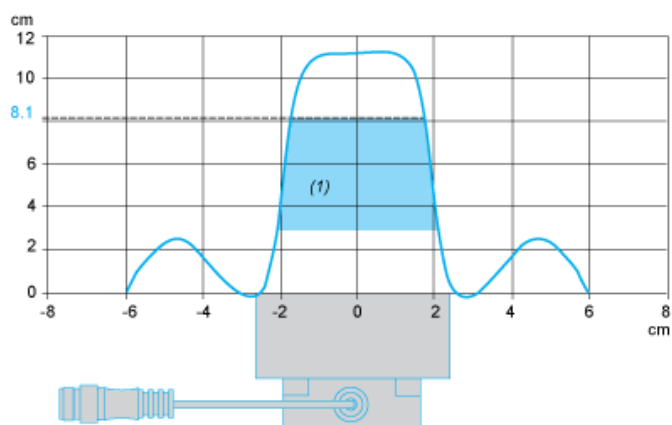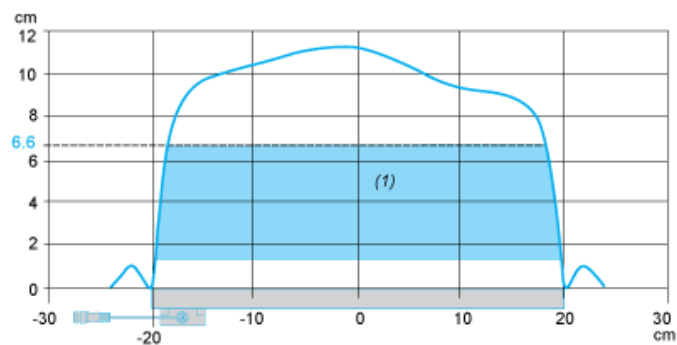

(1) Recommended working zone.

Curves

Dialogue Zones for Field Expanders

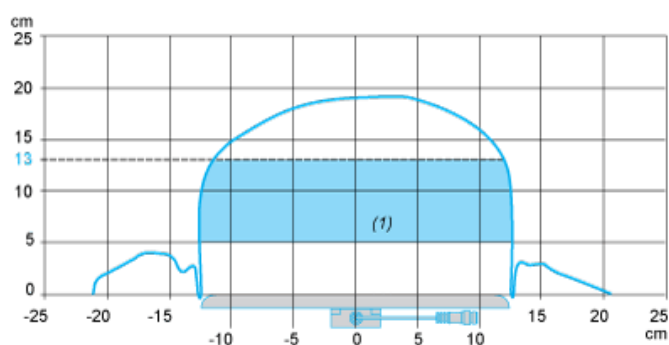

(1) Recommended working zone.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schneider Electric:

[XGHB520246](#)