



## Schneider Electric Relays

200 N. Martingale Rd., Suite 1000


Schaumburg, IL 60173

Phone: 847-441-2540 • Fax: 847-881-0741

E-Mail: [relays@schneider-electric.com](mailto:relays@schneider-electric.com) • Web site: [www.serelays.com](http://www.serelays.com)

### ITEM # 841CS5-UNI, 841 CURRENT SENSING RELAYS / SPDT, 15 AMP RATING

The 841 Current Sensor Series allows the user to monitor the current of one circuit (1 to 8 amps) and switch another circuit in case of an over current or under current condition.

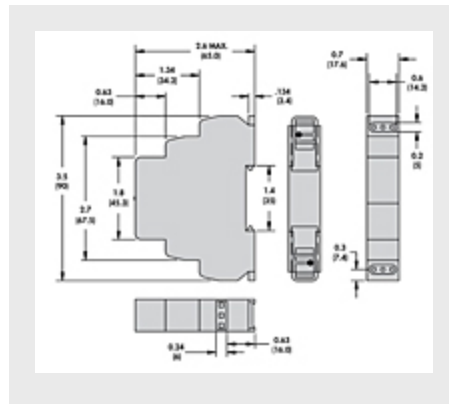

[SPECIFICATIONS](#) | [OUTPUT CHARACTERISTICS](#) | [INPUT CHARACTERISTICS](#) | [PERFORMANCE CHARACTERISTICS](#) | [ENVIRONMENT](#) | [PRODUCT CERTIFICATIONS](#)

#### Specifications

Check Inventory [Check Distributor Inventory](#)

Status Standard

Type of Device Current Sensor

Rated Current Load 15 A

Timing Range 0.1s to 10s

Sensing Current Range 0.5 to 5 A

#### California Proposition 65 Warning



**WARNING:** This product can expose you to chemicals including:  
**Substance 1:** Nickel compounds, which is known to the State of California to cause cancer.  
**Substance 2:** DIDP, which is known to the State of California to cause birth defects or other reproductive harm.  
 For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

#### Output Characteristics

Contact Configuration	SPDT
Contact Materials	Silver Alloy
Current Rating at 240 VAC, 24 VDC	15 A
Switching Voltage	24 VDC 240 VAC, 50/60 Hz
Switching Voltage [hp]	1 hp at 240 VAC 1/2 hp at 120 VAC
Switching Voltage (Pilot Duty)	B300
Indication (LED)	Red

Input Characteristics	
Maximum Consumption LED	1.50 VA
Indication	Green
Sensing Range	0.5 to 5 A
Functions Available	A - On Delay (Power On)
Time Scales	1
Time Ranges Available	0 to 10 s
Tolerance, Mechanical Setting	5 %
Repeatability, Constant Voltage and Temperature	1 %
Operate Time, Maximum	25 ms
Reset Time, Maximum	20 ms

Performance Characteristics	
Electrical Life (UL508), Operations at Rated Current (Resistive)	100000
Mechanical Life, Unpowered	10000000
Dielectric Strength - Input to Contacts	2500 VAC
Dielectric Strength - Between Open Contacts	1000 VAC
Terminal Wire Capacity	14 AWG 2.10 mm_

Terminal Torque (Maximum)	7.10 in lb
---------------------------	------------

Environment		—
Ambient Air Temperature around the Device - Operation	-20 to +55 °C	
Ambient Air Temperature around the Device - Storage	-30 to +70 °C	
Degree of Protection	IP 20	

Product Certifications		—
Agency Approvals	UL (E234203) CE (per IEC 61810-1) RoHs	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[841CS5-UNI](#)