

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of product	Zelio Control
Product or component type	Modular measurement and control relays
Relay type	Pump control relays
Product specific application	For 3-phase and single-phase pump
Relay name	RM35BA
Relay monitored parameters	Phase failure on 3-phase supply Phase sequence on 3-phase supply Overcurrent and undercurrent control
Time delay type	Ti on energisation adjustable 1...60 s, +/- 10 % Reset on terminal Y2 fixed 0.3 s Tt on crossing the threshold adjustable 0.1...10 s, +/- 10 %
Switching capacity in VA	1250 VA
Minimum switching current	10 mA at 5 V DC
Maximum switching current	5 A AC/DC
Power consumption in VA	<= 5 VA AC
Measurement range	1...10 A AC
Utilisation category	AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1

Complementary

Reset time	2000 ms
Maximum switching voltage	250 V AC/DC
[Un] rated nominal voltage	208...480 V AC 3 phases 230 V AC 1 phase
[Un] rated nominal voltage	208...480 V AC 3 phases 230 V AC single phase
Supply voltage limits	183...528 V AC
Operating voltage tolerance	- 15 % + 10 % Un
Resistance across terminals	0.01 Ohm E1-L2 terminals
Width	1.38 in (35 mm)
Output contacts	1 C/O
Nominal output current	5 A
Measuring cycle	<= 140 ms as true rms value
Delay at power up	0.5 s
Hysteresis	5 % of threshold
Measurement accuracy	+/- 10 % of the full scale value
Repeat accuracy	+/- 1 % input and measurement circuit +/- 1 % time delay
Measurement error	1 % by volt over the whole range +/- 0.05 %/°C
Response time	< 300 ms in the event of a fault

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Overload input current	11 A permanent at 25 °C E1-L2 terminals 50 A non repetitive < 1 s at 25 °C E1-L2 terminals
Marking	CE : EMC 89/336/EEC CE : 73/23/EEC
Overvoltage category	III conforming to IEC 60664-1
Insulation resistance	> 500 MOhm at 500 V DC between supply and relay output conforming to 60255-5 > 500 MOhm at 500 V DC between measurement and relay output conforming to 60664-1 > 1 MOhm at 500 V DC between supply and measurement conforming to 60255-5 > 500 MOhm at 500 V DC between supply and relay output conforming to 60664-1 > 500 MOhm at 500 V DC between measurement and relay output conforming to 60255-5 > 1 MOhm at 500 V DC between supply and measurement conforming to 60664-1
[Ui] rated insulation voltage	400 V conforming to IEC 60664-1
Supply frequency	50/60 Hz +/- 10 %
Operating position	Any position
Connections - terminals	Screw terminals 1 x 0.5...1 x 4 mm ² - AWG 20...AWG 11, solid cable without cable end Screw terminals 2 x 0.5...2 x 2.5 mm ² - AWG 20...AWG 14, solid cable without cable end Screw terminals 1 x 0.2...1 x 2.5 mm ² - AWG 24...AWG 12, flexible cable with cable end Screw terminals 2 x 0.2...2 x 1.5 mm ² - AWG 24...AWG 16, flexible cable with cable end
Tightening torque	5.31...8.85 lbf.in (0.6...1 N.m) conforming to IEC 60947-1
Housing material	Self-extinguishing plastic
Status LED	1 LED green power ON 1 LED yellow fault 1 LED yellow relay ON
Mounting support	35 mm symmetrical DIN rail conforming to EN/IEC 60715
Electrical durability	100000 cycles
Mechanical durability	30000000 cycles
Operating rate	<= 360 operations/hour under full load

Environment

Immunity to microbreaks	500 ms
Electromagnetic compatibility	Emission standard for industrial environments conforming to EN/IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to EN/IEC 61000-6-3 Immunity for industrial environments conforming to NF EN/IEC 61000-6-2
Standards	EN/IEC 60255-6
Product certifications	GL GOST UL CSA C-Tick
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Ambient air temperature for operation	-4...122 °F (-20...50 °C)
Relative humidity	95 % at 131 °F (55 °C) conforming to IEC 60068-2-30
Vibration resistance	0.35 mm (f = 5...57.6 Hz) conforming to IEC 60068-2-6/IEC 60255-21-1 1 gn (f = 57.6...150 Hz) conforming to IEC 60068-2-6/IEC 60255-21-1
Shock resistance	15 gn 11 ms conforming to IEC 60255-21-1
IP degree of protection	IP20(Terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Dielectric strength	2 kV AC 50 Hz (shock wave 4 kV)

Ordering and shipping details

Category	22380 - RELAYS-MEASUREMENT (RM17-RM35)
Discount Schedule	CP2
GTIN	00785901637417
Nbr. of units in pkg.	1
Package weight(Lbs)	0.27000000000000002
Returnability	N
Country of origin	ID

Offer Sustainability


Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0701 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available
California proposition 65	WARNING: This product can expose you to chemicals including:
- - - - - Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
- - - - - More information	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------

3-Phase and Single-Phase Pump Control Relays


Dimensions and Mounting

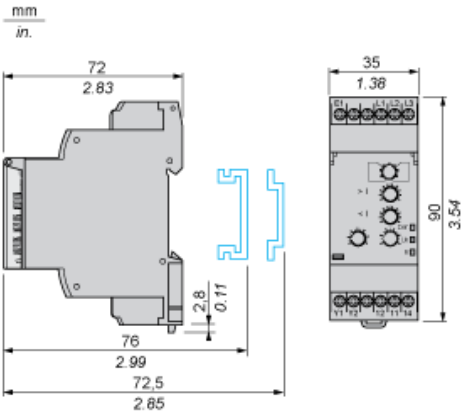


3-Phase and Single-Phase Pump Control Relays

Wiring Diagrams


3-phase < 10 A

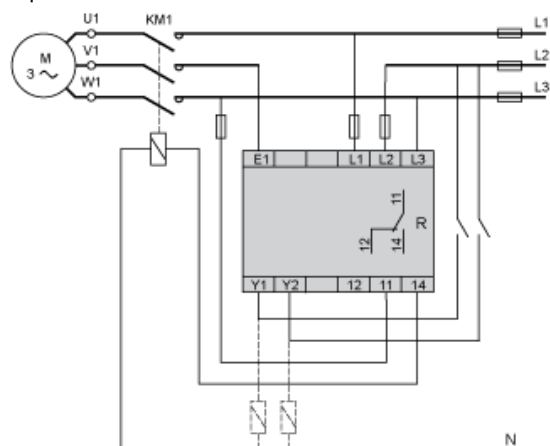


Single-phase ~ 230 V < 10 A

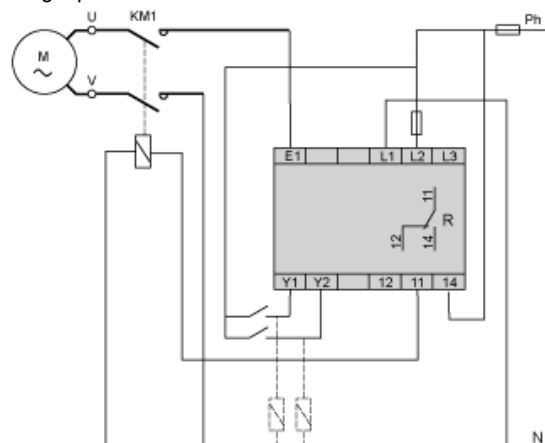

3-phase > 10 A

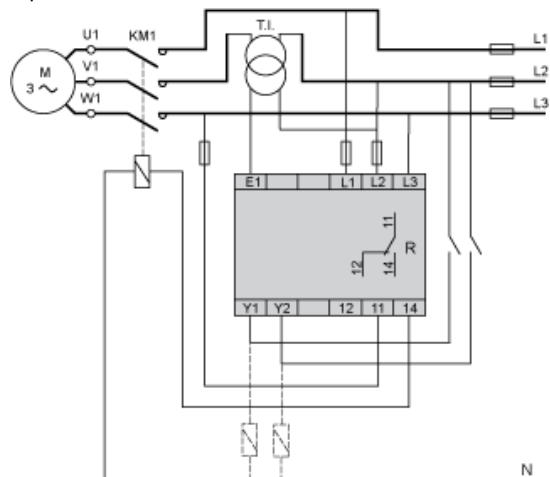


Single-phase ~ 230 V > 10 A

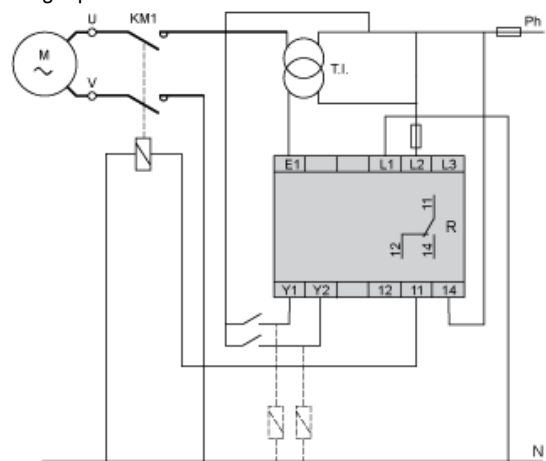

Function Diagrams

Single Control Mode

This mode is designed to control a pump via an external signal. The relay output is closed when the signal is present at Y1 (contact closed). Y2 can be used to reset the relay after a current fault.

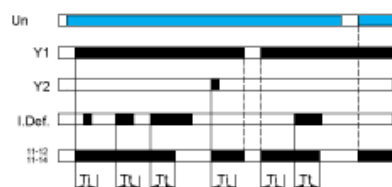

Double Control Mode


This mode is designed to control a pump via two external control signals (Y1 and Y2). The output relay closes when both input signals are present (Y1 and Y2 closed).




Current Control

If the control relay is configured for a single-phase supply, it monitors the current consumed by the pump. If the control relay is configured for a 3-phase supply, it monitors the current, phase sequence and phase failure.

Overcurrent detection

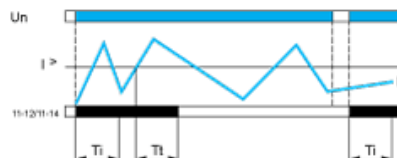

Undercurrent Detection

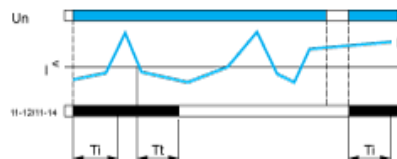

Legend

Ti Time delay to inhibit fault monitoring on starting of pump

Tt Time delay in the event of a fault

Un 3-phase or single-phase power supply

I Monitored current

$I <$ Undercurrent threshold

$I >$ Overcurrent threshold

I. Def Presence of a current fault

11-12, 11-14 Output relay connections

Relay status: black color = energized.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[RM35BA10](#)