

## 1- stage filter for 3-phase systems



See below:

### Approvals and Compliances

#### Description

- 3 phase line filter with standard attenuation
- Available as high voltage filter (up to 520 VAC)

#### Applications

- Voltage rating 480 and 520 VAC for world wide acceptance
- Protection against interference voltage from the mains
- For photovoltaic systems and industrial applications
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Filter types with excellent attenuation up to 110A and high attenuation filter (L-) types. UL PENDING for filter types with excellent attenuation with rated current >110A and high voltage filter (-I) types.
- Suitable for use in equipment according to IEC/UL 62368-1

#### Other versions on request

- Version available up to 760 VAC
- Version with wire connection instead of screw-on mounting available on request

#### References

We recommend for new applications the type [FMAC NEO](#); [FMBC EP](#)

#### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

#### Technical Data

|                         |                                           |
|-------------------------|-------------------------------------------|
| Rated Current           | 6 - 1100A                                 |
| Rated voltage           | 480/520 VAC, 50/60 Hz                     |
| Approval for            | 6 - 1100A @ Ta 40 (75) °C / 480 VAC; 50Hz |
| Overload Current        | 1.5 x Ir for 1 minute, per hour           |
| Leakage Current         | industrial < 15mA (440V / 50Hz)           |
| Dielectric Strength     | 480VAC:                                   |
|                         | 2.25kVDC between L-L                      |
|                         | 3kVDC between L-PE                        |
|                         | 520VAC:                                   |
|                         | 2.25kVDC between L-L                      |
| Number of Filter Stages | 4kVDC between L-PE                        |
|                         | Test voltage (2 sec)                      |
|                         | 1-stage                                   |
| Weight                  | 0.9 - 47kg                                |
| Material: Housing       | Metal                                     |
| Sealing Compound        | UL 94V-0                                  |

|                       |                                                                   |
|-----------------------|-------------------------------------------------------------------|
| Mounting              | Screw-on mounting on chassis, from top                            |
| Terminal              | Screw clamps                                                      |
| Operating Temperature | -25 °C to 100 °C                                                  |
| Climatic Category     | 25/100/21 acc. to IEC 60068-1                                     |
| Degree of Protection  | IP20 acc. to IEC 60529                                            |
| Protection Class      | Suitable for appliances with protection class I acc. to IEC 61140 |
| MTBF                  | > 200'000h acc. to MIL-HB-217 F                                   |

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.  
Approval Reference Type: FMAC

| Approval Logo                                                                    | Certificates  | Certification Body | Description                             |
|----------------------------------------------------------------------------------|---------------|--------------------|-----------------------------------------|
|  | VDE Approvals | VDE                | Certificate Number: 40004666 + 40004673 |
|  | UL Approvals  | UL                 | UR File Number: E72928                  |

Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard  | Description                                                  |
|----------------------------------------------------------------------------------|-----------------------|-----------|--------------------------------------------------------------|
|  | Designed according to | IEC 60939 | Passive filters for suppressing electromagnetic interference |
|  | Designed according to | UL 1283   | Passive filters for suppressing electromagnetic interference |

Application standards

Application standards where the product can be used

| Organization                                                                     | Design                         | Standard       | Description                                                                                   |
|----------------------------------------------------------------------------------|--------------------------------|----------------|-----------------------------------------------------------------------------------------------|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

Compliances


The product complies with following Guide Lines

| Identification                                                                     | Details                        | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|--------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | CE declaration of conformity   | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | UKCA declaration of conformity | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.                                                  |
|  | RoHS                           | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | China RoHS                     | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | REACH                          | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

Dimension [mm]



Case 24-3

Case 31-3


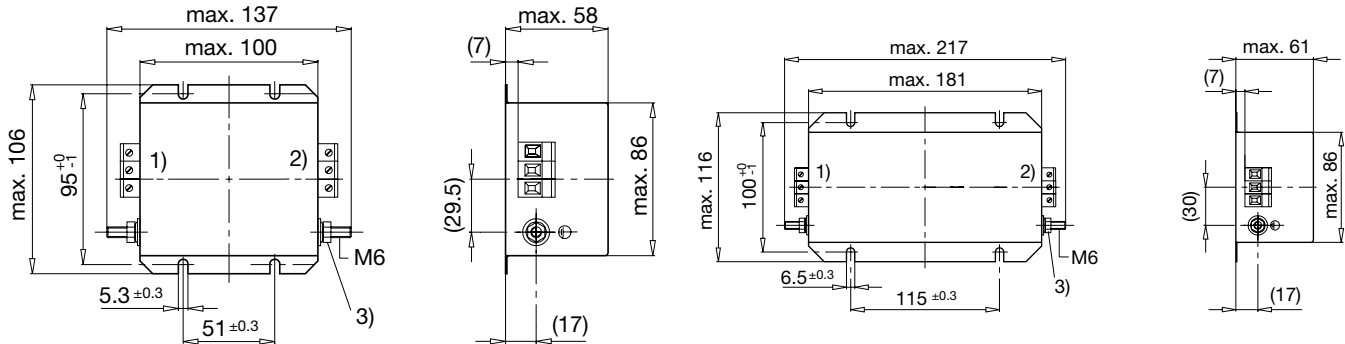


- 1) Line
- 2) Load
- 3) Nut torque 3...4 Nm



Case 32-3

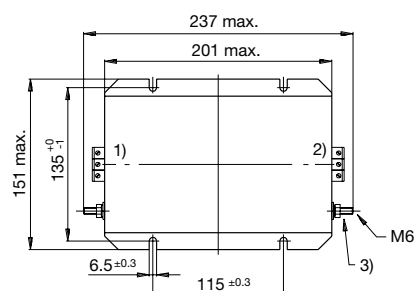



Case 32-7

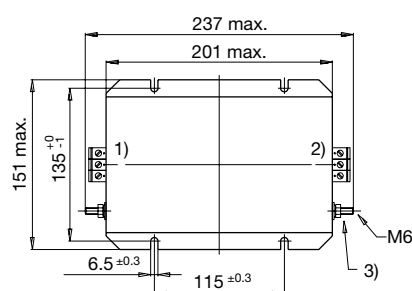



Case 32-C

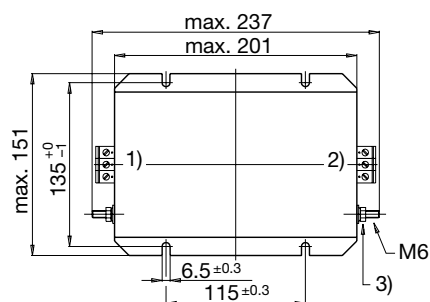



Case 34-3

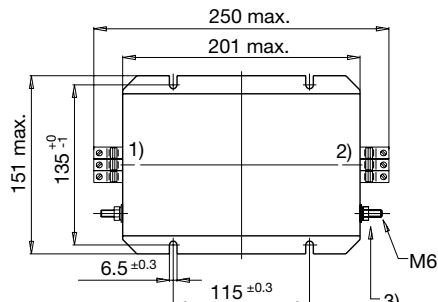


Case 34-C

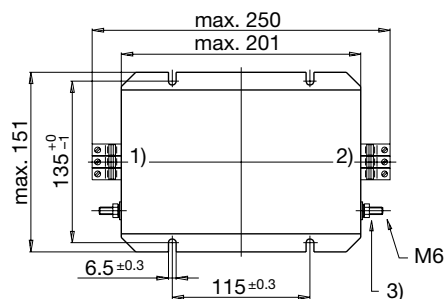


Case 37-3

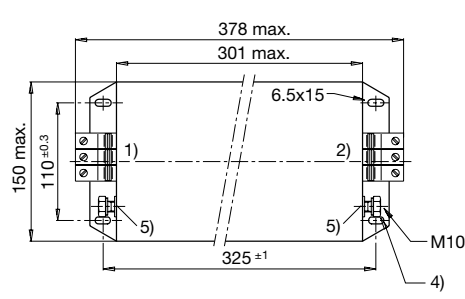

Case 53-3

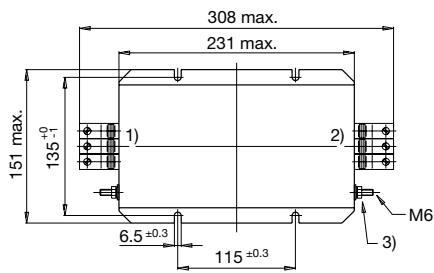





Case 54-3

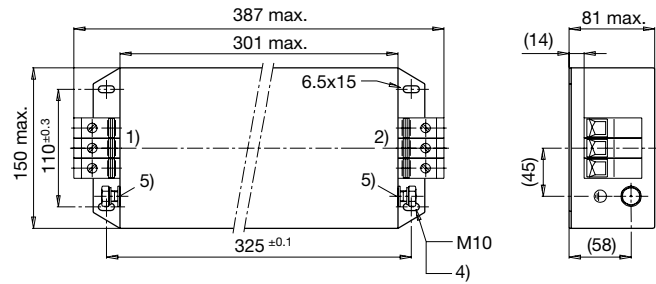


- 1) Line
- 2) Load
- 3) Tightening torque 3...4 Nm
- 4) Tightening torque 10...17 Nm
- 5) Do not unscrew lock-nut

Case 55-3


Case 56-3

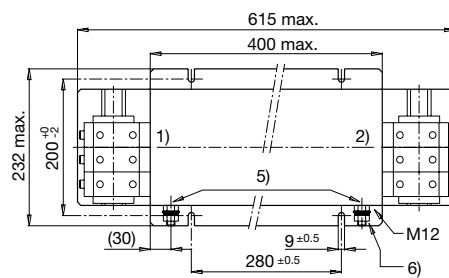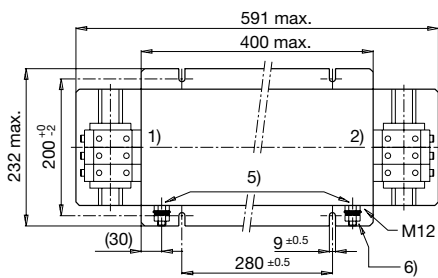

Case 57

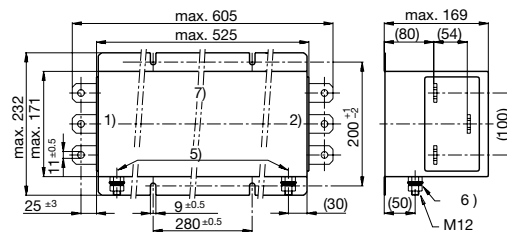

Case 74

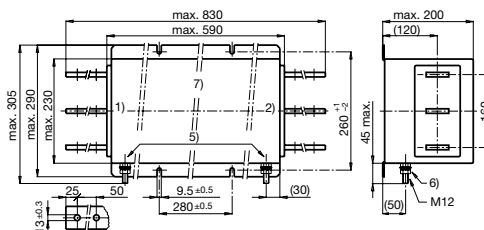


- 1) Line
- 2) Load
- 5) Do not unscrew lock-nut
- 6) Tightening torque 14...30 Nm
- 7) Current plates 720 mm² (60x12)

## Technical data to the filter components

| Rated Current @ Tu<br>40°C (75°C) [A] | Characteristic        | Rated Voltage [VAC] | L [mH] | C1 [μF] | C2 [μF] | C3 [nF] | C4 [nF] | C5 [μF] | C6 [μF] | R1 [MΩ] | R2 [MΩ] | R3 [MΩ] | R4 [MΩ] |
|---------------------------------------|-----------------------|---------------------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 6 (6)                                 | Excellent attenuation | 480                 | 10     | 1.0     | -       | 100     | 10      | 2.2     | -       | -       | -       | 1       | 1       |
| 8 (5)                                 | Excellent attenuation | 480                 | 10     | 1.0     | -       | 100     | 10      | 2.2     | -       | -       | -       | 1       | 1       |
| 16 (10)                               | Excellent attenuation | 480                 | 6      | 1.0     | -       | 100     | 10      | 2.2     | -       | -       | -       | 1       | 1       |
| 16 (C)                                | High voltage filter   | 520                 | 6      | 1.5     | -       | 50      | 11      | 1.5     | -       | 2       | 1       | 1       | 2       |
| 16 (10)                               | Excellent attenuation | 480                 | 6      | 1.0     | -       | 100     | 10      | 2.2     | -       | -       | -       | 1       | 1       |
| 25 (15)                               | Excellent attenuation | 480                 | 3      | 4.4     | 1       | 10      | 47      | 4.4     | 1       | 2.2     | 1       | 1       | 2.2     |
| 25 (14)                               | High attenuation      | 480                 | 2.4    | 4.4     | 1       | 10      | 47      | 4.4     | 1       | 2.2     | -       | 1       | 2       |
| 25 (C)                                | High voltage filter   | 520                 | 3      | 3       | 1.1     | 50      | 11      | 3       | 1.1     | 2       | 1       | 1       | 2       |
| 36 (20)                               | High attenuation      | 480                 | 1.5    | 4.4     | 1       | 10      | 47      | 4.4     | 1       | 2.2     | -       | 1       | 2       |
| 36 (C)                                | High voltage filter   | 520                 | 2      | 3       | 1.1     | 50      | 11      | 3       | 1.1     | 2       | 1       | 1       | 2       |
| 50 (32)                               | Excellent attenuation | 480                 | 1      | 4.4     | 1       | 10      | 100     | 4.4     | 1       | 2.2     | 1       | 1       | 2.2     |
| 50 (30)                               | High attenuation      | 480                 | 1      | 4.4     | 1       | 10      | 100     | 4.4     | 1       | 2.2     | -       | 1       | 2       |
| 50 (C)                                | High voltage filter   | 520                 | 1      | 3       | 1.1     | 50      | 11      | 3       | 1.1     | 2       | 1       | 1       | 2       |
| 64 (37)                               | High attenuation      | 480                 | 0.6    | 4.4     | 1       | 10      | 100     | 4.4     | 1       | 2.2     | -       | 1       | 2       |
| 80 (45)                               | Excellent attenuation | 480                 | 1      | 6.6     | 1       | 47      | 100     | 6.6     | 1       | 2.2     | 1       | 1       | 2.2     |
| 80 (C)                                | High voltage filter   | 520                 | 1      | 4.5     | 1.1     | 50      | 50      | 4.5     | 1.1     | 2       | 1       | 1       | 2       |
| 64 (37)                               | Excellent attenuation | 480                 | 0.6    | 4.4     | 1       | 10      | 100     | 4.4     | 1       | 2.2     | 1       | 1       | 2.2     |
| 64 (C)                                | High voltage filter   | 520                 | 0.6    | 3       | 1.1     | 50      | 11      | 3       | 1.1     | 2       | 1       | 1       | 2       |
| 110 (70)                              | Excellent attenuation | 480                 | 0.7    | 6.6     | 1       | 47      | 100     | 6.6     | 1       | 2.2     | 1       | 1       | 2.2     |
| 110 (C)                               | High voltage filter   | 520                 | 0.7    | 4.5     | 1.1     | 50      | 50      | 4.5     | 1.1     | 2       | 1       | 1       | 2       |
| 180 (C)                               | Excellent attenuation | 480                 | 0.4    | 6.6     | 1       | 47      | 100     | 6.6     | 1       | 2.2     | 1       | 1       | 2.2     |
| 180 (C)                               | High voltage filter   | 520                 | 0.4    | 4.5     | 1.1     | 50      | 50      | 4.5     | 1.1     | 2       | 1       | 1       | 2       |
| 250 (C)                               | Excellent attenuation | 480                 | 0.3    | 11      | 1       | 100     | 100     | 11      | 1       | 2.2     | 0.5     | 0.5     | 2.2     |
| 250 (C)                               | High voltage filter   | 520                 | 0.3    | 7.5     | 1.1     | 50      | 50      | 7.5     | 1.1     | 2       | 1       | 1       | 2       |
| 340 (C)                               | Excellent attenuation | 480                 | 0.2    | 11      | 1       | 100     | 100     | 22      | 1       | 2.2     | 0.33    | 0.33    | 2.2     |
| 340 (C)                               | High voltage filter   | 520                 | 0.2    | 7.5     | 1.1     | 50      | 50      | 15      | 1.1     | 2       | 1       | 1       | 2       |
| 450 (C)                               | Excellent attenuation | 480                 | 0.2    | 11      | 1       | 100     | 100     | 22      | 1       | 2.2     | 0.33    | 0.33    | 2.2     |
| 550 (C)                               | Excellent attenuation | 480                 | 0.2    | 11      | 1       | 100     | 100     | 22      | 1       | 2.2     | 0.33    | 0.33    | 2.2     |
| 1100 (C)                              | High voltage filter   | 520                 | 0.12   | 11      | 1.1     | 50      | -       | 22      | 1.1     | 2       | 0.5     | 0.25    | 2       |


## Diagrams

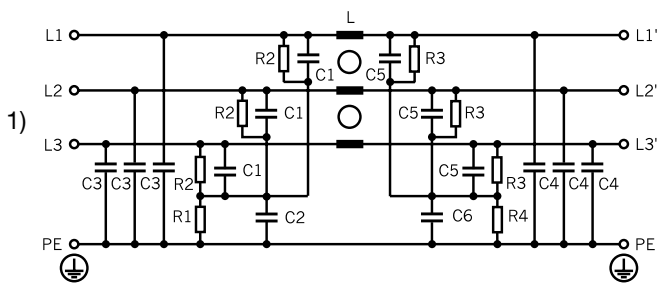

1) Line

Derating Curves

Permissible Working Current as a Function of Ambient Temperature

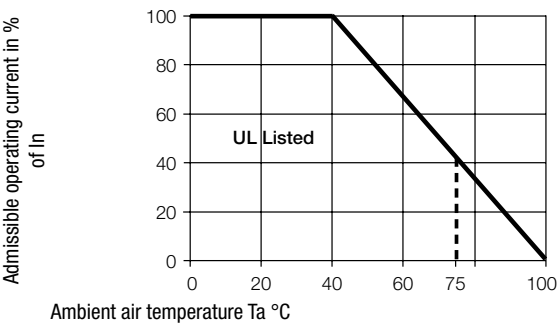



## Variants

| Rated Current @<br>Tu 40°C (75°C) [A] | Characteristic        | Rated Voltage [VAC] | Power<br>Dissipation<br>[W] | Leakage<br>Current [mA]<br>@ 440V <sub>L</sub> | Contact Resi-<br>stance [mΩ] | Weight<br>[kg] | Screw clamps<br>[mm <sup>2</sup> ] 2) | Housing | Order Number    |
|---------------------------------------|-----------------------|---------------------|-----------------------------|------------------------------------------------|------------------------------|----------------|---------------------------------------|---------|-----------------|
| 6 (6)                                 | Excellent attenuation | 480                 | 2.48                        | 1.3                                            | 23                           | 0.9 kg         | 4                                     | 24-3    | FMAC-0924-0610  |
| 8 (5)                                 | Excellent attenuation | 480                 | 5.38                        | 1.3                                            | 28                           | 1.8 kg         | 4                                     | 31-3    | FMAC-0931-0810  |
| 16 (10)                               | Excellent attenuation | 480                 | 8.83                        | 1.3                                            | 11.5                         | 1.8 kg         | 4                                     | 31-3    | FMAC-0931-1610  |
| 16 (C)                                | High voltage filter   | 520                 | 8.83                        | 0.7                                            | 11.5                         | 1.8 kg         | 4                                     | 31-3    | FMAC-0931-1612I |
| 16 (10)                               | Excellent attenuation | 480                 | 8.83                        | 1.3                                            | 11.5                         | 2.8 kg         | 4                                     | 32-3    | FMAC-0932-1610  |
| 25 (15)                               | Excellent attenuation | 480                 | 8.25                        | 8.4                                            | 4.4                          | 3.4 kg         | 6                                     | 32-7    | FMAC-0932-2510  |
| 25 (14)                               | High attenuation      | 480                 | 9.86                        | 8.4                                            | 5.26                         | 3.5 kg         | 4                                     | 32-7    | FMAC-0932-2510L |
| 25 (C)                                | High voltage filter   | 520                 | 8.25                        | 8.6                                            | 4.4                          | 3.35 kg        | 6                                     | 32-7    | FMAC-0932-2512I |
| 36 (20)                               | High attenuation      | 480                 | 10.55                       | 8.4                                            | 2.71                         | 3.75 kg        | 6                                     | 32-C    | FMAC-0932-3610L |
| 36 (20)                               | Excellent attenuation | 480                 | 12.91                       | 8.6                                            | 3.32                         | 3.5 kg         | 6                                     | 34-3    | FMAC-0934-3610  |
| 36 (C)                                | High voltage filter   | 520                 | 12.91                       | 8.6                                            | 3.32                         | 3.3 kg         | 6                                     | 34-3    | FMAC-0934-3612I |
| 50 (32)                               | Excellent attenuation | 480                 | 9.75                        | 9.0                                            | 1.3                          | 3.4 kg         | 6                                     | 34-3    | FMAC-0934-5010  |
| 50 (30)                               | High attenuation      | 480                 | 12.63                       | 9.0                                            | 1.68                         | 3.6 kg         | 6                                     | 34-C    | FMAC-0934-5010L |
| 50 (C)                                | High voltage filter   | 520                 | 9.75                        | 9.0                                            | 1.3                          | 3.35 kg        | 6                                     | 34-3    | FMAC-0934-5012I |
| 64 (37)                               | High attenuation      | 480                 | 18.23                       | 8.6                                            | 1.48                         | 4.2 kg         | 6                                     | 34-C    | FMAC-0934-6410L |
| 80 (45)                               | Excellent attenuation | 480                 | 22.6                        | 9.7                                            | 1.17                         | 7 kg           | 25                                    | 37-3    | FMAC-0937-8010  |
| 80 (C)                                | High voltage filter   | 520                 | 22.6                        | 9.7                                            | 1.17                         | 7.28 kg        | 25                                    | 37-3    | FMAC-0937-8012I |
| 64 (37)                               | Excellent attenuation | 480                 | 13.52                       | 9.0                                            | 1.1                          | 3.9 kg         | 25                                    | 53-3    | FMAC-0953-6410  |
| 64 (C)                                | High voltage filter   | 520                 | 13.52                       | 9.0                                            | 1.1                          | 3.8 kg         | 25                                    | 53-3    | FMAC-0953-6412I |
| 110 (70)                              | Excellent attenuation | 480                 | 27.23                       | 9.7                                            | 0.75                         | 7.5 kg         | 50                                    | 54-3    | FMAC-0954-H110  |
| 110 (C)                               | High voltage filter   | 520                 | 27.23                       | 9.7                                            | 0.75                         | 7.45 kg        | 50                                    | 54-3    | FMAC-0954-H112I |
| 180 (C)                               | Excellent attenuation | 480                 | 36                          | 9.7                                            | 0.37                         | 22 kg          | 95                                    | 55-3    | FMAC-0955-H210  |
| 180 (C)                               | High voltage filter   | 520                 | 36                          | 9.7                                            | 0.37                         | 23 kg          | 95                                    | 55-3    | FMAC-0955-H212I |
| 250 (C)                               | Excellent attenuation | 480                 | 36                          | 10.5                                           | 0.2                          | 23.7 kg        | 240                                   | 56-3    | FMAC-0956-H310  |
| 250 (C)                               | High voltage filter   | 520                 | 36                          | 9.1                                            | 0.2                          | 25 kg          | 240                                   | 56-3    | FMAC-0956-H312I |
| 340 (C)                               | Excellent attenuation | 480                 | 45                          | 10.5                                           | 0.13                         | 27 kg          | 240                                   | 56-3    | FMAC-0956-H410  |
| 340 (C)                               | High voltage filter   | 520                 | 45                          | 5.6                                            | 0.13                         | 30 kg          | 240                                   | 56-3    | FMAC-0956-H412I |
| 450 (C)                               | Excellent attenuation | 480                 | 40                          | 10.5                                           | 0.06                         | 33 kg          | (B)                                   | 57      | FMAC-0957-H550  |
| 550 (C)                               | Excellent attenuation | 480                 | 45                          | 10.5                                           | 0.046                        | 32 kg          | (B)                                   | 57      | FMAC-0957-H650  |
| 1100 (C)                              | High voltage filter   | 520                 | 80                          | 9.5                                            | 0.022                        | 47 kg          | (A)                                   | 74      | FMAC-0974-K152I |

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

6A version: packing unit 2 pcs.

(A): Connecting straps for M12

(B): Connecting straps for M10

(C): Article without UL approval only VDE approval

1) Leakage current according IEC 60939-1

2) Maximum conductor cross section (wire gauge) to be used; a comparative table for AWG and mm<sup>2</sup> values can be found in the general product information  
<https://www.schurter.com/en/FAQ#10>

## Packing unit

1 Pcs

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schurter:](#)

|                                        |                                        |                                        |                                        |                                        |                                       |
|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|----------------------------------------|---------------------------------------|
| <u><a href="#">FMAC-0924-0610</a></u>  | <u><a href="#">FMAC-0931-0810</a></u>  | <u><a href="#">FMAC-0931-1610</a></u>  | <u><a href="#">FMAC-0931-1612I</a></u> | <u><a href="#">FMAC-0932-1610</a></u>  | <u><a href="#">FMAC-0932-2510</a></u> |
| <u><a href="#">FMAC-0932-2510L</a></u> | <u><a href="#">FMAC-0932-2512I</a></u> | <u><a href="#">FMAC-0932-3610L</a></u> | <u><a href="#">FMAC-0934-3610</a></u>  | <u><a href="#">FMAC-0934-3612I</a></u> | <u><a href="#">FMAC-0934-5010</a></u> |
| <u><a href="#">FMAC-0934-5010L</a></u> | <u><a href="#">FMAC-0934-5012I</a></u> | <u><a href="#">FMAC-0934-6410L</a></u> | <u><a href="#">FMAC-0937-8010</a></u>  | <u><a href="#">FMAC-0937-8012I</a></u> | <u><a href="#">FMAC-0953-6410</a></u> |
| <u><a href="#">FMAC-0953-6412I</a></u> | <u><a href="#">FMAC-0954-H110</a></u>  | <u><a href="#">FMAC-0954-H112I</a></u> | <u><a href="#">FMAC-0955-H210</a></u>  | <u><a href="#">FMAC-0955-H212I</a></u> | <u><a href="#">FMAC-0956-H310</a></u> |
| <u><a href="#">FMAC-0956-H312I</a></u> | <u><a href="#">FMAC-0956-H350</a></u>  | <u><a href="#">FMAC-0956-H410</a></u>  | <u><a href="#">FMAC-0956-H412I</a></u> | <u><a href="#">FMAC-0956-H450</a></u>  | <u><a href="#">FMAC-0957-H550</a></u> |
| <u><a href="#">FMAC-0957-H650</a></u>  | <u><a href="#">FMAC-0974-K152I</a></u> | <u><a href="#">FMAC-0A24-0813</a></u>  | <u><a href="#">FMAC-0A27-1613</a></u>  | <u><a href="#">FMAC-0A38-3213</a></u>  | <u><a href="#">FMAC-0A40-2513</a></u> |
| <u><a href="#">FMAC-0F32-1713</a></u>  | <u><a href="#">FMAC-0FIA-6400</a></u>  | <u><a href="#">FMAC-091F-8010</a></u>  | <u><a href="#">FMAC-0FBN-5000</a></u>  |                                        |                                       |