
ے ت ا	m m		0	د ا	>	1
						4
ω			LAYOUT SHOWN AS EX	AMPLE		3
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium	Connector dimension         Dim       Nominal         ØS       25 Max         7       21 Max	]	SOURIALL shall not be liable for any	non-conformity or damage		
-Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Z 31 Max VV THREAD M15x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
<ul> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> </ul>			Country     Jurisdiction & Control List       FR     Not Listed       PN: 8D511F05AA			
-Temperature Range <u>+</u> -65°C to +200°C -Salt Spray : 48 hours — -Mass : 14.83 g ± 10%		A 15-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUSTOMER DRAWING	MOD N°	-
		TITLE	E Aluminium Plug 8D series			
BASIC SERIES: 8D 5 - 11 SHELL TYPE : Plug with RFI Shielding	F 05 A A	SCALE -	General linear Tolerances:	NPRDS / PROJECT 859		1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11	ORIEI CONTACT TYPE : PIN(5		SOURIAU         This document is the property of SOURIAU           it must not be reproduced or communicated without permission			
PLATING : F = Nickel	CONTACT LAY	OUT : 11-05	SOURIAU 8D511F0		SHEET 1/2	
H G	F E	D	C	B	4	-

-	Ŧ	۵	וד	m		0
		Contact Layout				
4	-X	$ \begin{array}{c} & & \\ & & \\ & \\ & \\ & \\ & \\ & \\ & \\ & $				
	Conta positic ID A B C D E Shell Arrangement Numb size no. conta	+.065 (1.65) +.056 (1.42) +.113 (2.87)065 (1.65) +.000 (0.00)130 (3.30) 113 (2.87)065 (1.65) 065 (1.65) +.056 (1.42)				
ယ	11 -5 5					
	F					SOURIAU shall not be liable for a due to a use of the Products v the Specifications issued by either (professional recommend
N						PN: 8D511
					A 15-10-20 ISS DATE Designed By:	016 First Release
_					TITLE SCALE NA	Alumi General linear Tolerances:
					SOURIA	
					FORMAT A3	SOURIAU 8D511F
L	Н	G	F	E	D	C

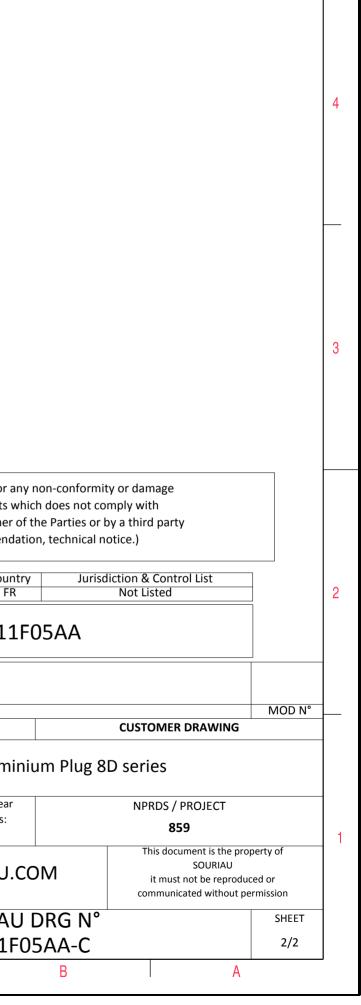

 $\triangleright$ 

σ

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Souriau: 8D511F05AA