
ſ	т Q Т				
4	Z		4		
ω		LAYOUT SHOWN AS EXAMPLE	3		
	Keying Shown as example				
	CHARACTERISTICS Connector dimension -Standard : Based on MIL-DTL-38999 Series III Dim Nominal	—			
	-Shell Material: Aluminium-Shell Plating: Nickel-Insulator: Thermoplastic-Contacts: Copper Alloy	SOURIAU shall not be liable for any non-conformity or damage			
N	-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	Country Jurisdiction & Control List FR Not Listed	2		
	-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories	PN: 8D521F16PA			
	-Temperature Range -65°C to +200°C	A 06-10-2016 First Release	_		
	-Salt Spray : 48 hours -Mass : 42.61 g ± 10%	ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING			
		TITLE Aluminium Plug 8D series	_		
<u> </u>	BASIC SERIES: 8D 5 - 21 F 16 P A SHELL TYPE : Plug with RFI Shielding	SCALE General linear NPRDS / PROJECT NA ± 859	-		
	CONTACT TYPE : Standard Crimp Contact ORIENT. SHELL SIZE : 21 CONTACT TYPE : PIN(500	RIENTATION : A SOURIAU This document is the property of SOURIAU IN(500 Matings) SOURIAU it must not be reproduced or communicated without permission			
	PLATING : F = Nickel CONTACT LAYOU	LAYOUT : 21-16 FORMAT SOURIAU DRG N° SHEET	_		
	H G F E	A3 8D521F16PA-C 1/2			

r	тт	G	וד	m	D	0	
		Contact Layout					
4		$X \stackrel{\bullet}{\stackrel{\bullet}{\rightarrow}} \stackrel{\bullet}{\rightarrow} \stackrel{\bullet}$					
	Contact position ID Loca A +.118 (3.00) B +.271 (6.88) C +.341 (8.66) D +.308 (7.82) E +.182 (4.62) F +.000 (0.00) G -1.182 (4.62)	Y-axis position ID X-axis Y-axis +.322 (8.18) J 341 (8.66) +.036 (0.91) +.11 (5.36) K 271 (6.88) +.211 (5.36) 036 (0.91) L 118 (3.00) +.322 (8.18) 150 (3.81) M +.000 (0.00) +.175 (4.45) 200 (7.37) N +.154 (3.91) +.062 (1.57) 343 (8.71) P +.094 (2.39) 122 (2.10)					
ω	H308 (7.82) Shell Arrangement Nur size no. co						
	F					SOURIAU shall not be liab due to a use of the Pro	
						the Specifications issued by (professional recor	y either o mmenda
N						PN: 80	Count FR 0521
_					A 06-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:	
					TITLE		Alumii al linear
-					NA		ances: ±
						SOU	RIAL
l	Н	G	F	E	A3	8D5	521F

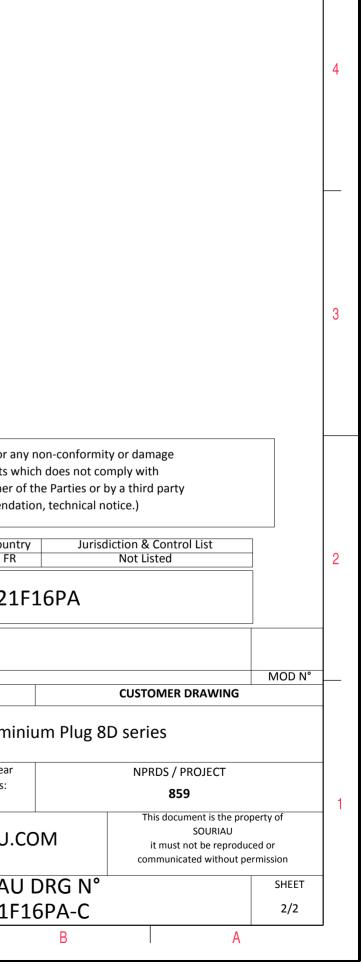

ω

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Souriau: 8D521F16PA