
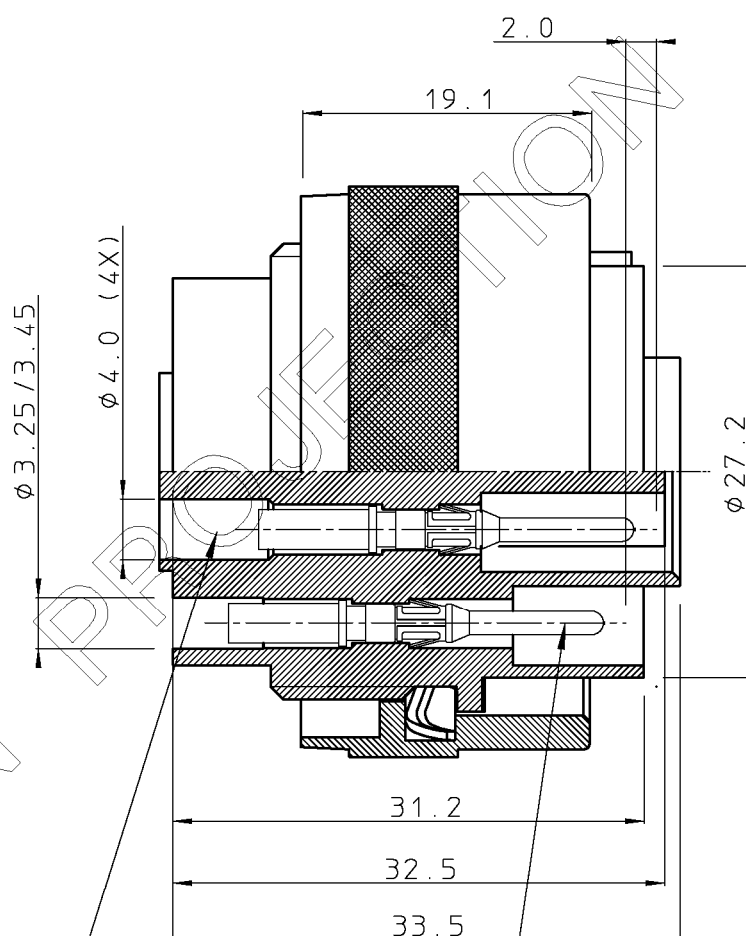


THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

REV.	DATE	DESCRIPTION	BY	C 'K' 'D'
01	07-09-90	DRAWING ADJUSTED	J.V.B.	
02	03-09-92	CAVITY DIAMETER ENLARGED	Y.D.	
03	07-11-95	B.E.C. 9.3289	K.N.	
04	10-03-99	Temperature range -55C instead of -25C	K.N.	

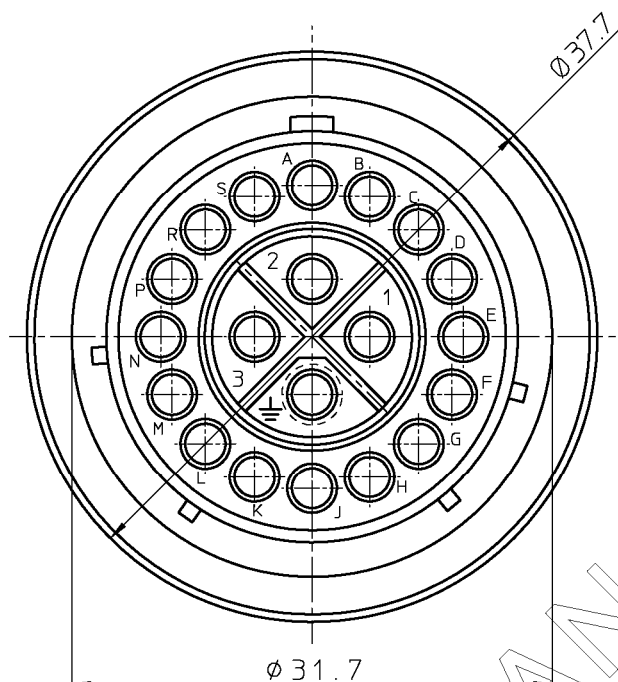

MATERIAL



- BODY : GLASS-FILLED POLYESTER UL94-V0. FM/LB POSITION
COLOUR : BLACK.
- BAYONET COUPLING RING : HIGH STRENGTH CuZn ALLOY, NICKEL PLATED.

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -55 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 MΩ MIN.
- TEST POTENTIAL : 2000 V EFF.
- 4 CONTACTS PER VDE 0110 CLASS 3-380V
CLASS 2-600V

NOTES

- 1 CONNECTOR ACCEPTS # 16 STRIP FORMED, MACHINED AND SUBMINIATURE COAXIAL
PIN AND SOCKET CONTACTS.
2 CONTACTS TO BE ORDERED SEPARATELY : REFER TO TRIM-TRIO CATALOG.

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90																	
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88
1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN		APPR.		DATE		SIGN.		MALE PLUG METALOK BANTAM 20 POS.																							
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.		DRAFT		23-11-89		M. BUEDS		CAT. No. UTG62020PN																							
		CHECKED						<div><div></div><div><div>SOURIAU</div><div>Route Nationale 23</div><div>72470 CHAMPAGNE</div></div></div>												SCALE											
		PROD. MGR.																													
ALL DIMENSIONS IN MM		PR. ENG. MGR.						<div><div></div><div>REFERENCES / REFERENTIES</div></div>																							
ALLE AFMETINGEN IN MM		PR. MGT. MGR.																													
<div><div>BS, A , 201052-004</div><div>04</div></div>		DRAWING NR.		CUSTOMER DRAWING		REVISION																									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Souriau:

UTG62020PN