


NOTES:


1. HARDWARE IS INCLUDED
2. MAXIMUM MOUNTING TORQUE: 4 IN-LBS
3. THIS IS A LEAD FREE PRODUCT
4. MAXIMUM REFLOW IS 245°C FOR 5 SECONDS

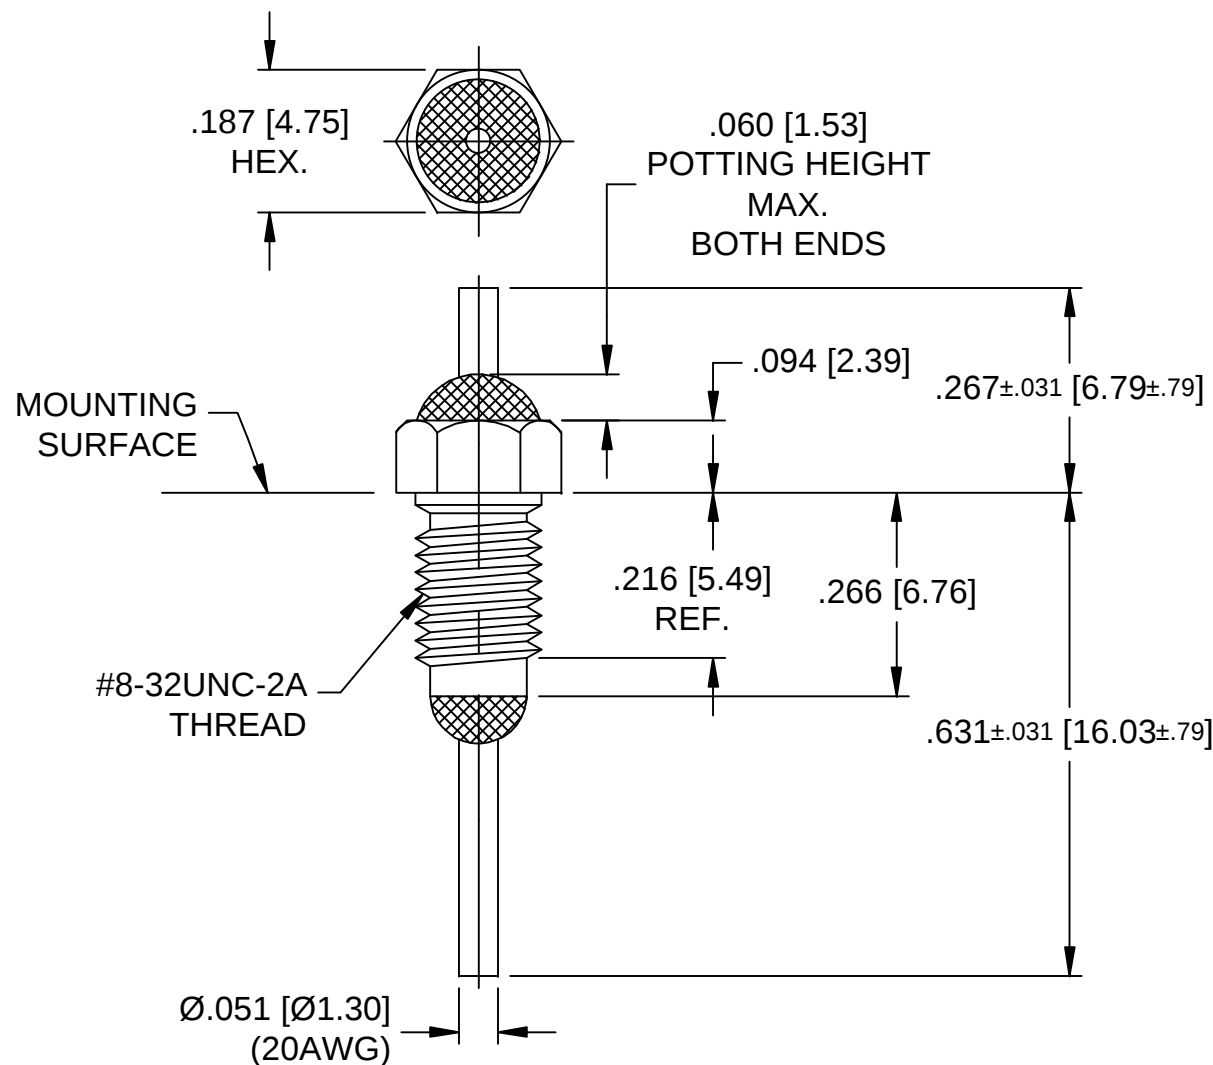

BUSHING FINISH	SILVER
LEAD FINISH	TIN / SILVER
CAPACITANCE	1000pF ⁻⁰ _{+100%}
TEMP. RANGE	-55°C TO +105°C
CURRENT	10 AMPS
WORKING VOLTAGE	125°C 300 VDC
DC RESISTANCE	.01 OHMS MAX.

MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD

FREQ. MHz	I.L. (db)
30	11
100	20
300	28
1 GHz	28
10 GHz	28



MARKING:

PART: SF105
 BAG: SCI
 54F-713-105
 DATE CODE
 LOT #
 QTY/BAG (200 MAX.)



										02	01	00	REV NO	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES [MILLIMETERS] DO NOT SCALE	TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMAL .X ± .030 DECIMAL .XX ± .010 DECIMAL .XXX ± .005 ANGLES ± 0° 30'	CODE IDENT. NUMBER 0LSP2	THIRD ANGLE PROJECTION	SPECTRUM CONTROL INC. DWN. P. Wells DATE 1-20-11 ENGR. S. Peters SHEET 1 OF 1	FAIRVIEW PENNSYLVANIA Description FILTER, SING, BUSHING, #8-32 54F-713-105
										CN 57452-ENG	CN 32001-CPD	CN 29589-CPD	CHANGE NOTICE						

Quality Products From The Specialists In Electro-Magnetic Compatibility

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Spectrum Control:](#)

[54F-713-105](#)