

CIRCUIT CONFIGURATION



NOTES:

- 1) CAPACITANCE (1000hrs.): 1000pF
- 2) CAP TOLERANCE: ±20%
- 3) DISSIPATION FACTOR: 4% MAX.
- 4) INSULATION RESISTANCE: 25°C 1GOHM MIN.
- 5) 200 VDC RATED @ +125°C
- 6) DIELECTRIC WITHSTANDING VOLTAGE: 700 VDC
- 7) CURRENT RATING: 20 AMPS
- 8) REFLOW TEMPERATURE LIMIT: +235°C FOR 5 SEC.
- 9) THIS IS LEAD FREE PRODUCT.

MARKING:

PART: NONE


PACKAGE: PART NO.

SCI DATE CODE

QTY.

PACKING:

BAG 1000 PCS/BAG MAX

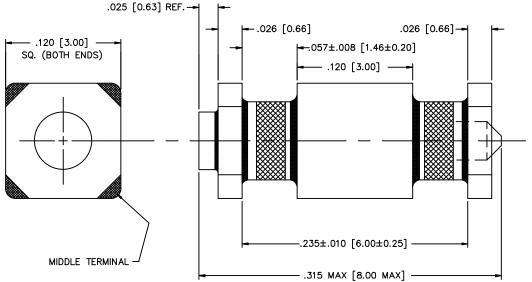



- 1																05	5	8	REV.	UNLESS OTHERWISE	TOLERANCES UNLESS OTHERWISE SPECIFIED		FAIR∨IEW
- 1																ပ္ခ	g	6	ICE		Fractions ± 1/64 Dec. ,××±.01(0.254)	SPECTRUM CONTROL I	PENNSYLVANIA
- 1																171	1 1	1 1		IN INCHES.	Decxxx±.005[0.127]	Dwn. KAUFFMAN	Description
- 1																44621-	302	2622	ANGE	DO NOT SCALE.	Angles ±0° 30′ CODE IDENT. NO.	From B DEVINE	SURFACE MOUNT FILTER
- 1																공	중	공	3	⊕ ☐ THIRD ANGLE PROJECTION	l	Sheet 1 of 2	PSM4F-102M-20B
	Quality Products From The Specialists In Electro—Magnetic Compatibility																						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Technologies: PSM4F-102M-20B