

NOTES:

1) CAPACITANCE (1000hrs.): 4000pF

2) CAP TOLERANCE: +80%/-20%

3) DISSIPATION FACTOR: 4% MAX.

4) INSULATION RESISTANCE: 25°C 1GOHM

5) 200 VDC RATED @ +125℃

6) DIELECTRIC WITHSTANDING VOLTAGE: 700 VDC

7) CURRENT RATING: 5 AMPS

8) REFLOW TEMPERATURE LIMIT: +260°C

9) PACKAGING: TAPE & REEL (500 OR 2000 PCS.)


MARKING:

PART: NONE

PACKAGE: PART NO.

SCI DATE CODE

QTY.

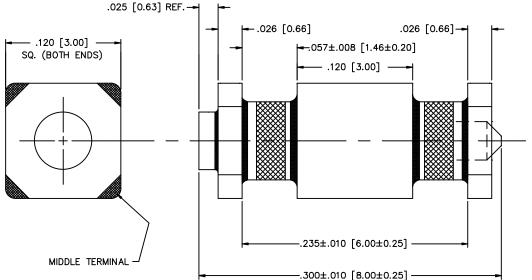



														80	07	90	05	94	3	02	5 5	3 2	REV.	UNLESS OTHERWISE	TOLERANCES UNLESS OTHERWISE SPECIFIED		FAIR∨IEW
														Ş	_	(_ _			TICE		Fractions ± 1/64 Dec. ,××±.01[0.254]	SPECTRUM CONTROL I	. PENNSYLVANIA
														19	55	82(88	3 3	3	2 2	֓֓֓֟֟֓֓֓֓֓֓֓֓֓֓֓֓֓֓֟֓֓֓֓֓֟֓֓֓֓֓֟֓֓֓֟֟֓֓֓֟֓֓֓֟֓֓֓֟֓֓֓֟֓֓֓֟֓֓֓֟֓֓֓֓	2	<u> </u>		Decxxx±.005[0.127]	Dwn. KAUFFMAN	Description
														842	9	03	5	82 8	ğ	۱ ا	2 5	=	병		Angles ±0° 30′	Ckd. 11-13-08	SURFACE MOUNT FILTER
														4	2	2	2	- -	-	- -	֡֟֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֡֡֡֓֓֓֓֡֡֓֓֓֡֡֡֡	-	₹	DO NOT SCALE.	CODE IDENT. NO.	Apvd.	PSM1-402Z-05T
L														중	ပ်	င်	င်	중 경	[כֿ	င် င်	5 ć	<u>כֿ</u>	ਠ	DE NET CONEEL	0LSP2	Sheet <u>1</u> of 2	1 31011 - 4022 - 031
	Quality Products From The Specialists In Electro—Magnetic Compatibility																										

MOUNTING INFORMATION

LEGEND

--- OCCUPIED AREA BY PART

SOLDER PASTE PATTERN

RECOMMENDED PAD,
MUST BE ABLE TO SUPPORT
CONTINUOUS SIGNAL CURRENT.


CIRCUIT CONFIGURATION

INPUT of Tool


GROUND

TYPICAL INSERTION LOSS: 16dB @ 10MHz

26dB @ 30MHz 42dB @ 100MHz 33dB @ 500MHz 30dB @ 1GHz

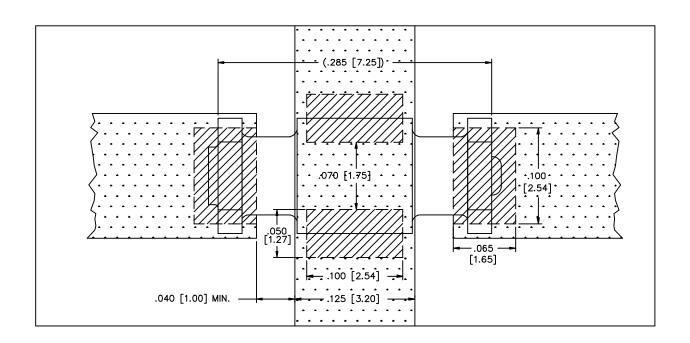



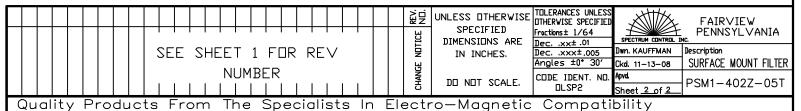

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Technologies:

PSM1-402Z-05T