

Double Balanced Mixer

Multi-Octave Band

Model MM9xMS-3

Model MM9xMS-13

RF 4.0 to 20.0 GHz

Electrical Specifications:⁽¹⁾

Parameter	Conditions			Specifications		
	RF (GHz)	LO (GHz)	IF (MHz)	Min	Typical	Max
SSB Conversion loss: ^{(2) (3)}	5.0-18.5	5.0-18.5	DC-500		6.5 dB	8.0 dB
	5.0-18.5	5.0-18.5	DC-2000		7.0 dB	8.5 dB
	5.0-18.5	5.0-18.5	DC-4000		8.0 dB	9.5 dB
	4.0-20.0	4.0-20.0	DC-500		7.0 dB	9.5 dB
	4.0-20.0	4.0-20.0	DC-2000		7.5 dB	10.0 dB
	4.0-20.0	4.0-20.0	DC-4000		8.5 dB	11.5 dB
Isolation						
	LO to RF:	4.0-5.0		20 dB	30 dB	
		5.0-20.0		25 dB	38 dB	
	LO to IF:	4.0-7.0		16 dB	21 dB	
		7.0-20.0		20 dB	27 dB	
RF to IF:	4.0-20.0				20 dB	
Input 1-dB Compression Point:	4.0-20.0	4.0-20.0	DC-4000		+2 dBm	MM93
					+5 dBm	MM94
					+8 dBm	MM96
					+12 dBm	MM97
Input Third Order Intercept Point:	4.0-20.0	4.0-20.0	DC-4000		+11 dBm	MM93
					+14 dBm	MM94
					+18 dBm	MM96
					+21 dBm	MM97
LO Power: ⁽⁴⁾	4.0-20.0	4.0-20.0	DC-4000		+7 dBm	MM93
					+10 dBm	MM94
					+14 dBm	MM96
					+18 dBm	MM97

Model MM9xMS-3
Model MM9xMS-13

LO Power


3 = +7 dBm
4 = +10 dBm
6 = +14 dBm
7 = +18 dBm

Notes:

- Specifications are guaranteed when tested as a downconverter in a 50 Ohm system at +25° C with the nominal LO power. Specifications indicated as typical are not guaranteed.
- Noise figure is typically within ±0.5 dB of conversion loss for IF frequencies greater than 10 MHz.
- Conversion loss typically degrades less than 0.5 dB at +100° C and improves less than 0.5 dB at -55° C.
- Usable LO drives are up to 2 dB below and 3 dB above nominal.


MM9xMS-3

Outline: MS3C

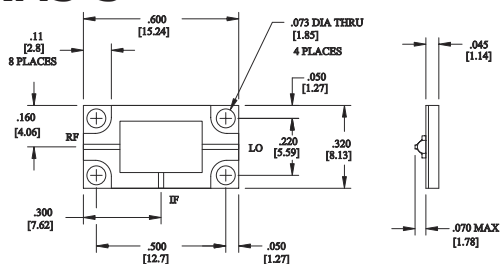


MM9xMS-13

Outline: MS3D

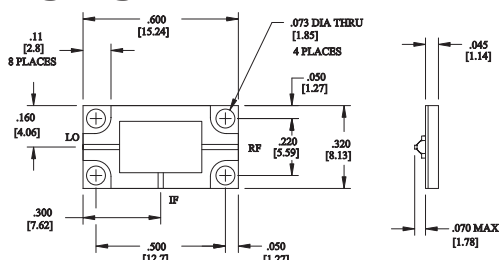

All dimensions are in inches and [mm].


Typical Performance at 25° C




Conversion Loss (200MHz IF)-dB




LO to RF, LO to IF Isolation-dB




LO VSWR




RF VSWR



IF VSWR



Relative Conv. Loss vs. IF Freq.-d



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, FL 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.SpectrumMicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, PA 19154 · PH (215) 464-4000 · Fax (215) 464-4001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[API Technologies:](#)

[MM94MS-3](#)