


Quad high-side smart power solid state-relay

Datasheet - production data

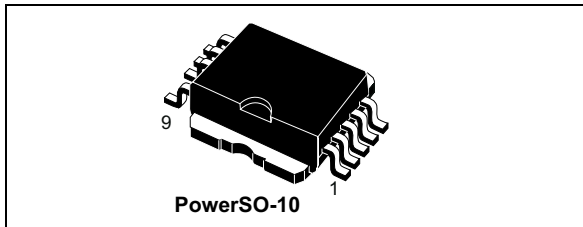

- Built-in current limiter
- Undervoltage shutdown
- Open drain diagnostic output
- Fast demagnetization of inductive loads
- Conformity to IEC 61131-2

Features

| Type | $V_{\text{demag}}^{(1)}$ | $R_{\text{DS(on)}}^{(1)}$ | $I_{\text{OUT}}^{(1)}$ | $V_{\text{CC}}^{(1)}$ |
|-----------|------------------------------|---------------------------|------------------------|-----------------------|
| VN340SP-E | $V_{\text{CC}}-55 \text{ V}$ | 0.2Ω | 0.7 A | 36 V |


1. Per channel

- Output current: 0.7 A per channel
- Digital I/O clamped at 32 V minimum voltage
- Shorted load and overtemperature protections
- Protection against loss of ground

Description

The VN340SP-E is a monolithic device developed using ST VIPower™ technology, intended to drive four independent resistive or inductive loads with one side connected to ground. Active current limitation avoids dropping the system power supply in case of shorted load. Built-in thermal shutdown protects the chip from overtemperature and short-circuit. The open drain diagnostic output indicates overtemperature conditions. Each I/O is pulled down when the overtemperature condition of the relative channel is verified.

Figure 1. Block diagram

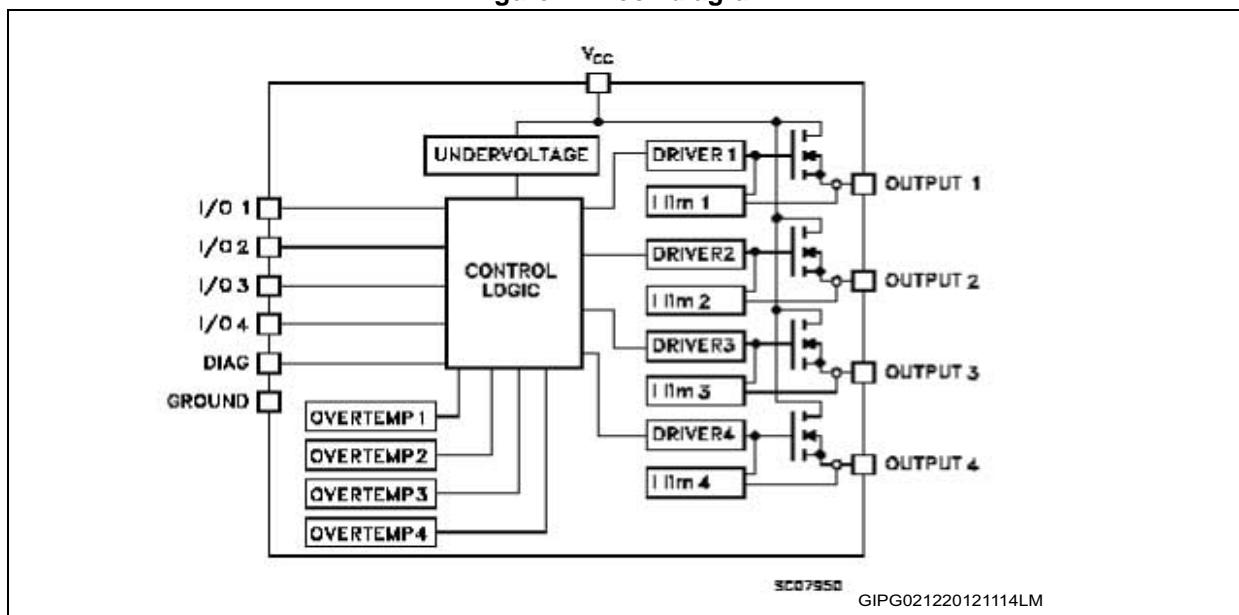

Contents

| | | |
|----------|---|-----------|
| 1 | Absolute maximum ratings | 3 |
| 2 | Pin connections | 4 |
| 3 | Electrical characteristics | 5 |
| 4 | Test circuits | 7 |
| 5 | Switching time waveforms and truth table | 9 |
| 6 | Package information | 11 |
| | 6.1 PowerSO-10 package information | 11 |
| | 6.2 PowerSO-10 packing information | 13 |
| 7 | Ordering information | 15 |
| 8 | Revision history | 16 |

1 Absolute maximum ratings

Table 1. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|------------|--|--------------------|------------------|
| V_{CC} | Power supply voltage | 45 | V |
| $-V_{CC}$ | Reverse supply voltage | -4 | V |
| I_{OUT} | Output current (continuous) | Internally limited | A |
| I_R | Reverse output current (per channel) | -6 | A |
| I_{IN} | Input current (per channel) | ± 10 | mA |
| I_{DIAG} | Diag pin current | ± 10 | mA |
| V_{ESD} | Electrostatic discharge (R = 1.5 k Ω ; C = 100 pF) | 2000 | V |
| E_{AS} | Single pulse avalanche energy one channel active $T_J = 125\text{ }^\circ\text{C}$, $I_{LOAD} = 0.625\text{ A}$ | 10 | J |
| | Single pulse avalanche energy all channels active simultaneously $T_J = 125\text{ }^\circ\text{C}$, $I_{LOAD} = 0.625\text{ A}$ | 2 | |
| P_{TOT} | Power dissipation at $T_C = 25\text{ }^\circ\text{C}$ | Internally limited | W |
| T_J | Junction operating temperature | | $^\circ\text{C}$ |
| T_{STG} | Storage temperature | -55 to 150 | $^\circ\text{C}$ |

Table 2. Thermal data

| Symbol | Parameter | Value | Unit |
|------------|--|-------|--------------------|
| R_{thJC} | Thermal resistance junction-case ⁽¹⁾ | 3 | $^\circ\text{C/W}$ |
| R_{thJA} | Thermal resistance junction-ambient ⁽²⁾ | 50 | $^\circ\text{C/W}$ |

1. Per channel
2. When mounted, minimum recommended pad size on FR-4 board

2 Pin connections

Figure 2. Connection diagram (top view)


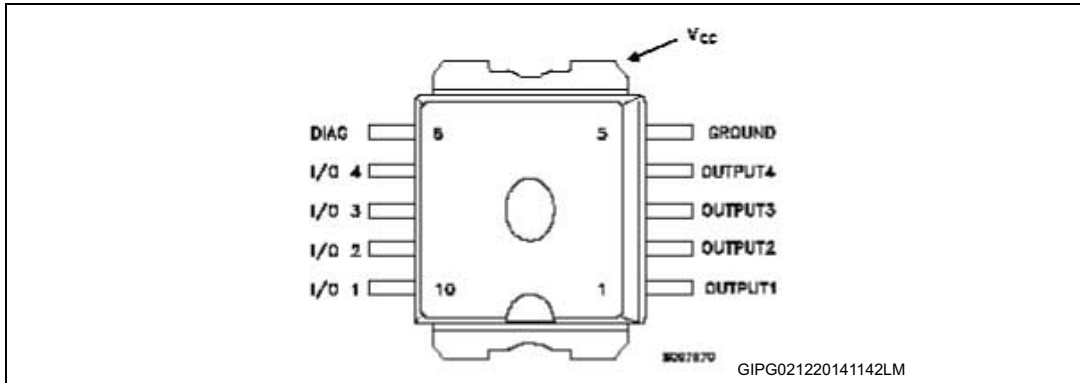


Figure 3. Current and voltage conventions

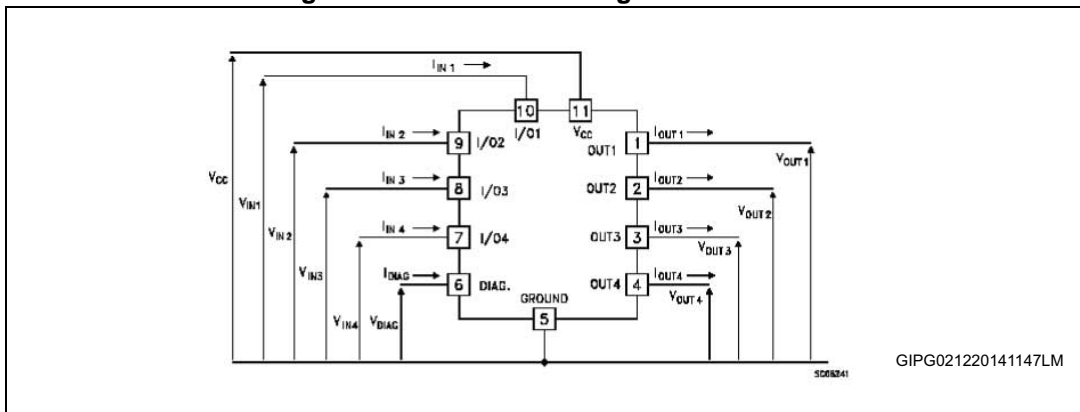

3 Electrical characteristics

10 V < V_{CC} < 36 V; -40 °C < T_J = 125 °C unless otherwise specified

Table 3. Power section

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|---------------------|----------------------------|---|---------------------|---------------------|---------------------|------|
| V _{CC} | Supply voltage | | 10 | | 36 | V |
| R _{DS(on)} | On-state resistance | I _{OUT} = 0.5 A; T _J = 25 °C | | | 0.2 | Ω |
| | | I _{OUT} = 0.5 A; T _J = 85 °C | | | 0.32 | |
| | | I _{OUT} = 0.5 A; T _J = 125 °C | | | 0.4 | |
| I _S | Supply current | All channels OFF | | | 1 | mA |
| | | On-state; V _{IN} = 30 V; I _{OUT} = 0 V (T _J = 125 °C) | | | 6 | |
| V _{OL} | Low-state output voltage | V _{IN} = V _{IL} ; R _{LOAD} = 10 mΩ | | | 1.5 | V |
| V _{demag} | Output voltage at turn-off | I _{OUT} = 0.5 A; L _{LOAD} = 1 mH | V _{CC} -65 | V _{CC} -55 | V _{CC} -45 | V |
| I _{LGND} | Output current at turn-off | V _{CC} = V _{INn} = V _{GNDn} = V _{STAT} = 18 to 30 V T _{amb} = 25 to 85 °C (see Figure 6) | | | 2 | mA |

Table 4. Switching (V_{CC} = 24 V)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|---------------------|---------------------------------------|--|------|------|------|------|
| t _{d(on)} | Turn-on delay time of output current | I _{OUT} = 0.5 A, resistive load input rise time < 0.1 μs T _J = 25 °C | - | 52 | 100 | μs |
| t _r | Rise time of output current | | | 94 | 250 | |
| t _{d(off)} | Turn-off delay time of output current | | | 34 | 50 | |
| t _f | Fall time of output current | | | 8 | 20 | |

Table 5. Logic input

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|---------------|--|-------------------------|------|------|------|---------------|
| V_{IL} | I/O input low level voltage | | | | 2 | V |
| V_{IH} | I/O input high level voltage | | 3.5 | | | |
| $V_{I(HYST)}$ | I/O input hysteresis voltage | | | 0.5 | | |
| I_{IN} | I/O input current | $V_{IN} = 30\text{ V}$ | | | 25 | μA |
| V_{ICL} | I/O input clamp voltage ⁽¹⁾ | $I_{IN} = 1\text{ mA}$ | 32 | 36 | | V |
| | | $I_{IN} = -1\text{ mA}$ | | -0.7 | | |

1. The input voltage is internally clamped at 32 V minimum, the input pins can be connected to a higher voltage via the external resistor without exceeding 10 mA

Table 6. Protection and diagnostic

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|------------------|-----------------------------------|---|------|------------|------|--------------------|
| $V_{DIAG}^{(1)}$ | Status voltage output low | $I_{DIAG} = 5\text{ mA}$ (fault condition) | | | 1 | V |
| $V_{SCL}^{(1)}$ | Status clamp voltage | $I_{DIAG} = 1\text{ mA}$ $I_{DIAG} = 1\text{ mA}$ | 32 | 36 -0.7 | | V |
| V_{USD} | Undervoltage shutdown | | 5 | | 8 | V |
| I_{LIM} | DC short-circuit current | $V_{CC} = 24\text{ V};$ $R_{LOAD} < 10\text{ m}\Omega$ | 0.7 | | 2 | A |
| I_{OVPK} | Peak short-circuit current | $V_{CC} = 24\text{ V}; V_{IN} = 30\text{ V};$ $R_{LOAD} < 10\text{ m}\Omega$ | | | 4 | A |
| I_{DIAGH} | Leakage on DIAG pin in high-state | $V_{DIAG} = 24\text{ V}$ | | | 25 | μA |
| I_{LOAD} | Output leakage current | $V_{CC} = 10\text{ to }36\text{ V};$ $V_{IN} = V_{IL}$ | | | 50 | μA |
| t_{SC} | Delay time of current limiter | | | | 100 | μs |
| T_{TSD} | Thermal shutdown temperature | | 150 | 170 | | $^{\circ}\text{C}$ |
| T_R | Thermal reset temperature | | 135 | 155 | | $^{\circ}\text{C}$ |

1. Status determination > 100 μs after the switching edge

Note: If INPUT pin floats, the corresponding channel automatically switches OFF. If GND pin is disconnected, the channel switches OFF provided that V_{CC} doesn't exceed 36 V

4 Test circuits

Figure 4. Avalanche energy test circuit

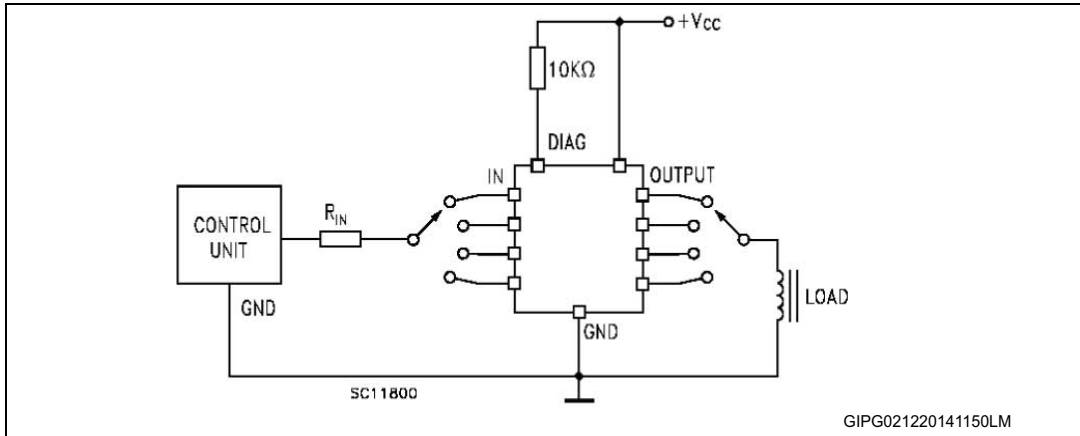


Figure 5. Peak short-circuit test diagram


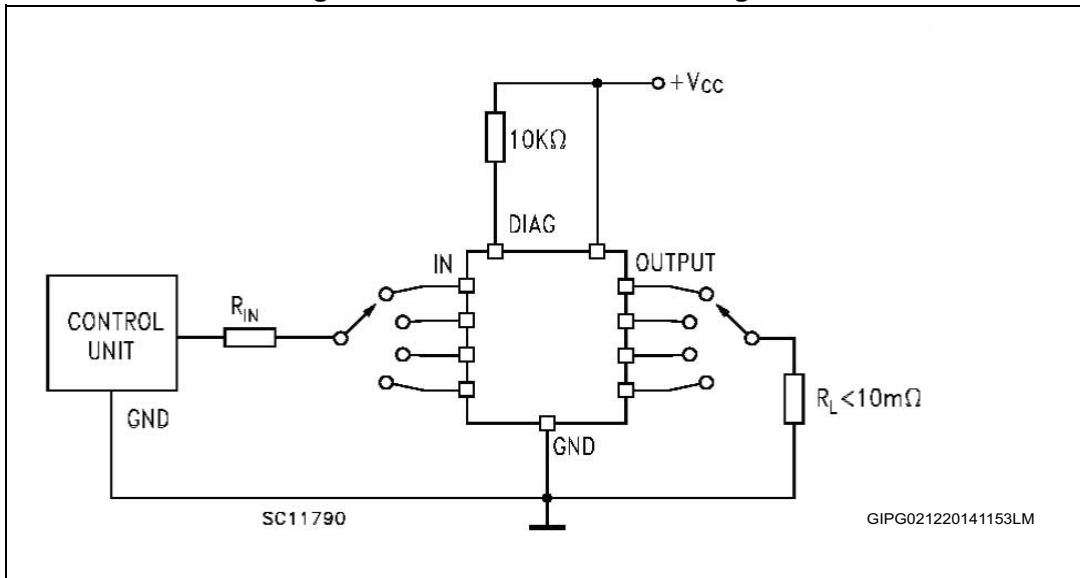


Figure 6. $I_{L\text{GND}}$ test configuration

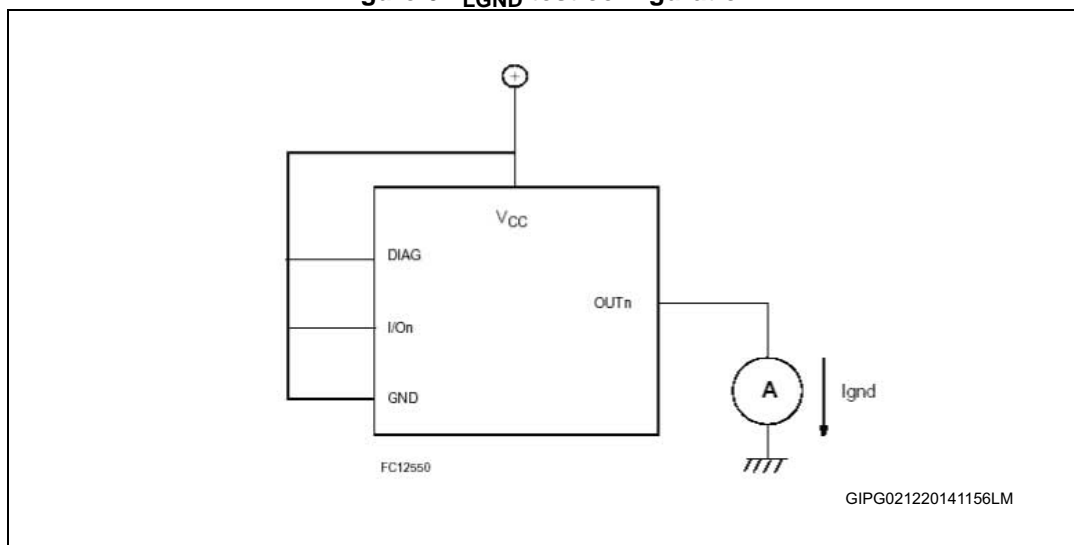

5 Switching time waveforms and truth table

Figure 7. Switching waveforms

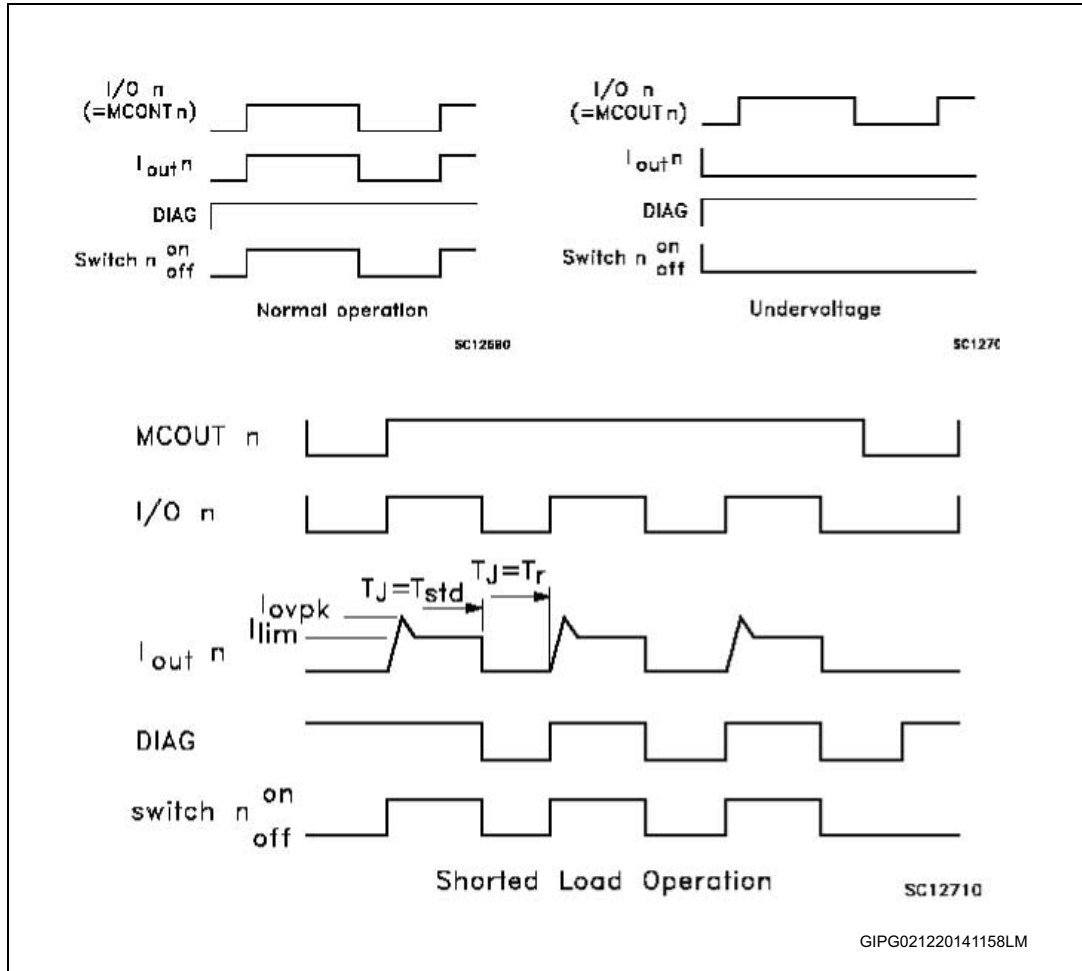


Figure 8. Switching parameter test conditions


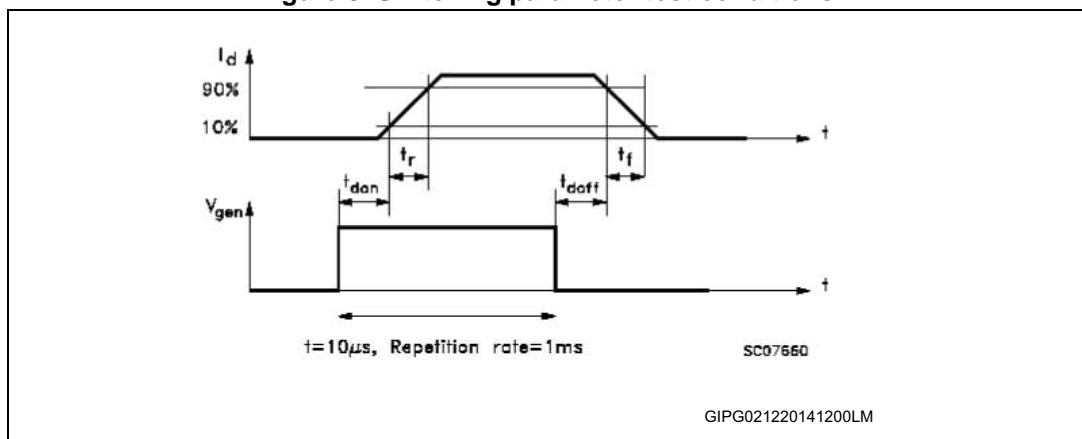


Table 7. Truth table

| Conditions | MCOUTn | I/On | OUTPUTn | Diagnostic |
|---------------------------------|--------|------|---------|------------|
| Normal operation | L | L | L | H |
| | H | H | H | H |
| Overtemperature | L | L | L | H |
| | H | L | L | L |
| Undervoltage | L | L | L | H |
| | H | H | L | H |
| Short load (current limitation) | L | L | L | H |
| | H | H | H | H |

Figure 9. Driving circuit

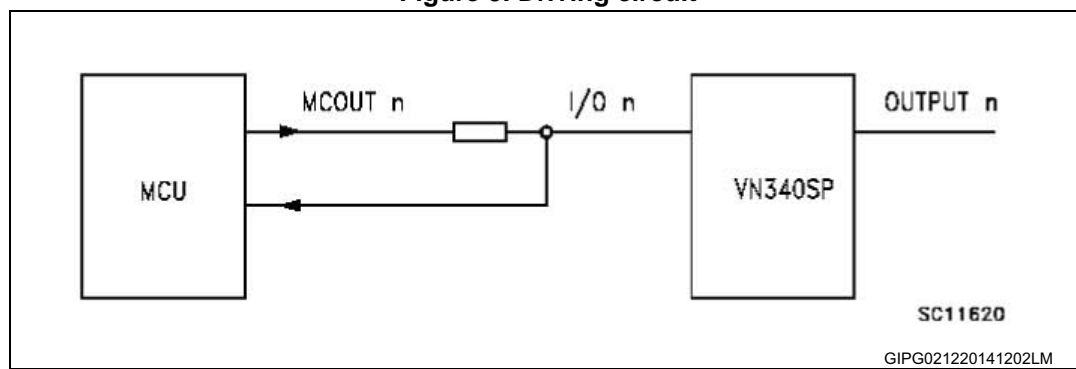

6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK[®] packages, depending on their level of environmental compliance. ECOPACK[®] specifications, grade definitions and product status are available at: www.st.com. ECOPACK[®] is an ST trademark.

6.1 PowerSO-10 package information

Figure 10. PowerSO-10 outline

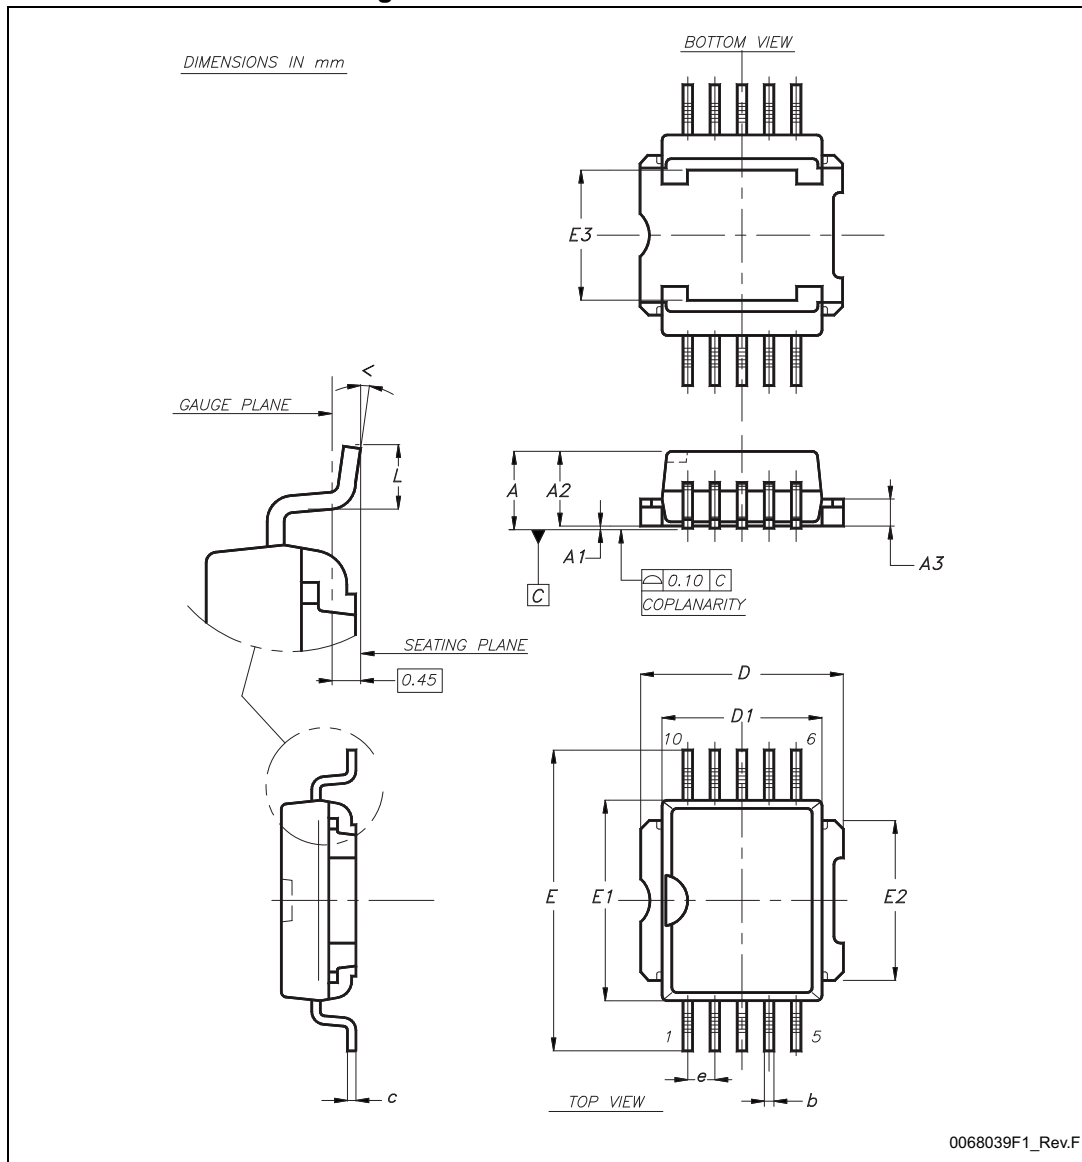



Table 8. PowerSO-10 mechanical data

| Dim. | mm | | |
|-------------------|-------|------|-------|
| | Min. | Typ. | Max. |
| A | | | 3.70 |
| A1 | 0.00 | | 0.10 |
| A2 | 3.40 | | 3.60 |
| A3 | 1.25 | | 1.35 |
| b | 0.40 | | 0.53 |
| c | 0.35 | | 0.55 |
| D | 9.40 | | 9.60 |
| D1 ⁽¹⁾ | 7.40 | | 7.60 |
| E | 13.80 | | 14.40 |
| E1 ⁽¹⁾ | 9.30 | | 9.50 |
| E2 | 7.20 | | 7.60 |
| E3 | 5.90 | | 6.10 |
| e | | 1.27 | |
| L | 0.95 | | 1.65 |
| < | 0° | | 8° |

1. Resin protrusion is not included (max. value 0.20 mm per side)

6.2 PowerSO-10 packing information

Figure 11. PowerSO-10 tape outline

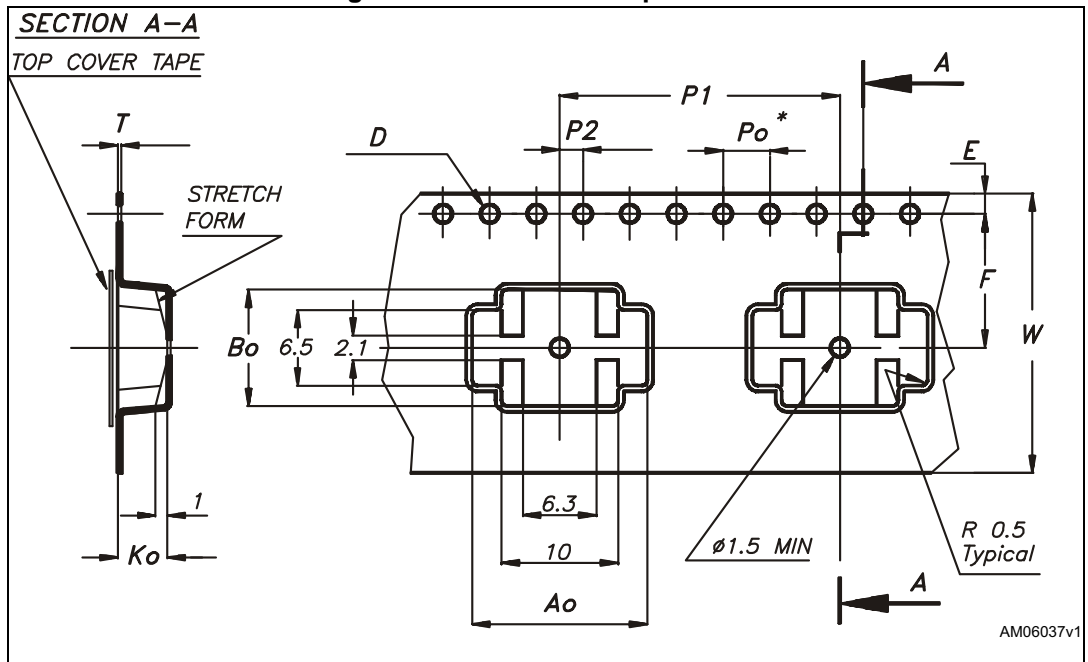

Note: Drawing is not in scale

Figure 12. PowerSO-10 reel outline

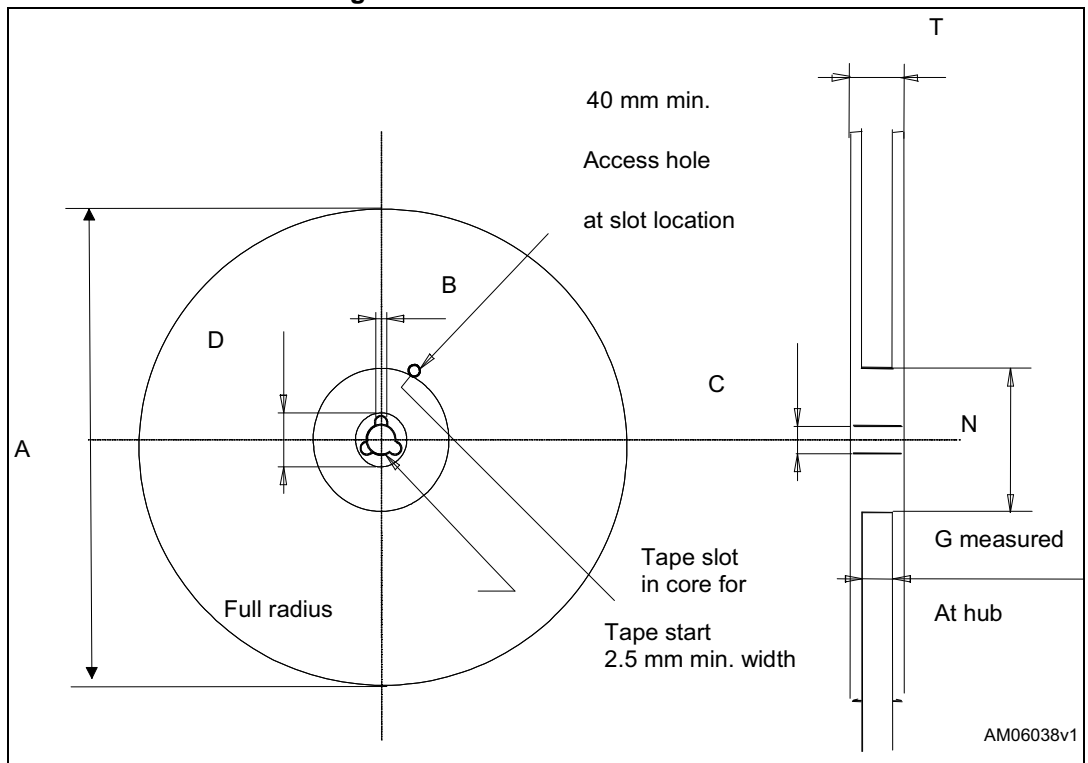


Table 9. PowerSO-10 tape and reel mechanical data

| Ref. | mm | | |
|------|-------|------|------|
| | Min. | Typ. | Max. |
| A0 | 14.9 | 15.0 | 15.1 |
| B0 | 9.9 | 10.0 | 10.1 |
| K0 | 4.15 | 4.25 | 4.35 |
| F | 11.4 | 11.5 | 11.6 |
| E | 1.65 | 1.75 | 1.85 |
| W | 23.7 | 24.0 | 24.3 |
| P2 | 1.9 | 2.0 | 2.1 |
| P0 | 3.9 | 4.0 | 4.1 |
| P1 | 23.9 | 24.0 | 24.1 |
| T | 0.025 | 0.30 | 0.35 |
| D(Ø) | 1.50 | 1.55 | 1.60 |

Note: 10 sprocket hole pitch cumulative tolerance ± 0.2 mm

7 Ordering information

Table 10. Ordering information

| Order code | Package | Packing |
|-------------|------------|---------------|
| VN340SP-E | PowerSO-10 | Tube |
| VN340SPTR-E | | Tape and reel |

8 Revision history

Table 11. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 05-Sep-2005 | 1 | Initial release. |
| 27-Jun-2006 | 2 | Updated mechanical data. |
| 18-Sep-2006 | 3 | Updated mechanical data and added PowerSO-10 tape and reel. |
| 31-Oct-2006 | 4 | Updated typo in electrical characteristic temperature conditions. |
| 05-Mar-2007 | 5 | Document reformatted, typo in note 1. |
| 04-Dec-2014 | 6 | Updated the title. Updated E_{AS} parameter in Table 1 and updated Table 5 and Table 6 . Minor text changes. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics – All rights reserved



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[VN340SP-E](#) [VN340SPTR-E](#)