


L9963E BMS IC evaluation board



Features

- Measures from 4 to 14 cells in series, with 0 μ s desynchronization delay between samples. Supports also busbar connection without altering cell results
- Coulomb counter supporting pack overcurrent detection in both ignition on and off states
- Fully synchronized current and voltage samples
- 16-bit voltage measurement
- 2.66 Mbps isolated serial communication with regenerative buffer, supporting dual access ring
- Transformer based isolation
- Up to 4 analog inputs for NTC sensing, plus PCB temperature sensing
- Onboard microcontroller SPC574S64E3 with 32-bit Power Architecture MCU for automotive chassis and safety applications
- Onboard L9001 regulator as microcontroller power supply
- Hot plug dedicated circuit

Description

The **EVAL-L9963E-MCU** is a hardware tool for evaluation of L9963E, automotive chip for battery management applications. It can be used for the development of a 48 V battery management system (BMS) or as lower stage of a distributed BMS (depending on total battery voltage. Additional stages can be added thanks to EVAL-L9963E-NDS).

EVAL-L9963E-MCU allows the user to connect up to 14 channels for cell voltage sensing, one channel for current sensing, and up to 4 analog input for temperature sensing (plus an additional on-board NTC to sense PCB temperature). The board provides an onboard microcontroller with preloaded GUI (graphical user interface) firmware intended to be used with STSW-L9963E PC GUI.

Product status link

[EVAL-L9963E-MCU](#)

Product summary


Order code	EVAL-L9963E-MCU
Reference	EVAL-L9963E-MCU evaluation board

1 Hardware description

The EVAL-L9963E-MCU board provides maximum flexibility, giving access to all pins to simplify the evaluation and debug phase of the device.

1.1 Block diagram

Figure 1. EVAL-L9963E-MCU block diagram

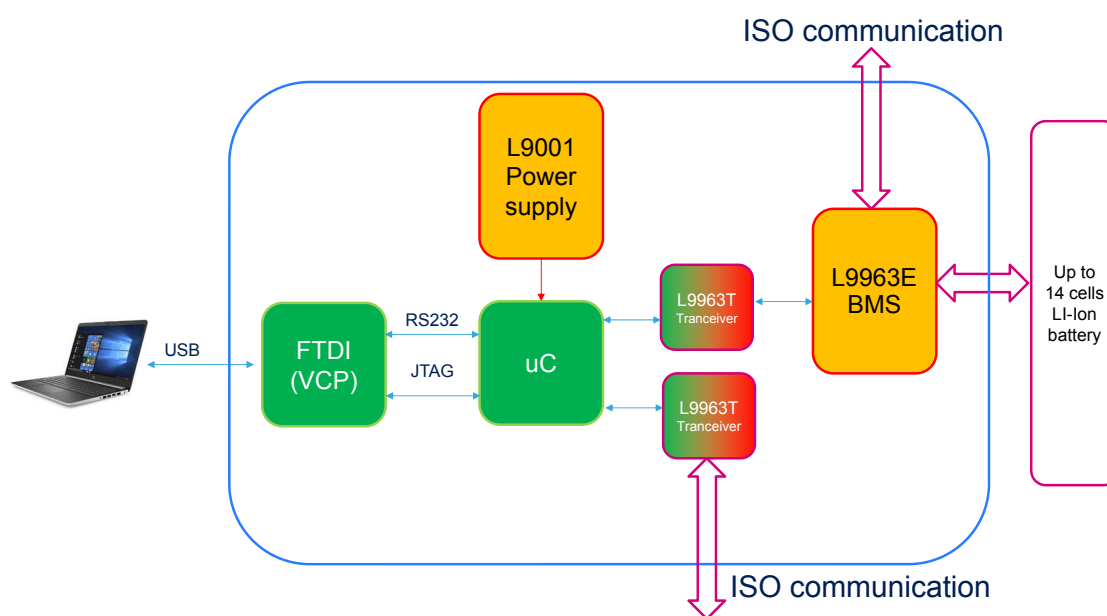

1.2 Featured components

The EVAL-L9963E-MCU can be considered a reference design for a 48 V BMS or as a first layer of a distributed BMS system. In the following table there is a short description of all the ST featured components.

Table 1. Featured components

Name	Description
L9963E	Automotive chip for battery management applications
L9963T	Automotive SPI to isolated SPI transceiver
L9001	Automotive power supply IC with multiple voltage regulators
SPC574S64E3	32-bit Power Architecture MCU for automotive chassis and safety applications

2 Minimum system requirements

- PC with Windows 7.0 or higher
- Mini USB to USB type A cable
- Power supply:
 - At least 3 output 0 – 30 V (if possible 60V):
 - 1 output to power L9963E (0:60 V)
 - 1 output to simulate cells common mode voltage (0:60V)
 - 1 output to simulate cell voltage (0:5V)
 - 12 V power supply with 2.1 mm jack output, internal pin +

Figure 2. Board schematic (1/5)

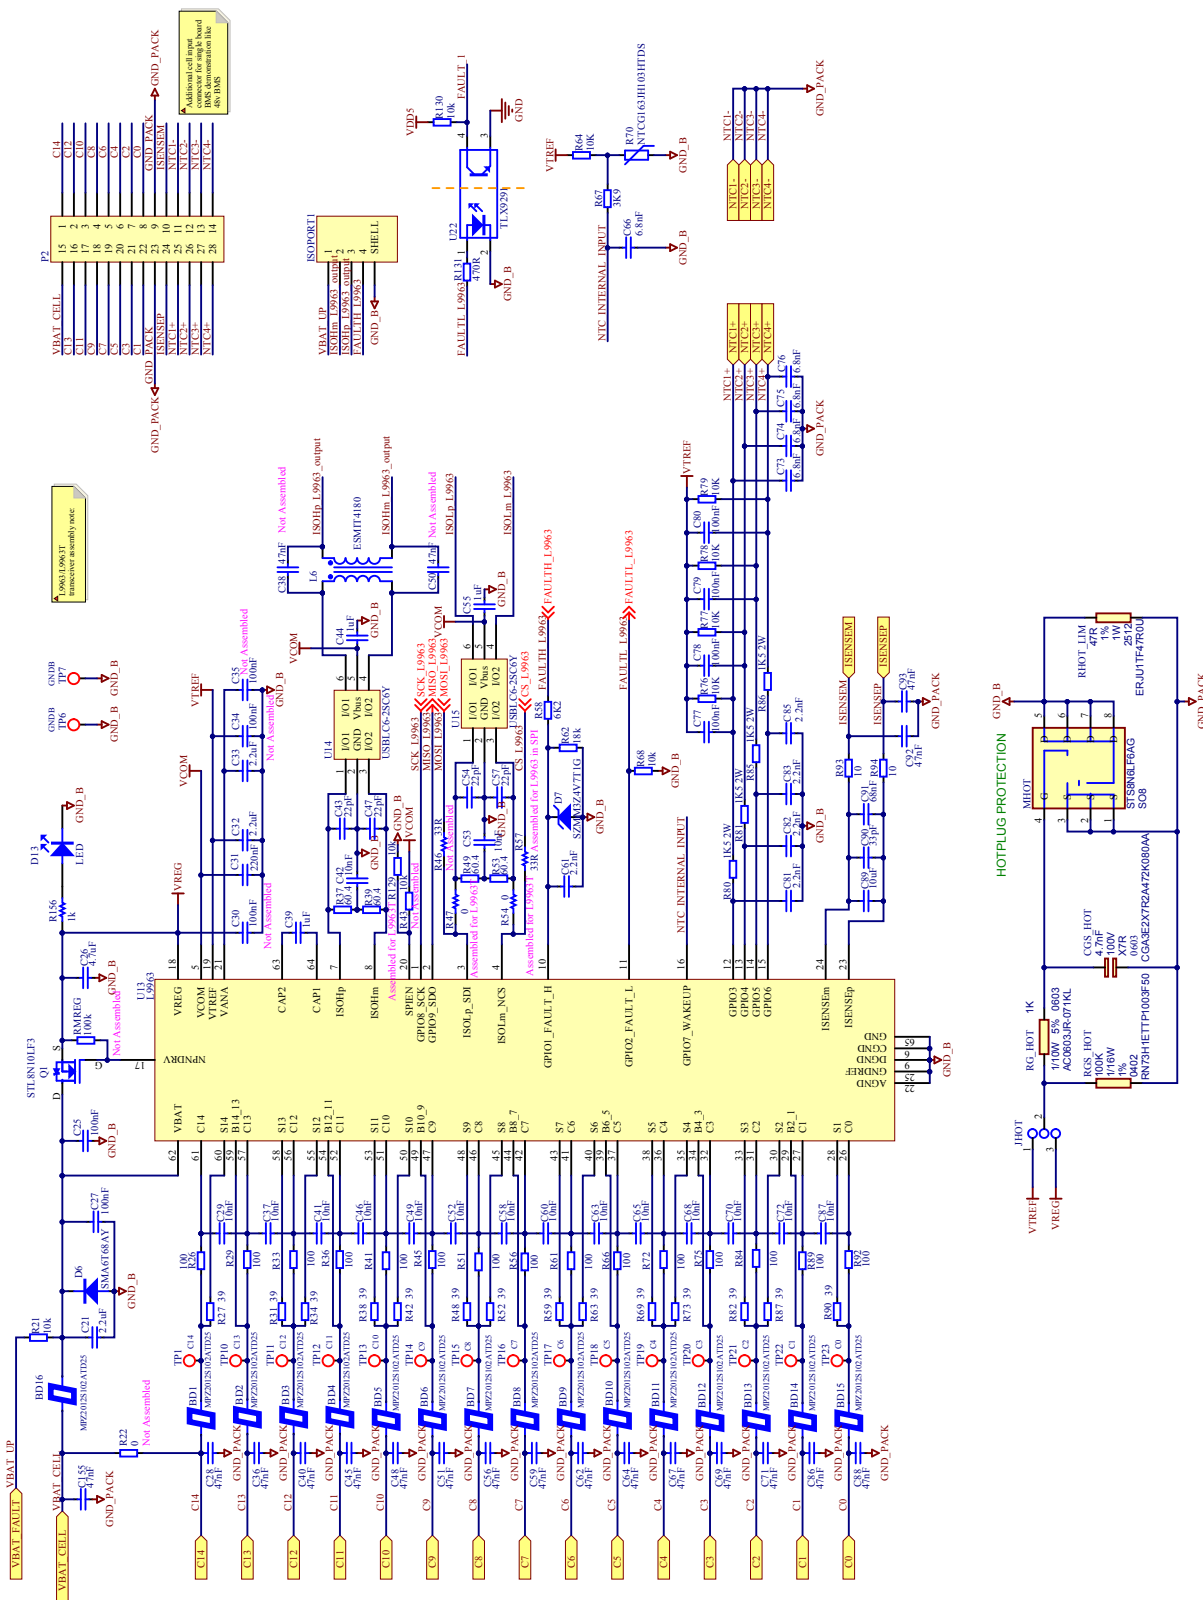


Figure 3. Board schematic (2/5)

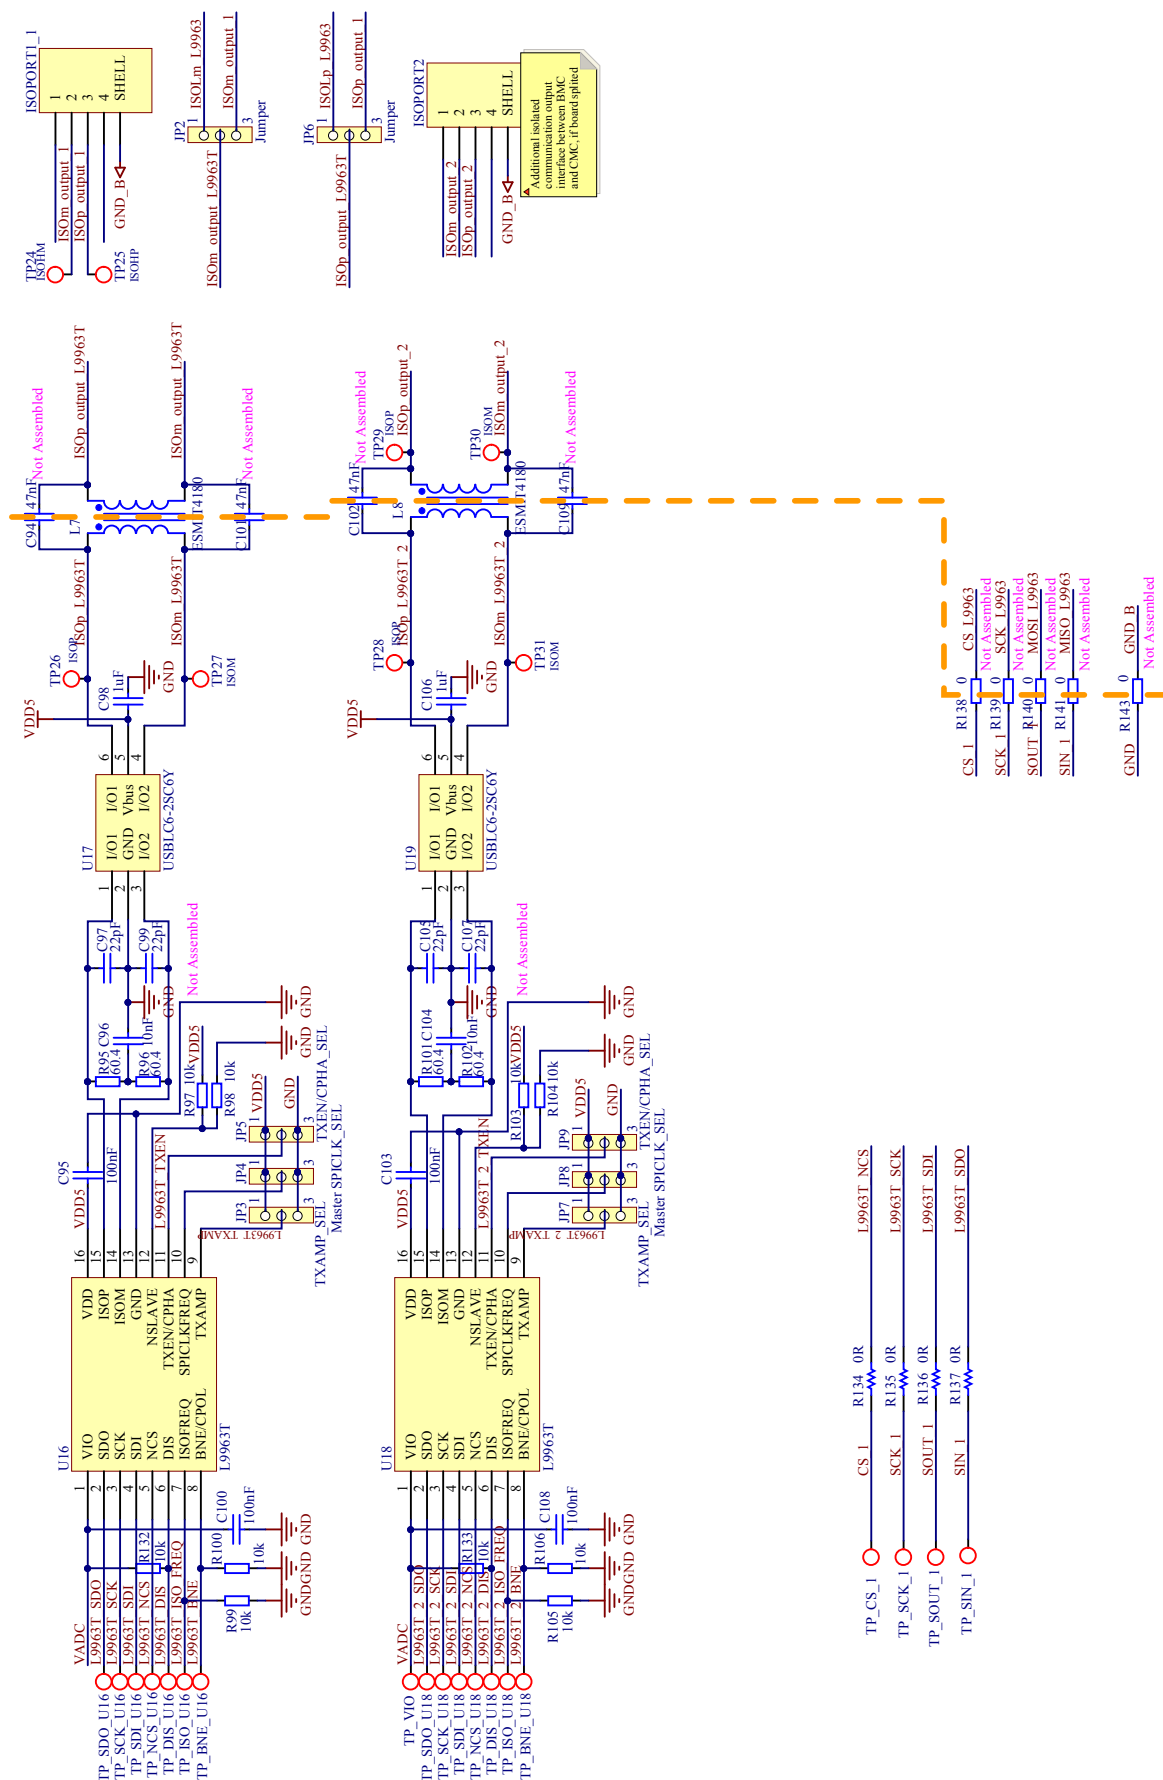


Figure 4. Board schematic (3/5)

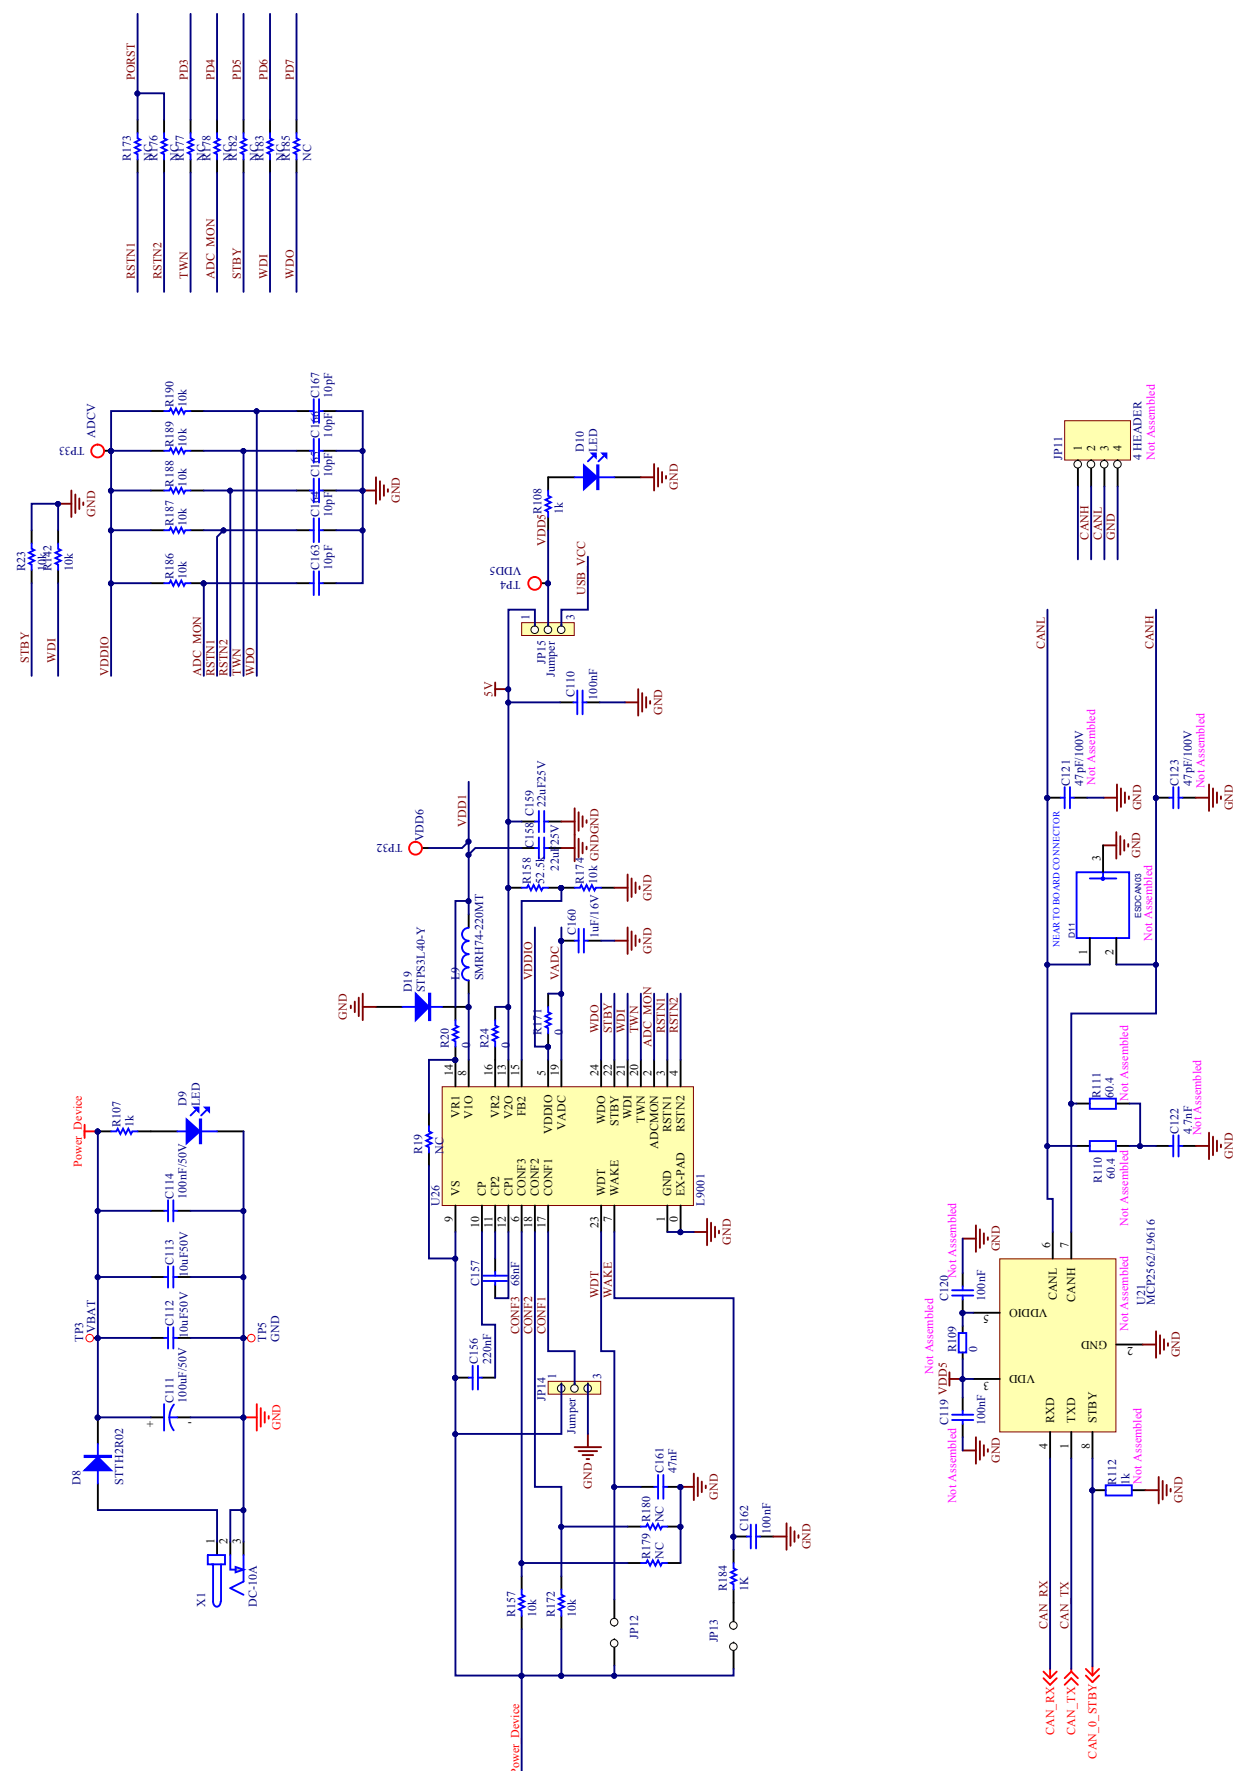


Figure 5. Board schematic (4/5)


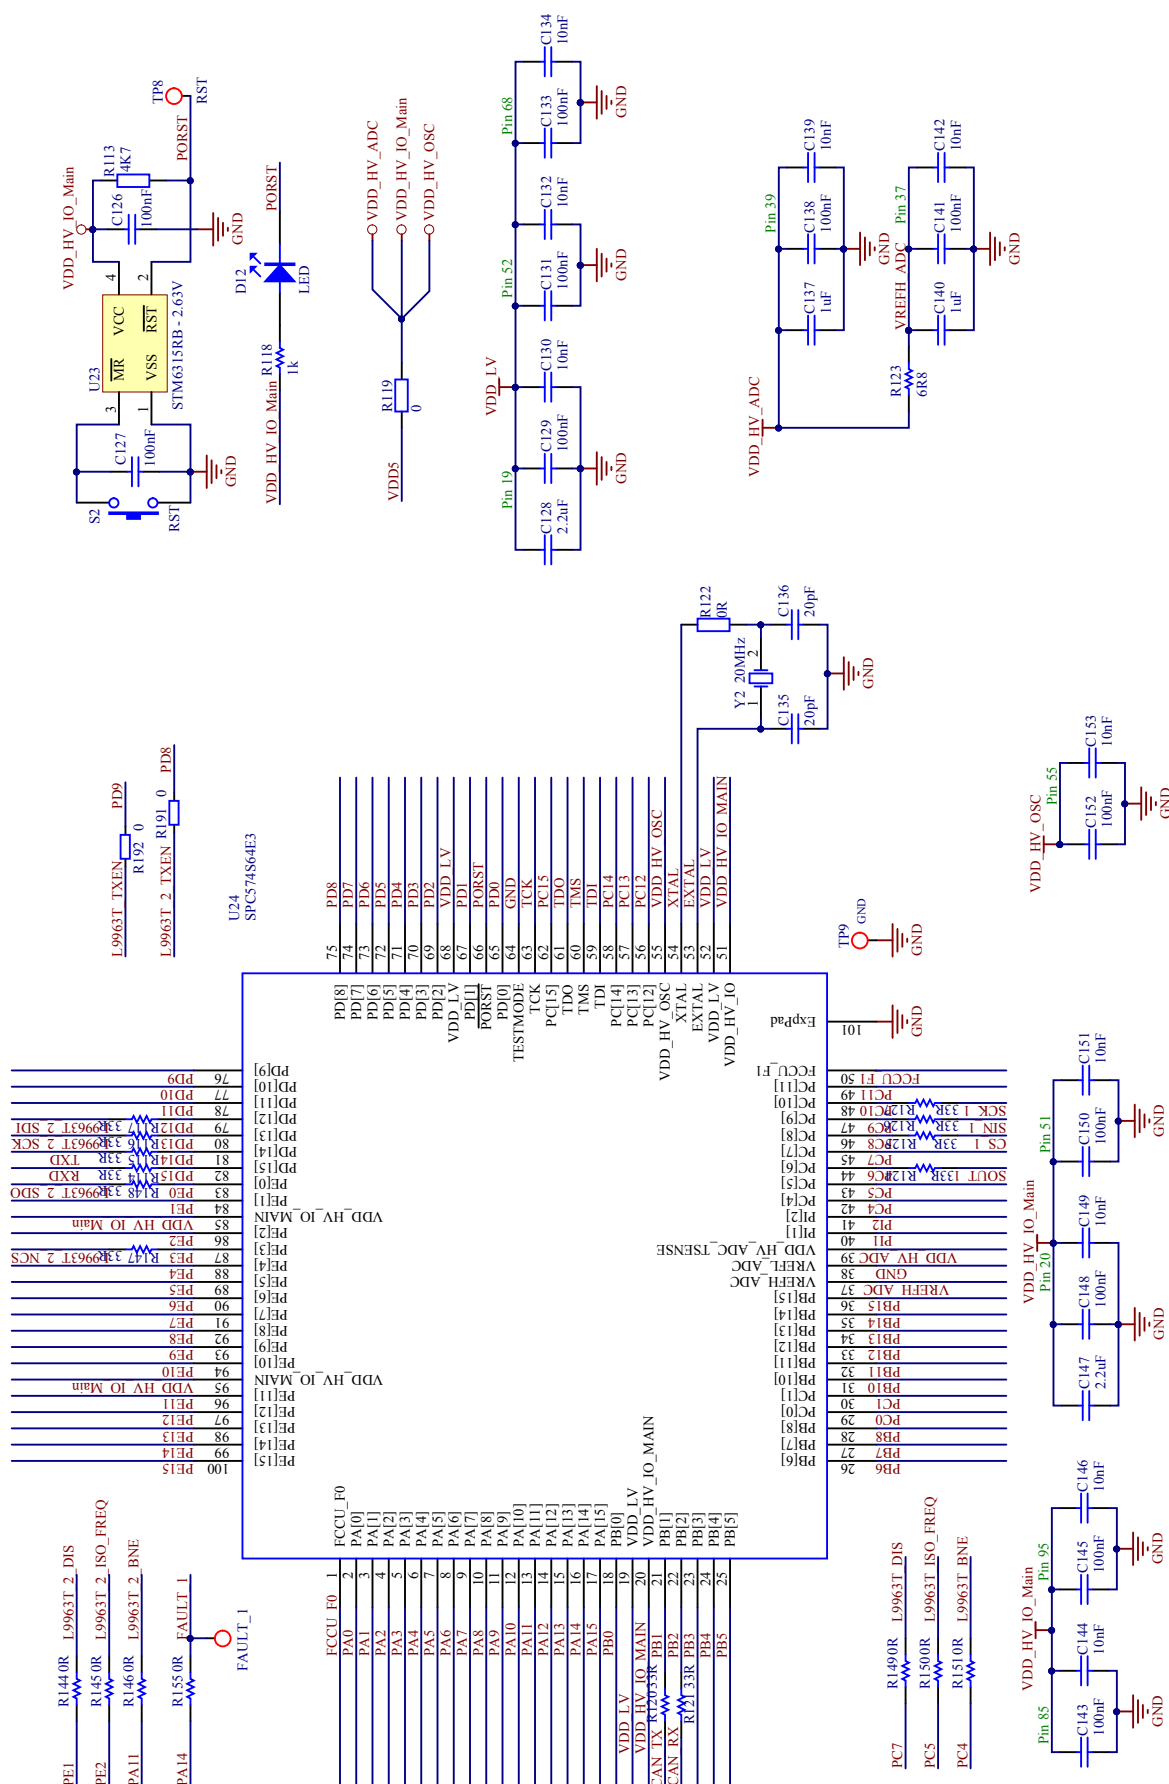


Figure 6. Board schematic (5/5)

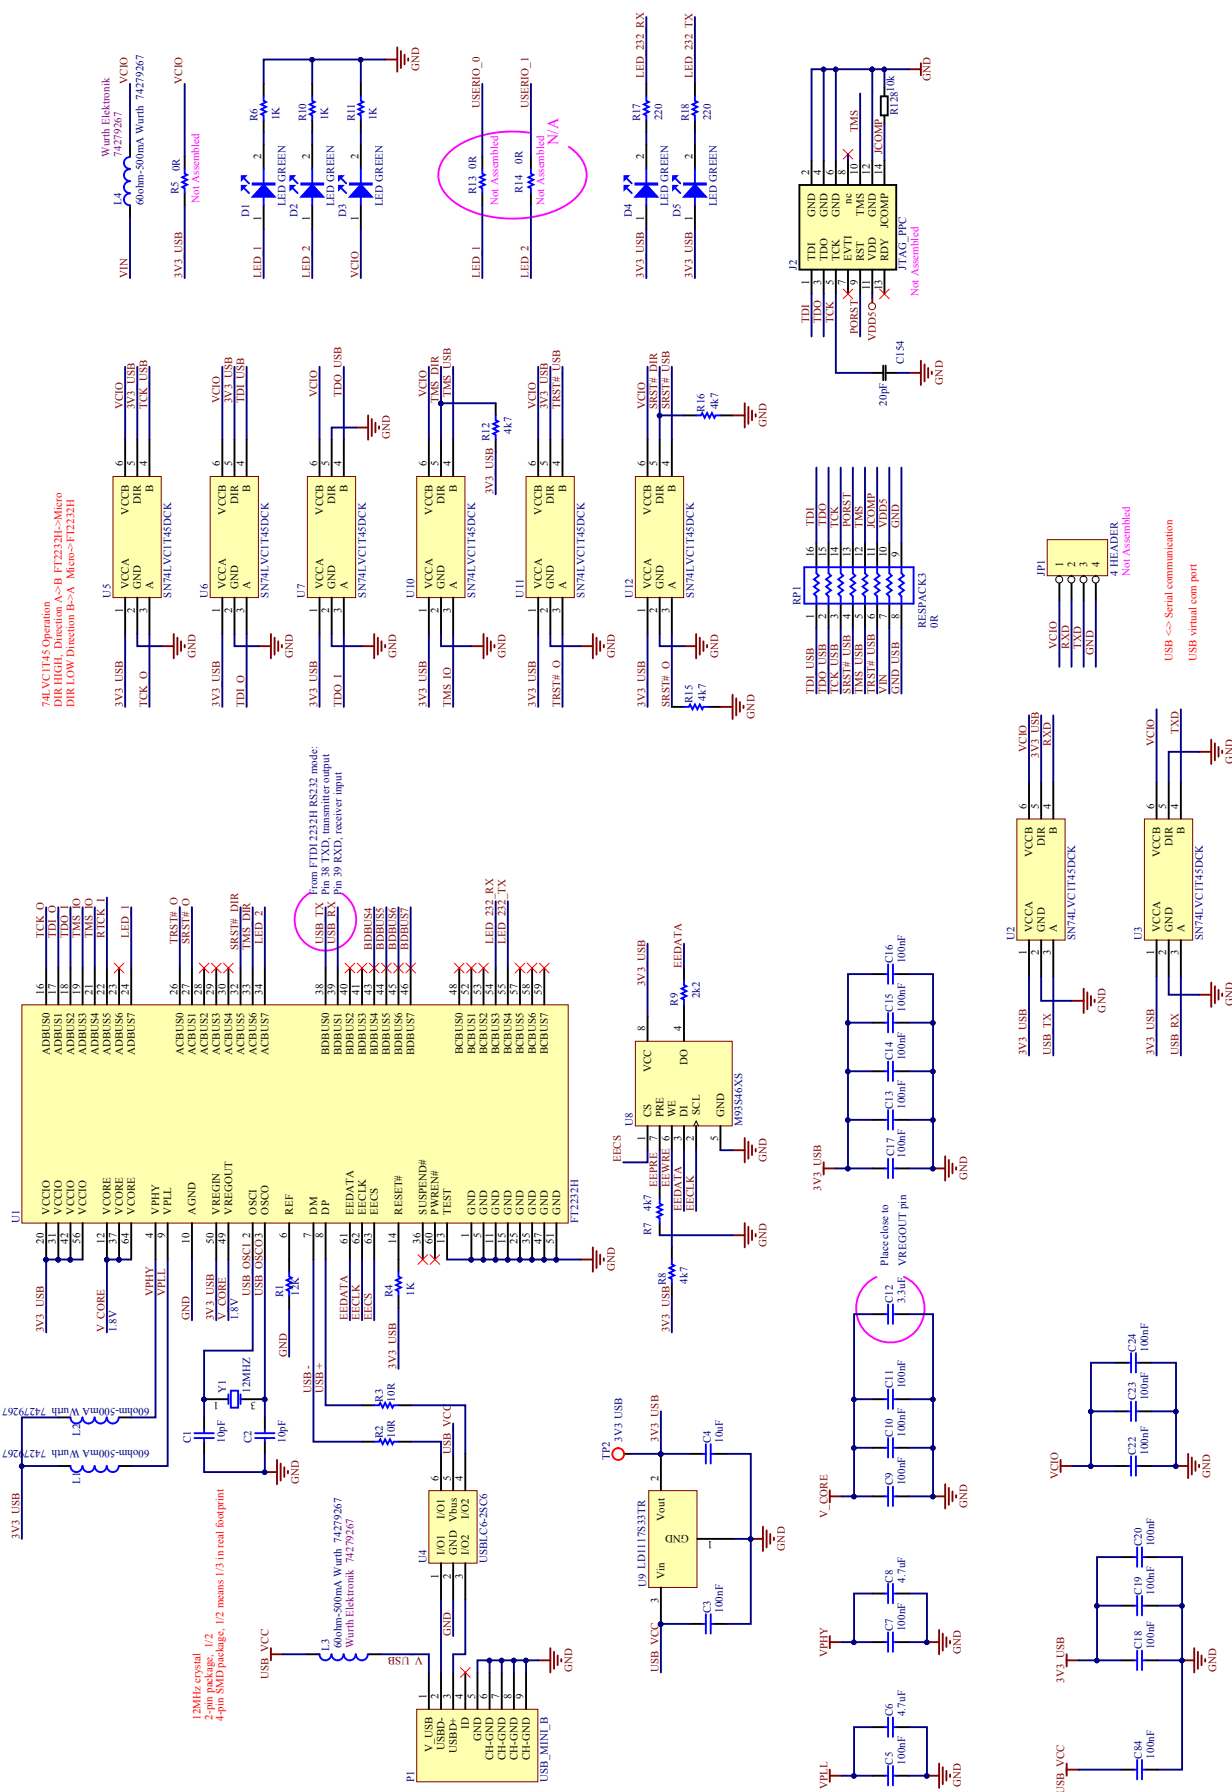

4 Board layout

Figure 7. Assembly top

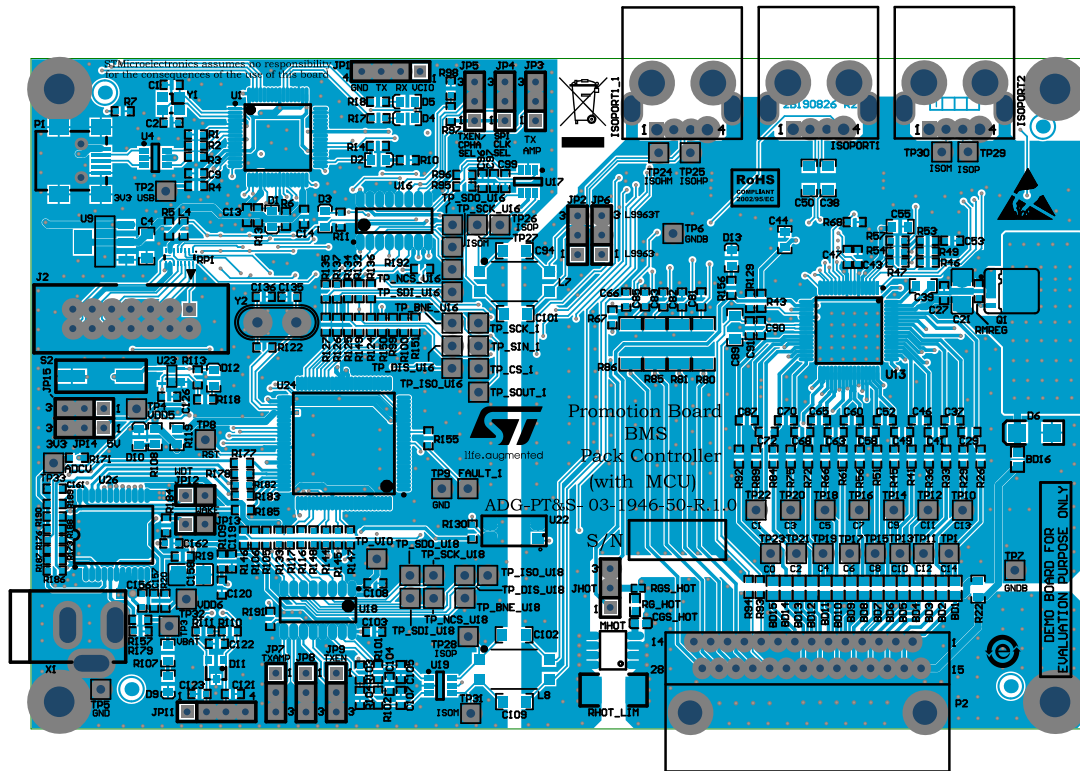


Figure 8. Inner 1

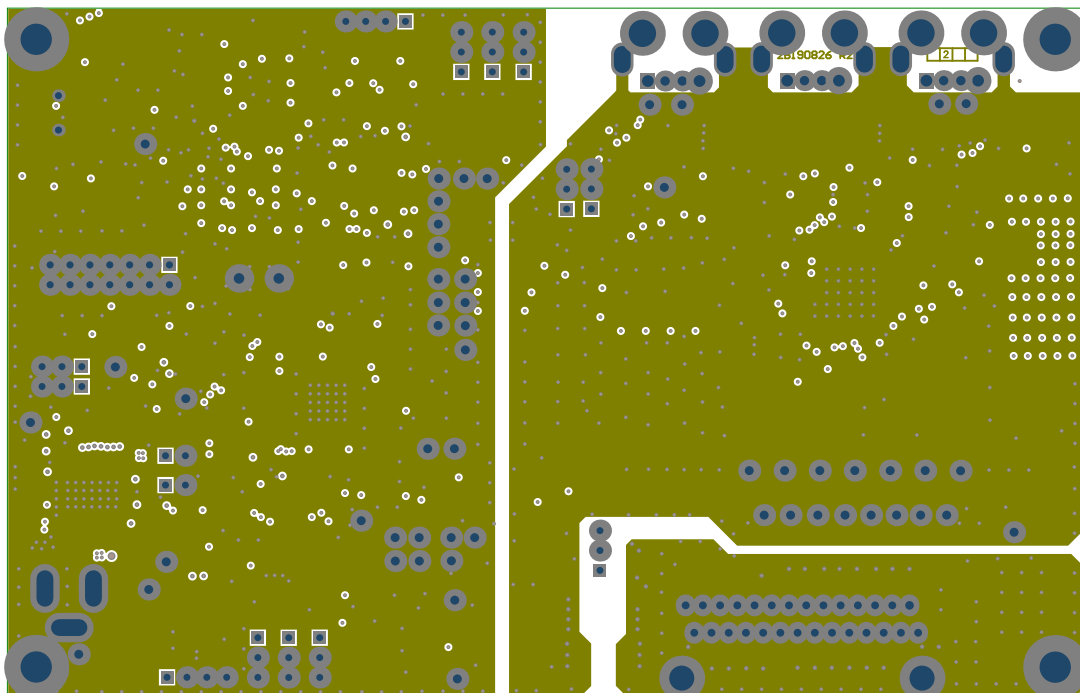


Figure 9. Inner 2


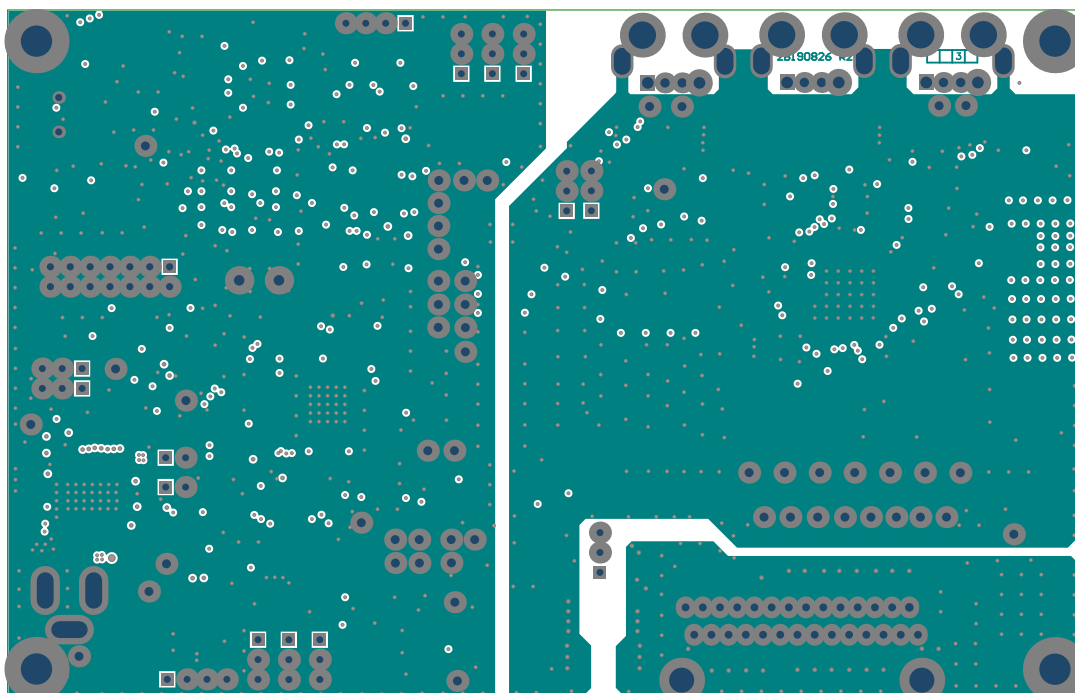


Figure 10. Assembly bottom

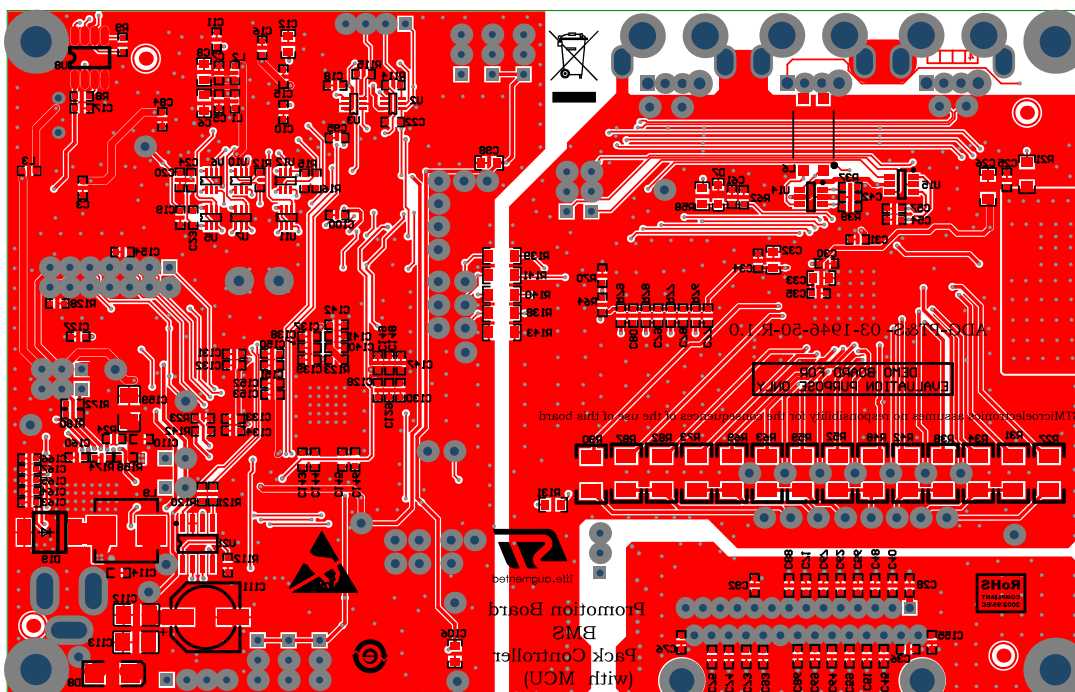

5 Demonstration software

STSW-L9963E software is available for demonstration purpose. For more information and download, please refer to ST web page ([STSW-L9963E](#)).

Revision history

Table 2. Document revision history

Date	Version	Changes
03-Mar-2020	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[EVAL-L9963E-MCU](#)