


## USB Type-C™ and Power Delivery™ Nucleo pack with NUCLEO-F072RB expansion board based on the STUSB1602

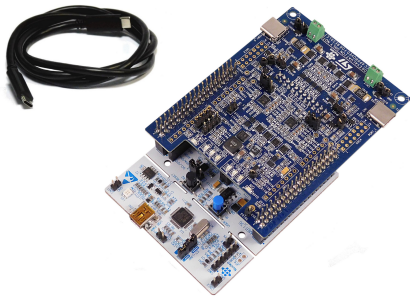

### Features

- 32-bit ARM® Cortex®-M0-based microcontroller STM32F072RB with 128 kB Flash and 16 kB SRAM
- Dual port solution based on certified USB Type-C™ port controller STUSB1602, featuring:
  - Type-C FSM with attach/detach and cable orientation detection
  - USB PD PHY and BMC transceiver
  - High voltage (20 V) technology
  - V<sub>BUS</sub> voltage monitoring
  - 600 mA V<sub>CONN</sub> power switch
  - V<sub>BUS</sub> and V<sub>CONN</sub> discharge paths
  - Dead-battery support
  - 22 V CC line protection
  - V<sub>BUS</sub> switch gate drivers
- Power connector to interface with external power supply (not included)
- USB 2.0 full speed data communication interface
- RoHS compliant

### Applications

- USB type-C™ cable and connector spec. (rev 1.3)
- USB Power Delivery spec. (rev 2.0 and 3.0)

Product status link

P-NUCLEO-USB002

### Description

The STM32 Nucleo pack is designed for USB Type-C™ and Power Delivery specifications.

Used with the embedded X-CUBE-USBPD certified software, the [P-NUCLEO-USB002](#) represents a development tool enabling fast prototyping of USBPD applications leveraging ready-to-use ST componentry and software.

The [P-NUCLEO-USB002](#) kit is designed to exploit the performance of the STM32F072 32-bit microcontroller based on ARM® Cortex®-M0 and two STUSB1602 USB Type-C™ port controllers, to develop applications managing up to two USB Type-C™ ports.

The STUSB1602 is a Type-C™ controller designed with 20-V technology that integrates a fully-featured USB Type-C state machine and a USBPD PHY + BMC driver. This analog front end features: Type-C™ attach and cable orientation detection; source / sink / DRP power role configuration; integrated V<sub>CONN</sub> power switch; integrated V<sub>BUS</sub> and V<sub>CONN</sub> discharge path; high voltage protection (including CC pins); V<sub>BUS</sub> switch gate drivers.

The [P-NUCLEO-USB002](#) is fully configurable and ready to support different power roles such as: provider, consumer or DRP.


The X-CUBE-USBPD is compliant with the USB Type-C™ 1.3 and USB Power Delivery 2.0 and 3.0 specifications.

## 1 P-NUCLEO-USB002 system architecture

The USB Type-C™ and Power Delivery kit is composed of:

1. The NUCLEO-F072RB development board that acts as the control board where the X-CUBE-USB-PD software is running
2. Power Delivery expansion board with two embedded STUSB1602 Type-C™ controllers
3. A USB Type-C™ fully-featured and certified cable

**Figure 2. P-NUCLEO-USB002 kit**

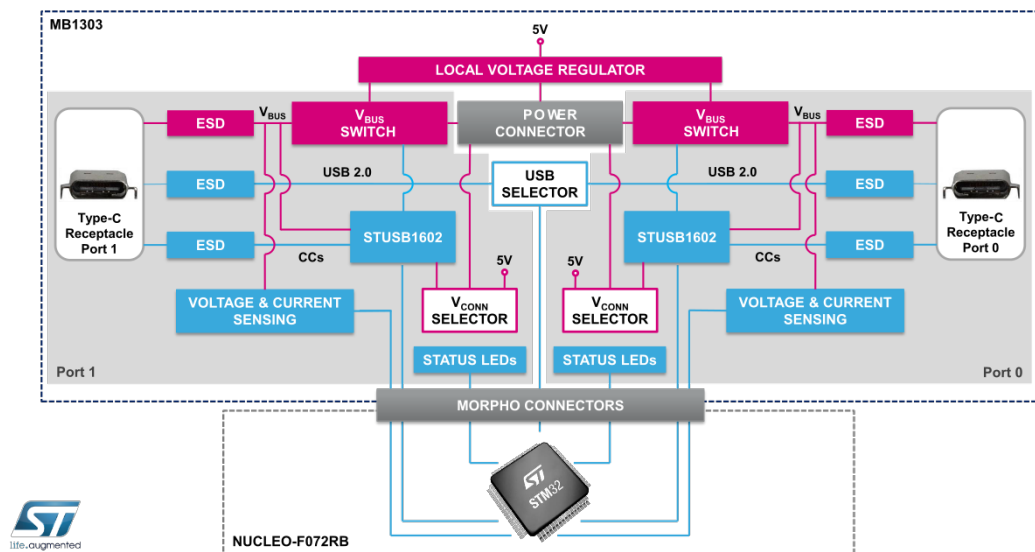

The Power Delivery expansion board is equipped with:

- Two DRP USB Type-C™ ports managed by two STUSB1602 Type-C™ port controllers
- Optional  $V_{BUS}$  current sensing (and discrete voltage monitoring)
- Dedicated power connector to interface with an external power supply (not included in the kit) to provide different profiles as well as  $V_{CONN}$  (5 V) if necessary
- On-board power management that is able to supply internal voltages
- Six status LEDs for the USBPD ports and a user LED
- USB 2.0 interface available on both Type-C™ port
- RoHS compliant
- PCB type and size:
  - material: FR4
  - four-layer
  - copper thickness: 35  $\mu\text{m}$
  - total expansion board dimensions: 74 mm x 98 mm

**Note:** The USB 2.0 peripheral can be alternatively mapped on one port or in pass-through configuration.

The NUCLEO-F072RB development board includes:

- The STM32F072RBT6 32-bit microcontroller based on the ARM Cortex-M0 with 128 kB Flash memory, 16 kB of SRAM, USB 2.0 full speed data interface in LQFP64 package
- Two types of extension resources:
  - Arduino Uno revision 3 connectivity
  - ST morpho extension pin headers for full access to all STM32 I/Os
- On-board ST-LINK/V2-1 debugger/programmer with SWD connector:

- selection-mode switch to use the kit as a standalone ST-LINK/V2-1
- Flexible board power supply:
  - USB  $V_{BUS}$  on mini-B connector or external source
  - Power management access point
- Three LEDs:
  - USB communication (LD1), user LED (LD2) and power LED (LD3)
- Two push buttons: USER and RESET
- USB re-enumeration capability: three different interfaces supported on USB
  - Virtual com port (the NUCLEO-F072RB in the kit has a different solder bridge configuration to the standalone board)
  - Mass storage
  - Debug port
- Supported by a wide range of integrated development environments (IDEs), including IAR™, Keil® and GCC

## Revision history

**Table 1. Document revision history**

| Date        | Version | Changes   |
|-------------|---------|---|
| 09-May-2017 | 1       | Initial release.  |
| 18-Apr-2018 | 2       | Updated <a href="#">Section • Applications</a> and <a href="#">Section • Description</a> .                        |
| 02-May-2018 | 3       | Updated <a href="#">Section • Description</a> and <a href="#">Section 1 P-NUCLEO-USB002 system architecture</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[P-NUCLEO-USB002](#)