

# Switchcraff

ENGINEERING DESIGN GUIDE 4th Edition



JACKS & PLUGS



JACK PANELS

PATCH CORDS & MOLDED CABLE ASSEMBLIES

SWITCHES

\* Please visit the product pages on our website for the most up-to-date product information

## **Switchcraft**

## **ABOUT SWITCHCRAFT, INC.**

Switchcraft, Inc. was established in 1946 to manufacture jacks, plugs and switches, from its original plant located on West Diversey Street in Chicago. The company moved to a larger facility at 1328 North Halsted Street in 1948, and in 1958, the operation moved to 5555 North Elston Avenue, which is still the headquarters of the corporation.

Switchcraft is a leading supplier of a broad line of components for the audio/video, broadcast, telecommunication, computer, medical, military, appliance, transportation and instrumentation industries.

In the 185,000-square-foot Chicago facility, Switchcraft manufactures electronic and elecromechanical components, including:

Jacks

Plugs

Connectors

- Jackfields
- Patch Panels
- Switches
- Molded Cable Assemblies
- Patch Cords
- EAC Power Receptacles

With a basic line of over 5,000 standard products and thousands of variations, Switchcraft is proud to offer a limited lifetime warranty on all products.

Switchcraft markets products both domestically and internationally through a network of manufacturers' representatives and independent distributors.

In 1999, Switchcraft acquired the Conxall Corporation located in Villa Park, Illinois. Conxall was founded in 1971 as a manufacturer of sealed connectors for the marine industry. Today, the company offers a broad line of custom cable assemblies and connectors used in marine, industrial, sensor, communications and transportation applications. For more information contact Conxall at (630) 834-7504, or visit their website at www.conxall.com.

#### LIMITED LIFETIME WARRANTY

Switchcraft warrants all of its products to be of sound design, good materials and workmanship at the time of manufacture.

Switchcraft will repair or replace at its discretion any product proven to be defective under normal use.

Switchcraft's liability under the terms of this warranty is limited to the repair or replacement of defective products which have not been damaged through accident, abuse, misuse or unauthorized repair. Switchcraft shall in no case be liable for special or consequential damages of any nature.

## **CATALOG SECTIONS**

Connectors	1-78
Jacks & Plugs	79-162
Jack Panels	163-238
Patch Cords and Molded Cable	
Assemblies	239-268
Switches	269-318

Index by Part Number ... 319-328

Visit us on the net: www.switchcraft.com

#### \* Please visit the product pages on our website for the most up-to-date product information

#### **CONNECTORS AND RECEPTACLES**

Q-G® XLR CONNECTORS	1-30
Q-G® Connector Part Numbering System	2
Professional Series Q-G® Connector Part Numbering Sy	/stem2
Q-G® Audio Connectors A, AA, AND QGP Series	3-4
Part Numbers - Male Cord Plugs/Female Cord Plugs	4
Q-G® Color Flex Reliefs/Flex Relief	5
AAA XLR Connectors	6-7
P(*)M Gooseneck Plug, P(*)F Microphone Plug,	
R(*)MZ Cord Plug, R(*)FZ Cord Plug	8
D(*)M, D(*)F and D(*)FD Receptacles	9
T(*)F and T(*)FM Cord Plug With On-Off Switch	9
B(*)F Receptacle, C(*)F Receptacle, B(*)M Receptacle	÷,
C(*)M Receptacle	
E Series Receptacles	
EH Series Receptacles	
PQG® Receptacles	
PD Series - Plastic Panel Mount	
Y3F, Y3FPC, Y3FDPC and Y3MPC Receptacles	
F Series Receptacles	
Q-G® Adapters, Accessories	
Q-G® Wall Plate Receptacles	
Q-G® Connector-Adapters	
S*FM Audio Connector-Adapter	
Audio "Y" Adapters	
DMX Adapter	
Q-G® Connector-Adapter Receptacles	
Z Matching Transformers, Series M(*)M, Series L(*)MN	130

## 

Tini Q-G® Audio Adapters	
TB(*)M AND TB(*)MB Receptacle, TLP(*) Looping Plug,	Straight
Female Looping Plug, Reverse Gender TQG Series	
TRA(*)M PC Mount Male Receptacle	34
TRASM*M, TRAPC*M Series	34-36
TY(*)F and TY(*)FPC Receptacles, TYEF Escutcheons,	
TQG(*)F and TQG(*)M Connector Inserts, TBA(**)	
Audio Adapter	37

#### 

EN3TMini WEATHERTIGHT CONNECTOR SERIES 2 - 8 pin Cord Connector, 9 - 18 pin Cord Connector 2 - 8 pin Panel Connector, 9 - 18 pin Panel Connector 2 - 8 pin Inline Connector, 2 - 8 pin Overmolded Cord	43 44
and Inline Connector	45
DIN CONNECTORS	
Panel Mount Receptacles	
Right Angle PC Mount Receptacles	
Mini-DIN Right-Angle Receptacles, Right-Angle, PC Mc	bunt
Receptacles	
SMD Series DMD Series	
USB CONNECTORS	56-57
IEEE 1394 FIREWIRE CONNECTORS	58-59
SLIM-LINE CONNECTORS	
Cord Plugs	
Slim-Line Connector Part Numbering System, Cable Cl Strain Relief	
SL40-SL41 Male/Female Cord Plugs	

64	SL18 Male/Female Receptacles
65	CB CONNECTORS MICROPHONE CONNECTORS, MINI-CON MINIATURE CONNECTORS
66-67	HP75BNC SERIES BNC CONNECTORS
68-77	EAC RECEPTACLES
78	RAPC322 POWER INLET SOCKET

#### **JACKS AND PLUGS**

JACK SCHEMATICS	79-80
1/4" LONG FRAME TELEPHONE JACKS 1/4" Jack Blocks	
BANTAM TYPE® JACKS TT-JAX® (.173") Telephone Jacks Bantam Type® TT-JAX® (.173") Telephone Twin Jacks Bantam Type® TT-JAX® (.173") Telephone Triple Jacks Bantam Type® RTT Series Miniature Telephone Jacks,	87-88 89
Right Angle, PC Mount	

#### LITTEL JAX® 2- AND 3-CONDUCTOR,

1/4" PHONE JACKS         Hi-D Jax® 2- and 3-Conductor         Spring Lock PC Terminals for Hi-D Jax®         SN Series, RA Series Right-Angle Phone Jacks         500 Series Jack Covers         Series E (Locking) and Thick Panel Phone Jacks         1/4" Extension Jacks and 1/4" Speaker Jacks         1/4" Shielded Phone Jacks, SF-Jax®         Short Frame Jacks	96-99 100 101-105 106 107 108
.141" MINIATURE PHONO JACKS	109-111
3.5MM DUAL STEREO JACK	112-113
3.5MM SINGLE MONO AND STEREO JACKS	114-118
3.5MM SINGLE MONO JACKS	119
2.5MM SINGLE MONO AND STEREO JACKS	
.101" SUBMINIATURE PHONE JACKS	121-122
RCA PHONO JACKS AND PHONO JACK SETS	123-129
RIGHT ANGLE MINIATURE POWER JACKS	130-133
STRAIGHT MINIATURE POWER JACKS	134-135
VJ SERIES VIDEO JACKS	
MVJ SERIES VIDEO JACKS	
MIL-TYPE 1/4" PHONE PLUGS Littel Plug® Phone Plugs	
MIL-TYPE 1/4" EXTENSION JACKS	142

## www.switchcraft.com

SL10-SL17 Male/Female Receptacles ......63

#### \* Please visit the product pages on our website for the most up-to-date product information

TELEPHONE PATCH ADAPTERS142	
BANTAM TYPE MINIATURE TELEPHONE PLUGS143-144	
1/4" COMMERCIAL PHONE PLUGS -         LITTEL-PLUG® PLUGS	
3.5MM HEAVY DUTY STEREO PLUGS156	
.141" MINIATURE PHONE PLUGS	
.097" SUBMINIATURE PHONE PLUGS	
AUDIO ADAPTERS	
RCA PHONO PLUGS160-161	
MINIATURE POWER PLUGS162	

## JACK PANELS, PATCH PANELS, PATCH KITS AND JACKFIELDS

AUDIO PATCHBAYS163-190Professional Punchdown Terminal (PPT)163Front Access MTPFA/TTPFA Series164-165MTP48K Wired Audio Series166-167TTP96K Wired Audio Series168-169MTPH/TTPH Harness Audio Series170-173MTPBP/TTPBP Backpanel Series174-175EZ NORM Patchbay Series176-177TTP96K Patchkit Series180-181MT48K/MT52K Patchkit Series182-183MT48/MT52 Patchbay Series184-185TTP96AS Patchbay Series186-187Q-G®XLR Patchbay Series188-189HPC Patchbay Series190
RS 422 DATA PATCHBAY SERIES
VIDEO PATCHBAYS193-201VPP Video Patchbay Series193-195MVP Midsize Video Patchbay Series196-198VAP Video/Audio Patchbay Series199-200MBPK Video/Audio Patchbay Series201
TELECOM TYPE JACK PANELS

Modular TT-Jax® (.173") Jack Panels -Series TT5102000,

TT5202000, TT5502000, TT5602000	217-218
TT-Jax® (.173") Twin Row and Three Row Jack Panels	.219-220
TT-Jax® (.173") Connectorized Jackfields - Series TT,	
2-wire, 4-wire, 6-wire	.221-229
TT® Lamps and Jewel Assemblies	230
Longframe Switchboard Switches	231
Dummy Plugs and Hole Plugs	232
TT® (Bantam) Circuit Guard Plugs	233
Miniature, Dummy Plugs, Hole Plugs	234
Designation Strips	.235-236
Kwik-Change® Designation Strips (Double Height)	
X-Wide® Vertical Designation Strips	238

#### PATCH CORDS AND MOLDED CABLE ASSEMBLIES

MOLDED CABLE ASSEMBLIES       239-261         Design Materials and Features       239         3.5MM Molded Cables       240         Power-Plug Battery Charger Plugs and Jacks       241         Power Plugs and Jacks Part Numbering System       242         EN3T MINI Weathertight Overmolded Cable Assemblies       243         Cordette® and Cord Switch Assemblies       244         DIN Plugs       246-248         MIDI Cables       249         Miniature, Shielded, Molded Tini Q-G® Plugs       250         Molded Cable Assemblies for Multi-Pin Interconnection       251         Standard Multi-Pin Interconnection Cables       252         Micro Plug® Subminiature Phone Plugs       253         Tini Plug® Miniature Phone Plugs       254         Phono Plugs and Phono Extension Jacks       255         Tini-Extension® Jacks       256         Littel Plug® Phone Plugs       256         Littel Plug® Phone Jacks       257         Cable Clamp Bands, "Y" Junctions       258         Part Numbering System       259         Standard Cable Guide       260	
Cross Reference Guide	

AUDIO/VIDEO PATCHCORDS	- 267
1/4" Longframe Telephone Patch Cords, MIL Type 1/4" Patch	n
Cords	262
Combination Patch Cords and MIL Type	
1/4" Twin Patch Cords	263
Miniature TT® Braided Patch Cords	264
Miniature TT® Molded Patch Cords	
and Telephone Couplers	265
Video Patch Cords	266
Broadcast Series 3-Conductor Bantam TT Patch Cords,	
Analog-AES/EBU Audio, and RS422 Patching	267

#### SWITCHES

#### PUSHBUTTON SWITCHES

IBS Series Miniature Keyboard Switches	269
IBS Keyboard Switch Pushbuttons	270
US Series Uniswitch® Switches	271
BXR Series Box Switch® Switches	272
Button-Switch® Switches, Tini-Switch® Switches	273
Littel-Switch® Switches	274
Hi-D Switch® PC Mount Switches, DA-Switch Switches .	275
$Cord\text{-}Switch \textcircled{B} Cord \ Switches, \ Cordette \textcircled{B} \ Cord \ Switches$	276

İ

#### \* Please visit the product pages on our website for the most up-to-date product information


İİİ

Push-Lite® Switches and Indicators Series PL9000 - PL® Indicators, Pushbutton/Indicator Screens, Color Filter Snap-Insserts, Optional	277-281
Mounting Barriers, Light Divider	
Part Numbering System	
Outline Dimensions	
SLIDE SWITCHES	282-290
General Purpose Slide Switches	284-287
Miniature Slide Switches	288-290
Side-Slide®/Miniature Slide Switches	
European Line Voltage Selector Switches	
LEVER SWITCHES	294-298
GENERAL PURPOSE STACK SWITCHES	299-300
MULTIPLE STATION SWITCHES	301-302
Littel® Multi Switch	303-308
DW Multi-Switch	309-311
Tini® DW Multi-Switch	312-313
IBS Multi-Switch - Series IBS	314-315
Multi-Switch Pushbuttons	
INDEX BY PART NUMBER	319-328

#### \* Please visit the product pages on our website for the most up-to-date product information

## **Q-G® CONNECTORS**

SECTIONALIZED VIEW - A3F Plug to B3M Receptacle

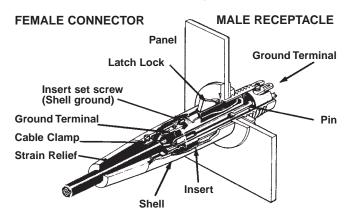

#### **DESIGN FEATURES**

CONSTRUCTION: Sturdy, die-cast zinc with satin nickel finish or Black-Velvet® finish to withstand hard use - even abuse. Vel-Tone non-reflective finish on QGP connectors only.

**INSERT INSULATION: High-impact, molded thermoplastic** provides high dielectric strength, and superior insulation resistance.

LOCKING: Latchlock on female plugs and receptacles locks into groove in mating male connector to prevent accidental disconnect. Manual release of latchlock is required to separate connectors. Q-G connectors are also available with FAS-DISCONNECT detent in place of latchlock. QGP has diecast latchlock.

FAS-DISCONNECT: FAS-DISCONNECT detent permits immediate disconnect of locked connectors with a 4-pound (1.8 kg) force. FAS-DISCONNECT connectors are not recommended for use in situations where strong or violent pulls on cable may occur and cause accidental disconnect. Available on Q-G connectors only.

**DUAL PRESSURE PLATES:** A\*F and A\*M Series provides secure cable lock and strain relief for all standard size cables.

FLEX RELIEF: TPR cable flex relief bushings on cord plugs are keyed to shell. Standard bushing opening accepts cables from .21" to .3" diameter Bushings with other openings accommodate cables from .105" to .205" diameter and from .3" to .328" diameter.

CONTACTS: Q-G female connectors are copper alloy, silver-plated, tarnish-resistant; male contacts are copper alloy, silver-plated, tarnish-resistant. Gold-plated female contacts are copper alloy. Male contacts are gold-plated.

WIRING: Large, unique design solder cups make wiring fast and easy. Certain receptacles are also available with PC terminals for use with printed circuit boards.

#### Grounding and Shielding

Tightening the insert screw establishes continuity between ground terminal, ground contactors and connector housing. Upon engagement with a mating plug or receptacle, the ground circuit is automatically connected to the mating shell through the ground contactor. Any pin or contact can be grounded by "jumping" it to the ground terminal. Contact 1 engages before all other contacts and disengages after all other contacts.

DIMENSIONS ARE FOR REFERENCE ONLY

Switchcraft Q-G<sup>®</sup> connectors feature a separate ground-terminal electrically integral with connector shell. Ground continuity between mating plugs is automatically accomplished through exclusive "Dual Point" grounding system. Socket and pin assemblies utilize "wedge-action" to insure firm, reliable positioning in connector shell. Inserts are easily removable for wiring and soldering. High-impact thermoplastic insures long reliable insert assembly life. Female connectors have latch lock feature to hold connectors firmly together. Plugs and receptacles are mechanically keyed for proper mating. Q-G (\*) Series 3-, 4-, 5-, 6-, and 7-pin/contact connectors offer 4-, 5-, 6-, 7-, and 8-pin contact versatility when ground-terminal is used. Switchcraft QGP connectors; are compatible with 3- and 4-contact (Neutrik, Amphenol 91-850 and Excellite 91-450 Series, and Cannon XLR-3, XLR-4): 5-contact (Neutrik, Cannon XLR-5 and Amphenol Excellite 91-450 Series).

#### Captive Design<sup>®</sup> Insert Screws



Insert screw engages as any conventional screw, except it is lefthand threaded. To disassemble the connector, turn screw counterclockwise down into insert (see illustration).



Insert assembly is now readily removed from shell. Note "Ground Terminal" area - large soldering cups make cable installation fast and easy. Unitized 1-piece insert eliminates possible loss of latchlock and spring.



To reassemble, replace insert assembly into shell, align insert screw under hole in shell and secure insert by turning insert screw clockwise. This "wedges" insert against interior of shell providing a rigid connector assembly and positive electrical continuity between ground terminal and shell (see illustration).

#### \* Please visit the product pages on our website for the most up-to-date product information

## Q-G® CONNECTOR PART NUMBERING

	Number of			
Series	Contacts	Gender		Options
A CORD PLUG WITH SCREW CABLE CLAMP	3-7	M MALE	D	FAS-DISCONNECT (FEMALE CONNECTORS)
AA CORD PLUG WITH CRIMP CABLE CLAMP		F FEMALE	В	BLACK EPOXY FINISH
AAA CORD PLUG WITH TWIST ON HANDLE				
B FRONT PANEL MOUNT USING NUT		FM BOTH (S SERIES)	ST	STRAIGHT PC TAILS
C FRONT PANEL MOUNT - CIRCULAR			RA	RIGHT ANGLE PC TAILS
D FRONT PANEL MOUNT - RECTANGULAR			Μ	MOMENTARY SWITCH ACTION (T SERIES ONLY)
E MODULAR FRONT PANEL MOUNT			PC	PC TERMINALS (Y SERIES ONLY)
G WALL PLATE - 1 B SERIES MALE			N	KNURLED COUPLING NUT (L SERIES ONLY)
H WALL PLATE - 2 B SERIES MALES			L	FLEX RELIEF FOR .250" TO .328" CABLE O.D.
J WALL PLATE - 1 D SERIES FEMALE			S	SEE NOTE 1.
K WALL PLATE - 2 D SERIES FEMALE			AU	GOLD CONTACTS
L MICROPHONE ADAPTER - INTERNAL THREAD			Н	HOUSING ONLY
M MICROPHONE ADAPTER - EXTERNAL THREAD			OP	TIONS SHOWN IN ORDER OF APPEARANCE
N CAP PLUG			Z	SCREWLESS STRAIN RELIEF
P GOOSENECK MOUNT				
QG CONNECTOR INSERT				
R RIGHT-ANGLE CORD PLUG				
S MALE/FEMALE BARREL ADAPTER				
T CORD PLUG WITH ON-OFF SWITCH				
W RIGHT-ANGLE PANEL MOUNT				
Y REAR PANEL MOUNT				

NOTE 1: S HAS DIFFERENT DESIGNATIONS DEPENDING ON THE SERIES.

FOR A, AA, AND T SERIES: SMALL FLEX RELIEF FOR 1165 TO .205" CABLE OUTSIDE DIAMETER FOR B, C, AND D SERIES: SANDED FRONT FACE FINISH

FOR G, H, J, AND K SERIES: STAINLESS STEEL WALL PLATE (STANDARD)

FOR N SERIES: SHORTING WIRING INSTALLED NOTE 2: J, K AND T SERIES AVAILABLE IN FEMALE GENDER ONLY. G, H, L, M, N, AND W SERIES AVAILABLE IN MALE GENDER ONLY.

## PROFESSIONAL SERIES Q-G® CONNECTOR PART NUMBERING SYSTEM

	Series	Number Of Contacts		Model
	PROFESSIONAL SERIES	3	22	FEMALE CORD PLUGS
QGP	PROFESSIONAL SERIES CORD PLUG WITH CRIMP CABLE CLAMP		23	MALE CORD PLUGS
AQGP			62	RECTANGULAR FEMALE PANEL MOUNT
			63	RECTANGULAR MALE PANEL MOUNT

Switchers

## CONNECTORS & RECEPTACLES Q-G® CORD PLUG CONNECTOR — A, AA AND QGP SERIES

\* Please visit the product pages on our website for the most up-to-date product information 91 Q-G 
<sup>®</sup> CORD PLUG CONNECTORS (continued) Q-G® AUDIO CONNECTORS A, AA, AND QGP SERIES Solid pins, **Bifurcated high** Sleek. stream-Cable Durable Rugged cable Rugged Standard nickel lined shell clamp silver plated performance metal latch clamp to ground metal shell or black finish for reliability socket contacts lock (no screws) Easy change Solder terminals "Dual-point "No screws' Easy change Light green, high "No screws rotated for easy flex relief for flex relief for retention performance insert shell grounding" retention color coding system access & soldering color coding system

QGP connectors (3 contacts only) feature Vel-Tone<sup>®</sup> non-reflective finish, gray TPR flex relief and plated pins/contacts for the most demanding applications.

Preferred by audio professionals the world over, Switchcraft<sup>®</sup> QG<sup>®</sup> connectors feature unsurpassed durability and a choice of finishes and contact platings. Features include:

- High performance inserts in traditional Switchcraft<sup>®</sup> green or black.
- Solder terminals rotated for easier access and soldering.
  All metal housing.

#### AA Series Only

- Rugged 1-piece cable clamp to relieve pulling and twisting stresses on terminations.
- No Screws flex relief retention system.
- Integral bump shell grounding system.

#### SPECIFICATIONS ELECTRICAL

**Contact Resistance:** 50 milliohm maximum, per pole. **Current Rating:** 3 pole – 15A, 4 pole - 10A, 5 and 6

pole – 7.5A, 7 pole – 5A @ 125VAC.

**Insulation Resistance:** 1,000 M $\Omega$ , minimum.

Dielectric Withstanding Voltage: 1,000 V (rms).

**Capacitance:** 2 pF between pins and 4 pF between pins and shell, maximum (AA3M and AA3F).

- MECHANICAL
- Insertion/Withdrawal Forces: 7 pound maximum,
- 5 pound nominal, insertion; 7 pound maximum,
- 5 pound nominal, withdrawal.
- Wire Size: #12 wire gauge solid; #14 wire gauge stranded (3 contact). #14 wire gauge solid; #16 wire gauge stranded
- (4 contact). #16 wire gauge solid; #18 wire gauge stranded
- (5 and 6 contact). #18 wire gauge solid; #20 stranded
- (7 contact). (Q-G and QGP).

#### MATERIAL Q-G CONNECTORS (A AND AA SERIES)

Shell: Die-cast zinc. Satin nickel finish, black velvet. Insert Insulation: Molded thermoplastic.

**Socket Contacts:** Silver-plated copper alloy tarnish-resistant; bifurcated on 3-contact type. Gold is available

**Pin Contacts:** Silver-plated copper alloy. Resists tarnishing, and provide excellent electrical conductivity. Gold is available. **Latchlock:** High-strength die-cast zinc.

Latch Release: Steel, nickel-plated. Latch Detent: Formed stainless steel.


Insert Screw: Stainless steel.

#### Flex Relief: TPR (thermoplastic rubber).

#### **QGP CONNECTORS**

**Shell:** Die-cast zinc, non-reflective gray Vel-Tone<sup>®</sup> finish. **Socket Contacts:** Gold-plated copper alloy **Pin Contact:** Gold-plated copper alloy

#### FACE VIEW OF PIN (MALE) INSERTS




(mm)


\* Please visit the product pages on our website for the most up-to-date product information

AA(\*)FD CORD PLUG

## Q-G® CORD PLUG CONNECTORS (continued)

## AA(\*)F CORD PLUG





AA3M

**⊘AA4**M

**⊘AA5**M

**⊘AA6**M

**⊘AA7M** 

color flex relief.

AA3MB

**⊘AA5MB** 

## AA(\*)M CORD PLUG

R

PART NUMBERS - MALE CORD PLUGS

**⊘AA3MBAU** 

Advanced Q-G<sup>®</sup> Cord Plugs, Series AA(\*)M and AQGP

**⊘AA3ML** 


**⊘AA4ML** 

**⊘AA5ML** 

**⊘AA6ML** 

**⊘AA7ML** 

All above part numbers have black flex relief installed. Contact Switchcraft for



**⊘AQGP323** 

\_

3

4

5

6

7

#### PART NUMBERS - FEMALE CORD PLUGS

Advanced Q-G <sup>®</sup> Cord Plugs, Series AA(*)F and AQGP							
AA3F	AA3FB	<b>⊘AA3FBAU</b>	<b>⊘AA3FD</b>	<b>⊘AA3FL</b>	<b>⊘AQGP322</b>	3	
—	—	_	AA3	FLD	_	3	
<b>⊘AA4F</b>	<b>⊘AA4FB</b>	—	<b>⊘AA4FD</b>	<b>⊘AA4FL</b>	-	4	
<b>⊘AA5F</b>	<b>⊘AA5FB</b>	—	<b>⊘AA5FD</b>	<b>⊘AA5FL</b>	-	5	
<b>⊘AA6F</b>	<b>⊘AA6FB</b>	—	<b>⊘AA6FD</b>	<b>⊘AA6FL</b>	-	6	
<b>⊘AA7F</b>	<b>⊘AA7FB</b>	_	<b>⊘AA7FD</b>	<b>⊘AA7FL</b>	_	7	

◊ Available on special order only; contact Switchcraft for price and delivery.


## A(\*)F CORD PLUG

## A(\*)FD CORD PLUG

\*Number of insert contacts or pins must be specified to complete part number.

# Emer

Straight female cord plug with standard latchlock. Available in 3-7 pin versions.



### PART NUMBERS - FEMALE CORD PLUGS

S	Standard Q-G <sup>®</sup> Cord Plugs, Series A(*)F and QGP							
Satin			Fas-	Large				
Nickel	Black	Finish	Dis-	Flex		Insert		
Finish	Silve	r 1 Gold 1	Connect	Relief <sup>2</sup>	QGP Series			
Contacts								
A3F	A3FB	A3FBAU	<b>⊘A3FD</b>	A3FL	QGP322	3		
A3FS <sup>3</sup>	_	_	—	_	—	3		
A4F	A4FB	A4FBAU	<b>⊘A4FD</b>	A4FL	—	4		
A5F	A5FB	A5FBAU	<b>⊘A5FD</b>	<b>⊘A5FL</b>	—	5		
A6F	A6FB	A6FBAU	—	_	—	6		
A7F	A7FB	A7FBAU	—	_	_	7		


<sup>1.</sup> Contact plating.

- 2. Accepts cables from .25" (6.35 mm) to .328" (8.33 mm) diameter
- 3. Accepts cables from .105" (2.7 mm) to .205" (5.2 mm)

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

# P

Straight female cord plug with FAS-DIS-CONNECT detent.




DIMENSIONS ARE FOR REFERENCE ONLY



A(\*)M CORD PLUG

Straight male cord plug.



#### PART NUMBERS - MALE CORD PLUGS

S	Standard Q-G <sup>®</sup> Cord Plugs, Series A(*)M and QGP						
Satin Nickel	Black	Finish	Large Flex		Insert		
Finish	Silver 1	Gold 1	Relief <sup>2</sup>	QGP Series	Contacts		
A3M	A3MB	A3MBAU	A3ML	QGP323	3		
A3MS <sup>3</sup>	—	_	_	—	3		
A4M	A4MB	A4MBAU	A4ML	—	4		
A5M	A5MB	A5MBAU	<b>⊘A5ML</b>	—	5		
A6M	—	A6MBAU	—	—	6		
A7M	_	A7MBAU	_	_	7		

All above part numbers have black flex relief installed. Contact Switchcraft for color flex relief.

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

Inch

(mm)

\* Please visit the product pages on our website for the most up-to-date product information

## Q-G<sup>®</sup> CONNECTORS (continued)

## **Q-G® COLOR FLEX RELIEFS**

Rainbow color cable strain relief bushings can be specified to match or complement equipment decors or code individual or grouped connections for quick recognition. On special order, tan, pink and dark blue are available. Bushings accommodate cables from .21" to .30" diameter. Prepackaged, 25 per bag.

Part N	lumbers	Flex	Flex
3 Pins	Contacts	Relief	Relief
Female	Male	Color	Only
A3F	A3M	Black	SR00
<b>⊘A3F01</b>	<b>⊘A3M01</b>	Brown	SR01
<b>⊘A3F02</b>	<b>⊘A3M02</b>	Red	SR02
<b>⊘A3F03</b>	<b>⊘A3M03</b>	Orange	SR03
<b>⊘A3F04</b>	<b>⊘A3M04</b>	Yellow	SR04
<b>⊘A3F05</b>	<b>⊘A3M05</b>	Green	SR05
<b>⊘A3F06</b>	<b>⊘A3M06</b>	Blue	SR06
<b>⊘A3F07</b>	<b>⊘A3M07</b>	Violet	SR07
<b>⊘A3F08</b>	<b>⊘A3M08</b>	Gray	SR08
<b>⊘A3F09</b>	<b>⊘A3M09</b>	White	SR09

 ${\boldsymbol{\Diamond}}$  Special order only; contact Switchcraft for price and delivery.

## Q-G<sup>®</sup> FLEX RELIEF

Flex relief bushing with small opening accommodates cables from .105" (2.7 mm) to .205" (5.2 mm). Standard size bushing accepts cables from .210" (5.3 mm) to .300" (7.6 mm) outside diameter. Bushing with large opening accommodates cables from .300" (7.6 mm) to .328" (8.3 mm). Larger cables are often needed for multiple-conductor instrumentation. Code letter "L" in last or second to last digit in part number indicates plug with large bushing. Code letter "S" in last or second to last digit in part number indicates plug with smaller bushing.

#### SWITCHCRAFT PART NUMBER (K255

Package of 100 cable clamp screws.

 ${\boldsymbol{\Diamond}}$  Special order only; contact Switchcraft for price and delivery.



5

DIMENSIONS ARE FOR REFERENCE ONLY



## CONNECTORS & RECEPTACLES AAA CONNECTORS

## PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

## AAA CONNECTORS



#### AAA SERIES Q-G® TWIST CONNECTOR

Switchcraft introduces the AAA Series or Q-G<sup>®</sup> Twist XLR connectors. The Q-G<sup>®</sup> Twist Series is available in male or female cord plug, 3 through 7 pins or contacts. The unique features are the easy twist on combination handle/strain relief, and the reduced number of parts to assemble. With the insert built into the front shell, and the strain relief preloaded into the handle, the end user has only two parts to assemble – slide the handle onto the cable, solder the terminations, and twist on the handle. As the handle is tightened, the strain relief tightens around the outer jacket of the cable. A ramp on the strain relief keeps it from rotating around the cable jacket and twisting the cable. The strain relief was designed to accommodate the most popular cable sizes. A rugged die-cast metal handle insures optimum protection, and increases signal shielding. Popular options include black and gold finishes, as well as a lower cost plastic handle version.

### SPECIFICATIONS

ELECTRICAL

Contact Resistance: 50 milliohm maximum, per pole. Current Rating @ 125VAC: 3 pole – 15A

4 pole –10A 5 & 6 pole – 7.5A 7 pole – 5A

**Insulation Resistance:** 1,000 MΩ, minimum. **Dielectric Withstanding Voltage:** 1,000 V (rms) **Capacitance:** ≤3 pF between pins and ≤6 pF between pins and shell, maximum

#### MECHANICAL

Insertion/Withdrawal Forces: 10 lbs. maximum, 8 lbs. nominal / 7 lbs. maximum, 5 pounds nominal. Wire Size: 3 Contact

#12 wire gauge solid #14 wire gauge stranded



#### FEATURES AND BENEFITS

- Only two pieces to assemble
- · Easy twist on handle reduces assembly time
- Rugged die-cast metal handle
- Accepts cable OD's (.100" .285")
- Black finish available
- Gold-plated pins/contacts available
- · Lower cost plastic handle version available

#### **APPLICATIONS**

- Audio
- Medical
- Instrumentation
- Process Controls

#### 4 Contact

#14 wire gauge solid	#16 wire gauge stranded						
5 & 6 Contact							
#16 wire gauge solid	#18 wire gauge stranded						
7 Contact							
#18 wire gauge solid	#20 wire gauge stranded						
MATERIAL							
Shell: Die-Cast zinc with r	nickel finish or black chrome.						
Handle: Die cast with nick	el finish or black chrome.						
Also black thermoplastic handle available.							
O Ring: TPR (Thermoplastic rubber).							
Insert Insulation: Molded	I thermoplastic.						
Socket Contacts: Silver p	plated copper alloy tarnish resistant;						
bifurcated on 3 and 4 cont	tact types. Gold is available.						
Pin Contacts: Silver plate	ed copper alloy. Resists tarnishing,						
and provides excellent ele	ctrical conductivity. Gold is available.						
Latch lock: High strength	die cast zinc.						

#### Strain Relief: TPR

Flex Relief: TPR (Thermoplastic rubber)


#### CONNECTOR PART NUMBER SCHEME

Series	Pins/Contacts	Gender	Handle Material	Housing Finish	Terminal Finish	Z
AAA	3-7 pins	F: Female	P: Plastic	B: Black	AU: Gold	New Strain Relief
	3-7 pins	M: Male	Blank: Metal	Blank: Nickel	Blank: Silver	

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

\* Please visit the product pages on our website for the most up-to-date product information

## AAA CONNECTORS (continued)

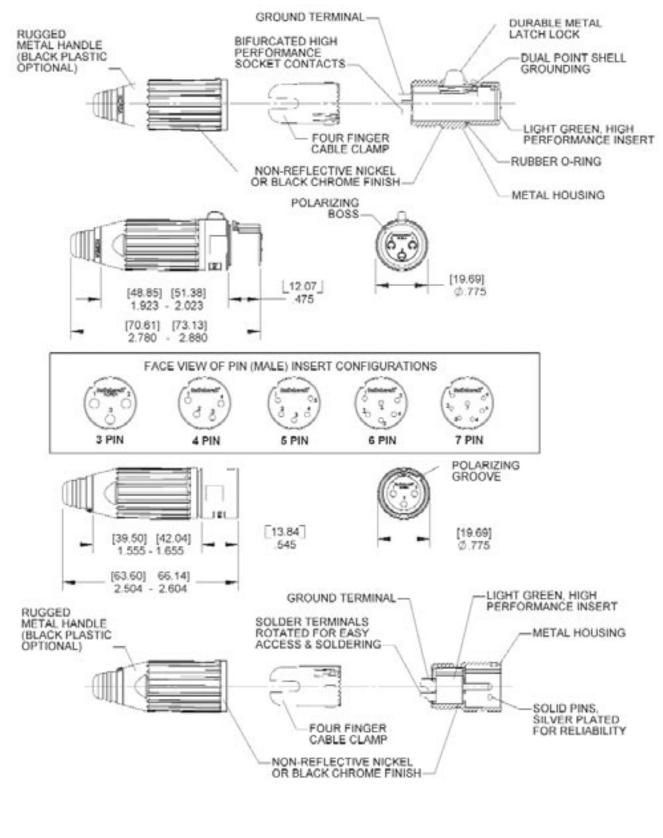


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

#### \* Please visit the product pages on our website for the most up-to-date product information

## Q-G<sup>®</sup> CONNECTORS (continued) R(\*)FZ CORD PLUG

Right angle, female cord mount plug, latching. New style incorporates an insert that can rotate every 45° for added flexibility in tight applications. Also utilizes the new strain relief system with twist-on handle.

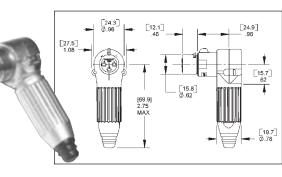


Part Number	Insert Contacts
R3FZ	3
R4FZ	4
R5FZ	5
R6FZ	6
R7FZ	7
Accepts cable	O.D.'s .100"285

For black/gold finish, add "B" suffix.

## P(\*)F MICROPHONE PLUG


Female microphone plug for gooseneck mount. Fits standard gooseneck with external 5/8-27 thread. Microphone plugs directly into connector. (Gooseneck not supplied.)

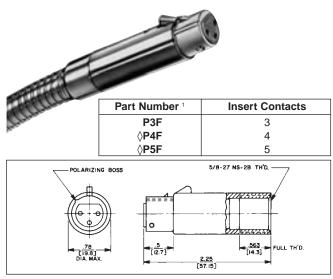

- 1. Satin Nickel Finish. (standard)
- 2. Large flex relief accepts cable from .25" to .328" diameter. (optional)
- 3. Gold-plated contacts. (optional)
- $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

#### R(\*)MZ CORD PLUG

Right angle, male cord mount plug, latching. New style incorporates an insert that can be rotated every 45° for added flexibility in tight applications. Also utilizes the new strain relief system with twist-on handle.

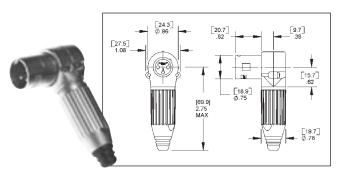


Part Number	Insert Pins
R3MZ	3
R4MZ	4
R5MZ	5
R6MZ	6
R7MZ	7

Accepts cable O.D.'s .100"–.285" For black finish, add "B" suffix. For black/gold finish, add "BAU" suffix.

## P(\*)M GOOSENECK PLUG

Male plug for gooseneck mount. Fits standard gooseneck with internal 5/8-27 thread. Use on gooseneck with microphone plug on opposite end. Plugs directly into female receptacle. (Gooseneck not supplied.)



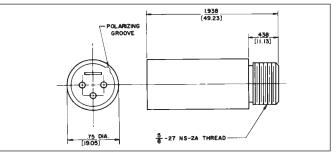

Part Number 1	Insert Pins
P3M	3
<b>⊘P4M</b>	4
<b>⊘</b> P5M	5


DIMENSIONS ARE FOR REFERENCE ONLY (mm)


**CONNECTORS & RECEPTACI** 

\* Please visit the product pages on our website for the most up-to-date product information


## Q-G<sup>®</sup> CORD PLUG CONNECTORS AND RECEPTACLES

## T(\*)F AND T(\*)FM CORD PLUG WITH ON-OFF SWITCH

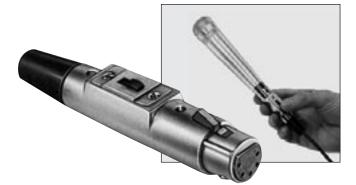

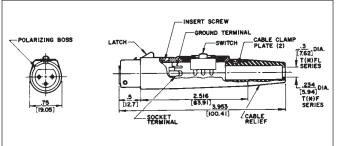

## D(\*)M, D(\*)F AND D(\*)FD RECEPTACLES

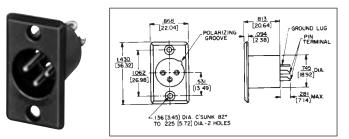

Studio quality black and gold Q-G<sup>®</sup> receptacle with black housing and gold contacts is designed for low/stable contact resistance and withstands corrosion where highest quality is required for recording and broadcast studio equipment, consoles, and other applications.


**D(\*)M SERIES** – Male receptacle for panel or chassis mounting. Special rectangular flange permits close spacing on crowded panels, has two .136" (3.45mm) diameter countersunk holes for #5-40 flat head mounting screws (not supplied). Mounts from front of panel or chassis in .766" (19.45) diameter hole. Satin nickel finish (Series D\*M) or black finish (Series D\*MB, or D\*MBAU).


**D(\*)F SERIES** – Female receptacle for panel or chassis mounting. Flange has two .136" (3.45 mm) diameter countersunk holes for #5-40 flat head mounting screws (not supplied). Mounts from front of panel or chassis in .953" (24.21 mm) diameter hole. Series D(\*)F has standard latchlock; Series D(\*)FD has FAS-DISCONNECT detent. Satin nickel finish (Series D\*F and D\*FD) and "Black-Velvet" finish (Series D\*FBAU).

Part Number	Part Number	Insert Contacts
T3F	<b>⊘T3FL</b>	3
<b>⊘T3FM</b>	<b>⊘T3FLM</b>	3
<b>⊘T4F</b>	<b>⊘T4FL</b>	4
<b>⊘T4FM</b>	<b>⊘T4FLM</b>	4

T(\*)F Straight female cord plug with DPDT (2-C) locking on-off switch; standard latchlock.

**T(\*)FM** Straight female cord plug with SPDT (1-C) momentary on-off switch; standard latchlock. Slide switches rated 500 mA, 125V (AC or DC). Mounting screws are supplied.

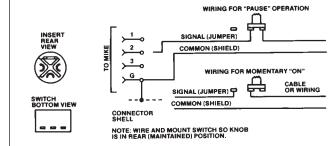

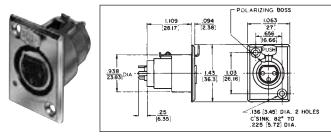

Nickel	Black Finish				
Finish	Silver	Gold	Detent	QGP Series <sup>1</sup>	Pins
D3M	D3MB	D3MBAU	_	QGP363	3
D4M	D4MB	D4MBAU	_	_	4
D5M	D5MB	D5MBAU	-	—	5
D6M	D6MB	D6MBAU	-	—	6
D7M	D7MB	D7MBAU	-	—	7
D3F	D3FB	D3FBAU	D3FD	QGP362	3
D4F	D4FB	D4FBAU	<b>⊘D3FDB</b>	—	4
D5F	D5FB	D5FBAU	_	—	5
D6F	D6FB	D6FBAU	<b>⊘D6FDB</b>	_	6
D7F	D7FB	D7FBAU	—	—	7

\* Number of insert contact or pins must be specified to complete part number.  $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

1 Non-reflective gray finish, gold-plated pins.

ECTORS & RECEPTACLES

DIMENSIONS ARE FOR REFERENCE ONLY

#### \* Please visit the product pages on our website for the most up-to-date product information


## Q-G<sup>®</sup> RECEPTACLES (continued)

## B(\*)F RECEPTACLE


Panel-mount female receptacle. Mounts with spanner nut from front of panels up to .4375" (11.11 mm) thick. Slot in threaded part of housing permits non-turn mounting. Requires 1.25" (31.75 mm) diameter minimum mounting hole. Spanner nut is die-cast zinc with satin nickel finish (Series B\*F) or black finish (Series B\*FB).

#### **B(\*)M RECEPTACLE**


Panel-mount male receptacle. Mounts with locknut from front of panels up to .250" (6.35 mm) thick. Requires .812" (20.64 mm) diameter mounting hole. For non-turning mounting, can be keyed to "D" shaped panel hole, or S3519 mounting adapter can be used. Satin nickel finish (Series B\*M) or black finish (Series B\*MB).



Part No.1	Part No. <sup>2</sup>	Insert Contacts
B3F	B3FB	3
B4F	—	4
B5F	—	5
B6F	—	6
B7F	—	7

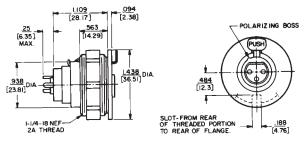

# Part No.<sup>1</sup> Part No.<sup>2</sup> Insert Pins B3M B3MB 3 B4M — 4 B5M — 5 B6M — 6 B7M — 7

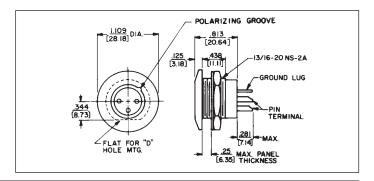


## C(\*)F RECEPTACLE

[23.83]


DIA


Female receptacle for panel or chassis mounting. Flange has three .140" (3.57 mm) diameter holes for #5-40 mounting screws (not supplied). Mounts from front of panel or chassis in 0.953" (24.21 mm) diameter hole.

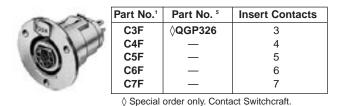

## C(\*)M RECEPTACLE

Male receptacle for panel or chassis mounting. Flange has three .140" (3.57 mm) diameter holes for #5-40 mounting screws (not supplied). Mounts from front of panel or chassis in .766" (19.45 mm) diameter hole.

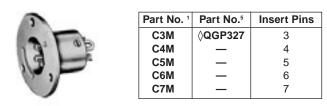

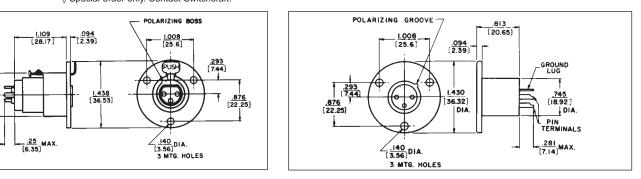

1. Satin nickel finish. (standard) 2. "Black-Velvet" finish. (optional) 3. Gold-plated contacts. (optional) 4. Fas-disconnect detent. (optional) 5. Non-reflective gray finish, gold-plated pins. (standard)


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

## CONNECTORS & RECEPTACLES E SERIES Q-G® RECEPTACLES

## 11

#### \* Please visit the product pages on our website for the most up-to-date product information

## E SERIES RECEPTACLES

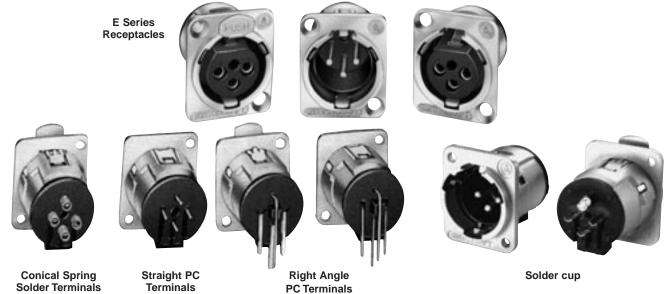

E Series Q-G $^{\circ}$  Receptacles are available with quick release inserts. Quick insert release is accomplished by turning screw lock from front of insert. Insert can then be removed from the rear. For PC board applications, insert can be removed/assembled to the housing while soldered to the PC board.

#### FEATURES

- Replaces Neutrik D Series
- 3-pin contact; male and female types
- Both male and female fit in same panel cutout
- Choice of 4 terminations; solder cups, conical springs, straight or right angle PC terminals.
- · Inserts and housings can be specified separately
- Quick release inserts for ease of removal
- Locking receptacles
- Protected ground clip minimizes scooping damage
- Insert lock detent resists disassembly from shock or vibration during normal handling and transportation
- Silver and gold-plated contacts available
- Rugged metal shells; black or satin nickel finishes
- Through-the-shell ground connection and all-metal shells for greater shielding effectiveness
- Compatible with Switchcraft Q-G <sup>®</sup>, QGP and other connectors with similar configurations

#### QUICK RELEASE INSERT

In two simple steps, inserts can be released while housing stays fastened to the panel.

- 1. With a small screwdriver, twist insert locking screw from front of insert.
- 2. Remove insert from the rear of the housing.

#### TERMINALS

Four terminations are available on E Series receptacles:

- Conical Spring Solder terminals conical spring on each pin holds wire in place providing constant pressure during soldering process. This effectively acts as a third hand, assuring a high quality solder termination. Housing mounts to panel.
- 2. Straight PC terminals direct termination to PC board. Housing mounts to panel.

inserts and housings offer considerable cost and time savings by minimizing inventory and maximizing configuration possibilities.

E Series receptacles can be specified as complete assemblies,

or as separate inserts and housings. Stocking separate

- **3. Right-angle PC terminals** direct termination to PC board at a right-angle. Housing mounts to panel.
- 4. SC Solder cup

## SPECIFICATIONS

#### ELECTRICAL

**Contact Resistance:** 50 milliohms maximum, per pole. **Current Rating:** 15A

Insulation Resistance: 2 X 10<sup>6</sup> MΩ Dielectric Resistance: 1,000 V rms Capacitance: 10 pF

#### MECHANICAL

Insertion/Withdrawal Forces: 7 pounds maximum/ 5 pounds nominal insertion; 7 pounds maximum/ 5 pounds nominal withdrawal. Life: 10,000 operations (minimum).

#### **ENVIRONMENTAL**

Thermal Range: -55° C to +85° C Humidity: Meets MIL-STD-202F, method 106E. Thermal Shock: Meets MIL-STD-202F, method 107D. Salt Spray: Meets MIL-STD-202F, method 101D.

#### MATERIAL

Shells: Die-cast; satin-nickel or Black Velvet. Inserts: Glass-filled thermoplastic. Socket Contacts: Copper alloy, silver- or gold-plated. Pin Contacts: Copper alloy, silver- or gold-plated. Latch Release: Steel, nickel-plated. Insert Locking Cam: Die-cast zinc.

DIMENSIONS ARE FOR REFERENCE ONLY

## CONNECTORS & RECEPTACLES E SERIES PART NUMBERING SYSTEM

\* Please visit the product pages on our website for the most up-to-date product information

## E SERIES PART NUMBERING SYSTEM

## CONNECTOR PART NUMBER SCHEME

Series	Pins/ Contacts		Fas-disconnect Option	Termination Style	Housing Finish	Terminal Finish	Mounting Hole Options
E	3-5 pins	F: Female M: Male		ST: Straight PC terminals RA: Right angle PC terminals SC: Solder cups Blank: Conical springs*	B: Black Blank: Nickel	AU: Gold Blank: Silver	M3: M3 x 0.5 thread 440: #4-40 thread Blank: Counter- sunk hole

#### HOUSING ONLY PART NUMBER SCHEME

Series	Pins/	Housing	Mounting Hole
	Contacts	Finish	Options
E	F: Female M: Male	B: Black Blank: Nickel	M3: M3 x 0.5 thread 440: #4-40 thread Blank: Counter-sunk hole

#### **INSERT ONLY PART NUMBER SCHEME**

Series	Pins/ Contacts	Gender	Fas-disconnect Option	Termination Style	Housing Finish	Terminal Finish
E	3-5 pins	F: Female M: Male	D: Fas-disconnect Blank: Standard locking	ST: Straight PC terminals RA: Right angle PC terminals SC: Solder cups Blank: Conical springs*		AU: Gold Blank: Silver


\*3-pin only

**CONNECTORS & RECEPTACLES** Switchera

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

## **E SERIES**

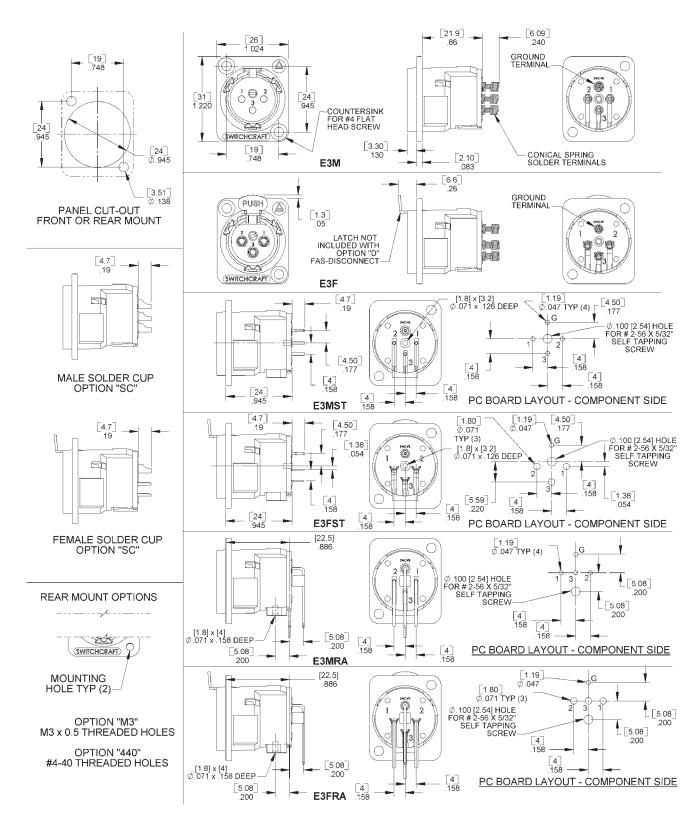


DIMENSIONS ARE FOR REFERENCE ONLY

13

\* Please visit the product pages on our website for the most up-to-date product information

## E SERIES (continued)



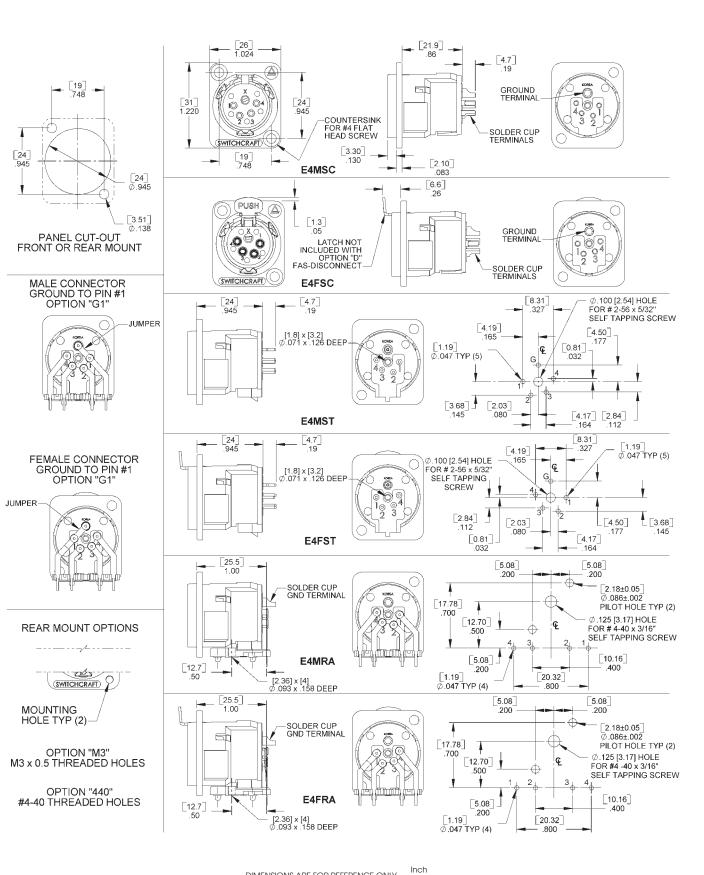


DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

\* Please visit the product pages on our website for the most up-to-date product information

## E SERIES (continued)

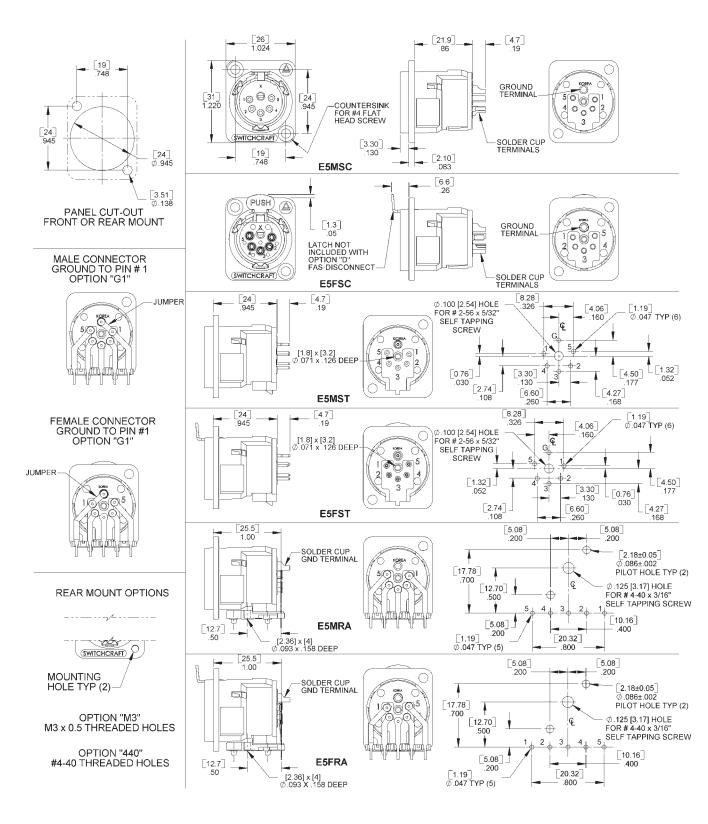

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

15

#### \* Please visit the product pages on our website for the most up-to-date product information


## EH SERIES RECEPTACLES

The EH Series consist of different styles of popular connectors in our E Series housing. This allows the end user to punch one single hole size and populate wall plates, gang assemblies with different types of connectors. Connector styles include BNC feed-throughs, RCA feed-throughs, USB feed-throughs, IEEE 1394 Firewire feed-throughs, BNC to solder cup, and RCA to BNC.

#### **FEATURES**

- Utilizes same panel cut-out as E Series QG connectors
- Rugged metal shells
- · Available with a wide variety of popular feed-through connectors



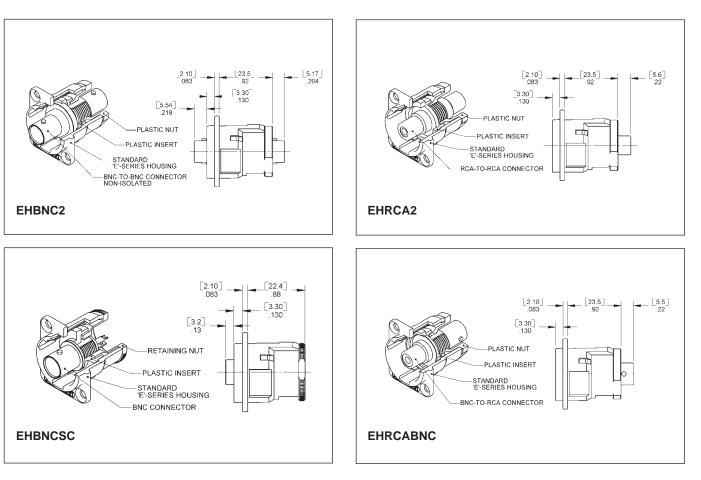

Part Number	Description
EHBNC2	BNC to BNC
EHBNCSC	BNC to solder cup
EHRCA2	RCA to RCA
EHRCABNC	RCA to BNC
EHUSB2	USB to USB
EH13942	IEEE1394 to IEEE1394
EHCAT62	Cat6 to Cat6

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

\* Please visit the product pages on our website for the most up-to-date product information

## PQG<sup>®</sup> RECEPTACLES



PQG3FRA112



PQG3MRA112

 $Q-G^{\circ}$  3 pin/contact PC receptacles offer economy, reliability and performance in amplifiers, audio mixing boards, and other outboard gear. Choose receptacles with just the right combination of standard and optional bonus features to tailor the PQG series to your exact needs.

#### STANDARD FEATURES

- UL 94V-0 plastic materials.
- Circuit #1 "makes" first and "breaks" last during connect/disconnect.
- Positive mechanical polarization.
- Minimum PC board space required.
- Integral PC board locating posts.
- Mating/unmating cycles in excess of 10,000.
- Mates with Switchcraft Q-G and other compatible connectors.

#### **OPTIONAL FEATURES**

- Positive latch lock or FasDisconnect (female only).
- Shell-to-ground terminal.
- Mounting Plates:
  - **A. Backup Mounting Plate** with two, M3 x 0.5 threaded holes for faster, more rugged mounting to equipment panel/chassis.
  - B. "Tri-Mounting" Plate...plus two bifurcated pcb retainers with snap-in terminals which perform three valuable functions:
    - 1. Provide ground connection from panel to PCB.
    - 2. Hold connector securely to PCB during wave-soldering.
    - **3.** Add strength between panel/chassis and PCB during soldering by "wicking" solder through the PCB and up sides of retainers to assure continuity.
  - C. Two panel grounds are integral with mounting plate.






PQG3FST112

PQG3MST112

#### SPECIFICATIONS

Housing: Black, glass-filled thermoplastic, UL 94V-0. Flange mounting holes are .128 inch diameter Socket Contacts: Copper alloy, electrotinned. Pin Contacts: Copper alloy, electrotinned. Latch Release: Steel, nickel-plated. Mounting Plate: Copper alloy. Shell-to-Ground Terminals: Copper alloy, electrotinned. Latches: Copper alloy, nickel-plated. Insertion/Withdrawal Forces: 2 pound (nominal). Contact Resistance: .05 ohms per pole (maximum). Dielectric Withstanding Voltage: 1,000 V rms for 1 minute. Insulation Resistance:  $10^4 M\Omega @ 500 V DC$ . Current Capacity: 10A maximum (carry only). Operating Temperature:  $-30^\circ$ F to  $185^\circ$ F ( $-34^\circ$ C to  $85^\circ$ C). Mechanical Life: 10,000 cycles @ 10 cpm.

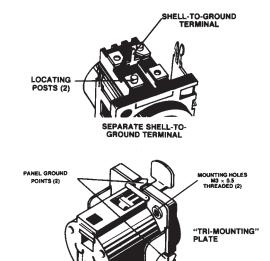




DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

## PQG<sup>®</sup> SERIES PART NUMBERING SYSTEM

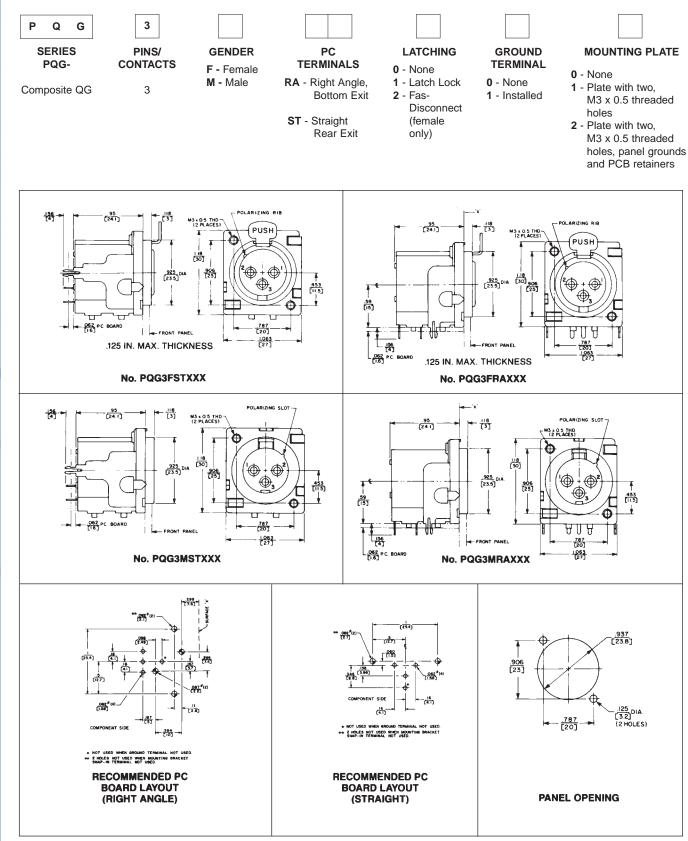

Inch DIMENSIONS ARE FOR REFERENCE ONLY

18

## CONNECTORS & RECEPTACLES Q-G® AUDIO RECEPTACLES FOR PC/PANEL MOUNT

\* Please visit the product pages on our website for the most up-to-date product information

## Q-G® AUDIO RECEPTACLES FOR PC/PANEL MOUNT



### PD SERIES - PLASTIC PANEL MOUNT

NEW Bifurcated PCB Terminals



PD3FRL1



....



PD3FS2



PD3FRML1



PD3FS2

PD3FRA1 Bifurcated

PCB Terminals

Switchcraft offers the PD Series (plastic panel mount) audio connectors with a wide variety of 3-pin/contact, male and female types and many terminals for combined PC/panel mount. Female types offer larger contact area for higher ratings and longer life. Panel mounting may be at users option, either front or rear. New PD series connectors mate with Switchcraft Q-G and other compatible types.

PD3MRML1

#### PD SERIES FEATURES

- 3 pins/contacts
- Male and female
- Straight and right-angle terminals
- PC or PC/panel mount
- Front or rear panel mount
- Special PC/solder terminal type with exits at 0° (down, 90° (right), 180° (top), and 270° (left)
- Rugged molded black glass-filled thermoplastic housings.


#### SPECIFICATIONS

Housing: Black molded thermoplastic, glass-filled. Ground Pin: Copper alloy. Stamped Terminals/Contacts: Copper alloy, electrotinned. Screw Machine Terminals/Pins: Copper alloy, silver-plated.

#### **BIFURCATED PC TERMINALS**

Bifurcation configuration for PC terminals on selected connectors offers these advantages.

- 1. Provides convenient snap-in retention for mounting.
- 2. Holds connector securely to PCB during wavesoldering.
- Adds strength to all terminal connections by solder "wicking" through PCB and up sides of terminals.

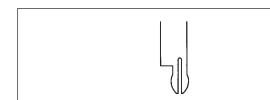

BIFURCATED HOLD-DOWN FEATURE FOR ALL PC TERMINALS



19

## CONNECTORS & RECEPTACLES PD SERIES PART NUMBERING SYSTEM

## PHONE: 773 792-2700

#### \* Please visit the product pages on our website for the most up-to-date product information

## PD SERIES PART NUMBERING SYSTEM





- GENDER F - Female M - Male

Note: New solder cup option shown.

G	ENDER
	MAL

RA - Right-angle, Bottom Exit RL - Right-angle, Left exit RR - Right-angle,

FEMALE

- Right Exit RU - Right-angle, Top Exit
- RML Right-angle, S Bottom Exit, Long Screw SC Mach. Term. RMS - Right-angle, Bottom Exit, Short Screw

Mach. Term.

 Straight, Rear Exit
 Solder Cup MALE RML - Right-angle, Bottom Exit, Long Screw Mach. Term. RMS - Right-angle, Bottom Exit, Short Screw

Mach. Term. - Straight, Rear Exit - Solder Cup

- HOUSING
- Front Mount

   11" (2.8 mm)
   diameter flange
   mounting holes

   Rear Mount
- .091" (2.3 mm) diameter flange mounting holes 3 - Front Mount
- .126" (3.2 mm) diameter flange mounting holes



Blank= Silver terminals

AU= Gold terminals




PD3MS1 3-pin male, straight (rear exit) PC terminals. Front mount.



S

SC

PD3MRML2 3-pin male, right angle (bottom exit) long screw machine terminals. Panel mount holes not countersunk.




PD3FRL1 3-contact female, right-angle (left exit) PC/solder terminals. Ground lug. Front panel mount.

PCB Terminals




Bifurcated PCB Terminals

PD3FRA1 3-contact female, right-angle (bottom exit) PC/solder terminals. Ground lug. Front panel mount.

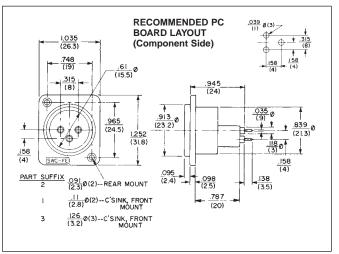

Numbers PD3FS1, 2, and 3 (Typical)

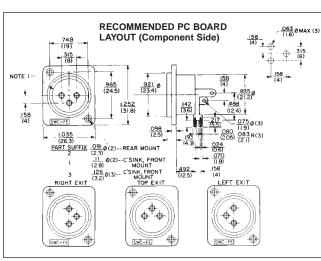

Numbers PD3FRA1, 2, and 3; PD3FRL1, 2, and 3; PD3FRR1, 2 and 3; PD3FRU1, 2 and 3 (Typical)


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

NEGTORS & RECEPTACIES 02

## CONNECTORS & RECEPTACLES PD SERIES

\* Please visit the product pages on our website for the most up-to-date product information

## PD SERIES (continued)

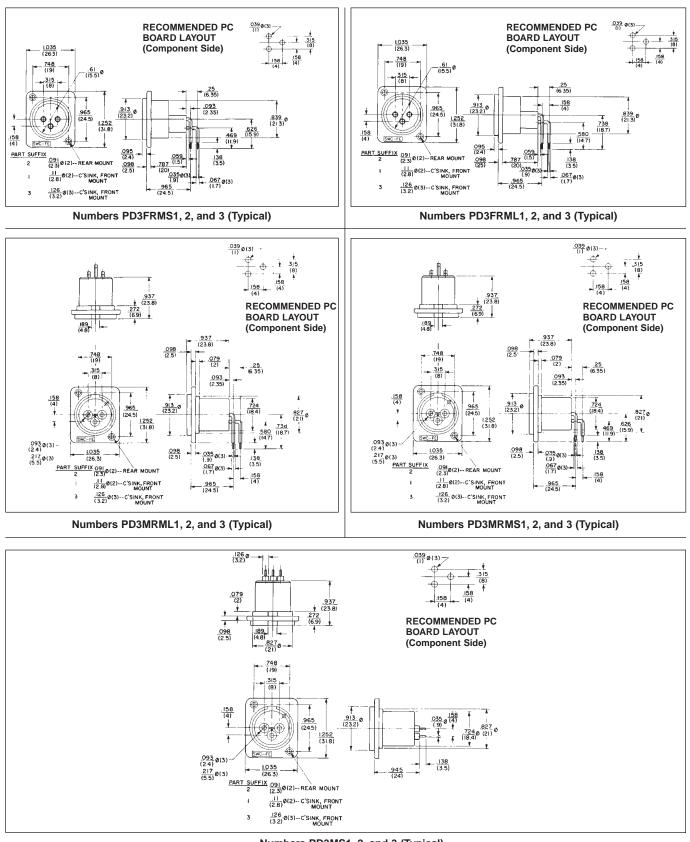

Numbers PD3MS1, 2, and 3 (Typical)

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

21

\* Please visit the product pages on our website for the most up-to-date product information

## Q-G ® RECEPTACLES

## SERIES Y(\*)F, Y(3)FPC, Y(\*)FD, Y(3)FDPC AND Y(3)MPC RECEPTACLES



**Series Y(\*)MPC.** Male receptacle for panel or chassis mounting escutcheon. PC terminals and standoffs. Rear of panel mount in .750 inch diameter hole. Maximum panel thickness: 25 inches (6.35 mm); .156 inches (3.96 mm) if YEM escutcheon is used.

**Series Y(\*)FPC.** Female receptacle for panel or chassis mounting. PC Terminal and standoffs. Rear of panel mount in .875 inch (22.22 mm) diameter hole.

Series Y(\*)F. Female receptacle for panel or chassis mounting. Rear of panel mount in .875 inch (22.22 mm) diameter hole.


**Series Y(\*)FD, Y(\*)FDPC.** Female receptacles. Same as Y(\*)F and Y(\*)FPC, respectively, except with FAS-DISCONNECT detent.

**Series YEF Escutcheons.** Trim escutcheons provide distinctive panel appearance and can also color code connections. Available in black (standard), red, green, white, and yellow. Other colors possible on special order where production quantities warrant.

#### **ASSEMBLY/MOUNTING**

All receptacles are rear-of-panel mount (units with PC terminals also mount/terminate to PC board). Flange fastens to chassis/panel with two #4-40 machine screws (not supplied). Use of escutcheons is optional.

Install latch release lever (Series Y(\*)F and Y(\*)FPC) after receptacle is fastened to chassis/panel. Insert lever in slot from front and press inward until it locks (snaps) into place. To remove lever, depress rear of lever (with screwdriver) through opening at top rear of housing and pull lever straight out.

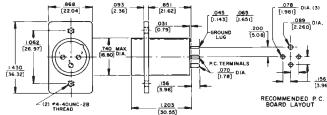

(Component Side)



#### RECEPTACLES


Part Numbers				
Female Latchlock <sup>†</sup>	Female Detent <sup>†</sup>	Insert Contacts	Part Number Male <sup>†</sup>	Insert Pins
Y3F	Y3FD	3	Y3MPC	3

†Suffix letters "PC" indicate PC terminals; all others have solder lugs.

#### **ESCUTCHEONS**


Part Number	Color	Part Number	Color
♦YEF01	Red	YEF04	Blue
YEF02	Black	<b>⊘YEF05</b>	White
<b>⊘YEF03</b>	Green	<b>⊘YEF08</b>	Yellow

 $\ensuremath{\textbf{SPECIFYING NOTE:}}\xspace$  YEM02 escutcheon can be ordered on special order; contact Switchcraft.

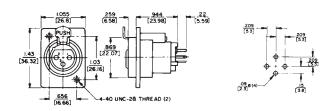



YEF02 ESCUTCHEONS



**CONNECTORS & RECEPTACLES** 

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

\* Please visit the product pages on our website for the most up-to-date product information

## F SERIES RECEPTACLES



F3FSTF

Switchcraft now offers the F Series. Available in male and female, the receptacles can be mounted from the rear of the panel. Features include an all metal housing with a ferrite disk for added EMI/RMI shielding. Both male and female connectors can be mounted vertical or horizontal to the PC board. All connectors have a PC-board retention feature to hold the connectors firmly to the PC board prior to soldering. See the chart below for part numbers.

#### **F SERIES FEATURES**

- Replaces Cannon XLM-Series
- 3-pin contact; male and female types
- Both male and female fit in same panel cutout
- Locking receptacles
- Silver-plated contacts
- Rugged metal shells; satin nickel finishes
- Through-the-shell ground connection and all-metal shells for greater shielding effectiveness
- Compatible with Switchcraft Q-G<sup>®</sup>, QGP and other connectors with similar configurations
- Added EMI/RFI ferrite shield

Part Number	Terminals	Contacts	Housing	Туре
F3MSTF	Straight			Μ
F3FSTF		Silver	Satin Nickel	F
F3MRAF		Silver	Saun Nicker	М
F3FRAF				F

#### **SPECIFICATIONS:**

#### ELECTRICAL

Contact Resistance: 50 milliohms maximum, per pole. Current Rating: 15A Insulation Resistance: 1,000 M $\Omega$ 

Dielectric Resistance: 1,000 V rms Capacitance: 2 to 4 pF

#### MECHANICAL

Insertion/Withdrawal Forces: 7 pounds maximum/nominal Insertion: 7 pounds maximum withdrawal. Life: 10,000 operations (minimum).

#### ENVIRONMENTAL

Thermal Range: -55° C to +85° C Thermal Shock: Meets MIL-STD-202F, method 107D Salt Spray: Meets MIL-STD-202F, method 101D (for 16 hrs.)

#### MATERIAL

Shells: Die-cast; satin-nickel plated
Inserts: Glass-filled thermoplastic.
Socket Contacts: Copper alloy, silver-plated.
Pin Contacts: Copper alloy, silver-plated.
Latch Release: Steel, nickel-plated.

#### TERMINALS

Two terminations are available on F-Series receptacles:

- 1. Straight PC-terminals direct termination to PC-board. Housing mounts to panel.
- 2. Right Angle PC terminals direct termination to PC-board at right angle. Housing mounts to panel.


DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

23

#### \* Please visit the product pages on our website for the most up-to-date product information

## F SERIES RECEPTACLES (continued)

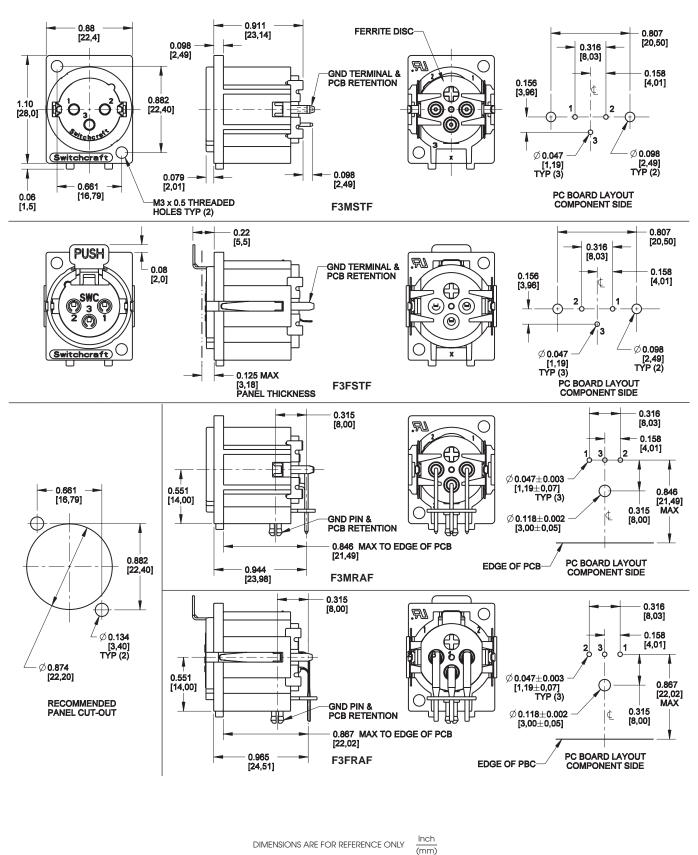

**CONNECTORS & RECEPTACLES** G

24

\* Please visit the product pages on our website for the most up-to-date product information

## Q-G® ADAPTERS, ACCESSORIES

## **Q-G® CONNECTOR INSERTS**



Male and female Q-G  $^{\circ}$  inserts with 3-7 pins/contacts, fit appropriate plug and receptacle housings. Female inserts available with standard latchlock or FAS-DISCONNECT detent mating, and with solder or PC terminals. Intended for replacement, or building into equipment such as microphones and transducers.

Standard Latchlock	FAS-* DISCONNECT	Male Inserts	Insert Pins/ Contacts
—	◊ QG3FDPC	—	3
QG3F	QG3FD	QG3M	3
QG4F	QG4FD	QG4M	4
QG5F	QG5FD	QG5M	5
QG6F	QG6FD	QG6M	6
QG7F	QG7FD	QG7M	7

\*Suffix letters "PC" indicate PC terminals; all others (except "S") have solder lugs.

\*\*Suffix letter " $\tilde{S}$ " indicates locking PC terminal and plastic housing.  $\Diamond$  Special order only. Contact Switchcraft.

Note: Add suffix "BAU" for black insert with gold-plated contacts.

## W(\*)M RECEPTACLE



Part Number	Insert Pins
W3M	3
W4M	4


## SHORTING PLUG




Part Number	Insert Pins
<b>⊘N3MS</b>	3
	•

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

Right-angle male panel receptacle. Mounts with two, #5-40 machine screws.

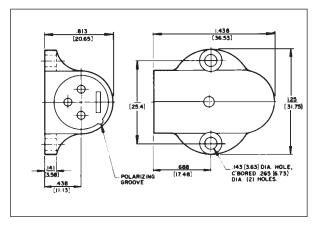

3-pin plug shorts out unused hi-Z microphone inputs or other sensitive circuits (shorting jumper installed between pins 2 and 3). 6" (152.4 mm) chain fastened to end pin to prevent plug loss. Switchcraft can install special wiring for a nominal extra charge.

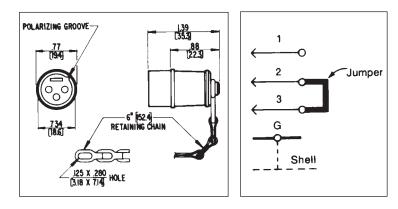

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

NECTORS

RTIT

## CONNECTORS & RECEPTACLES Q-G® WALL PLATE RECEPTACLES

#### \* Please visit the product pages on our website for the most up-to-date product information


## Q-G<sup>®</sup> WALL PLATE RECEPTACLES G(\*)M WALL PLATE RECEPTACLE



Wall plate with one B3M or B4M male receptacle mounted (in "D"-shaped hole to prevent turning) on standard single electrical outlet box. Cover mounting screws included.

Part Number	Finish	Insert Pins
G3MS	Stainless	3
<b>∂G4MS</b>	Steel	4

♦ Special order only. Contact Switchcraft.




## H(\*)M WALL PLATE RECEPTACLE



Wall plate with two, B3M or B4M male receptacles mounted (in "D"-shaped holes to prevent turning) on standard single electrical outlet box. Cover mounting screws included.

Part Number	Finish	Insert Pins
<b>⊘H3MS</b>	Stainless	3
<b>∂H4MS</b>	Steel	4

◊ Special order only. Contact Switchcraft.




## J(\*)F WALL PLATE RECEPTACLE



Wall plate with one, D3F or D4F female receptacle. Mounts on standard single electrical outlet box. Cover mounting screws included.

Part Number	Finish	Insert Pins
J3FS	Stainless	3
<b>⊘J4MS</b>	Steel	4

◊ Special order only. Contact Switchcraft.




## K(\*)F WALL PLATE RECEPTACLE



Wall plate with two, D3F or D4F female receptacles. Mounts on standard single electrical outlet box. Cover mounting screws included.

Part Number	Finish	Insert Pins
K3FS	Stainless	3
<b>⊘K4FS</b>	Steel	4

 $\Diamond$  Special order only. Contact Switchcraft.



DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

2

**CONNECTORS & RECEPTACI** 

41

\* Please visit the product pages on our website for the most up-to-date product information

## Q-G<sup>®</sup> CONNECTOR-ADAPTERS



Switchcraft Q-G <sup>®</sup> Connector-Adapters, designed to solve common interconnection problems, are ideally suited to the interconnection of microphones, mixers, amplifiers, public address and sound reinforcement equipment, broadcast equipment, and any other component that does not have an appropriate mating connector. All are completely shielded, and incorporate the high quality and outstanding design features of the Switchcraft line of Q-G Audio Connectors, including:

- 1. Separate ground terminal.
- 2. Ground Contactors.
- 3. Captive Design<sup>®</sup> Insert Screw
- 4. High impact Thermoplastic Insulation.

#### MATERIAL SPECIFICATIONS PHONE JACK AND PLUG TERMINATIONS

Shell: Copper alloy, nickel-plated.
Insulation: Paper-base phenolic.
Plug Tip and Sleeve: Copper alloy, nickel-plated.
Phone Pin and Plug Housing: Copper alloy, nickel-plated.
Phono Plug Insulation: Rigid plastic.
Phono Jack Housing: Steel, copper alloy-plated,

Phono Jack Pin Receptacle: Brass, silver-plated, copper alloy.

Phono Jack Insulation: Thermoplastic.

**321.** Phono plug to 3-contact female audio-connector (Switchcraft<sup>®</sup> A3F).


**322.** Phono jack to 3-contact female audio-connector (Switchcraft<sup>®</sup> A3F).

**323.** Phono plug to 3-pin male audio-connector (Switchcraft A3M).

**324.** Phono jack to 3-pin male audio-connector (Switchcraft<sup>®</sup> A3M).

**383A.** Three-contact female audio-connector (Switchcraft® A3F) to standard .250" (6.35 mm) diameter 3-conductor extension phone jack.

**384A.** Three-pin male audio connector (Switchcraft<sup>®</sup> A3M) to standard .250" (6.35 mm) diameter 3-conductor extension phone jack.

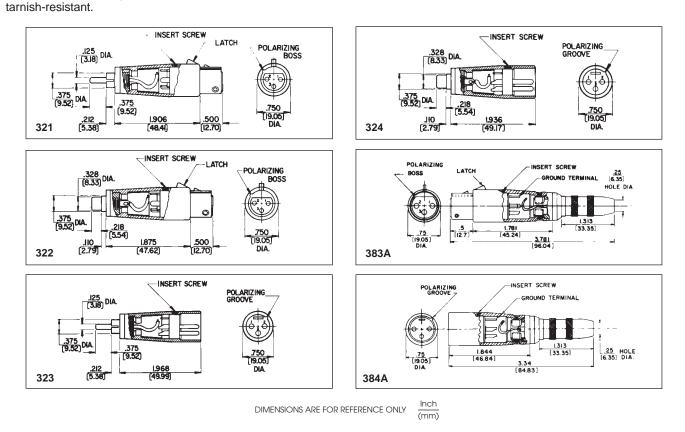

## CONNECTORS & RECEPTACLES QG® AUDIO CONNECTOR ADAPTERS


## **PHONE: 773 792-2700**


\* Please visit the product pages on our website for the most up-to-date product information

## **Q-G® AUDIO CONNECTOR-ADAPTERS**


386A: Three-contact female audio connector (Switchcraft® A3F) to standard .250" (6.35 mm) diameter 3-conductor phone plug.
387A: Three-pin male audio connector (Switchcraft® A3M) to standard .250" (6.35 mm) diameter 3-conductor phone plug.
389: Three-contact female audio connector (Switchcraft® A3F) at both ends. Pre-wired contacts: 1 to 1, 2 to 2, 3 to 3.
390: Three-pin male audio connector (Switchcraft® A3M)


at both ends. Prewired pins: 1 to 1, 2 to 2, 3 to 3.

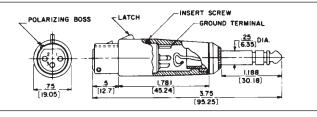

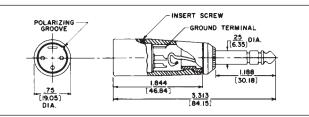





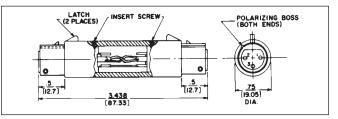

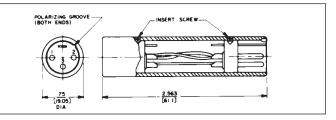

## S\*FM AUDIO CONNECTOR-ADAPTER AUDIO "Y" ADAPTERS

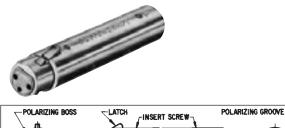



Male-female connector conversion has male Q-G<sup>®</sup> insert at one end and corresponding female Q-G<sup>®</sup> insert at the other. Designed to accept internally connected transformer, attenuator, or other circuitry inline with microphone input. Includes 1.50" (38.1 mm) long x .594" (15.08 mm) diameter of usable internal volume.

Part Number	Female Insert	Male Insert	Insert Pins/Contacts
S3FM	QG3F	QG3M	3
<b>⊘S4FM</b>	QG4F	QG4M	4
<b>♦S5FM</b>	QG5F	QG5M	5

Available on special order only; contact Switchcraft for price and delivery.



Series 391Q Y-Adapters can combine or split typical audio signals using a combination of Switchcraft Q-G<sup>®</sup> A3F and A3M cord plugs. Outputs of two microphones can conveniently be connected in parallel and connected to a single input using a 391Q23 Y-Adapter. Cabling is 2-conductor shielded, 2-foot long gray jacket with molded Y-junction at center point. Mates with Switchcraft Q-G<sup>®</sup> and QGP<sup>®</sup> connectors.

	Q-G <sup>®</sup> Cord Plug Part Numbers		
Part Number	Plug A	Plug B	Plug C
391Q13	A3F	A3M	A3M
<b>⊘391Q23</b>	A3F	A3M	A3F
<b>⊘391Q33</b>	A3F	A3F	A3F
391Q43	A3M	A3F	A3F
<b>⊘391Q53</b>	A3M	A3F	A3M
<b>⊘391Q63</b>	A3M	A3M	A3M

Note: "Y" adapters may use either series A(\*) or AA(\*) plugs.

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

28

## CONNECTORS & RECEPTACLES DMX ADAPTER

#### \* Please visit the product pages on our website for the most up-to-date product information

## DMX ADAPTER

Switchcraft introduces our new series of DMX adapters. The DMX adapters were developed for use in the theater lighting industry. The adapters allow the end user to use standard 3 pin XLR cable assemblies in connecting DMX equipment. The adapters are available in 3 pin male to 5 pin female and 5 pin male to 3 pin female. All are wired "straight through."

#### FEATURES AND BENEFITS

- Nickel-plated die-cast housing increases durability
- Pre-wired for immediate use
- Available in two configurations

#### **APPLICATIONS**

- Theater lighting
- Any DMX application


#### **SPECIFICATIONS**

Shell: Die-cast zinc, satin nickel finish Insert Insulation: Molded thermoplastic Socket contacts: Silver-plated copper alloy, tarnish-resistant Pin contacts: Sliver-plated copper alloy, tarnish-resistant

#### **ORDERING INFORMATION**

S3F5M	3 pin female to 5 pin male
S5F3M	5 pin female to 3 pin male



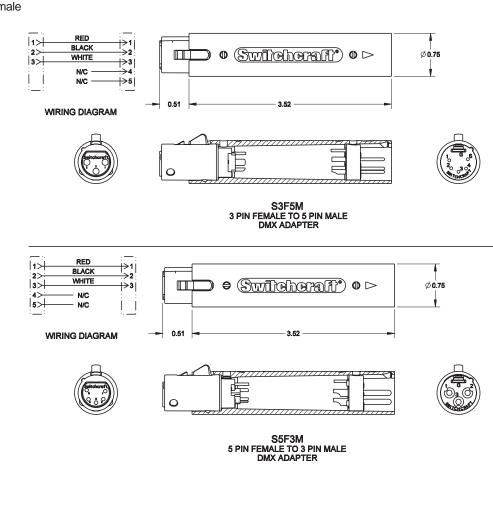

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

#### \* Please visit the product pages on our website for the most up-to-date product information


## Q-G<sup>®</sup> CONNECTOR-ADAPTER RECEPTACLES

Adapter receptacles mount directly to microphones or similar equipment to provide highly reliable 3-, 4- and 5-pin Switchcraft Q-G<sup>®</sup> connections. Adapter shell and coupling nut are brass, satin nickel finish.

#### SERIES L(\*)MN

Male has plain cylindrical shell with knurled, internally threaded collar to engage external 13/16-27 threads on microphone body.






## Z MATCHING TRANSFORMERS



9244

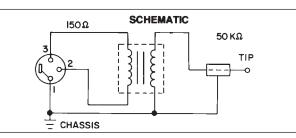


Series 9000 Line Matching Transformers offer low-loss interconnections between high and low impedance equipment. Exclusive mu-metal shielding protects against spurious electrostatic and RF fields. Units are bi-directional and can be used as follows:

- Low to hi, such as professional low impedance microphones to high impedance amplifiers. Stereos, cassette recorders, public address systems, and mixers.
- Hi to low, such as high impedance microphones or electronic instruments to low impedance amplifiers or mixers.

Designed to mate with Switchcraft Q-G $^{\otimes}$  connectors. Available with various terminations; see chart.

#### SERIES M(\*)M

Male with shell having 13/16-27 external threads to engage equipment with internally threaded body. Terminals extend out rear (threaded end) to permit wiring without disassembly.

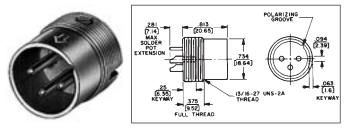

Part Numbers		
Series	Series	Insert
L(*)MN	M(*)M	Pins
<b>⊘L3MN</b>	⊘МЗМ	3
<b>⊘L4MN</b>	<b>⊘M4M</b>	4
<b>⊘L5MN</b>	<b>⊘M5M</b>	5

#### SPECIFYING FEATURES

- Plug-in impedance changes
- Fully wired
- Connections bi-directional (low to high impedance or high to low impedance)
- Rugged die-cast housings
- Mu-metal shielding

#### MATERIAL SPECIFICATIONS

**Shell:** Die-cast zinc shell, nickel-plated with black non-glare metalized foil label.

Shielding: Mu-metal.

**Dimensions:** Diameter–.75" (19.05 mm) nominal Length – 3" (76.2 mm) nominal (Part Number 92XX); 3.375" (85.73 mm) nominal (Part Number 91XX).

#### **ELECTRICAL SPECIFICATIONS**

**Frequency Response:** Flat–20 Hz to 20 kHz ± 2 decibels **Impedance:** High–50 K ohms (nominal); Low–150 ohms (nominal) **Voltage Step Ratio (Input Power Level);** Low to High: +29 decibels (typical); high to low: -29 decibels (typical)

Part Number	Switchcraft Connector		
<b>⊘9115</b>	Lo Z: 3-contact Q-G <sup>®</sup> female, A3F	Hi Z: 2-conductor phone plug, 1/4" finger diameter, right angle handle, 4" extension (shielded) cable	
<b>⊘9129</b>	Lo Z: 3-contact Q-G <sup>®</sup> female, A3F	Hi Z: 2-conductor phono plug, right angle handle, 4 inch extension (shielded) cable	
9144	Lo Z: 3-contact Q-G <sup>®</sup> female, A3F	Hi Z: 2-conductor phone plug,	
9244	Lo Z: 3-pin Q-G <sup>®</sup> male, A3M	1/4" finger diameter	

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

30

## TINI Q-G<sup>®</sup> MINIATURE CONNECTORS

Series TA(\*)F, TA(\*)FB, TA(\*)FL and TA(\*)FLB -Straight female cord plug Series TA(\*)M, TA(\*)MB, TA(\*)ML and TA(\*)MLB -Straight male cord plug Series TB(\*)M and TB(\*)MB - Chassis/panel mount male receptacle Series TY(\*)F and TY(\*)FPC - Chassis/panel, female receptacle, choice of solder lugs or P.C. terminations. Series TLP – Looping Plugs Series TBA(\* \*) – Audio Adapters Series TRA(\*)M – PC Mount Male Receptacles Series TRG(\*) - Reverse Gender Panel Mount, Cord Mount

#### **DESIGN FEATURES**

STYLE - Streamlined, miniaturized with nickel-plated metal and contrasting black plastic parts. Designed for light weight and unobtrusiveness. Also available in conductive black chrome finish.

CONSTRUCTION - Metal parts are rugged die-cast or precision machined with nickel-plating; plastic parts are molded of high dimensional-stability thermoplastic. Advanced design assures minimum weight consistent with strength and durability of cord plug housings of .413" (10.5 mm) diameter Weight: Series TA(\*)F plug = .25 ounce (7 g); Series TA(\*)M = .3 ounce (8.5 g).

**INSERTS** - Precision molded of thermoplastic for high mechanical and dielectric strength. Contacts and terminals are precision formed and plated for intimate contact and low resistance connections. Terminal numbers are molded on rear of male insert and on face of female insert for easy identification (except 6-pin male insert). Inserts can be supplied for OEM installation in microphones and instrumentation for optimum connecting reliability. For cord plugs, inserts can also be supplied for replacements.

LATCHLOCK - Positive latch system assures high integrity, vibration-resistant mating and transfer of shielding connection between housing, combined with simple, easy fingertip release.

STRAIN RELIEF - Rugged internal clamp holds cable tightly, while making a secure, low resistance connection between cable shield and housing.

## TINI Q-G <sup>®</sup> AUDIO ADAPTERS

Series TA Tini Q-G <sup>®</sup> audio adapters have been designed to adapt Tini Q-G <sup>®</sup> connections to standard audio connectors. Tini Q-G<sup>®</sup> adapters convert to Switchcraft Q-G<sup>®</sup> and QGP connectors and similar full-size connectors.



Part Number	Tini Q-G <sup>®</sup> End Mates With	Q-G <sup>®</sup> End Mates With
<b>⊘TA01</b>	TA3F	A3M
<b>♦TA02</b>	TA4F	A4M
<b>⊘TA03</b>	TA5F	A5M
<b>⊘TA04</b>	TA3F	A3F
<b>⊘TA05</b>	TA4F	A4F
<b>⊘TA06</b>	TA5F	A5F



FLEX RELIEF - Protects by minimizing cable bending stress at point of cable entry. Maximum recommended cable diameter is .115" (2.92 mm) when flex relief is used. By omitting flex relief (Series T(\*)FL and T(\*)ML only), cable up to .170" (4.32 mm) diameter can be used.

ASSEMBLY - Connector parts are mechanically keyed for simple assembly.

**POLARIZATION** – Mating male and female connectors are also mechanically keyed (latch and groove) so that it is impossible to mate them incorrectly.

"SCOOP-PROOF" FEATURE - Fully recessed pins on male plugs and receptacles cannot be "scooped", bent or damaged by accidental mismating with mating connector.

COLOR ESCUTCHEONS - Attractive color escutcheons, Series TYEF, are recommended for use with Series TY(\*)F and TY(\*)FPC receptacles (when rear mounted) for attractive panel trim, as well as color coding one or more connectors. Colors are: red, black, gray, green, blue, white and yellow.

CUSTOM Tini Q-G® CABLE ASSEMBLIES - On special order where production quantities warrant, Switchcraft can supply assembled and tested Tini Q-G® cables.

#### MOUNTING


Panel/Chassis Thickness: Series TB(\*)M: .25" (6.35 mm) maximum Series TY(\*)F:

Rear-.093" (2.3 mm) maximum

#### Series TY(\*)FPC:

Front—.312" (7.9 mm) maximum Rear—.093" (2.3 mm) maximum

POLARIZING GROOVE POLARIZING BOSS 2.38 60.45 <u>.509</u> TA-01, TA-02, TA-03

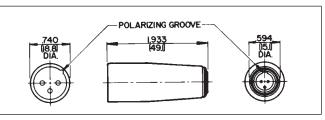

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

#### \* Please visit the product pages on our website for the most up-to-date product information

## TINI Q-G<sup>®</sup> MINIATURE CONNECTORS (continued)

#### SPECIFICATIONS: (3 - 5 CORD MOUNT ONLY)

#### **ELECTRICAL**

**Contact Resistance:** .010 ohms maximum after life (and after salt spray).

Current Rating (Carry Only): 5 A, 125 V AC (4 A, 125 V AC on 5 circuit) based on 30°C maximum.

Insulation Resistance: 510,000 megohms minimum @ 500 V DC (initial); 10,000 megohms minimum (after humidity test). Dielectric Strength: 1,000 V (rms).

#### MECHANICAL

Life: 5,000 operations minimum Insertion/Withdrawal Forces (after life): 6.1 lb./2.77 kg after life, insertion; 5.6 lb/2.54 kg, withdrawal. Solderability Standard: Meets EIA RS-186-9E. Mechanical Shock: Meets MIL-STD-202, method 213B. Vibration: Meets MIL-STD-202, method 201A. Wire Size: #22 wire gauge solid; #24 wire gauge stranded.


#### ENVIRONMENTAL

Thermal Range: -55°C to + 85°C. Humidity: Meets MIL-STD-202, method 106D. Thermal Shock: Meets MIL-STD-202, method 107D. Salt Spray: Meets MIL-STD-202, method 101.

#### MATERIAL

Housing, Plugs and Male Receptacles: Copper alloy, nickel-plated. Female Receptacle–Die-cast zinc, nickel-plated. Black Tini Q-G<sup>®</sup> Housing: Copper alloy, black chrome-plated. Pin and Socket Contacts: Copper alloy, silver-plated. Flex Relief: Molded black thermoplastic elastomer. Latch Button: Molded black thermoplastic. Release Lever and Mounting Washer: Steel, nickel-plated. Standoff/Ground Terminal and Cable Clamp: Steel, electrotinned. Inserts and Insulating Spacer: Molded high strength

**Inserts and Insulating Spacer:** Molded, high strength thermoplastic.



#### STRAIGHT FEMALE CORD PLUG

Part Number	Insert Contacts	Part Number	Insert Contacts <sup>2</sup>
TA3F	3	TA4FLB*	4
TA3FB*	3	TA5F	5
TA3FL <sup>1</sup>	3	TA5FL <sup>1</sup>	5
TA3FLB*	3	TA5FLB*	5
TA4F	4	TA6FL <sup>1</sup>	6
TA4FB*	4	TA7FL	7
TA4FL <sup>1</sup>	4	TA8FL	8

1 Flex relief omitted for larger diameter cable

2. Add AU to Part Number for Gold Contacts.

\* B indicates black housing

Latch (Female): Copper alloy, nickel-plated. Mounting Nut: Copper alloy, nickel-plated.

#### SPECIFICATIONS:

(6 – 8 Cord Mount and all Receptacles and Adapters)

#### **ELECTRICAL**

**Contact Resistance:** .010 ohm maximum after life. **Current Rating (Carry only):** 1.5A, 125 VAC, based on 30° maximum **Insulation Resistance:** 510,000 MΩ minimum @ 500 VDC (initial).


**Dielectric Strength:** 250 V rms.

#### **MECHANICAL**

Life: 2,000 operations Insertion/Withdrawal Forces (after life): -13 pound insertion; -13 pound maximum withdrawal Solderability Standard: Meets EIA RS-186-9E. Wire Size: 28 wire gauge stranded.

#### MATERIAL

Housings, Plugs and Male Receptacles: Copper alloy, nickel-plated.
Socket Contacts: Copper alloy, silver-plated.
Pin Contacts: Copper alloy, electrotinned.
Flex Relief and Latch Button: Molded thermoplastic.
Ground Terminal: Copper alloy, electrotinned.
Inserts and Insulating Spacer: Molded high strength thermoplastic, UL 94 V-0.
Latch (Female): Copper alloy, nickel-plated.
Mounting Nut: Copper alloy, nickel-plated.
Ferrite: 43 material, shielded head.
Frame: Molded thermoplastic, UL 94 V-0.

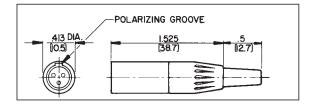

#### STRAIGHT MALE CORD PLUG

Part Number	Insert Pins	Part Number	Insert Pins
TA3M	3	TA5M	5
TA3MB*	3	TA5ML	5
TA3ML	3	TA5MLB*	5
TA4M	4	TA6ML <sup>1</sup>	6
TA4MB*	4	TA7ML	7
TA4ML <sup>1</sup>	4	TA8ML	7

1. Add AU to Part Number for Gold Contacts.

\* B indicates black housing

◊ Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

32


\* Please visit the product pages on our website for the most up-to-date product information

# TINI Q-G® MINIATURE CONNECTORS (continued)


#### TB(\*)M AND TB(\*)MB RECEPTACLE



Male receptacle for chassis/panel mounting. Specially designed flange permits close (front) mount on crowded panels. Mounting hardware supplied. Available with PC terminals. Call factory for details.




Part Number	Insert Pins	Part Number	Insert Pins
TB3M	3	TB5MB*	5
TB3MB*	3	TB6M	6
TB4M	4	TB7M	7
TB4MB*	4	TB8M	8
TB5M	5		



#### TLP(\*) LOOPING PLUG



Looping plug is designed for circuit testing. Other inserts and wiring patterns are possible; contact Switchcraft.



#### STRAIGHT FEMALE LOOPING PLUG

Part Number	Insert Contacts
<b>⊘TLP4</b>	4
<b>♦TLP6</b>	6

B indicates black housing

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery. \* Number of insert contacts or pins must be specified to complete Part Number.




#### **REVERSE GENDER TQG SERIES**


Same specifications as the original TQG Series, however, the latch is on the male cord mount. Available in 4 pin only.



TRGS4F



Part Number	Insert Pins	Description
TRGS4F	4	Panel mount female
TRG4M	4	Cord mount male w/latch



DIMENSIONS ARE FOR REFERENCE ONLY

ILY  $\frac{\text{lnch}}{(\text{mm})}$ 

# CONNECTORS & RECEPTACLES TINI Q-G® MINIATURE CONNECTORS

# **PHONE: 773 792-2700**

TRA6M

#### \* Please visit the product pages on our website for the most up-to-date product information


# TINI Q-G<sup>®</sup> MINIATURE CONNECTORS (continued)


#### TRA(\*)M PC MOUNT MALE RECEPTACLE

The TRA(\*)M low profile male receptacles mount in minimum space from the rear of panel or chassis, and feature space-saving right-angle construction and PC type terminals. The TRA3M is a cost-effective choice for audio equipment, medical instrumentation, computer equipment and test/measurement applications. Also available with 6 pins.

Part Number	Insert Pins
TRA3M	3
TRA6M	6
TRA6MF*	6

\*F designates ferrite shielding.

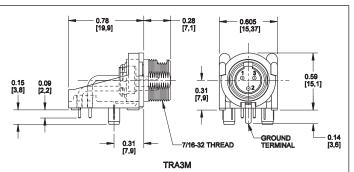

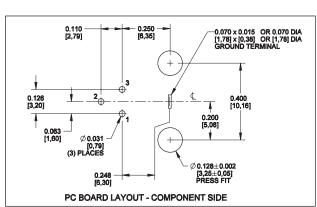

#### TRASM\*M, TRAPC\*M SERIES

Switchcraft introduces an expansion of its popular TQG Series of connectors. The TRASM\*M and TRAPC\*M offers low profile, right angle PC board mount connectors. The TRASM\*M versions are true surface mount connectors, while the TRAPC\*M versions are through-hole PC mount connectors. Both versions are available in 3-8 pins. All plastic connectors, the TRASM\*M and TRAPC\*M series have flats on the top of the connectors to facilitate pick and place assembly. As an added option, a non-threaded bushing version is also available.

#### FEATURES AND BENEFITS

- · Low profile, compact design reduces PC board space
- Mates with TQG female cord plugs
- Rated at 5A for 3-6 pins, 3A for 7 and 8 pin versions

#### MARKETS

- Wireless microphone systems
- Medical Instrumentation
- Test Instrumentation

#### SPECIFICATIONS

#### MATERIALS

Housing: Thermoplastic Contacts: Brass, tin-plated Nut and Washer: Brass, nickel-plated

#### TRASM3M








#### ELECTRICAL

Current Rating: 5A for 3-5 pins, 1.5A for 6-8 Contact Resistance: 10 m Ohm max Insulation Resistance: 100 m Ohm min Dielectric Withstanding Voltage: 250VAC Mechanical Life: 2,000 cycles

#### TINI Q-G® CONNECTORS ORDERING INFORMATION

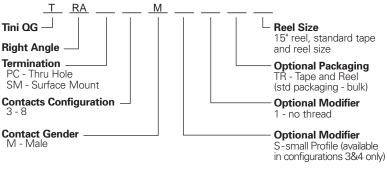


See next pages for drawings

DIMENSIONS ARE FOR REFERENCE ONLY

# TINI Q-G ® MINIATURE CONNECTORS (continued)


#### **TRASM\*M, TRAPC\*M SERIES**






SMALL PROFILE

SURFACE MOUNT TERMINATION




SMALL PROFILE


NO THREAD OPTION (THRU HOLE SHOWN)




REAR VIEW (CONFIG. 3 THRU HOLE SHOWN)









THRU HOLE TERMINATION DOUBLE ROW (CONFIG. 5, 6, 7, & 8)



SURFACE MOUNT TERMINATION SINGLE ROW (CONFIG. 3 & 4)




SURFACE MOUNT TERMINATION DOUBLE ROW (CONFIG. 5, 6, 7, & 8)



NO THREAD OPTION (SINGLE ROW THRU HOLE SHOWN)

[13.46] .530



SMALL PROFILE THRU HOLE TERMINATION



SMALL PROFILE SURFACE MOUNT TERMINATION



SMALL PROFILE NO THREAD OPTION (THRU HOLE SHOWN)

REAR VIEW (CONFIG. 3 THRU HOLE SHOWN)

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm) 35

[0.51]

020

0.99]


0.39


8


\* Please visit the product pages on our website for the most up-to-date product information

# TINI Q-G ® MINIATURE CONNECTORS (continued)


**TRASM\*M, TRAPC\*M SERIES** 






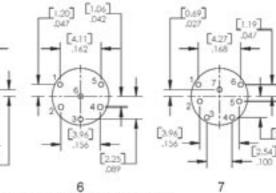











THRU HOLE TERMINATION THRU HOLE TERMINATION (CONFIG. 3) (CONFIG. 4)

THRU HOLE TERMINATION (CONFIG. 5)


[2.54] .100 TYP


[2.54]


.100


THRU HOLE TERMINATION (CONFIG. 6)

THRU HOLE TERMINATION (CONFIG. 7 AND 8)














(CONFIG. 6)

SMALL PROFILE SURFACE MOUNT (CONFIG. 4)

[2.54]

100

300

ſþ С 47.2 6

5831


SURFACE MOUNT (CONFIG. 7 AND 8)

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

www.switchcraft.com

TINI Q-G <sup>®</sup> MINIATURE CONNECTORS (continued)

### TY(\*)F AND TY(\*)FPC RECEPTACLES

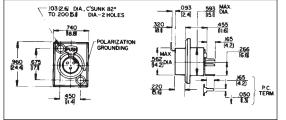


Female receptacle mounts in minimum space from front or rear panel or chassis. Terminals are solder lugs, Series TY(\*)F, or P.C., Series TY(\*)FPC. All receptacles have separate ground lug.

Part Number	Insert Contacts	Part Number	Insert Contacts
TY3F	3	TY5F	5
TY3FPC	3	TY5FPC	5
TY4F	4		
TY4FPC	4		

#### TYEF ESCUTCHEONS







Trim escutcheons in seven colors for use with Series TY(\*)F and TY(\*)FPC receptacles, are recommended for rear mount receptacles. Escutcheons must be ordered separately.

Part Number	Color
<b>♦TYEF01</b>	Red
TYEF02	Black
<b>⊘TYEF03</b>	Green
<b>⊘TYEF04</b>	Blue
<b>⊘TYEF05</b>	White
<b>⊘TYEF08</b>	Yellow
<b>⊘TYEF11</b>	Gray

#### MOUNTING HOLE DETAIL SERIES TY(\*)F, TY(\*)FPC



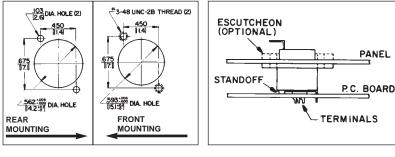

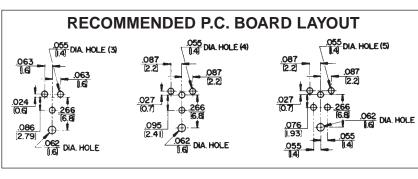

#### TQG(\*)F AND TQG(\*)M CONNECTOR INSERTS



Male and female inserts with 3, 4, 5 or 6 pins/ contacts. For replacement (cord plugs only) or build-into equipment, such as microphones, transducers and instruments.

#### **Male Inserts**


Part Number	Insert Pins
TQG3M	3
TQG4M	4
TQG5M	5
<b>⊘TQG6M</b>	6

#### **Female Inserts**

Part Number	Insert Contacts
TQG3F	3
TQG4F	4
TQG5F	5
<b>⊘TQG6F</b>	6

#### **TBA(\*\*) AUDIO ADAPTER**





3-6 pin male-to-male adapter is designed for through-bulkhead or cable expansion usage. Adapter is prewired pin 1 to pin 1, pin 2 to pin 2, etc. Mounting nuts are supplied for each threaded end. Panel hole diameter required is .45"; maximum panel thickness is .25" (6.35 mm).

Part Number	Insert Pins
<b>⊘TBA03</b>	3
<b>⊘TBA04</b>	4
<b>⊘TBA05</b>	5
<b>♦TBA06</b>	6

◊ Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

**HPCC4RAF** 

\* Please visit the product pages on our website for the most up-to-date product information

HPC SERIES PANEL MOUNTS AND CORD PLUGS











HPCP410RA



HPCI4F

HPCC4F

- Right angle or straight PC board terminals on panel mounts
- Built in gasket gives all HPC connectors IP 25 environmental ratings
- All HPC Series meet IEC 529 and IEC 1010-1 safety ratings
- Cord plug versions offer "push to lock" design, no 1/4" turn to engage
- Cord plug versions accept 10 AWG wire, 0.560" cable OD max

#### **APPLICATIONS**

- Loudspeakers
- · Power audio amplifiers

#### **SPECIFICATIONS**

#### Materials

Housings: Thermoplastic UL 94V-O rated Seal Rings: Thermoplastic rubber Contacts: Silver-plated over copper alloy

#### **ELECTRICAL**

PC Terminals Current Rating: 30A per UL 1977 Faston® Terminals Current Rating: 50A RMS w/10AWG wire, normal ambient, per UL 1977 Voltage Rating: 1,500 AC RMS, Per Mil-Std 202 Method 301 Insulation Resistance: > 2T Ohms Contact Resistance: 1m Ohm, 1.5mOhm after 1,000 insertion/withdrawals

#### **MECHANICAL**

Shock: Mil-Std 202, Method 213B Cond.K Vibration: Mil-Std 202, Method 201A Life: 1,000 insertion/withdrawals Cable Range: 0.560" OD max

#### ENVIRONMENTAL

Salt Spray: Mil-Std 202, Method 101D Cond. B Thermal Shock: Mil-Std 202, Method 107G Temperature Limits: -55 C to +85 C Moisture Resistance: Mil-Std 202, Method 106E Life@Ambient Temperature: Mil-Std 202, Method 108A Touch Proof: IEC 65 and 1010-1 Weather Tightness: IEC 529, IP 25

#### CORD MOUNT ORDERING INFORMATION

Part Number	Description
HPCC4F	Straight Cord Plug
HPCI4F	Inline Cord Plug
HPCC4RAF	Right Angle Cord Plug

# **HPC SERIES**

Switchcraft recently introduced a complete line of panel mount speaker connectors that are completely compatible with the Neutrik<sup>®</sup> Speakon<sup>®</sup> 4 pole series. We are now introducing a complete line of cable mounts as well. The complete HPC Series offers both panel mount and cord mount connectors.

The HPC panel mounts have been updated with new silver-plated contact materials that boost the contact ratings to 30A per UL 1977 on PC mount versions, 50A per UL 1977 on Faston® versions. They are still available with either 0.100" depth flanges or 0.200<sup>°</sup> depth flanges. The 0.200<sup>°</sup> depth flange allows for rear mounting of the HPC Series, and proper mating of all cord plugs. The panel mount versions are available with either 0.187" or 0.250" Faston® terminals, and either straight or right angle PC mount terminals. The right angle PC mount version also has, as an option, a mounting post which allows the connector to snap onto the PC board for wave soldering.

The HPC cord plugs are available in either straight, right angle, or as an in-line. The in-line version mates with either the straight or right angle cord plug, allowing the end user to extend cable runs. All cord plugs are compatible with Speakon® panel mounts. The in-line mates with our HPC cord plugs, as well as Speakon<sup>®</sup> cord plugs. The unique feature of the HPC series cord plugs are the "push to lock" feature, similar to the connection of an XLR connector. The HPC cord plugs, when mated to either HPC panel mounts or Speakon® panel mounts do not require a 1/4" turn to engage. Simply push the connector in until it locks. To disengage, push forward on the latch lever and pull the connector out. This feature eliminates the need to remember to turn the connector to make contact. All HPC cord plugs utilize 0.250" Faston® terminals, which allow for easy assembly, and make it easy to change cord plugs. To change from a straight cord plug to an in-line cord plug, back off the strain relief nut, twist off the handle, disconnect the Faston® terminals, fasten the new cord connector, twist on the handle and the strain relief. Barbs on the handle keep the handle from vibrating loose from the front shell.

Both HPC panel mounts and cord plugs incorporate a built-in gasket, which allows them to meet IP 25 harsh environment ratings, as well as IEC 529 and IEC 1010-1 safety ratings.


#### FEATURES AND BENEFITS

- Completely compatible with Neutrik® Speakon® 4 pole connectors
- 30A rating per UL 1977 on PC mount versions
- 50A rating per UL 1977 on Faston<sup>®</sup> versions
- · Panel mounts have two different Faston® terminal sizes, 0.187" and 0.250"
- · Panel mounts offered with two different flange depths, 0.100" and 0.200"
- 0.200" depth flange offers easy rear mounting

Inch DIMENSIONS ARE FOR REFERENCE ONLY

it chori


www.switchcraft.com

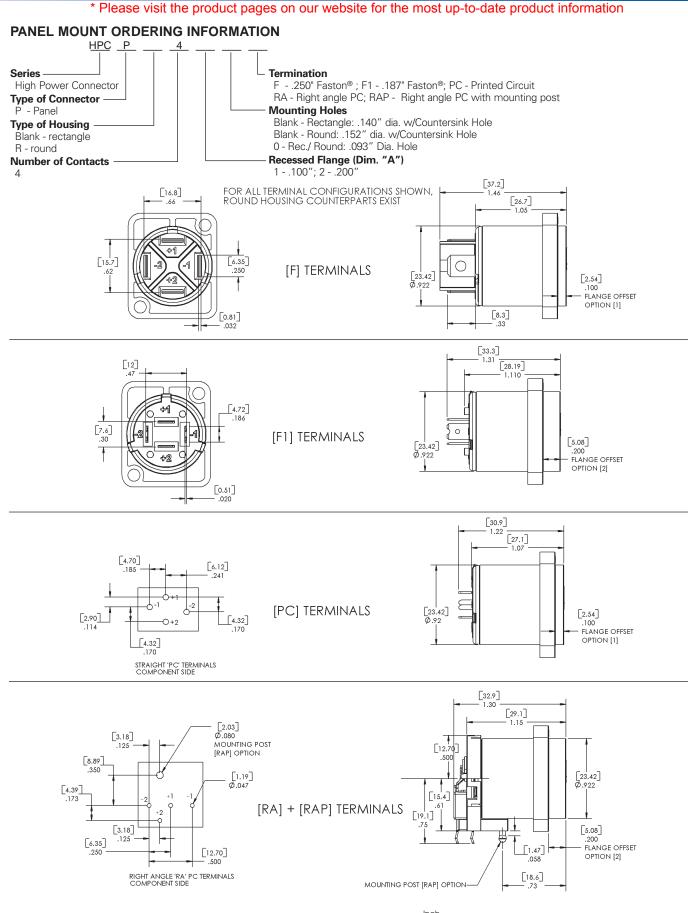

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

& RECEPTACLES



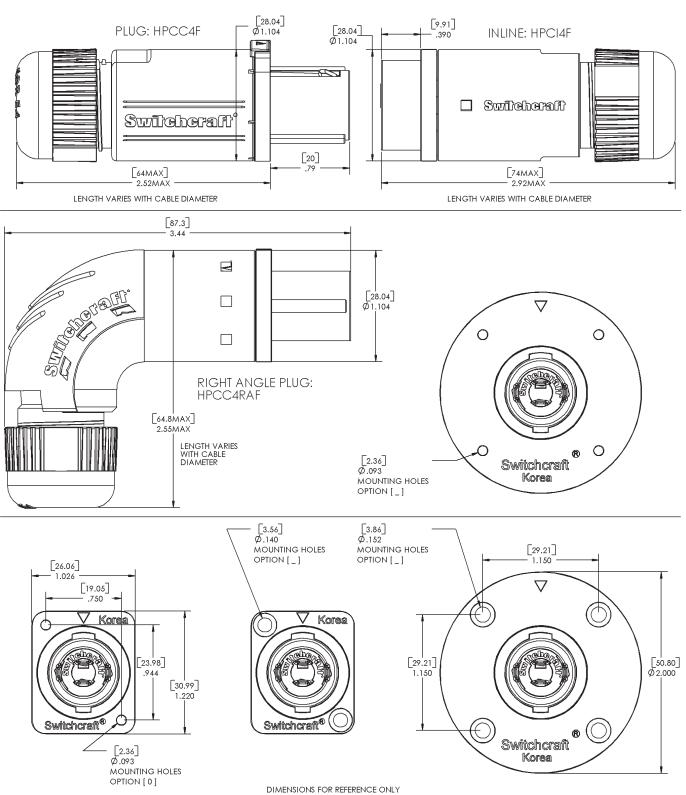

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**CONNECTORS & RECEPTACLES** 

Nife

# **CONNECTORS & RECEPTACLES** EN3<sup>™</sup> MINI WEATHERTIGHT CONNECTOR SERIES

#### \* Please visit the product pages on our website for the most up-to-date product information

### EN3<sup>™</sup> MINI WEATHERTIGHT CONNECTOR SERIES

#### **GENERAL FEATURES AND BENEFITS**

- Great all-purpose connector "weather" or not sealing feature is required.
- Superior leakage protection. Contact area is double-sealed for excellent moisture and chemical resistance when mated to Switchcraft's connectors.
- Integral O-ring and gasket. O-ring is molded onto cord housing assembly and gasket is molded onto panel housing assembly to prevent leakage and eliminate need for additional O-rings and gaskets.
- Reduced part count for reduced labor to assemble.
- No Grommets. Cable clamp assembly features living hinges, which snap easily onto and support the cable. • Thermoplastic rubber body simulates closed entry contact
- system to prevent probe damage or accidental loss of spring retention due to misaligned or bent pins.
- Abrasion-resistant thermoplastic boot provides strain relief and accepts cable diameter .195" to .265". • Housing rated UL 94V-O against flammability.
- Panel connector shell features a positioning keyway to prevent misalignments and a polarizing single "D" design for proper panel mounting and to prevent rotational movement.
- 2-18 pins.
- Exceeds Coast Guard specifications for water tightness (CFR 46 Part 110.20).
- Optional cap covers panel housing assembly when not in use.
- Exceeds enclosure rating IP16/IP18 when not mated or covered and IP66/IP68 when mated or covered (IEC 529)
- Exceeds enclosure rating 6P at 1000V when mated or covered (NEMA 250).

#### MATING INSTRUCTIONS FOR A CORD CONNECTOR TO A PANEL MOUNT OR IN-LINE CONNECTOR

First, align the notched keyway on both the panel mount or in-line and cord connector. Then, push the cord connector onto the mating connector. Grasp the coupling ring between the slots, push it toward the panel mount connector and rotate it clockwise nearly one half a turn. Continue rotating until you feel the coupling ring ride over the locking "bump". This is the locked position. The cord connector is not securely in place unless this procedure is followed.

#### **APPLICATIONS**

Process Control Marine Electronics Medical Instrumentation Geothermal Instrumentation

Communications Transportation General Industrial Electronics Harsh Environments

#### MATERIALS

Cord and panel connector shells, contact locking disk, and cable clamp assembly: Thermoplastic polymer glass fiber, flame retardant Coupling ring: Nylon

Rear boot and connector shell interior: Thermoplastic rubber Contacts: Copper base alloy gold-plated over nickel underplate

#### SPECIFICATIONS MECHANICAL

Shock: Mil-Std 202 Method 213B, condition K Vibration: Mil-Std 202 Method 201 Life: 600 insertion/withdrawal cycles (minimum)

#### ELECTRICAL

Voltage Rating (sea level): Tested at 600 VRMS Insulation Resistance: 100 megohms (minimum) at 77° F Contact Resistance: 5 milliohms (maximum) Current Rating: 3.0 Amps (#26 contact)– 9 through 18pin 6.5 Amps (#20 contact)– 7 and 8 pin 7.5 Amps (#20 contact)– 2 through 6 pin 13.0 Amps (#16 contact)- 2 and 3 pin



#### **ENVIRONMENTAL**

Temperature Limits: -40°C to +65°C (non-operating) Moisture Resistance: Mil-Std 202 Method 106F Insulation Resistance: Mil-Std 202 Method 302 condition B

Thermal Shock: Mil-Std 202 Method 107G Salt Spray: Mil-Std 202 Method 101D condition B


#### RATINGS


Ν

P16/IP18	CFR 46 Part 110.20
P66/IP68	UL 94V-O
NEMA 250 (6F	<b>)</b>

Patent 5,485,673 File 36049

EN3<sup>™</sup> Weathertight Connector Current Carry Capability (per UL 498 Standard)

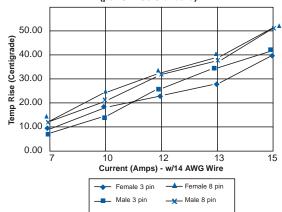

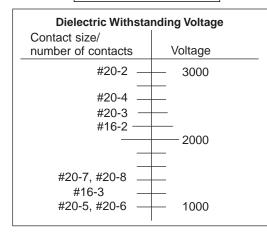

Insertion/Extraction Tool for 16 AWG

Insertion/Extraction Tool for 20 AWG

Positioner for 16 AWG contacts and pins

Positioner for 20 AWG contacts and pins

**Tool Description** 

Crimp Hand Tool

NOTE: A positioner must be used with the

Pneumatic Crimp Tool

#### \* Please visit the product pages on our website for the most up-to-date product information

**CRIMP TOOLS** 

Part Number

**EN3CRAUTO** 

EN3POS16

EN3POS20

EN3CR and EN3CRAUTO.

EN3INS16

EN3INS20

EN3CR

### CRIMP CONTACT INSERTION INSTRUCTIONS


HOUSING NOT SHOWN

HAND TOOL

PLACE CRIMP CONTACT AND CONDUCTOR ONTO HAND TOOL.

INSERT TOOL INTO HOUSING UNTIL IT BOTTOMS ONTO DISC

### CRIMP CONTACT EXTRACTION INSTRUCTIONS




ROTATE HAND TOOL CLOCKWISE AND REMOVE FROM HOUSING.

Note: Solder and PC contacts are factory assembled

## CORD CONNECTOR ASSEMBLY INSTRUCTIONS


#### STEP 1

**Cord Connector:** To assemble the three-part cord connector, first feed the end of the cable through the boot, cable clamp housing, and coupling ring in that order and position as shown in the figure below. NOTE: The coupling ring can also be inserted onto the cord connector from the front. **In-line Connector:** Feed the end of the cable through the boot and cable clamp housing in the order and position shown.

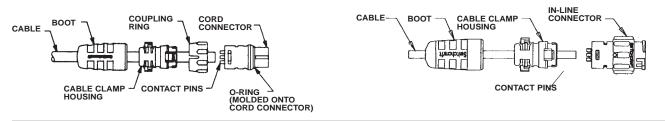


#### STEP 2

Next, strip the cable .218" as shown and begin soldering conductors to pins, or insert contacts crimped on wire starting with contact #1 next to the "notch" and following with the remaining conductors counter-clockwise with #6 or #8 conductor in the center.

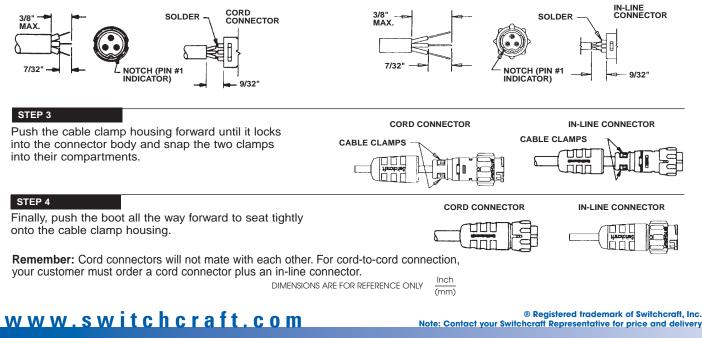


### EN3<sup>™</sup> MINI WEATHERTIGHT CONNECTOR SERIES (continued)

#### 2 - 8 PIN CORD CONNECTOR

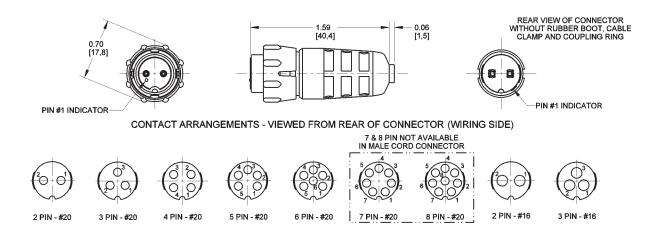

#### 9 – 18 PIN CORD CONNECTOR

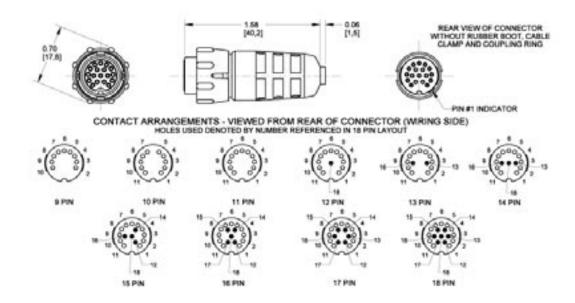

#### **EN3 Cord Connector Part Number Scheme**

Series	Style	Pins/ Contacts	Gender	Contact Size	Contact Style	Contact Plating	Packaging
EN3	С	2-18	F: Female M: Male	16: #16 Leave blank for #20 26: for 9-18 only	C: Crimp P: PC S: Staggered Leave blank for solder	AG: Silver Leave blank for gold	K: Kit Leave blank for bulk packaging

Notes: 7 & 8 pin not available in cord male

9-18 pin available in either staggered solder or straight solder only

9-18 pin available only with # 26 terminals

AG: Silver plating special order


#16 contact available in 2 & 3 pins only

DIMENSIONS ARE FOR REFERENCE ONLY (mm)


43

EN3<sup>™</sup> MINI WEATHERTIGHT CONNECTOR SERIES (continued)

#### 2 – 8 PIN PANEL CONNECTOR

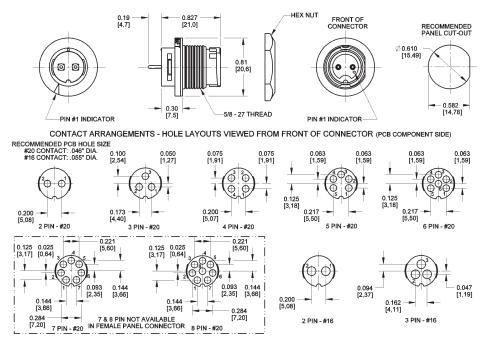

#### 9 - 18 PIN PANEL CONNECTOR

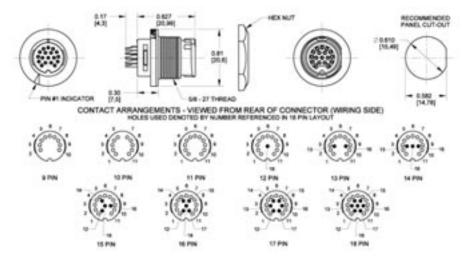

#### **EN3 Panel Connector Part Number Scheme**

Series	Style	Pins/ Contacts	Gender	Contact Size	Contact Style	Contact Plating	Packaging
EN3	Ρ	2-18	F: Female M: Male	16: #16 Leave blank for #20 26: for 9-18 only	C: Crimp P: PC S: Staggered Leave blank for solder	AG: Silver Leave blank for gold	K: Kit Leave blank for bulk packaging

Notes: 7 & 8 pin not available in panel female

9-18 pin available in either staggered solder or straight solder only

9-18 pin available only with # 26 terminals

AG: Silver plating special order


#16 contact available in 2 & 3 pins only

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

44

### EN3<sup>™</sup> MINI WEATHERTIGHT CONNECTOR SERIES (continued)

#### **2 – 8 PIN INLINE CONNECTOR**

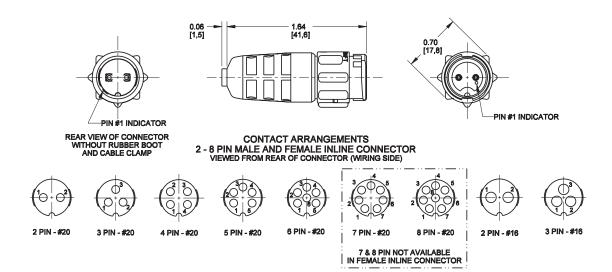


#### **EN3 Inline Connector Part Number Scheme**

Series	Style	Pins/ Contacts	Gender	Contact Size	Contact Style	Contact Plating	Packaging
EN3	I	2-8	F: Female M: Male	16: #16 Leave blank for #20	C: Crimp P: PC Leave blank for solder	AG: Silver Leave blank for gold	K: Kit Leave blank for bulk packaging

Notes: 7 & 8 pin not available in inline female #16 contact available in 2 & 3 pins only AG: Silver plating special order

#### 2 - 8 PIN OVERMOLDED CORD AND INLINE CONNECTOR

(See Cable Section for More Details.)

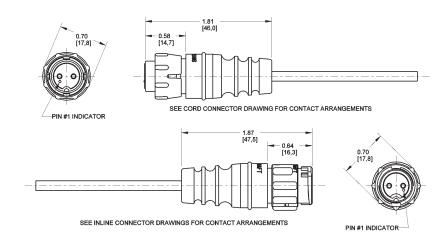

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

45

**CTORS & RECEPTA** 

# **CONNECTORS & RECEPTACLES** DIN CONNECTORS AND PLUGS

# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

### DIN CONNECTORS

#### **SPECIFICATIONS** ELECTRICAL

Contact Resistance: Cord Plugs and Receptacles; .010 ohms, contact spring/pin .030 ohms, ground clip/shell. Control and Switching Receptacles; .015 ohms, contact spring/pin; .020 ohms, switch contacts. Dielectric Withstanding Voltage: 500 V (rms) Contact Rating: 5-pin; 3A, 34 V DC Leakage Resistance: 10<sup>5</sup> MΩ Recommended Wire Size: 22 wire gauge maximum

#### **MECHANICAL INSERTION/WITHDRAWAL FORCES:**

Number of Contacts	Insertion Force pound/N	Withdrawal Force pound/N
2	3.6/(16)	.45- 2.7/(2-12)
3	5.4/(24)	.67- 4.1/(3-18)
4	7.2/(32)	.90- 5.4/(4-24)
5	9.0/(40)	1.24- 6.8/(5.5-30)
6	10.8/(48)	1.46- 8.1/(6.5-36)
7	12.6/(56)	1.68- 9.5/(7.5-42)
8	14.4/(64)	1.90-10.8/(8.5-48)


NOTE: All connectors meet DIN specifications #41524. Din specification numbers (except for 4-pin, 5-pin @ 240°, and 8-pin @ 262°)

#### **DIN PLUGS**

### **STRAIGHT CORD PLUG**



with 30° lock ring

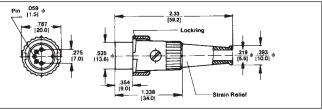

Type 05CL5M - typical Male plug with ground key-rib. Unique 30° turn lockring securely fastens two halves of connector. Mates with lock flange female connectors and receptacles. Insert screw holds insert assembly in shell and also retains lockring on shell. Flexible black strain relief with 7/32" diameter cable entry. Heavy duty clamp.


#### **ORDERING INFORMATION**


Part Number	Description	Pin Arrangement
05CL3M	3 pins at 180°	2
05CL5M	5 pins at 180°	5
09CL4M	4 pins at 210°	3
12CL5M	5 pins at 240°	4
015CL7M	7 pins at 270°	7
<b>◊15CL8M</b>	8 pins at 270°	9

◊ Available on special order only; contact Switchcraft for price and delivery.

#### MATERIAL

Shell: Die-cast zinc alloy, nickel-plated. Receptacle Mounting Flange: Steel. Receptacle Body: Plastic. Insert Material: Plastic. Socket Contacts: Tin-plated. Pin Contacts: Tin-plated. Switching Contacts: Silver-plated. Cable Relief Bushing: Soft plastic.

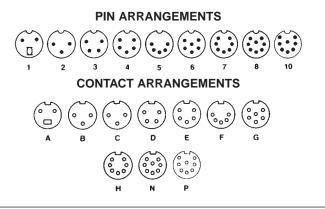

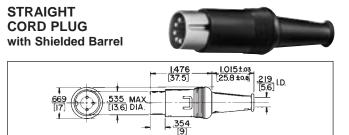

**Type 15GM7M – typical:** Male cord plug with shielded barrel and insulated snaplock plastic body. Two piece metal barrel surrounds pin insert to form an electrical shield. The entire insert assembly is held together by snapping the insulated plastic shell over the assembly. The barrel's special metal tab locks the shell in place. Standard color of plastic shell is gray. All-purpose cable clamp.

#### **ORDERING INFORMATION**

Part Number	Description	Pin Arrangement
05GM3M	3 pins at 180° Gray body and strain relief.	2
05GM5M	5 pins at 180° Gray body and strain relief	5
<b>◊09GM4M</b>	4 pins at 210° Gray body and strain relief	3
12GM5M	5 pins at 240° Gray body and strain relief	4
<b>◊12GM6M</b>	6 pins at 240° Gray body and strain relief	6
15GM7M	7 pins at 270° Gray body and strain relief	7
15GM8M	8 pins at 270° Gray body and strain relief	9
<b>⊘20GM8M</b>	8 pins at 262° Gray body and strain relief	10

SPECIFYING NOTE: Use letter "JL" in place of "GM" to order same part number with black housing.

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# CONNECTORS & RECEPTACLES DIN PLUGS AND RECEPTACLES

S & RECEPT

\* Please visit the product pages on our website for the most up-to-date product information


# **DIN PLUGS AND RECEPTACLES**

#### STRAIGHT CORD PLUG with Extended Barrel



#### TYPE 12BL6M – TYPICAL

Male plug with ground key-rib. Nickel-plated diecast handle. Contact friction coupling. Flexible black strain relief. Heavy duty cable clamp.

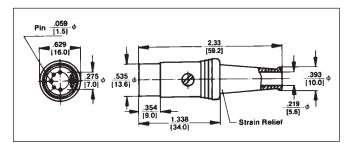

#### **ORDERING INFORMATION**


Part Number	Description	Pin Arrangement
03BL2M	2 pins with insulated switch actuator	1
05BL3M	3 pins at 180°	2
05BL5M	5 pins at 180°	5
09BL4M	4 pins at 210°	3
12BL5M	5 pins at 240°	4
12BL6M	6 pins at 240°	6
<b>◊15BL7M</b>	7 pins at 270°	7
<b>◊15BL8M</b>	8 pins at 270°	8



RIGHT-ANGLE CORD PLUG with 8 Position Barrel and 30° Lockring

#### TYPE 05YL5M – TYPICAL

Right-angle chassis hugging, male plug with flexible strain relief. Unique 8-position barrel gives you a choice of any one of eight different cable entry angles. ground key rib 30° turn lockring securely fastens two halves of connector.

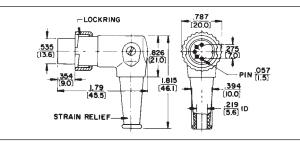

#### **ORDERING INFORMATION**

Part Number	Description	Pin Arrangement
05YL3M	3 pins at 180°	2
05YL5M	5 pins at 180°	5
<b>⊘09YL4M</b>	4 pins at 210°	3
<b>⊘12YL5M</b>	5 pins at 240°	4

# RIGHT-ANGLE CORD PLUG with 8 Position Barrel



#### **TYPE 05DL5M – TYPICAL**


Right-angle chassis hugging, male plug with flexible black rubber strain relief. Unique 8-position barrel offers a choice of eight different cable entry angles.

#### **ORDERING INFORMATION**

Part Number	Description	Pin Arrangement
<b>⊘05DL3M</b>	3 pins at 180°	2
05DL5M	5 pins at 180°	5
<b>⊘09DL4M</b>	4 pins at 210°	3
أ⊘12DL5M	5 pins at 240°	4
<b>⊘12DL6M</b>	6 pins at 240°	6
أ¢15DL7M	7 pins at 270°	7

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)



#### \* Please visit the product pages on our website for the most up-to-date product information


### **DIN PLUGS AND RECEPTACLES (continued)**

#### STRAIGHT CORD PLUG with Flush Socket Insert



#### **TYPE 06AL5F – TYPICAL**

Female plug with ground contact. Diecast metal shell, nickel-plated. Two contact plug, Part number 04AL2F includes a break circuit switch (1-B) which is opened by engaging the insulated switch actuator of the mating plug or receptacle. Flexible black strain relief.

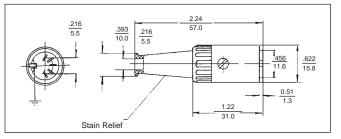

#### **ORDERING INFORMATION**


Part Number	Description	Contact Arrangement
06AL5F	5 contacts at 180°	F
<b>⊘13AL5F</b>	5 contacts at 240°	E
<b>⊘13AL6F</b>	6 contacts at 240°	G
<b>⊘15AL7F</b>	7 contacts at 270°	Н
15AL8F	8 contacts at 270°	N

#### STRAIGHT CORD PLUG with Lock Flange



#### **TYPE 06EL5F – TYPICAL**

Female plug with ground contact. Lock flange designed to accept 30° lockring. Insert screw firmly holds insert assembly in shell. Flexible black strain relief with 7/32" diameter cable entry. Heavy duty cable clamp.

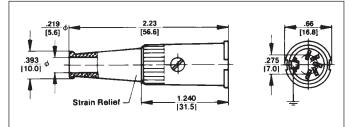

#### **ORDERING INFORMATION**


Part Number	Description	Contact Arrangement
<b>⊘06EL5F</b>	5 contacts at 180°	F
13EL5F	5 contacts at 240°	E
أ¢15EL8F	8 contacts at 270°	N

#### **RECEPTACLE** with Extended Shell



#### **TYPE 57KD3M – TYPICAL**

Male receptacle, 3 pins, with ground key-rib. Diecast extended shell and flange for chassis or panel mounting. Turret terminals.

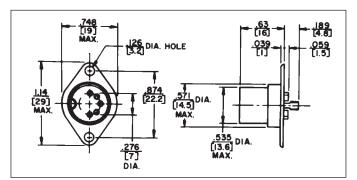

#### **ORDERING INFORMATION**

Part Number	Description	Pin Arrangement	
57KD3M	3 pins at 180°	2	

 ${\boldsymbol{\Diamond}}$  Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

www.switchcraft.com

#### \* Please visit the product pages on our website for the most up-to-date product information


### **DIN RECEPTACLES (continued)**

#### RECEPTACLE with Closed Circuit Switch



#### **TYPE 59GB3F – TYPICAL**

Unique 3 and 5 contact receptacles include a 1-B (closed circuit) switch which is mounted to drawn metal shell. Switch is actuated by the shell of the mating plug. Receptacles also provide complete shielding through the ground contact. Flared solder terminals.

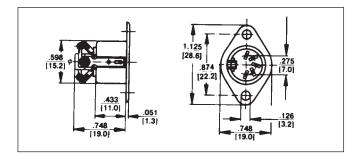

#### **ORDERING INFORMATION**

Part Number	Description	Contact Arrangement
<b>◊59GB3F</b>	3 contacts at 180° plus closed-circuit switch (Schematic #5)	В


◊ Available on special order only; contact Switchcraft for price and delivery.

**RECEPTACLE** for Chassis or Panel Mounting For shielded and extended barrel plugs



#### TYPE 57GB5F – TYPICAL – FLARED SOLDER TERMINALS

Drawn metal recessed shell with mounting flange and ground contact. Available flared solder terminals. Part Number 58GB3F features two extra blanks in insert for proper mating (5 pins at 180°) plug where applications may require greater connector flexibility. Flared solder terminals standard.

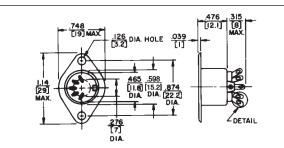

#### **ORDERING INFORMATION**

Part Number Descriptions		Contact Arrangement
<b>◊57GB3F</b>	3 contacts at 180°	В
57GB5F	5 contacts at 180°	F
60GB4F	4 contacts at 210°	D
61GB5F 5 contacts at 240°		E
61GB6F	6 contacts at 240°	G
62GB7F	7 contacts at 270°	Н
62GB8F	8 contacts at 270°	N

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

49

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**CONNECTORS & RECEPTACLES** 

# CONNECTORS & RECEPTACLES DIN RECEPTACLES

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information


### **DIN RECEPTACLES (continued)**

RECEPTACLE for Lockring Plug Flared solder terminals on Part Number 57HB5F



#### **TYPE 61HA5F – TYPICAL**

Female receptacle with ground contact. Chassis or panel mount. Diecast bayonet extension shell with mounting flange. Mates with all lockring plugs. such as Part Number 12CL5M. Part Number 55HA2F includes closed-circuit switch (1-B). All receptacles have straight solder terminals, except as noted.

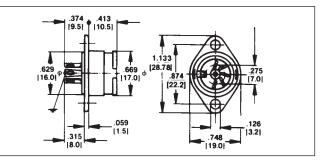

#### ORDERING INFORMATION

Part Number	Description	Pin Arrangement
<b>◊55HA2F</b>	2 contacts with closed-circuit switch (Schematic #4)	A
57HB3F*	3 contacts at 180°	В
57HB5F*	5 contacts at 180°	F
60HA4F	4 contacts at 210°	D
61HA5F	5 contacts at 240°	E
62HB7F*	7 contacts at 270°	Н
62HB8F*	8 contacts at 270°	Ν

\*Flared solder terminals

"A" in part number indicates straight terminal. (solder lug).


 ${\boldsymbol{\Diamond}}$  Available on special order only; contact Switchcraft for price and delivery.

RECEPTACLE for Printed Circuit Board Mounting



#### **TYPE 57NC5F – TYPICAL**

Mounts to printed circuit boards. Special PC type terminals "snap-in" precut boards. See drawing. Tubular metal shell with ground contact. Part Number 58NC3F mates with either 3 pin or 5 pin (at 180°) plugs because of its 2 extra blanks in the contact insert.

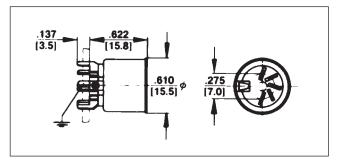

#### **ORDERING INFORMATION**

Part Number Description		Contact Arrangement
57NC5F 5 contacts at 180°		F
\$\$58NC3F         3 contacts at 180°           2 extra blanks		С
♦ <b>60NC4F</b> 4 contacts at 210°		D
61NC5F 5 contacts at 240°		E
<b>62NC7F</b> 7 contacts at 270°		Н
62NC8F 8 contacts at 270°		Ν

"C" in part number indicates PC terminals.

Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

# CONNECTORS & RECEPTACLES DIN RECEPTACLES

#### \* Please visit the product pages on our website for the most up-to-date product information

RIGHT-ANGLE RECEPTACLE for Printed Circuit Board Mounting




#### **TYPE 57PC5F-TYPICAL**

Mounts to PC boards. Plugs connect at right-angle to mounting surface. Part Number 57PC3F mates with either 3 or 5 pin (at 180°) plugs because of two extra blanks in contact insert. ground contact provides complete shielding through receptacles.

ORDERING INFORMATION			
Part Number Description		Contact Arrangement	
<b>◊57PC3F</b>	3 contacts at 180°	В	
57PC5F	5 contacts at 180°	F	
<b>◊60PC4F</b>	4 contacts at 210°	D	
61PC5F	5 contacts at 240°	E	
61PC6F	6 contacts at 240°	G	
<b>⊘62PC7F</b>	7 contacts at 270°	Н	
62PC8F	8 contacts at 270°	N	

 ${\boldsymbol{\Diamond}}$  Available on special order only; contact Switchcraft for price and delivery.

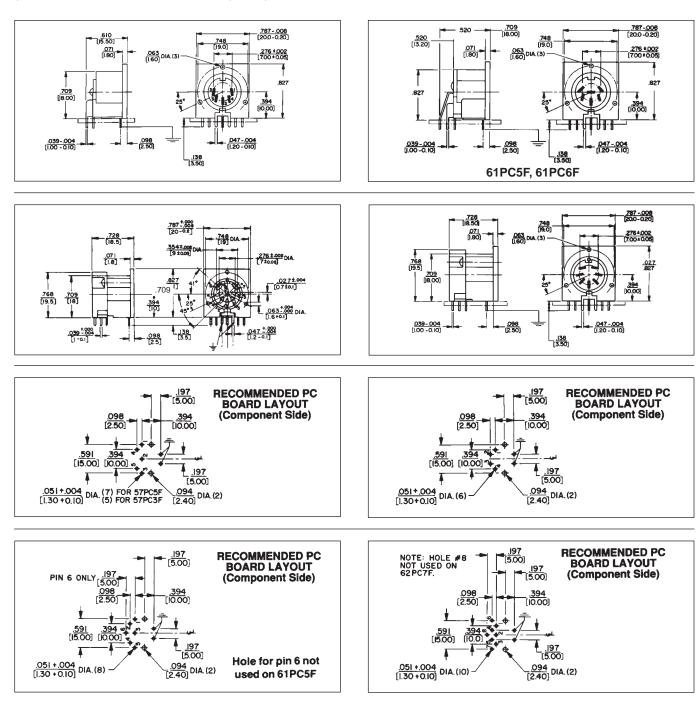

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# CONNECTORS & RECEPTACLES DIN RECEPTACLES

# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

**RIGHT-ANGLE** 

mounting

grounding.

SHIELDED RECEPTACLE for printed circuit board

**TYPE 60PC4FS–TYPICAL** Similar to 57PC5F – Typical, except flange surrounding face


of insert is metal to provide through-grounding between plug

and receptacle and to potential panel/chassis for common

Part Number	Description	Contact Arrangement
<b>◊57PC3FS</b> 3 contacts at 180°		В
57PC5FS	5 contacts at 180°	F
<b>◊60PC4FS</b> 4 contacts at 210°		D
61PC5FS 5 contacts at 240°		E
61PC6FS 6 contacts at 240°		G
62PC7FS 7 contacts at 270°		Н
62PC8FS 8 contacts at 270°		N

SPECIFYING NOTE: Another series of receptacles with a trimmed metal flange .052" (1.32 mm) below housing top is available. Replace suffix "S" with "T" in part numbers above to specify these receptacles or contact Switchcraft. Mounting: #2 or #3 self-tapping screw.

◊ Available on special order only; contact Switchcraft for price and delivery.

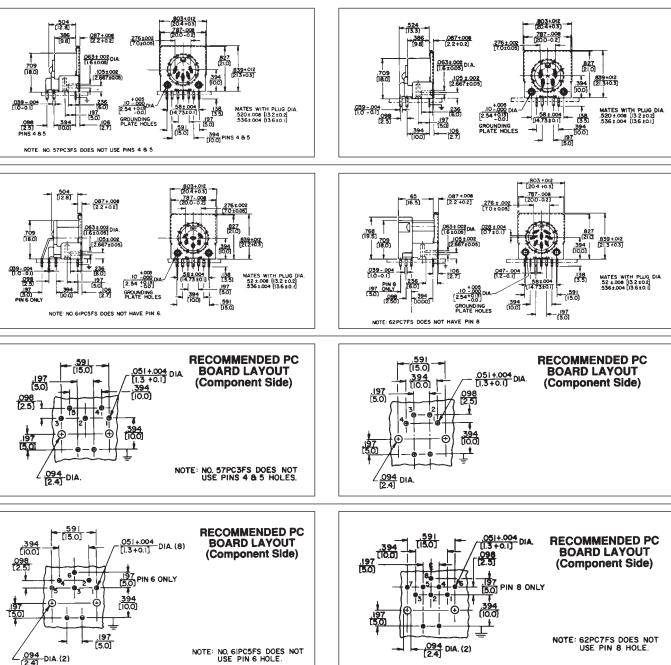

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

NNECTORS & RECEPTACLES 

# CONNECTORS & RECEPTACLES MINI-DIN RECEPTACLES

#### \* Please visit the product pages on our website for the most up-to-date product information

### **DIN RECEPTACLES (continued)**

#### MINI-DIN RIGHT-ANGLE RECEPTACLES

Miniature DIN right-angle connectors are designed for personal computer, video and data communications, medical and instrumentation equipment and systems.

#### **RIGHT-ANGLE, PC MOUNT RECEPTACLES**

Available with 3 through 8 contacts, female only, receptacles also have a standard (and separate) ground contact system. Ground terminal can be straight or snap-in type. Snap-in terminals are bifurcated to assure tight hold down on PC board before, during and after soldering. Solder wicking around the terminal strengthens the connection. Additionally, PC terminals are staggered to assure more "hold down" capability during soldering.

Receptacle/plug retention is "friction" type, and a separate outer shield can be specified.

Series SMD\*FRAX10: 3 through 8 contacts, female, right-angle PC mount, straight ground terminal, and no outer shield.


**Series SMD\*FRAX20:** Same as SMD\*FRAX10, except with bifurcated snap-in ground terminal.

Series SMD\*FRAX11: 3 through 8 contacts, female, right-angle PC mount, straight ground terminal, and outer shield.

Series SMD\*FRAX21: Same as SMD\*FRAX11, except with snap-in ground terminal.

Series DMD\*FRAX111: Dual stacked miniature DIN connectors, available in 4, 5, 6, and 8 contacts. Shielded and non-shielded versions available.

**Dimensions:** .552" (14 mm) wide x .502" (12.8 mm maximum depth x .642" (16.3 mm) height, including terminals.





SPECIFICATIONS

**Ratings:** 1A, 100 VAC; 2A, 12 VDC. **Insulation Resistance:** 50 M $\Omega$  minimum **Dielectric Strength:** 250 VDC for 1 minute. **Contact Resistance:** 30 m $\Omega$  maximum **Insertion/Withdrawal Force:** 0.8 to 5 kilograms **Withdrawal Force:** 0.8 to 4 kilograms **Contacts/Terminals:** Copper alloy, silver or gold-plated **Ground Terminal:** Copper alloy, nickel-plated. **External Shield:** Copper alloy, solder-coated. **Body:** Black molded thermoplastic, UL 94V-0.

#### MINI-DIN RIGHT-ANGLE RECEPTACLES PART NUMBER SCHEME


Series	Contacts	Style	Shield/Ground	<b>Optional Mounting Screw Hole</b>
SMD-Single Insert#: FRA		FRA	110: Unshielded, no snap-in ground	A: Adds screw hole
DMD-Dual	3-8		111: Shielded, no snap-in ground 120: Unshielded, snap-in ground 121: Shielded, snap-in ground	Blank: None

Note: Dual available in 4,5,6, and 8 only

Note: Snap-in ground available on single only

Note: Optional mounting screw hole available on dual only

Note: Special order only, contact factory for details

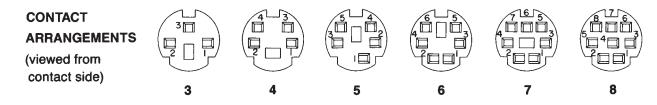


DIMENSIONS ARE FOR REFERENCE ONLY


\* Please visit the product pages on our website for the most up-to-date product information

# DIN RECEPTACLES (continued)

#### SMD SERIES

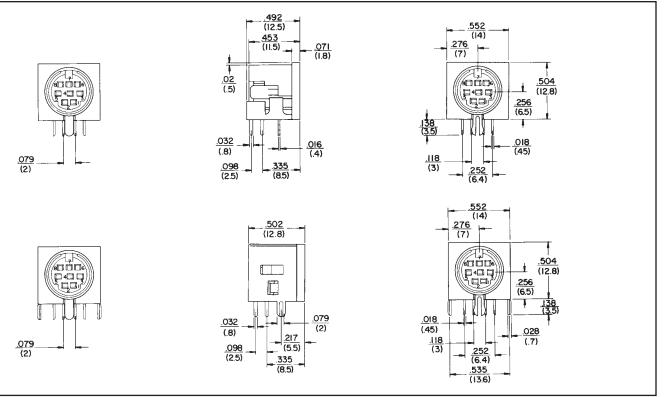

RECOMMENDED PC BOARD LAYOUTS (Viewed from component side)

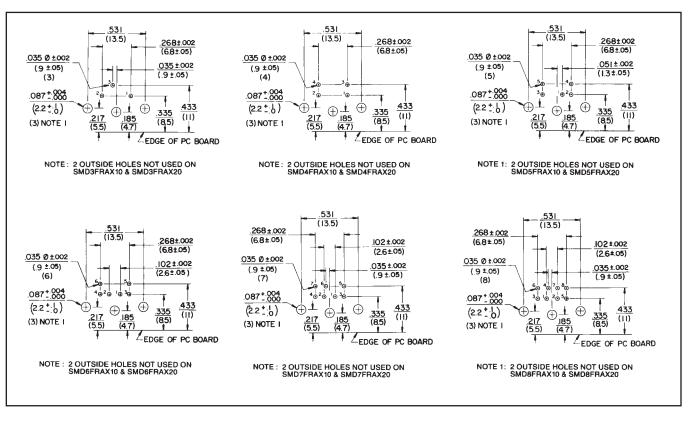


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# www.switchcraft.com

# **DIN RECEPTACLES (continued)**


**DMD SERIES** 

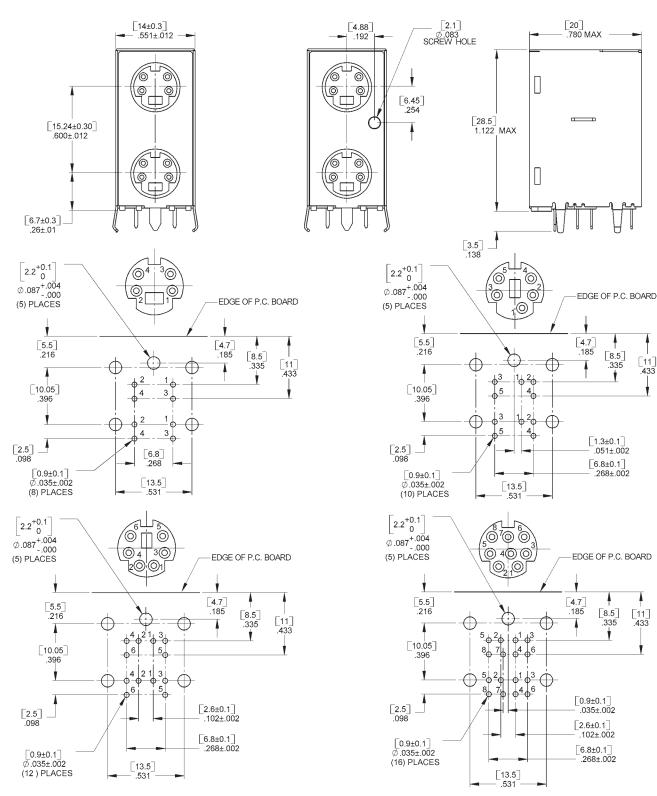


Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm) [11] .433

1

### SINGLE AND DUAL STACKED USB CONNECTORS





Switchcraft introduces single and dual USB connectors. The USB connectors are fast becoming the industry standard for plug and play connectivity between PCs and their peripherals. The DUSB and USB connectors are RAPC mounted, with kinked terminals for snap-in placement to the PC board. Both meet all Universal Serial Bus standards.

#### FEATURES AND BENEFITS

- · Snap-in terminals facilitate wave soldering
- Shielded for reduced EMI/RFI emissions
- Dual stacked version increases PC board density

#### **APPLICATIONS**

- Personal Computer
- Data Communications
- Medical Equipment
- Test Equipment
- Instrumentation

### SPECIFICATIONS

GENERAL Voltage Rating: 30 VAC (rms) Max. Current Rating: Signal application only, 1A Max. per contact Contact Resistance: 25m ohms Max. initial Temperature Rating: 32°F to 104°F (0°C to 40°C) Insertion Force: 7.7 lbs Max. (3.5 kg Max.) Withdrawal Force: 0.8 lb Min. (0.4 kg Min.)

Life: 1500 cycles

#### MATERIALS

**Body:** Black, molded thermoplastic, UL 94V-0 **Shell:** Copper alloy, tin plated **Contact Terminal:** Copper alloy, gold plating in mating area, tin plating on solder tails, all over nickel plating.


Part Number	Description
SUSB Single	USB Connector
DUSB Dual Stacked	USB Connector

Note: Special order only, contact factory for details.

DIMENSIONS ARE FOR REFERENCE ONLY

www.switchcraft.com

### SINGLE AND DUAL STACKED USB CONNECTORS (continued)

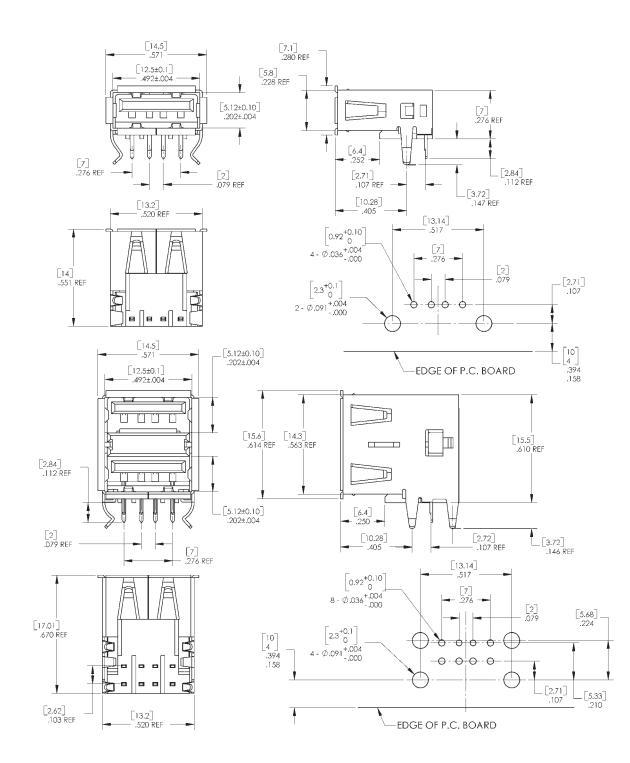

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

57

# CONNECTORS & RECEPTACLES IEEE 1394 FIREWIRE CONNECTORS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

### **IEEE 1394 FIREWIRE CONNECTORS**

1394RAPC

1394SMT



Switchcraft introduces both right angle PC and surface mount versions of IEEE 1394 Firewire connectors. The Firewire connectors are becoming another connector standard used in the upcoming multimedia/computer market. The connectors meet IEEE 1394R-4006N Series standards.

#### FEATURES AND BENEFITS

- Shielded housings to reduce EMI/RFI emissions
- Mounting posts add stability for wave soldering
- · Low profile requires less space

#### **APPLICATIONS**

- Multimedia
- Video
- Personal Computers
- Computer Peripherals

#### **SPECIFICATIONS GENERAL**

Voltage Rating: 40 VAC Current Rating: 1.5A Contact Resistance: 30m Ohms Max. Temperature Rating: -55°C to +105°C Insertion Force: 6.0 lbs. Max. Withdrawal Force: 4.4 lbs. Min. Lifecycles: 1,500 Min.


Part Number	Description
1394RAPC	IEEE 1394 RAPC
1394SMT	IEEE 1394 SMT

Note: Special order only, contact factory for details.

DIMENSIONS ARE FOR REFERENCE ONLY



# IEEE 1394 FIREWIRE CONNECTORS (continued)

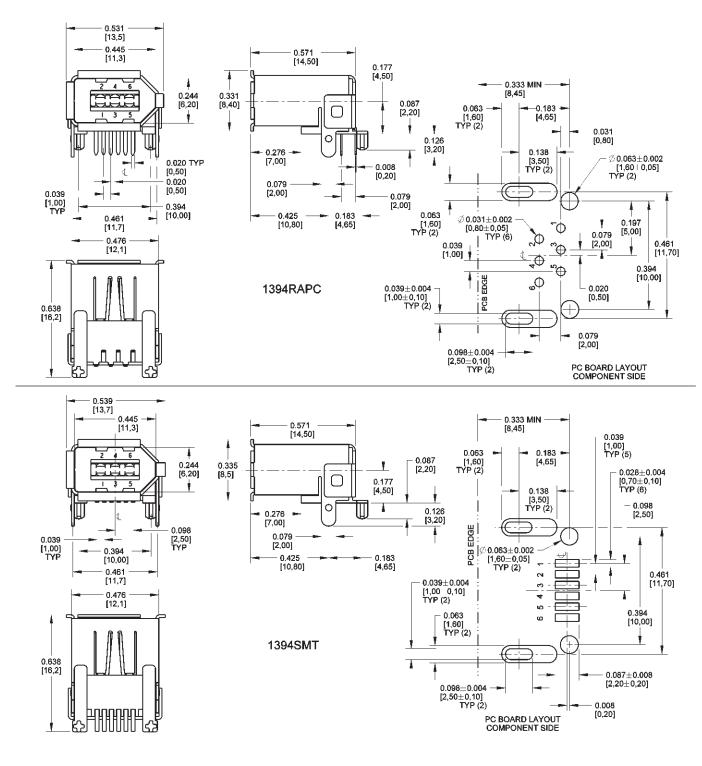


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

59

#### \* Please visit the product pages on our website for the most up-to-date product information

## SLIM-LINE CONNECTORS

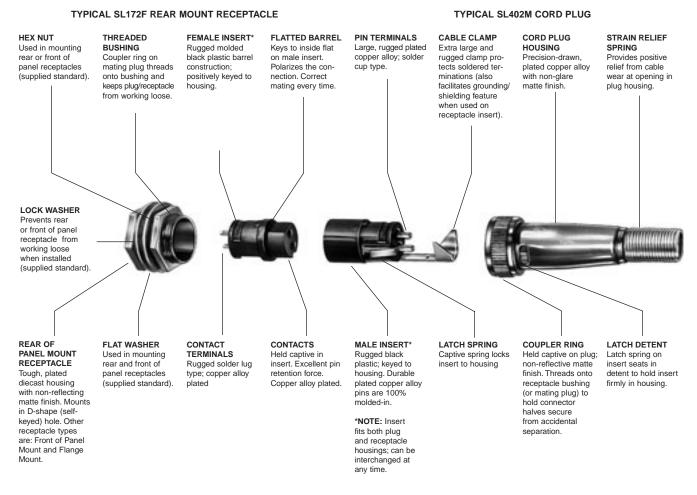

#### **DESIGN FEATURES**

Slim-Line® Audio Connectors are a unique series of premium quality connectors featuring interchangeable inserts which allow any plug or receptacle to be male or female. This versatility is valuable in a wide variety of applications: microphones, public address systems, 2-way, CB, ham, and marine radios, audio-visual systems, industrial control and instrumentation, broadcast, security and medical electronics.

#### **APPLICATIONS**

**Retrofit/Replacement;** Slim Line Cord Plug **(SL405M)** and Receptacle **(SL105F)** are recommended as a possible choice to replace Switchcraft/DIN plug **(12CL5M)** and receptacle **(55HA5F)**. Receptacle **SL105F** fits the same mounting holes as the Switchcraft/DIN receptacle.

Four pin/contact Slim-Line plugs and receptacles are recommended as direct replacements for the original Slim-Line connectors, Series **2504**, and for the molded version of the Slim-Line connector, **Style ST34**.

#### RECEPTACLES

Three types of receptacles can be specified:

#### 1. Flange mount (Series SL10)

2. Rear of panel mount (Series SL17)

Receptacles can be specified with same male and female insert combinations as cord plugs. For rear and front of panel mounting types, hex nuts, lock washers, and flat washers are supplied. For flange mount receptacles, mounting holes in flange accept #4 machine screw or .125" (3.18 mm) diameter rivet.

#### CORD PLUGS

Miniature Cord Plugs feature nickel-plated copper alloy housings with matte finish on exterior parts. Plugs may be specified with inserts having 2-, 3-, 4- and 5-pins (male) or contacts (female), or 2-, 3-, or 4-contact receptacles having shunts (N.C.) on two contacts (special order only). Extra large cable clamp protects against pulling and twisting strains on terminations. Strain relief spring protects against excess cable wear at entry point at rear of housing. Cord plugs accept cables up to .281" (7.14 mm) diameter. Captive coupler ring feature (Series SL40) provides secure mechanical connection and protection against shock and vibration between cord plugs and mating plug (Series SL41) or receptacle.

DIMENSIONS ARE FOR REFERENCE ONLY

www.switchcraft.com

60

### SLIM-LINE CONNECTORS (continued)

#### INSERTS

Inserts are molded of high-strength plastic, and are completely interchangeable between plug and receptacle housings at any time. Inserts are keyed to housings, and male and female inserts are polarized to prevent mismating.

#### **PIN/CONTACT CONFIGURATIONS:**

Pins	Contacts	Contacts (Shunts)
2	2	2 (N.C. Shunt on each contact)
3	3	3 (N.C. Shunts on contacts 1 and 3)
4	4	4 (N.C. Shunts on contacts 1 and 4)
5	5	_

(Add an "S" to end of part number for shunts. Special order only.

Insert is installed from front, and the captive latch spring locks insert to housing. To remove insert from receptacle, depress latch spring and apply pressure to rear of insert (DO NOT APPLY PRESSURE TO TERMINALS). On cord plugs, depress latch spring and press in on strain relief to free the insert.

#### **GROUNDING/SHIELDING**


Housings shield internal connections and provide ground (common) connections without using a pin/contact. On cord plugs, ground lead (or shield) is connected to cable clamp. For receptacles Cable Clamp, SL04 is ordered separately as a special and installed. If desired, ground/shield connection may then be made to clamp. When mated, a continuous, shielded, low resistance path is made through the connector.

Part Number	ltem
♦SL01	Hex Nut
<b>⊘SL02</b>	Lockwasher
<b>⊘SL03</b>	Flat Washer
<b>⊘SL04</b>	Cable Clamp
<b>♦</b> \$L05	Strain Relief Spring

#### SLIM-LINE CONNECTOR PART NUMBERING SYSTEM

	SERIES	HOUSING TYPE	Number of Contacts	Gender	Options
SL	SLIM-LINE	- NONE	2	M MALE	S WITH SHUNTS
		10 RECEPTACLE, FLANGE MOUNT	3	F FEMALE	
		17 RECEPTACLE, REAR MOUNT	4		
		18 RECEPTACLE, FRONT MOUNT	5		
		40 CORD PLUG WITH COUPLING RING			
		41 CORD PLUG WITHOUT COUPLING RING			

#### PIN AND CONTACT ARRANGEMENTS

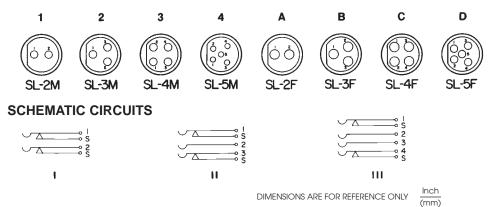

Receptacle Housings: Die-cast zinc, nickel-plated. Cord Plug Housings: Copper alloy, nickel-plated.

Inserts: Glass-reinforced thermoplastic. UL 94 V-0. Female Contacts: Copper alloy, silver-plated, solder lug type. Pins: Copper alloy, silver-plated, solder cup type. Cable Clamp, Strain Relief, and Mounting Hardware: Steel, plated. Latch: Steel, plated.

#### **ELECTRICAL**

**SPECIFICATIONS** 

MATERIALS

Current Rating: 5 Amps carry only.

#### MOUNTING

Cord Plugs: Plugs accept cables up to .281" (7.14 mm) diameter.

Receptacles: Flange mount type mounts in panels or chassis up to .188" (4.78 mm) thick. .125" (3.18 mm) diameter holes accept #4 machine screws or .125" (3.18 mm) diameter rivets. Rear and front of panel types mount in "D"-shaped hole in panels or chassis up to .219" (5.56 mm) thick. Hex nut (SL01), lockwasher (SL02), and flat washer (SL03) are supplied for mounting.

#### CABLE CLAMP AND STRAIN RELIEF

Cord Plugs: Plugs are supplied with rugged cable clamps and strain relief springs. Cable clamp serves two valuable functions: to firmly hold cable to prevent pulling or twisting strains on soldered terminations, and as a connecting point for ground (common) or shield when grounding/shielding through the connector is required.

Receptacles: Receptacles are not supplied standard with cable clamp for strain relief. If grounding/shielding feature is desired, separate Cable Clamp, SL04, is installed on receptacle insert.

#### **MOUNTING HARDWARE**


(Supplied with Series SL17 and SL18 receptacles)


#### \* Please visit the product pages on our website for the most up-to-date product information

# SLIM-LINE CONNECTORS (continued)

#### SL40 CORD PLUG with Coupler Ring



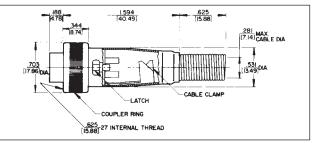

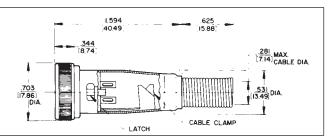

Non-reflective metal shell; coupling ring; 2 through 5 pins (male) or 2 through 5 contacts (female). Also 2-, 3- and 4-contact inserts with two shunted (N.C.) contacts. Efficient cable clamp and strain relief.

#### SL MALE CORD PLUGS

		Pin
Part Number	Pins	Arrangements
SL402M	2	1
SL403M	3	2
SL404M	4	3
SL405M	5	4

#### SL FEMALE CORD PLUGS

Part Number	Contact	Contact Arrangements
SL402F	2	A
SL403F	3	В
SL404F	4	С
SL405F	5	D

STRAIN RELIEF SPRING Strain Relief Spring Part Number SL05





 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

#### SL41 CORD PLUG without Coupler Ring



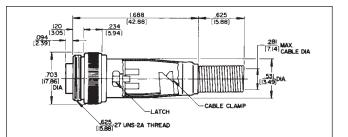

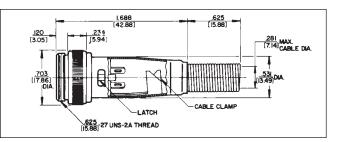

Non-reflective metal shell; 2 through 5 pins (male) or 2 through 5 contacts (female). Also 2-, 3- and 4-contact inserts with two shunted (N.C.) contacts. Efficient cable clamp and strain relief.

#### SL MALE CORD PLUGS

Part Number	Pins	Pin Arrangements
SL413M	3	2
SL414M	4	3
SL415M	5	4

#### SL FEMALE CORD PLUGS

Part Number	Contacts	Contact Arrangements
SL412F	2	А
SL413F	3	В
SL414F	4	С
SL415F	5	D

62


www.switchcraft.com


\* Please visit the product pages on our website for the most up-to-date product information

# SLIM-LINE CONNECTORS (continued)

SL10 RECEPTACLES Flange Mount



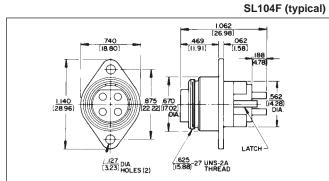

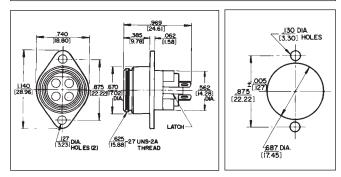

Flange mounted; 2 through 5 pins (male) or 2 through 5 contacts (female). Also 2-, 3- and 4-contact inserts with 2 shunted (N.C.) contacts.

#### SL MALE RECEPTACLES

Part Number	Pins	Pin Arrangements
SL102M	2	1
SL103M	3	2
SL104M	4	3
SL105M	5	4

#### SL FEMALE RECEPTACLES

Part Number	Contacts	Contact Arrangements
SL102F	2	А
SL103F	3	В
SL104F	4	С
SL105F	5	D

SL17 RECEPTACLES Rear of Panel Mount


.688 +002



SL17 and SL18 Receptacles

Non-turn panel cut-out

SL175F (typical)

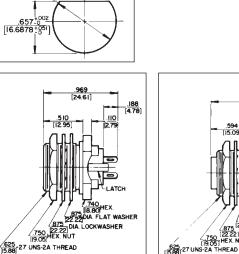

Rear of panel mount; 2 through 5 pins (male) or 2 through 5 contacts (female). Also 2-, 3- and 4-contact inserts with 2 shunted (N.C.) contacts. Mounting locknut (Part Number SL01), lock washer (Part Number SL02), and flat washer (Part Number SL03) supplied.

#### SL MALE RECEPTACLES

Part Number	Pins	Pin Arrangements
SL173M	3	2
SL174M	4	3
SL175M	5	4

#### SL FEMALE RECEPTACLES

Part Number	Contacts	Contact Arrangements
SL172F	2	A
SL173F	3	В
SL174F	4	С
SL175F	5	D

 $\Diamond$  Available on special order only; contact Switchcraft for price and delivery.


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

SLIM-LINE CONNECTORS (continued)

SL18 RECEPTACLES Front of Panel Mount



SL183FS (typical)

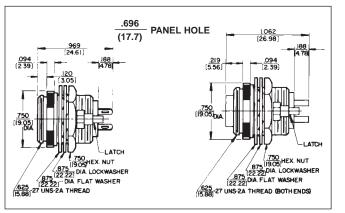

Front of panel mount; 2 through 5 pins (male) or 2 through 5 contacts (female). Also 2-, 3- and 4-contact insert with 3 shunted (N.C.) contacts. Mounting locknut (Part Number SL01), lockwasher (Part Number SL02), and flat washer (Part Number SL03) supplied.

#### SL MALE RECEPTACLES

		Pin
Part Number	Pins	Arrangements
SL182M	2	1
SL183M	3	2
SL184M	4	3
SL185M	5	4


#### SL FEMALE RECEPTACLES

Part Number	Contacts	Contact Arrangements
SL182F	2	А
SL183F	3	В
SL184F	4	С
SL185F	5	D

#### **INSTALLING CABLE CLAMP ON INSERT**

- To install cable clamp on any insert:
- 1. Position insert approximately as shown in the diagram.
- Hold clamp at approximately 30° angle (as shown). Place tip of clamp center finger into slot under molded ring "A". Note position of notch on insert in relation to slot.
- 3. Press center finger forward into slot and reduce angle of clamp until clamp shoulders seat just ahead of molded barrier on rear of insert "B".

#### Cable Clamp SL04

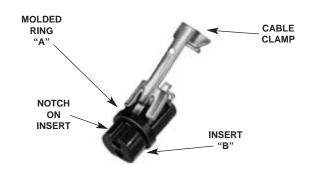

# **CONNECTORS & RECEPTACLES** AUDIO CONNECTORS

\* Please visit the product pages on our website for the most up-to-date product information

## **CB CONNECTORS**

Miniature 3 and 4 circuit connectors for microphone connections in mobile/communications equipment. Cord plug has silver-plated copper alloy contacts, large cable clamp, and strain relief spring.

CB-3F 3-contact female cord plug. Knurled coupling ring has internal metric M16x1 thread. Solder lug terminals accept wires up to #18 AWG. Accommodates cables up to .281" (7.14 mm) diameter.

CB-4F Same as CB-3F. except 4 contacts.

**CB-3M** 3-pin male receptacle. Housing keys insert of mating plug; bushing with external M16x1 metric thread mates with coupling ring on plug. Cup-type terminals accept wires up to #16 AWG. Mounts in .64" (16.26 mm) diameter hole from front of panels up to .125" (3.18 mm) thick, using washer and locknut supplied. Can also be "D"-hole mounted for non-turn mounting (see drawing). Pin diameter. is .093".

CB-4M Same as CB-3M, except 4 pin.

Insert		Dimension	s, In. (mm)
Part No.	Contacts	Length	Diameter
CB3F	3	1.594 (40.49)	.703 (17.86)
CB3M	3	.781 (19.84)	.705 (19.05)

## MICROPHONE CONNECTORS


Connectors with 5/8-27 threads are designed for use with single conductor microphone cable with .281" (7.14 mm) maximum outside diameter. 44 adapts 2501F to fit standard 2-conductor phone jack. Coupling ring on 2501F is removable for fast change from female to male type. Spring assembled into body, cable braid and spring clamped by hollow set screws .281" (7.14 mm) maximum cable diameter. 2501MP mounts in .390" (9.92 mm) diameter hole.

### MINI-CON MINIATURE CONNECTORS


Approximately 1/2 the size of standard microphone connectors. Ideal for miniature lapel microphones, musical instruments and wherever small cable is used. Accepts single-conductor shielded cable up to .187" (4.76 mm) diameter Coupling ring on 5501F removable for quick change of female to male type. Cable is braid spring clamped to body by hollow point set screw.

Part Number	Description	Mounting Hole, Inches (mm)
5501F	Female Plug	—
<b>◊5501M</b>	Male Plug	—
<b>◊5501MF</b>	Receptacle	.375 (9.52) (Front of panel)
5501MP	Receptacle	.375 (9.52) (Front of panel)

(Available on special order; contact Switchcraft for price and delivery.

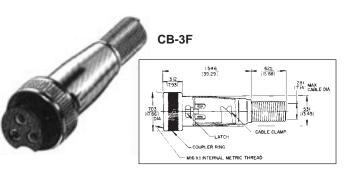

CB-3M









2501M













5501MF



5501MP

DIMENSIONS ARE FOR REFERENCE ONLY

#### \* Please visit the product pages on our website for the most up-to-date product information

#### HP75BNC SERIES BNC CONNECTORS



Switchcraft Inc. introduces a complete line of true 75 Ohm BNC cable mount connectors. This new series was developed for the broadcast industry, or wherever true 75 Ohm impedance BNC's are used. The HP75BNC Series is available in a wide range of styles, to accommodate the most popular types of coaxial cables. All are crimp terminated using standard crimping tools.

#### FEATURES AND BENEFITS

- True 75 Ohm impedance
- Gold-plated center pins for increased life
- Available for a wide range of cable types
- Outstanding electrical performance
- Rugged nickel-plated, machined shells

### SPECIFICATIONS

#### Electrical

Characteristic Impedance: 75 Ohms Voltage Rating: 500 Volts RMS Return Loss: Less than -25 db at 3 GHz Insulation Resistance: 5000 Megohms min

#### MECHANICAL

Lifecycles: 500 min Center Contact Retention: 6 lbs. min Coupling Mechanism: 100 lbs. min Force to Engage: 2.5 lbs. max

#### **ENVIRONMENTAL**

Thermal Shock: -65° C to 165° C Moisture Resistance: Mil Std 202 Corrosion: Mil Std 202 Flammability: UL 94-VO Vibration: Mil Std 202 Solvent Resistance: Mil Std 202

#### FINISH


Body/Bayonet: Nickel-plated copper alloy Center Conductor: 50 mi gold-plated copper alloy


#### **ORDERING INFORMATION**

Part Number	Cable Type
HP75BNC1	Belden #8241
HP75BNC2	Belden #8281B
HP75BNC6	Belden #1695A
HP75BNC7	Belden #1694A
HP75BNC9	Belden #1505A
HP75BNC10	Belden #1506A
HP75BNC12	Belden #1855A

DIMENSIONS ARE FOR REFERENCE ONLY

# HP75BNC SERIES BNC CONNECTORS (continued)

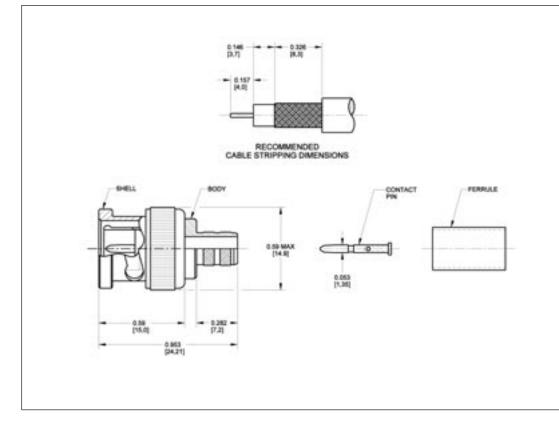

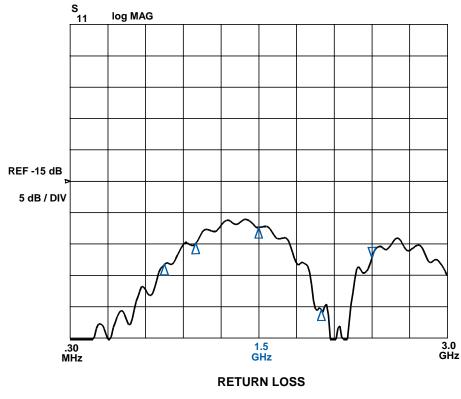

 $\frac{\text{lnch}}{(\text{mm})}$ DIMENSIONS ARE FOR REFERENCE ONLY

**CONNECTORS & RECEPTACLES** 

**BNC CONNECTORS** 

#### \* Please visit the product pages on our website for the most up-to-date product information

### EAC RECEPTACLES

#### SERIES EAC

Two and three-pin/contact grounding primary power receptacles are designed to meet EN 60 320, as well as applicable UL, CSA, VDE and other specifications. Receptacles feature choice of short, standard or long solder lugs or FASTON ® terminals. Receptacles snap-in or screw mount from the front or rear of panel. Receptacles have orbitally riveted lugs (except EAC233, EAC305, EAC323 EAC325, EAC333, EAC405) for superior mechanical/electrical connections. Extended socket versions permit minimum behind-panel depth.



Receptacles are designed for use in European and domestic instrumentation, power rack mounted devices, test equipment and appliances. Three-pin male receptacles have .125" (3.18 mm) longer center (ground) pin. Ground circuit is established before power circuits "make", and is maintained until after power circuits "break".



# **CONNECTORS & RECEPTACLES** 69 EAC RECEPTACLES **NECTORS & RECEPTACLES**

# FAX: 773 792-2129

#### \* Please visit the product pages on our website for the most up-to-date product information

### EAC RECEPTACLES (continued)

SERIES EAC





**EAC405** 

#### **SPECIFICATIONS ELECTRICAL**

Insulation Resistance: 2 million megohms @ 500 V DC. Dielectric Strength: 1500 V (rms). Arcing Test: Meets UL 498 Standard.

#### MECHANICAL

Solderability Standard: Meets MIL-STD-202, method 208, EIA RS-186-9E.

#### **ENVIRONMENTAL**

Thermal Range: -55° C to +65° C (except EAC45x series). Salt Spray: Meets MIL-STD-202, method 101; EIA-RS-186-5E, method 5.

#### MATERIAL

Shell: EAC307 through EAC327. Black polyester. EAC303, EAC307 through EAC315. UL flammability rating of UL94 V-0, yellow card #E45575.

EAC309 through EAC327, EAC333. Black polyester, UL flammability rating of UL94 V-0, yellow card #E45575.

EAC233, EAC233S, EAC305, EAC325, and EAC333S. Black polycarbonate, UL flammability rating of UL94 V-0, yellow card #E45329.

EAC323, EAC409 through EAC411 Black polycarbonate, UL flammability rating, or equivalent UL94 V-0, yellow card #E33640, or equivalent.

Pins, Contacts and Terminals: Plated copper alloy.

EAC227-2-pin male receptacle with standard solder lug terminals, similar to EAC327.

**EAC233**—2-pin, male receptacle with right-angle housing for PC mount. PC terminals project .130" (3.3 mm) to extend through PC board. Rear of panel mount. Two, .136 " (3.45 mm) diameter holes permit fastening to PC board; two additional .136" (3.45 mm) holes are for fastening to panel or chassis, if required.

**EAC233S**—Similar to EAC233, but with two, snap-in retainers through mounting flanges for PC mount.

EAC305-3-contact female receptacle. Front mount with two, #4 screws or .094" (2.38 mm) diameter rivets (not supplied).

EAC309—3-pin male receptacle with standard lug terminals. Mounts from front or rear of panel with two, #5 screws or .125 " (3.18 mm) diameter rivets (not supplied).

EAC311-3-pin male receptacle with FASTON® terminals. Mounts from front or rear of panel with two, #5 screws or .125 " (3.18 mm) diameter rivets (not supplied).

**EAC315**—3-pin male receptacle with long solder lug terminals. Mounts from front or rear of panel with two, #5 screws or .125" (3.18 mm) diameter rivets (not supplied).

**EAC319**—3-pin male receptacle with short solder lug terminals. Mounts from front or rear of panel with two, #5 screws or .125" (3.18 mm) diameter rivets (not supplied).

**EAC323**—3-pin male receptacle with short solder lug terminals. Extended socket housing (mounting flange on rear of receptacle) provides more behind panel clearance. Mounts with two, #4 screws or .094" (2.38 mm) diameter rivets (not supplied).

EAC325-3-contact female receptacle with short solder lug terminals. Extended housing (mounting flange on rear of receptacle) provides more behind panel depth. Mounts with two, #4 screws or .094" (2.38 mm) diameter rivets (not supplied).

EAC327-3-pin male receptacle, similar to EAC319 except with standard solder lugs.

EAC333—3-pin, 10A, 250V male receptacle with right-angle housing for PC mount. PC terminal and hole mounting details are the same as for EAC233. Ground pin is integral with ground solder lug on rear of receptacle.

**EAC333S**—Similar to EAC333, but with two, snap-in retainers through mounting flanges for PC mount.

**EAC405**—3-contact female receptacle with standard solder lug terminals. Snap-in panel mounting.

EAC409-3-pin male receptacle with standard solder lug terminals. Snap-in panel mounting.

EAC411—3-pin male receptacle with FASTON terminals. Snap-in panel mounting.

EAC413—3-pin male receptacle with FASTON terminals on LINE and NEUTRAL and a solder lug on EARTH GROUND. Snap-in panel mounting.

EAC451-3-contact female receptacle with straight PC terminals for use in "HOT" applications. Snap-in panel mounting.

EAC453—Same as EAC451 except with solder lug terminations.

EAC455—Same as EAC451 except with FASTON terminations.

EAC457—Same as EAC451 except with FASTON power terminations and solder lug ground termination.

 ${\boldsymbol{\Diamond}}$  Available on special order only; contact Switchcraft for price and delivery.

\* Please visit the product pages on our website for the most up-to-date product information

### SERIES EAC (continued)

Part Number	Pins/ Contacts 1	Mounting <sup>2</sup>	Terminals	Listings	Ratings	Switchcraft Mating Number <sup>3</sup>	Comments <sup>4</sup>
<b>∂EAC227</b>	М	Front or Rear	Solder Lug	UL CSA	15 A, 250 V AC	P2392	_
<b>⊘EAC233</b>	М	Rear	PC	UL, CSA, VDE	15 A, 250V AC 10 A, 250 V AC	P2392	Semko, Demko, Nemko, SETI, and SEV Approved
<b>⊘EAC233S</b>	М	Rear	PC	UL, CSA, VDE	15 A, 250 V AC 10 A 250 V AC	P2392	Semko, Demko, Nemko, SETI, and SEV Approved
EAC305	F	Front	Solder Lug	UL & VDE VDE	15 A, 250 V AC 10 A, 250 V AC		Semko, and SEV Approved
EAC309	М	Front or Rear	Solder Lug	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC	P2392	Demko, Semko, Nemko, SETI and SEV Approved
EAC311	М	Front or Rear	FASTON	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC	– P2392	Semko, Demko, Nemko, SETI and SEV Approved
♦EAC315	М	Front or Rear	Solder Lug (Long)	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC	– P2392	Semko, Demko, Nemko, SETI and SEV Approved
♦EAC319	М	Front or Rear	Solder Lug (Short)	UL & CSA VDE	15 A, 250 V AC	P2392	_
<b>∂EAC323</b>	М	Front or Rear	Solder Lug (Short)	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC	– P2392	Mounting flange on rear Semko, Nemko, SETI Approved
EAC325	F	Rear	Solder Lug (Short)	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC		Mounting flange on rear
EAC327	М	Front or Rear	Solder Lug	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC	– P2392	Demko, Semko, Nemko SETI and SEV Approved
EAC333	М	Rear	PC	UL, & VDE CSA	15 A, 250 V AC 10 A, 250 V AC	– P2392	Semko, Demko, Nemko, SETI, SEV Approved
<b>⊘EAC333S</b>	М	Rear	PC	UL & VDE CSA	15 A, 250 V AC 10 A, 250 V AC	- P2392	Semko, Demko, Nemko, SETI, SEV Approved
<b>⊘EAC405</b> ⁵	F	Snap-In	Solder Lug	UL & CSA VDE	15 A, 250 V AC 10 A, 250 V AC		_
EAC409 ⁵	М	Snap-In	Solder Lug	UL, & CSA VDE	15 A, 250 V AC 10 A, 250 V AC	- P2392	Demko, Semko, Nemko, SETI and SEV Approved
EAC411 ⁵	М	Snap-In	FASTON	UL, CSA VDE	15 A, 250 V AC 10 A, 250 V AC	- P2392	Semko, Demko, Nemko, SETI and SEV Approved
EAC413 ⁵	М	Snap-In	Solder Lug/ FASTON	UL, CSA VDE	15 A, 250 V AC 10 A, 250 V AC	- P2392	Semko, Demko, Nemko, SETI and SEV Approved
EAC451 <sup>6</sup>	F	Snap-In⁰	PC	UL, & CSA VDE	15 A, 250 V AC 10 A, 250 V AC		Rated for use up to 120°C
EAC4536	F	Snap-In <sup>6</sup>	Solder Lug	UL, & CSA VDE	15 A, 250 V AC 10 A, 250 V AC		Rated for use up to 120°C
EAC455 <sup>6</sup>	F	Snap-In <sup>6</sup>	FASTON	UL, & CSA VDE	15 A, 250 V AC 10 A, 250 V AC		Rated for use up to 120°C
EAC457 <sup>6</sup>	F	Snap-In <sup>6</sup>	Solder Lug/ FASTON	UL, & CSA VDE	15 A, 250 V AC 15 A, 250 V AC 10 A, 250 V AC		Rated for use up to 120°C

1 M = Male; F = Female.

2 F = Front; R = Rear. See mounting drawings for mounting details.

3 Also mates with Belden and other standard cords.

5 Receptacles are snap-in mount, and can be ordered to accommodate .030, .040, .050 and .060 inch panel thickness. For snug fit in panel or

for other specifying assistance, contact Switchcraft.

6 Available only for .050 inch and .060 inch panel thickness

Available on special order only; contact Switchcraft for price and delivery.

UL No. E38829-EAC-309 thru -327 UL No. E65081-EAC-305

CSA Guide 365-E-1, Class 6233, File Card No. LR27474

VDE Certificate of Compliance No. 731 (EAC-305, -325, -405),

Inch DIMENSIONS ARE FOR REFERENCE ONLY all others VDE approval No. 3181. (mm)

### www.switchcraft.com


If you have been using a 15 amp rated Switchcraft EAC connector ending in an even number, you can now buy an identical part number that has a 10 amp European rating in addition to the 15 amp UL and CSA approval. The part number for the new dual rated part is one less than the old part number (eg. EAC310 becomes EAC309, EAC412040 becomes EAC411040, EAC234 becomes EAC233, EAC458050 becomes EAC457050, etc.)

70

<sup>4</sup> Semko (Sweden), Demko (Denmark), Nemko (Norway), SETI (Finland), SEV (Switzerland).

### EAC RECEPTACLES (continued)

### SERIES EAC

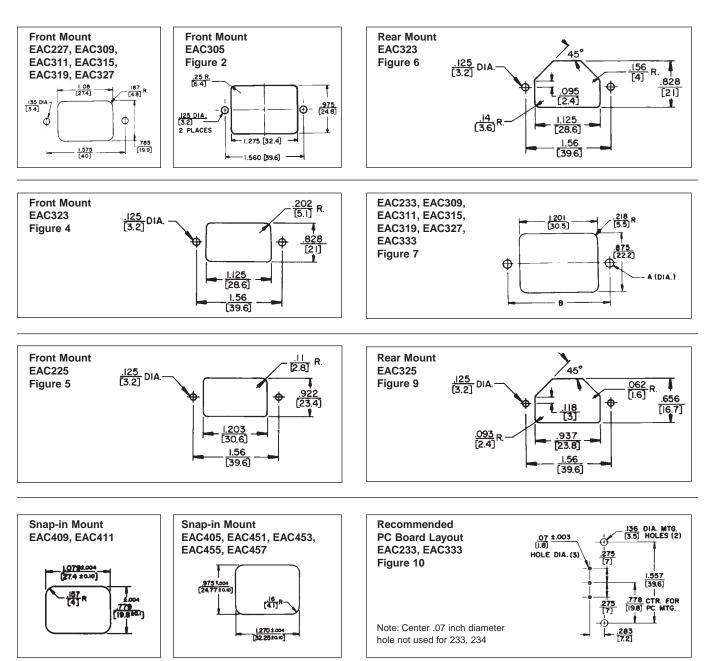

Note: Unless otherwise specified, all dimension tolerances are  $\pm$  .01" (+0.25 mm)

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

71

.<u>.136</u> DIA. (3.5) 2 HOLES


<u>.955</u> (24.3)


1.18 (30)


\* Please visit the product pages on our website for the most up-to-date product information

# EAC RECEPTACLES (continued)

#### SERIES EAC

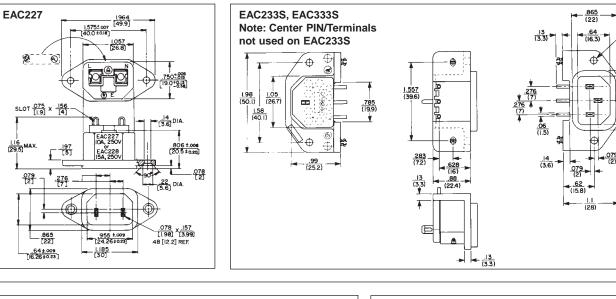

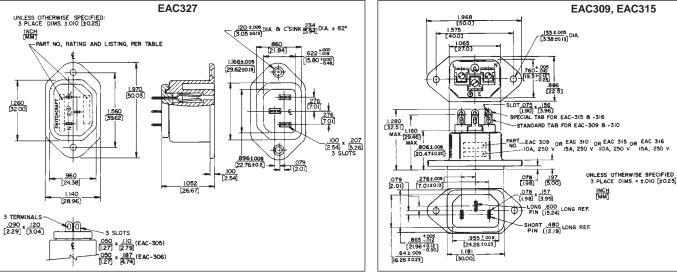

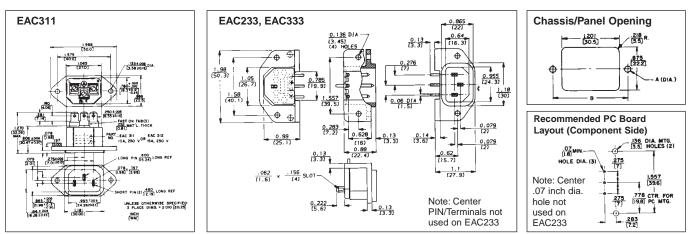


Note: Unless otherwise specified, all dimension tolerances are ± .01" (+0.25 mm)


DIMENSIONS ARE FOR REFERENCE ONLY


 $\frac{\text{lnch}}{(\text{mm})}$ 

72

# EAC RECEPTACLES (continued) SERIES EAC

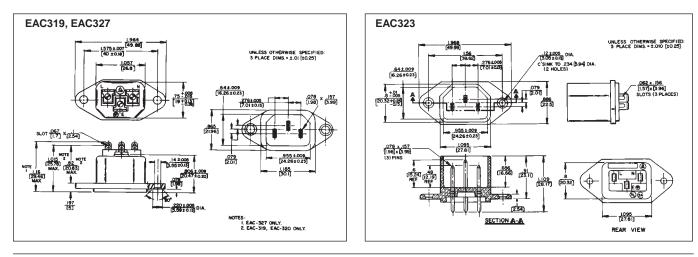

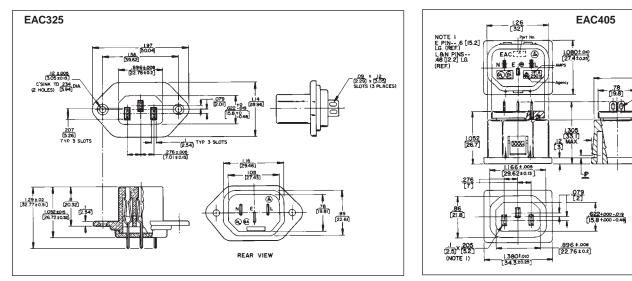

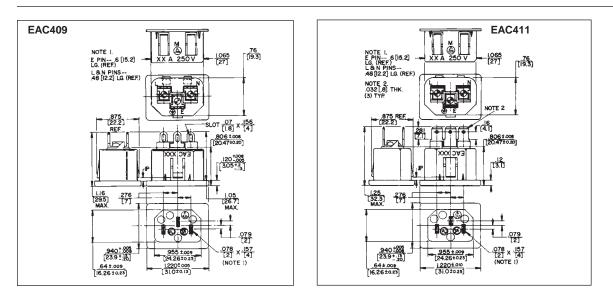

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

<u>.96</u> [24.4]

> 09 12 [2.3] × [3] SLOT


1.05 REF. 73

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630


# EAC RECEPTACLES (continued)

SERIES EAC



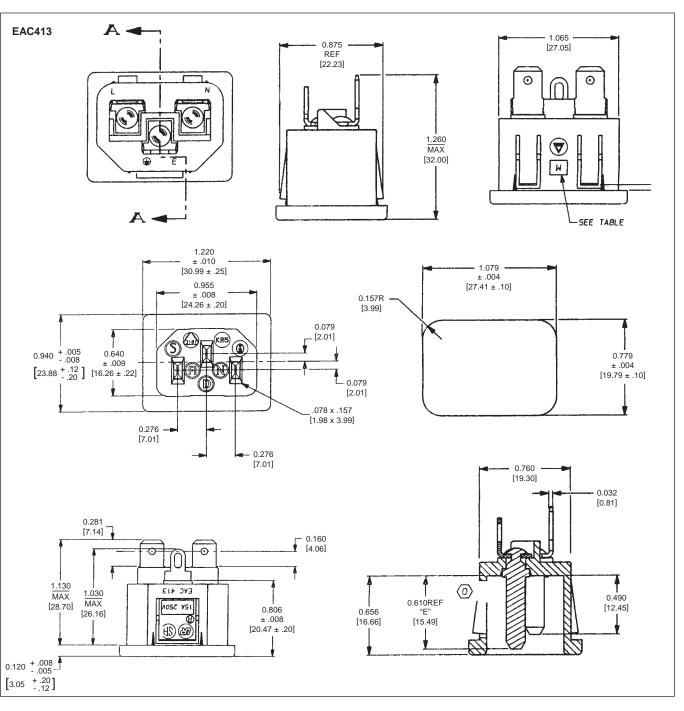

### EAC RECEPTACLES (continued) SERIES EAC

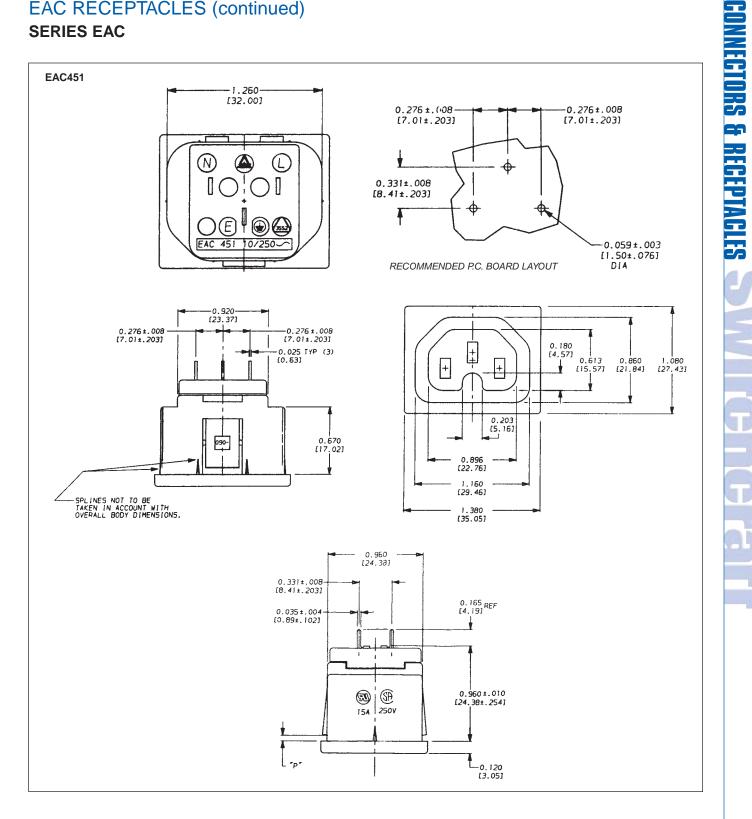


Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

## SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

# EAC RECEPTACLES (continued)


SERIES EAC

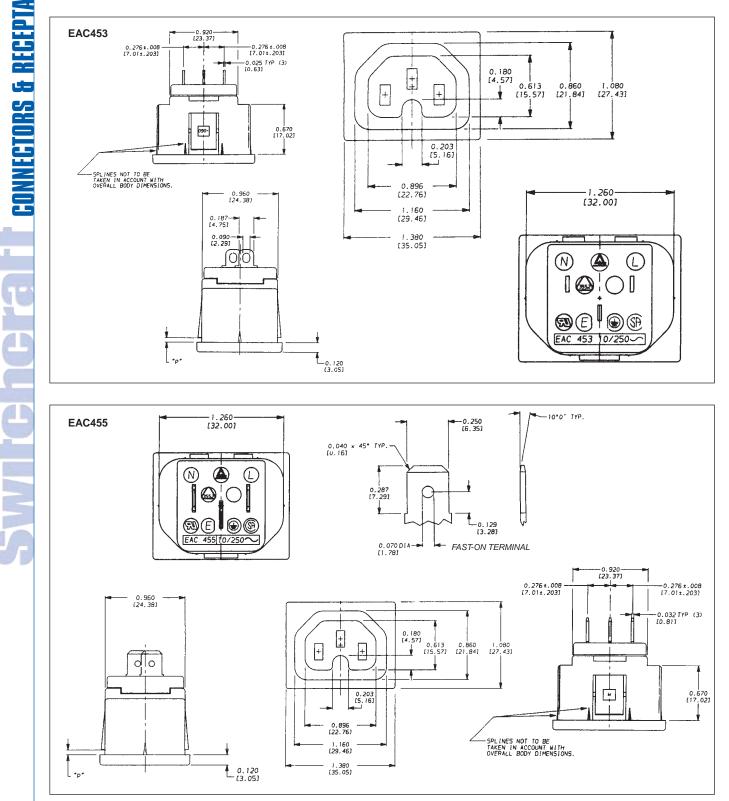

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# EAC RECEPTACLES (continued)

SERIES EAC

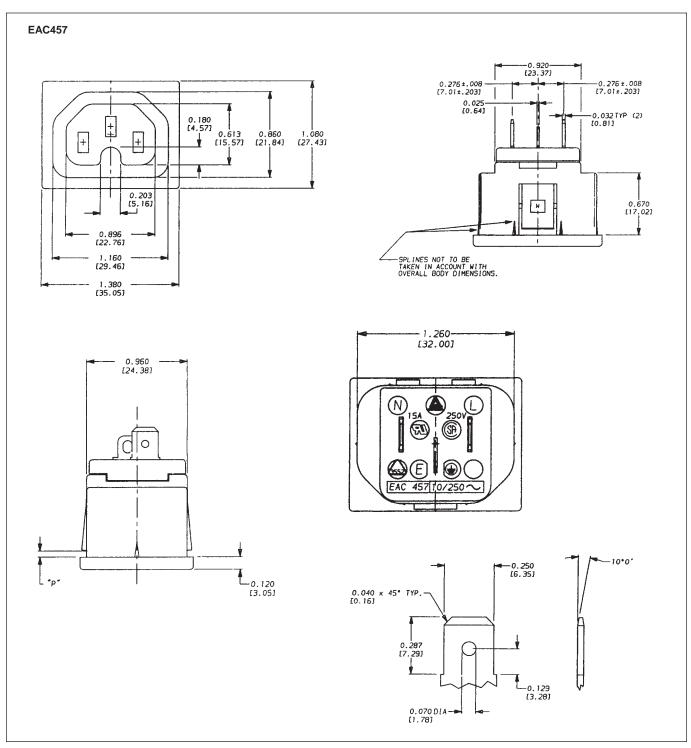

#### \* Please visit the product pages on our website for the most up-to-date product information

### RAPC322 POWER INLET SOCKET

Switchcraft introduces the RAPC322, an IEC320 inlet developed as a low power interconnect used in a variety of applications. The RAPC322 is molded from 94-VO rated material, is UL recognized, and meets a wide variety of approvals including CSA and VDE. The RAPC is rated at 2.5A at 250V. Applications for the RAPC322 include notebook computers, medical devices, and data communications products.

#### FEATURES AND BENEFITS

- Snap-in feet facilitate wave soldering
- Top and side slots allow chassis to captivate connector
- Conforms to EN 60320-1/2

#### **APPLICATIONS**

- Appliance Inlet
- Personal Computer
- Data Communications
- Medical Equipment
- Test Equipment
- Instrumentation

#### SPECIFICATIONS


GENERAL


**Current Rating:** 5A, UL and CSA 2.5A, VDE and SEMKO **Nominal Voltage:** 250V **Temperature Range:** - 55°C to 65°C

Dielectric Strength: 2000V @ 1 minute

#### MATERIALS

Housing: Black, molded thermoplastic, UL 94V-0 Male Pins: Copper alloy, nickel plated PC Terminals: Copper alloy, tin plated




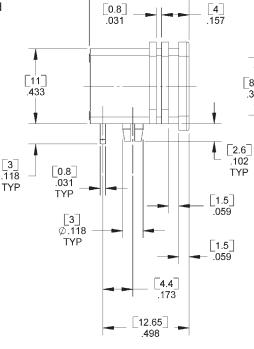


14.65

.577



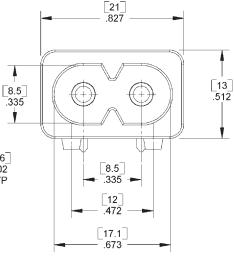



DIMENSIONS ARE FOR REFERENCE ONLY

**CONNECTORS & RECEPTACLES** 

itcher

#### \* Please visit the product pages on our website for the most up-to-date product information


### JACK SCHEMATICS

**Circuit Types:** Jacks normally have through circuits, shunt circuits, and/or isolated switching circuits, either individually or in various combinations. The chart below shows schematics of 39 common jacks - many more combinations are possible, but these are the most commonly used. A basic description of the switching action of each jack accompanies each schematic.

**Military Identification:** Military specifications covering phone jacks use a special code to describe jack functions. Jack schematic descriptions are coded J-1 through J-13 (as appropriate) to coincide with Federal Item Identification Guides for Supply Cataloging. One or more groups of suffix numbers/letters identify isolated switching circuits used. Suffixes identify the switching by industry recognized notation, i.e., 1-A, 1-B, 1-C, 1-D, etc. See chart below.

Notation	Meaning
1-A	One, SPST switching circuit. Also known as NO (normally open) or "make" circuit.
1-B	One, SPST switching circuit. Also known as NC (normally closed) or "break" circuit.
1-C	One, SPDT switching circuit. Also known as transfer or "break" before "make" circuit.
1-D	One, SPDT switching circuit. Also known as "make" before "break" circuit.

**NOTE:** Number indicates the quantity of circuit - 2-A means 2, A circuits. Terminals locations shown on jack schematics do not necessarily coincide with physical locations on jacks. Not all circuit types available on all jacks.

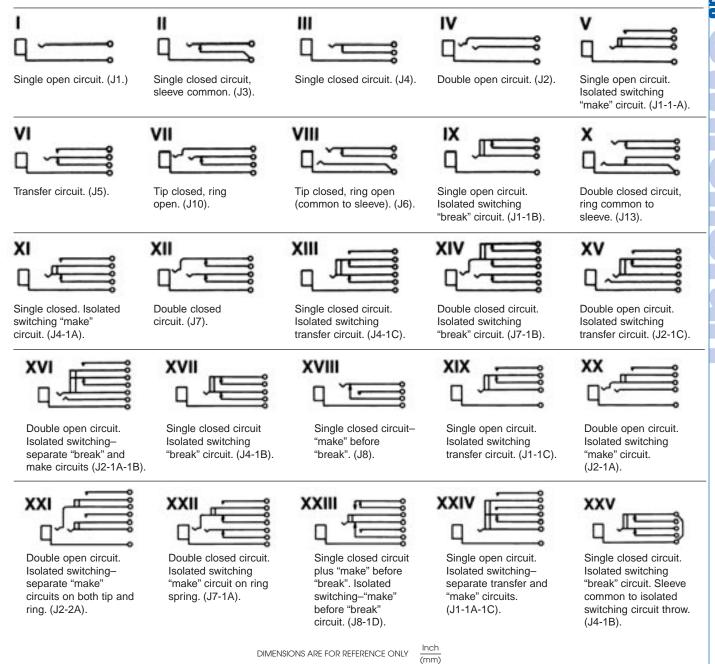

### SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

# JACKS AND PLUGS JACK SCHEMATICS

# **PHONE: 773 792-2700**


XXX

\* Please visit the product pages on our website for the most up-to-date product information


# JACK SCHEMATICS

### XXVI


80




Single closed circuit. Isolated switching-"make" before "break" circuit. (J4-1D).




Tip closed; ring closed circuits. Isolated switching-"break" before "make" circuit.




Double closed circuit. Isolated switching-One "make" and one "break" circuit.



Tip closed; ring open circuits. Isolated switching-two "make" circuits and one "break" circuit. (J10-2A-1B).



Double closed circuit. Separate sleeve "break" circuit.




Tip closed; ring open circuits. Isolated switching-One "make" circuit.




XXVIII


Single open (tip) circuit and single closed (ring) circuit. (J9).




Single closed circuit. Isolated switching-Two "make" circuits.



Double closed circuit. Isolated switching-Two "make" circuits.



Double jack, 2-conductors on each side. Tip circuits cross shunted: common sleeve. (J12).



Single open circuit. Isolated switching-Two "make" circuits.




Single open circuit-"make" before "break". (J11).

XXXV

Double open circuit. Isolated switching-One "make" and one "break" circuit.





Double open circuit. Isolated switching-"break" before "make" circuit.

### WIRE-WRAPPING TERMINATIONS

Switchcraft can build complete Jack Panel Assemblies with jacks, lamp jacks and switches with wire-wrapping terminals. If desired, components with solder lugs and wire-wrapping terminals can be installed in the same assembly.

#### WIRE-WRAPPING TERMINAL DESIGN

Jack springs with integral wire-wrapping terminals are made of special copper alloy for maximum work-life with excellent resistance to corrosion. Shank of terminal accommodates a maximum of three wire connections. Tini-Telephone® phone jacks, lamp jacks and switches with wire-wrapping terminals have slightly higher stack due to greater spacing required for wrapping tool access. Actuator springs and ground lug terminals are .704" long by .060" wide.

#### WIRE-WRAPPING CONNECTIONS

Use the chart below as a guide to recommended tools to be used with varying terminal thickness and wire gauges.

Terminal		Recommended Wire-Wrapping Tool (Gardner-Denver Co. Part Numbers)		
Thickness	Wire	Use with 14B1-A	Wrapping Tool	
(Inches)	Gauge	Wrapping Bit	Sleeve	
.020 thru .032	22 & 24	500131	18840	
.016	24	500131	18840	
.016 thru .032	26	37006	17611-2	

SPECIFYING NOTE: Due to assembly variations containing components (solder lugs, wire-wrapping terminals, or both), these Jack Panel Assemblies are available on special order only. Contact Switchcraft.

### JACK MATING DATA

NOTE: See tables for jack/plug mating data

\* Please visit the product pages on our website for the most up-to-date product information

# 1/4" LONG FRAME TELEPHONE JACKS

#### JACK MATERIALS

The complete Switchcraft line of standard size panels, jacks, plugs, switches and accessories are rugged, premium quality devices...hand-crafted by experts...100% inspected... and carefully adjusted to meet the traditionally high quality demands of the telephone industry and the military. Tightly controlled incoming inspection, manufacturing methods, and QC procedures assure you of long-life, reliable components. Typical applications where Switchcraft components have been specified for more than five decades are: telephone central office equipment, switchboards, jackfields, test and patch panels, and station equipment; TV and radio broadcasting consoles; PA and communication consoles; telegraph systems and apparatus; multichannel video and audio patching; and data processing equipment, such as computers, telemetry, I/O devices and facsimile.

**FRAMES** – Jack frames are heavy steel, formed and press welded for added strength. Side member adds to frame rigidity and resistance to shock and vibration. Both "A" and "C" type frames can be supplied. (See next page.)


**SPRINGS** – A special copper alloy is used for leaf springs because it offers excellent mechanical and electrical characteristics, and good corrosion resistance. The spring alloy has special hardness and ductility, and springs are produced from custom-designed dies. Although normally adjusted to mate with telephone (and MIL-type) plugs, springs can be adjusted to mate with commercial phone plugs.

**BUSHINGS** – Bushings are copper alloy (except insulated jacks), drilled to accept either a standard (.250" diameter finger) plug or a popular smaller (.206" diameter finger) plug. Series M Hi-D Jax<sup>®</sup> have a threaded brass bushing, or a molded thermoplastic bushing for insulated mounting.

**CONTACTS** – Jack design includes "wiping" action of contacts for low resistance connections. The contacts supplied depend on the jack selected. Gold or silver plating is normally offered as an option on tip, ring and/or sleeve springs. Several precious metals and shapes are used on jacks.

Material	Shape	Description
Palladium	Welded	Best overall combination of life,
	Crossbar	current carrying, and resistance
		to environment. Also known as
		WEco #2.
Fine silver	Riveted,	Carries higher current than
	button-type	palladium.
Gold alloy	Welded	Recommended for dry circuit
Crossbar	switching.	Excellent resistance to
		corrosion and contamination.
		Also known as WEco #1.
Fine silver	Riveted,	Heavy currents.
(Large)	button-type	
Gold or	Plating	For lower contact resistance
Silver		(used on through circuit springs).

**SOLDER LUGS TERMINALS** – Lugs project out directly from rear of jack and are solder-coated for easy wiring and soldering. Offset lugs can be supplied on special order (except standard on MT-Jax<sup>®</sup>). Jacks with offset ground lugs are particularly suitable for bussing connections on jack panels. Contact Switchcraft for special order lug requirements.

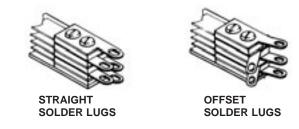


**WIRE-WRAPPING TERMINALS** – Wire-wrapping eliminates the need for soldering. Each terminal accepts up to three wrapped wires (22 or 24 gauge, 5 wraps each), applied with standard wire-wrapping tools. Terminal base has standoff shoulder which prevents first wrapped wire from accidentally sliding down and shorting against another terminal or adjacent spring. Terminal tips are radiused to facilitate positioning of wire-wrapping tool over terminals. See page 80 for wire-wrapping data.

WIRE-WRAPPING TERMINALS



**PRINTED CIRCUIT TERMINALS** – Components can be supplied with printed circuit terminals on special order. Terminals can be specified in various lengths to accommodate different thicknesses of single and double sided boards, as well as multilayers, and flat flexible cable and circuitry.

PRINTED CIRCUIT TERMINALS (SPECIAL)



**OTHER TERMINALS** – Many other special terminal styles are possible. For example, where mounting permits, jacks can be supplied with stacks having right-angle terminals. Contact Switchcraft for special terminals.

#### **CUSTOM COMPONENTS**


Only the most popular types of jacks are listed.

DIMENSIONS ARE FOR REFERENCE ONLY

#### \* Please visit the product pages on our website for the most up-to-date product information

#### LONG FRAME TELEPHONE JACKS







XMT-Jax<sup>®</sup>. Number **XMT-332A** 






WMT-Jax®, Number WMT-332B

YMT-Jax<sup>®</sup>. Number **YMT-332B** 

#### **Details of Typical Buss Wiring of Jacks** with Offset Ground Lugs

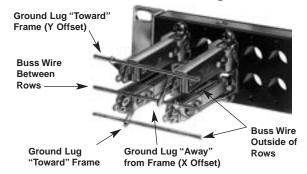

Long frame jacks are designed especially for high quality communication equipment, and to meet exacting MIL specifications, as well as telephone and communication systems. Many jacks have WEco equivalent types. MT-Jax® phone jacks are offered in four styles: MT-Jax<sup>®</sup>, WMT-Jax<sup>®</sup>, XMT-Jax<sup>®</sup> and YMT-Jax<sup>®</sup>. Rugged steel frames are produced in specially designed dies, press welded to provide rigidity and dimensional stability required by telephone and communication jack panels - and to meet MIL frame strength tests. "A" and "C" frame styles are available.

TERMINALS - Solder Lug: All MT-Jax<sup>®</sup> have solder lug terminals. Wire-Wrapping Terminals: WMT-Jax® have wire-wrapping terminals. Offset Ground Lugs: XMT-Jax® and YMT-Jax® have ground lugs, which simplify production line wiring time. A single row of jacks can be installed with a single buss wire connected to all ground lugs in a row, or when double rows are mounted on .625" vertical centers with lugs oriented between rows, holes in ground lugs line up so a single buss wire provides connections for both rows. XMT-Jax® have ground lugs oriented away and YMT-Jax® are oriented toward jack frame. See illustration.

MIL STANDARDIZATION - MIL jack types listed have been adjusted for use with plugs specified in Amendment No. 1, MIL-P-642, usually M642/1-1, M642/1-2, M642/2-1, M642/2-2, M642/4-1 or M642/4-2. When applicable, specify the plug you will use; we will adjust with that plug where the item is not a MIL-type. NOTE: MT-Jax<sup>®</sup> jacks Numbers (MT-342B and (MT-344B have shorter bushings, 0.5" long with a hold inside diameter of .21". They will mate with MIL plug M642/5-1 or M642/8-1. M642/5-1 plug (Switchcraft 480) cannot be used with (MT-342B or (MT-344B if these jacks are mounted on standard .625" thick panels. The short jack bushings are recessed .125", and the M642/5-1 is too wide to fit in the panel recess. Use plug M642/8-1 (Switchcraft 484) with a narrower diameter to fit in the recess and mate properly.

**CONTACTS** – Contacts on shuts and isolated switching circuits are welded crossbar palladium. Welded crossbar gold alloy contacts (WEco #1) are available on special order for dry circuit applications.

#### **SPECIFICATIONS**

Frame and Stack Screws: Plated steel, with iridescent iridite finish.

Springs: Copper alloy, spring tempered. Solder lugs are tinned. Bushings: Plated copper alloy standard. Natural brass finish optional.

Insulation: Rigid plastic spacers (MIL-type PBE-P per Specification LP-513). One piece molded through stack. Contacts: Welded crossbar palladium contacts in shunt and isolated switching circuits are standard. Gold alloy (WEco #1) and fine silver are available on special order.

#### **MECHANICAL**

Life: Commercial jacks: 10,000 insertion/withdrawal cycles, minimum. Military Jacks: 20,000 insertion/withdrawal cycles, minimum. Mechanical Shock: Military Jacks - Per MIL-STD-202, method 213, Test Condition H (75g). Vibration: Military Jacks - Per MIL-STD-202, method 213, (10-55 Hz).

#### ELECTRICAL

Contact Resistance: Commercial Jacks - .030 ohms maximum (initial), .050 ohms maximum (after humidity, durability exposure). Military Jacks – .010 ohms maximum (initial), .020 ohms maximum (after life), .10 ohms maximum (after salt spray).

Insulation Resistance: Commercial Jacks – 10,000 M $\Omega$ minimum (initial), 1,000 MΩ minimum (after humidity). Military Jacks – 10,000 M $\Omega$  minimum (initial), 1,000 M $\Omega$  minimum (after humidity, durability exposure).

Dielectric Withstanding Voltage: 500 V, 60 Hz (rms) AC.

#### **ENVIRONMENTAL**

Thermal Range: Commercial Jacks - -55°C to +85°C (non-operating); -20°C to +65°C (operating). Military Jacks --55°C to +85°C (non operating); -40°C to +65°C (operating). Thermal Shock: Commercial Jacks - Per MIL-STD-202, method 107. Military Jacks - Per MIL-STD-202, method 107. Humidity: Commercial Jacks - Per MIL-STD-202, method 106. Military Jacks – 0% to 95% operating and non-operating. Salt Spray: Commercial Jacks - Per MIL-STD-202, method 101. Military Jacks - Per MIL-STD-202, method 101 (48 hours). Moisture Resistance: Military Jacks - Per MIL-STD-202, method 106 (240 hours).

**ORDERING** – Order jacks by part number. Additional variations in jacks are available on special order. Special circuitry, frames, contacts, natural brass bushings, as other terminals are available.

Inch DIMENSIONS ARE FOR REFERENCE ONLY

82

**FI** 

### 1/4" LONG FRAME TELEPHONE JACKS

#### MT-JAX<sup>®</sup> (with WEco Equivalent Jacks)<sup>2</sup>

Switchcraft	WEco	MIL	Sche- matic	Dim. "X" maximum	Mating			
Part Number	Equiv.	Type1	Circuit*	Inch (mm)	Plug3			
	2-CONDUCTOR 2							
MT331	233A,							
	221E3	M641/2-8	1	.438 (11.1)				
♦ CMT331	223C	-	1	.438 (11.1)				
<b>⊘WMT331</b>	223AM	-	1	.438 (11.1)				
<b>⊘WCMT331</b>	223CM	-	1	.438 (11.1)				
<b>⊘MT332</b>	232A,							
	544A4	-	11	.5 (12.7)				
♦CMT332	232C	-	11	.5 (12.7)				
MT332A	218A	M641/2-3		.5 (12.7)				
♦ CMT332A	218C	-		.5 (12.7)				
<b>⊘MT332C</b>	303A	M641/2-1	XVIII	.562 (14.3)				
MT333	215A	M641/2-6	V	.469 (11.9)				
	215C	-	V	.469 (11.9)				
<b>⊘MT333E</b>	237A	-	IX	.625 (15.9)	MC40/4.4			
♦ CMT333A	237C	_	IX	.625 (15.9)	M642/4-1			
MT334A	225A,				M642/4-2			
	234A	-	XI	.562 (14.3)	Or MC40/4-0			
♦CMT334A	225C,				M642/4-3			
	234C	-	XI	.562 (14.3)				
MT334C	216A	M641/2-5	XVII	.625 (15.9)				
♦CMT334C	216C,							
	484C5	-	XVII	.625 (15.9)				
MT334E	217A	M641/2-7	XXV	.562 (14.3)				
♦ CMT334E	217C	_	XXV	.562 (14.3)				
<b>⊘MT334F</b>	226A	M641/2-4	XIX	.562 (14.3)				
♦ CMT334F	226C	-	XIX	.562 (14.3)				
<b>⊘MT335</b>	236A	-	XIII	.562 (14.3)				
♦ CMT335	236C	-	XIII	.562 (14.3)				
<b>⊘MT336E</b> <sup>10</sup>	438A	-	XXIII	.75 (19.0)				
CMT336E	438C	M641/1-2	XXIII	.75 (19.0)				
<b>⊘MT337</b> <sup>10</sup>	411A	M641/2-9	XXIV	.75 (19.0)				
♦ CMT337	411C	M641/1-1	XXIV	.75 (19.0)				
♦CMT351C	394C	-	XXXIII	.812 (20.6)				
<b>⊘MT352A</b>	218J	-		.5 (12.7)				
♦CMT354F	361C	-	XXXIV	.75 (19.0)				

\*Refer to page 79 and 80 for schematics.

Special order only; contact Switchcraft.

- Many jacks are offered with MIL specifications. Other jacks are made of MIL-spec materials but do not have MIL approval because no MIL type numbers have been assigned.
- MT-Jax have nickel-plated copper alloy bushing. WEco equivalent jacks have plain copper alloy bushings (except WEco Number 221E, which has nickel-plated copper alloy bushing).
- 3. Mating plugs and patch cords are contained in the catalog.
- 4. Adjust non-short tip-ring.
- 5. Adjusted for plug M642/1-1 or M642/1-2.
- 6. Actuates differently (insulated "A" off ring instead of tip).
- 7. Same as MIL type M641/2-3 except with offset ground lug.
- 8. Same as MIL type M641/3-1 except with offset ground lug.
- 9. Same as MIL type M641/3-2 except with offset ground lug.
- 10. When mounted on "A" frames, stacks are too high to fit in standard panels with .625" horizontal space add prefix "C" to part number to order jacks with "C" frame.

Switchcraft Part Number	WEco Equiv.	MIL Type <sup>1</sup>	Sche- matic Circuit*	Dim. "X" maximum Inch (mm)	Mating Plug <sup>3</sup>
		3-COND	UCTOR		
MT332B	238A	M641/3-1	IV	.562 (14.3)	
♦ CMT332B	238C	-	IV	.562 (14.3)	1
WMT332B	238AM	-	IV	.562(14.3)	1
<b>⊘WCMT332B</b>	238CM	-	IV	.562 (14.3)	]
MT333B	300A	-	VII	.562 (14.3)	1
<b>⊘MT334B</b>	239A	M641/3-2	XII	.562 (14.3)	1
♦ CMT334-B	239C	-	XII	.562 (14.3)	]
WMT334B	239AM	-	XII	.578 (14.7)	]
<b>⊘WCMT334B</b>	239CM	-	XII	.578 (14.7)	
<b>⊘MT336</b>	241A	M641/3-4	XX	.562 (14.3)	
♦ CMT336	241C	-	XX	.562 (14.3)	
<b>♦WMT336</b> <sup>10</sup>	241AM	-	XX	.625 (15.9)	
<b>⊘WCMT336</b>	241CM	-	XX	.625 (15.9)	M642/2-1
<b>♦MT336A</b> <sup>10</sup>	242A	M641/5-5	XIV	.688 (17.5)	or
♦ CMT336A	242C	-	XIV	.688 17.5)	M642/2-2
<b>⊘WMT336A</b>	242AM	-	XIV	.75 (19.0)	
<b>⊘WCMT336A</b>	242CM	-	XIV	.75 (19.0)	
<b>⊘MT336B</b> <sup>10</sup>	285A	M641/3-6	XXI	.812 (20.6)	
♦CMT336B	285C	-	XXI	.812 (20.6)	
MT336C <sup>10</sup>	240A	M641/3-3	XXII	.688 (17.5)	
♦ CMT336C	240C	-	XXII	.688 (17.5)	
<b>◊WMT336C</b> <sup>10</sup>	240AM	-	XXII	.75 (19.0)	
<b>⊘WCMT336C</b>	240CM	-	XXII	.75 (19.0)	
<b>⊘MT336D</b> <sup>10</sup>	280A	-	XXXI	.75 (19.0)	
♦ CMT336D	280C	-	XXXI	.75 (19.0)	
<b>⊘WMT336D</b> <sup>10</sup>	280AM	-	XXXI	.938 (23.8)	
<b>⊘WCMT336D</b>	280CM	-	XXXI	.938 (23.8)	
<b>⊘MT338</b>	267A	-	XXXII	.562 (14.3)	
♦ CMT338	267C	-	XXXII	.562 (14.3)	
<b>⊘MT339</b> <sup>10</sup>	284A6	M641/3-7	XXVII	.967 (24.6)	
♦ CMT339	384C6	-	XXVII	.967 (24.6)	
<b>⊘MT342B</b>	246A	-	IV	.563 (14.3)	M642/5-1

#### MT-JAX (WITH WECO EQUIVALENT JACKS)<sup>2</sup>

Switchcraft Part Number	WEco Equiv.	MIL Type¹	Sche- matic Circuit*	Dim. "X" maximum Inch (mm)	Mating Plug <sup>3</sup>
		3-CONDUC	CTOR 2		
<b>⊘WMT342B</b>	246 AM	-	IV	.562 (14.3)	
MT344B	248A	-	XII	.625 (15.9)	
<b>⊘MT346</b>	249A	-	XX	.562 (14.3)	M642/5-1
<b>⊘CMT346</b>	249C	-	XX	.562 (14.3)	
<b>⊘MT354B</b>	248E	-	XII	.625 (15.9)	
<b>⊘MT355</b> ¹⁰	243C	-	XXXV	.812 (20.6)10	
<b>⊘MT356C</b> <sup>10</sup>	245A	-	XXXVI	.938 (23.8)10	M642/5-1
♦ CMT356C	245C	-	XXXVI	.938 (23.8)	or
<b>⊘MT357</b> ¹⁰	363A	_	XXXVII	.75 (19.0)10	M642/2-2
<b>⊘CMT358</b>	290C	-	XXXVIII	.875 (22.2)	
<b>⊘CMT359</b>	326C	-	XXXIX	.75 (19.0)	

Inch (mm)

# JACKS AND PLUGS Long Frame telephone Jacks


# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

### **MT-JAX®**

#### (Industry Standard - No WEco Equivalent)

Switchcraft Part Number	MIL Type¹	Schematic Circuit*	Dim. "X" maximum Inch (mm)	Mating Plug <sup>3</sup>			
2-CONDUCTOR <sup>2</sup>							
<b>⊘WMT332A</b>	-	====	.5 (12.7)				
<b>⊘WCMT332A</b>	-	=	.5 (12.7)				
XMT332A	-	=	.5 (12.7)				
<b>⊘YMT332A</b>	-	=	.5 (12.7)				
⊘CMT332C	-	XVIII	.562 (14.3)				
<b>⊘WMT332C</b>	-	XVIII	.5 (12.7)				
<b>⊘WMT333</b>	-	V	.469 (11.9)				
<b>⊘WCMT333</b>	-	V	.469 (11.9)				
<b>⊘MT333A</b>	-	VI	.967 (24.6)				
<b>⊘WMT333E</b>	-	IX	.625 (15.9)				
<b>⊘WMT334A</b>	-	XI	.562 (14.3)	M642/4-1			
<b>⊘WMT334C</b>	-	XVII	.562 (14.3)	M642/4-2			
<b>◊WMT334E</b>	-	XXV	.562 (14.3)	or			
<b>⊘WMT334F</b>	-	XIX	.641 (16.3)	M642/4-3			
<b>⊘WMT335</b> <sup>10</sup>	-	XIII	.688 (17.5)				
<b>⊘WCMT335</b>	-	XIII	.688 (17.5)				
MT335A <sup>10</sup>	M641/2-2	XXVI	.75 (19.0)				
<b>⊘CMT335A</b>	-	XXVI	.75 (19.0)				
<b>⊘WMT335A</b>	-	XXVI	.75 (19.0)				
<b>⊘WCMT335A</b>	-	XXVI	.75 (19.0)				
<b>◊₩ΜΤ336E</b> <sup>10</sup>	-	XXIII	.875 (22.2)				
<b>⊘WCMT336E</b>	-	XXIII	.875 (22.2)				
♦CMT341	-	I	.438 (11.1)				

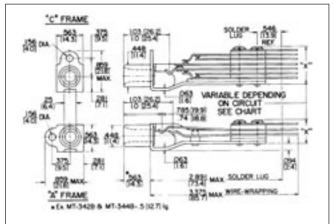

#### MT-Jax<sup>®</sup> and WMT-Jax<sup>®</sup>

**MT-JAX®** 

#### (Industry Standard - No WEco Equivalent)

Switchcraft Part Number	MIL Type <sup>1</sup>	Schematic Circuit*	Dim. "X" maximum Inch (mm)	Mating Plug <sup>3</sup>					
	3-CONDUCTOR <sup>2</sup>								
XMT332B	-	IV	.562 (14.3)						
<b>⊘YMT332B</b>	-	IV	.562 (14.3)						
♦CMT333B	-	VII	.562 (14.3)						
<b>⊘WMT333B</b>	-	VII	.562 (14.3)	M642/2-1					
XMT334B	-	XII	.562 (14.3)	or					
<b>◊YMT334B</b> <sup>10</sup>	-	XII	.562 (14.3)	M642/2-2					
<b>⊘WMT336B</b>	-	XXI	.812 (20.6)						
<b>⊘WCMT336B</b>	-	XXI	.812 (20.6)						
<b>⊘MT343B</b>	-	VII	.5 (12.7)						
⟨CMT342B	-	IV	.562 (14.3)						
<b>⊘CMT344B</b>	-	XII	.625 (15.9)						
<b>⊘WMT344B</b>	-	XII	.625 (15.9)	M642/5-1					
<b>⊘MT346A</b> <sup>10</sup>	-	XIV	.688 (17.5)						
<b>◊MT346B</b> <sup>10</sup>	-	XXI	.812 (20.6)						
<b>♦</b> MT346C <sup>10</sup>	-	XXII	.688 (17.5)	M642/5-1					
⊘CMT346C	-	XXII	.688 (17.5)	or M642/2-21					

\*Refer to pages 79 and 80.


Special order only; contact Switchcraft.


Inch

(mm)

DIMENSIONS ARE FOR REFERENCE ONLY

- Many jacks are offered with MIL specifications. Other jacks are made of MIL-spec materials but do not have MIL approval because no MIL type numbers have been assigned.
- MT-Jax have nickel plated copper alloy bushing. WEco equiv. jacks have plain copper alloy bushings (except WEco No. 221E, which has nickel plated copper alloy bushing). 2.
- 3. Mating plugs and patch cords are contained in this catalog.
- 7. Same as MIL type M641/2-3 except with offset ground lug.
- Same as MIL type M641/3-1 except with offset ground lug. 8.
- Same as MIL type M641/3-2 except with offset ground lug. 9.
- When mounted on "A" frames, stacks are too high to fit in standard panes with .625" horizontal space add prefix "C" to part number to order jacks with "C" frame.

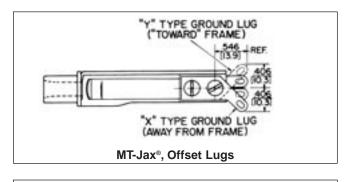

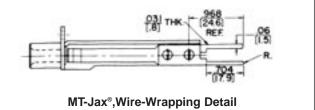

**FChCra** 

#### \* Please visit the product pages on our website for the most up-to-date product information

### 1/4" LONG FRAME TELEPHONE TWIN JACKS



High quality telephone jacks are essentially doubled versions of MT-Jax<sup>®</sup>. Twin-Jax<sup>®</sup> are used in Switchcraft Series 2400, 2600 and JP<sup>®</sup> Jack Panels and other standard jack panels. Twin-Jax<sup>®</sup> have direct WEco equivalents.

#### **MT388 AND WMT388**

Frame mounting ears are on 1.375" centers, and bushings are on .625" centers. Jacks are double, 2-conductor type with a crossover wiring feature. If a mating plug is inserted in either bushing, crossover contacts are opened (see schematic). MT388 (solder lugs) is equivalent to WEco jack 410A, 410C and 410D. WMT388 (wire-wrapping) is equivalent to WEco 410AM.

#### MT389 AND WMT389

Double, 3-conductor jacks with both the tip and ring circuits interconnected (crossover wired) so if a plug is inserted in either jack, common circuits are opened (see schematic). MT-389 (solder lugs) is equivalent to WEco 482A. WMT389 (wire-wrapping) is equivalent to WEco 482AM and 482BM.

#### SPECIFICATIONS

Frame and Stack Screws: Steel, plated with iridescent iridite finish.

**Springs:** Copper alloy, spring tempered. Solder lugs are solder coated.

Bushings: Nickel-plated copper alloy.

**Contacts:** Welded crossbar palladium in shunt circuits. **Insulation:** Rigid plastic (MIL-type PBE-P, per MIL Specification LP-513C). Extruded plastic insulating tubing through stack.

#### ORDERING


Order by part number from table.


Part Number <sup>1</sup>	Adjusted for Plug	Dim. "X" max. Inch (mm)
MT388	WEco types 298B and 347B MIL types M642/9-1 and M642/1-1	.562 (14.3)
<b>◊WMT388</b>	Switchcraft types 411, 412, 413, 420	.562 (14.3)
MT389	WEco type 310	.594 (15.1)
	MIL types M642/2-1 and M642/2-2	
WMT389	Switchcraft types 414 and 482	.562 (14.3)

◊ Special Order only; contact Switchcraft.

1. Number MT388 is equivalent to MIL-type M641/11-1

2. Complete data for telephone and MIL-type plugs are contained in this section. **Mounting Screws:** #6-32, Part Number P10725, can be ordered separately. Contact Switchcraft. (Screws not supplied with jacks).

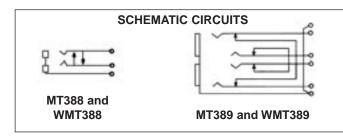

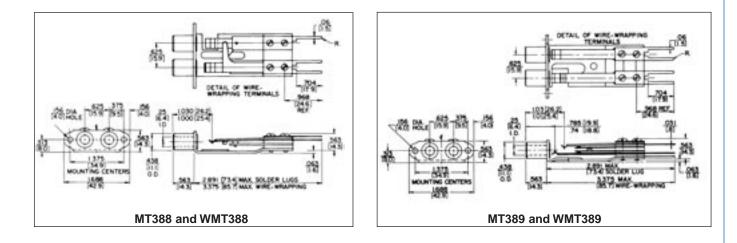

DIMENSIONS ARE FOR REFERENCE ONLY

## SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" JACK BLOCKS

#### **DUAL-JAX BLOCK®**





Dual-Jax Blocks are ideal where limited jack connections are needed but larger jack panels are not required. Designed for broadcasting, intercom and PA systems, switchboards, and commercial, industrial and military communications equipment. Dual-Jax Blocks mount in panels or chassis, either singularly or in multiples. Four countersunk holes accommodate four #8-32 screws (not supplied) for block mounting. Blocks can be supplied without jacks, or with MT-Jax<sup>®</sup> installed. Many other jacks including, T-Jax<sup>®</sup>, T-Switch<sup>®</sup> switches and lamp jacks can be installed. Jacks with wire-wrapping terminals or offset lugs can also be supplied. By drilling additional holes, Twin-Jax<sup>®</sup> may also be used. Contact Switchcraft for any special order items.

#### SPECIFICATIONS


**Block:** Molded black thermoplastic. **Screws:** #6-20 plated steel, QQ-P-416, Type II, Class 2 (for jack mounting).

#### ORDERING

Order by part number from table.

Part Number	Description
2300	Block, without jacks.
2331	Two, MT331 MT-Jax installed.
2332A	Two, MT332A MT-Jax installed.
2332B	Two, MT332B MT-Jax installed.
<b>⊘2333</b>	Two, MT333 MT-Jax installed.

 $\Diamond$  Special order only; contact Switchcraft for price and delivery. Mounting Screws: #6-20, P1544, can be ordered separately, contact Switchcraft.

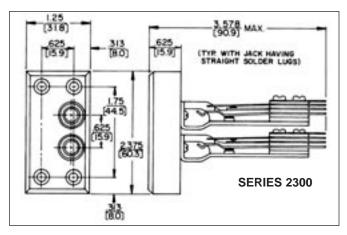

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

JACKS AND PLUGS BANTAM TYPE® JACKS 87

#### \* Please visit the product pages on our website for the most up-to-date product information

### TT-JAX<sup>®</sup> (.173") TELEPHONE JACKS BANTAM TYPE<sup>®</sup>





STEEL FRAME

DIE-CAST FRAME (special order only)

#### FEATURES

- Steel (standard) or die-cast frames (special order).
- 2-or 3-conductors.
- Palladium crossbar welded contacts are standard in switching circuits. Fine silver or gold alloy contacts are available on special order.
- Series TT30, TT30FM and TT600 solder lugs; Series WTT-30, WTT30FM and WTT600FM -wire-wrapping terminals. Bussing solder lugs are available on special order.
- Series TT30 and WTT30 jacks mounts in Series 1600, A1600, B1600 and C1600 jacks panels.
- Series TT30FM and WTT30FM jacks mount in Series TT51, TT52, TT55 and TT56 jack panels.
- Series TT600 and WTT600 jacks mount in .25" diameter holes in panels up to .281" thick. Mounting centers: .438".
- Add "N" for nickel-plated frame and "Y" or for offset solder lugs.





TT36FM FRONT MOUNT WTT636C THREADED BUSHING

#### SWITCHCRAFT VS. MIL NUMBERS

Jack Number	MIL Spec. Number
TT32B	641/19-2
TT32BFM	641/19-6
TT34B	641/19-4
TT34BFM	641/19-8
TT36C	641/19-10
WTT32B	641/19-1
WTT32BFM	641/19-5
WTT34B	641/19-3
WTT34BFM	641/19-7
WTT36C	641/19-9

	Part Numbers, Jack with Solder Lugs				Dim. "X"		Typical	
Serie	es TT30	Series	TT30FM	Series TT600		Max.		Mating
Steel	Die Cast	Steel	Die Cast	Steel	Schem.1	In (mm) <sup>2</sup>	Cond.	Plug <sup>3</sup>
TT31	<b>♦TT31DC</b>	TT31FM	<b>♦TT31FMDC</b>	TT631	I	.422 (10.7)	2	TT251
TT32A	<b>♦TT32ADC</b>	TT32AFM	<b>♦TT32AFMDC</b>	TT632A	III	.406 (10.3)	2	TT251
TT32B	<b>⊘TT32BDC</b>	TT32BFM	<b>♦TT32BFMDC</b>	<b>⊘TT632B</b>	IV	.578 (14.68)	3	TT253
TT32C	<b>♦TT32CDC</b>	<b>⊘TT32CFM</b>	<b>♦TT32CFMDC</b>	<b>⊘TT632C</b>	XVIII	.422 (10.7)	2	TT251
TT33	<b>♦TT33DC</b>	TT33FM	<b>♦TT33FMDC</b>	<b>⊘TT633</b>	V	.578 (14.7)	2	TT251
<b>⊘TT33B</b>	<b>♦TT33BDC</b>	<b>⊘TT33BFM</b>	<b>♦TT33BFMDC</b>	<b>⊘TT633B</b>	VII	.484 (12.3)	3	TT253
TT34A	<b>♦TT34ADC</b>	<b>⊘TT34AFM</b>	<b>♦TT34AFMDC</b>	<b>⊘TT634A</b>	XI	.547 (13.9)	2	TT251
TT34B	<b>⊘TT34BDC</b>	TT34BFM	<b>♦TT34BFMDC</b>	TT634B	XII	.578 (14.68)	3	TT253
TT34C	<b>♦TT34CDC</b>	TT34CFM	<b>♦TT34CFMDC</b>	<b>⊘TT634C</b>	XVII	.547 (13.9)	2	TT251
TT34F	<b>♦TT34FDC</b>	-	-	-	XIX	.609 (15.5)	2	TT251
TT35	<b>♦TT35DC</b>	<b>⊘TT35FM</b>	<b>♦TT35FMDC</b>	<b>⊘TT635</b>	XIII	.609 (15.5)	2	TT251
TT36	<b>♦TT36DC</b>	<b>⊘TT36FM</b>	<b>♦TT36FMDC</b>	<b>⊘TT636</b>	XX	.609 (15.5)	3	TT253
TT36A	<b>♦TT36ADC</b>	TT36AFM	<b>♦TT36AFMDC</b>	TT636A	XIV	.625 (15.9)	3	TT253
TT36B	<b>♦TT36BDC</b>	_	_	_	XXI	.703 (17.9)	3	TT253
TT36C	<b>♦TT36CDC</b>	TT36CFM	<b>♦TT36CFMDC</b>	<b>◊TT636C</b>	XXII	.625 (15.9)	3	TT253

P	Part Numbers	s, Jack with V	Vire Wrapping	<b>F</b> erminals		Dim. "X"		Typical
Series	s WTT30	Series	WTT30FM	Series WTT600		Max.		Mating
Steel	Die Cast	Steel	Die Cast	Steel	Schem.1	In (mm) <sup>2</sup>	Cond.	Plug <sup>3</sup>
WTT31	<b>⊘WTT31DC</b>	WTT31FM	<b>⊘WTT31FMDC</b>	WTT631	1	.422 (10.7)	2	TT251
WTT32A	<b>⊘WTT32ADC</b>	WTT32AFM	<b>⊘WTT32AFMDC</b>	WTT632A	111	.406 (10.3)	2	TT251
WTT32B	<b>⊘WTT32BDC</b>	WTT32BFM	<b>WTT32BFMDC</b>	WTT632B	IV	.578 (14.68)	3	TT253
<b>⊘WTT32C</b>	<b>⊘WTT32CDC</b>	<b>⊘WTT32CFM</b>	<b>◊WTT32CFMDC</b>	<b>⊘WTT632C</b>	XVIII	.422 (10.7)	2	TT251
WTT33	<b>⊘WTT33DC</b>	WTT33FM	<b>⊘WTT33FMDC</b>	<b>⊘WTT633</b>	V	.578 (14.7)	2	TT251
<b>⊘WTT33B</b>	<b>⊘WTT33BDC</b>	<b>⊘WTT33BFM</b>	<b>WTT33BFMDC</b>	<b>⊘WTT633B</b>	VII	.484 (12.3)	3	TT253
<b>⊘WTT34A</b>	<b>⊘WTT34ADC</b>	<b>⊘WTT34AFM</b>	<b>◊WTT34AFMDC</b>	<b>⊘WTT634A</b>	XI	.547 (13.9)	2	TT251
WTT34B	<b>⊘WTT34BDC</b>	WTT34BFM	<b>⊘WTT34BFMDC</b>	WTT634B	XII	.578 (14.68)	3	TT253
-	-	-	_	<b>⊘WTT634C</b>	XVII	.547 (13.9)	2	TT251
<b>⊘WTT35</b>	<b>⊘WTT35DC</b>	<b>◊WTT35FM</b>	<b>⊘WTT35FMDC</b>	<b>⊘WTT635</b>	XIII	.609 (15.5)	2	TT251
<b>⊘WTT36</b>	<b>⊘WTT36DC</b>	<b>⊘WTT36FM</b>	<b>⊘WTT36FMDC</b>	<b>⊘WTT636</b>	XX	.609 (15.5)	3	TT253
<b>⊘WTT36A</b>	<b>⊘WTT36ADC</b>	<b>⊘WTT36AFM</b>	<b>⊘WTT36AFMDC</b>	<b>⊘WTT636A</b>	XIV	.625 (15.9)	3	TT253
WTT36C	<b>⊘WTT36CDC</b>	WTT36CFM	<b>⊘WTT36CFMDC</b>	<b>⊘WTT636C</b>	XXII	.625 (15.9)	3	TT253

◊ Special order only.

1. See schematic diagrams.

2. "X" dimension of die cast frame jacks may be slightly greater.

3. See Mating Plugs Section.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS BANTAM TYPE® JACKS


# PHONE: 773 792-2700

#### \* Please visit the product pages on our website for the most up-to-date product information

## TT-JAX<sup>®</sup> (.173") TELEPHONE JACKS BANTAM TYPE<sup>®</sup>



Frame: Plated (steel or zinc diecast).
Stack Screws: Steel plated.
Bushing: Plated (brass or steel).
Tip and Ring Springs: Copper alloy.
Contact Spring: Copper alloy.
Contacts: Welded crossbar palladium. Other alloys in various sizes available on special order.
Insulation: Rigid plastic with plastic tubing through stack assembly.

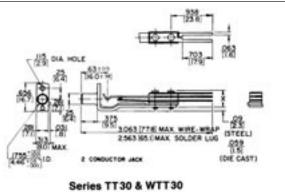

2-Conductor

to be class to be and

Series TT30FM & WTT30FM 2-Conductor

#### **MOUNTING HARDWARE**


**Series TT30:** #3-48 x 1/4"; mounting screws, P10834, can be ordered separately.


**Series TT30FM:** Supplied with one #3-48 x 1/4" fil. head machine screw, steel-plated.


**Series TT600:** Supplied with one P1975, nickel-plated copper alloy locknut, and one S3997, steel, nickel-plated washer.

**FU** 

**NOTE:** Dimensional drawings show panels with steel frame jacks. Overall dimensions for steel or die-cast frame jacks are the same, except as noted.

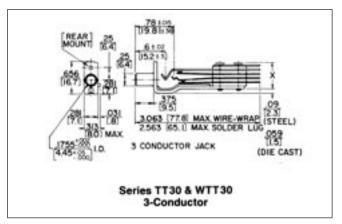

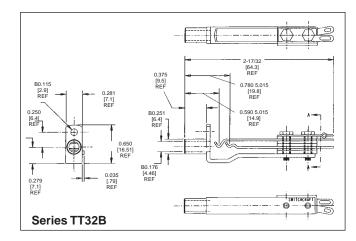

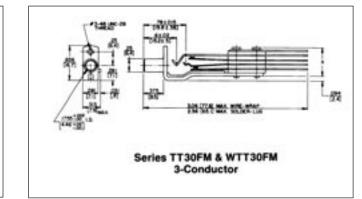

DIMENSIONS ARE FOR REFERENCE ONLY

www.switchcraft.com

-32 NEF-2A TH'D

Series TT600 & WTT600

3-Conductor (typ.)

JACKS AND PLUGS BANTAM TYPE® JACKS

#### \* Please visit the product pages on our website for the most up-to-date product information

# TT-JAX<sup>®</sup> (.173") TELEPHONE TWIN JACKS BANTAM TYPE<sup>®</sup>



#### **FEATURES**

- · Steel or die-cast frames. (Special order only).
- Twin, 3-conductor jacks on .312" centers, inter-connected so circuit is opened when a mating plug is inserted in one side of the jack. Palladium welded crossbar contacts are standard in switching circuits.
- · Solder lugs or wire-wrapping terminals.
- TT89, TT89C, WTT89 and WTT89DC jacks mount in Series 1700 jack panels.
- TT89FM, TT89FMDC, WTT89FM and WTT89FMDC jacks mount in Series TT59, TT60, TT61 and TT62 jack panels.

#### **SPECIFICATIONS**

Frame: Plated (steel or diecast zinc).

Stack Screws: Steel-plated.


Bushing: Plated (steel or copper alloy).


Tip, Ring and Contact Springs: Copper alloy. Contacts: Welded crossbar palladium. Other alloys in various sizes available on special order.

Insulation: Rigid plastic with plastic tubing through stack assembly.

Mounting Hardware: #3-48 x 1/4" mounting screws, P10834, can be ordered separately for TT89, TT89DC, WTT89 and WTT89DC jacks. Two mounting screws, P25424, are supplied with TT89FM, TT89MDC, WTTFM and WTT89FMDC jacks.

NOTE: Dimensional drawings show panels with steel frame jacks. Overall dimensions for steel or die-cast frame jacks are the same.



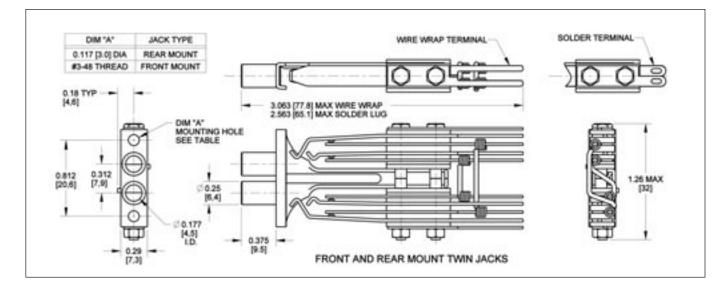

Solder	Solder Lugs		Wire-Wrapping Terminals		Typical Mating
Steel	Die Cast	Steel	Die Cast	Conductors	Plug <sup>1</sup>
TT89	<b>⊘TT89DC</b>	WTT89	<b>⊘WTT89DC</b>	Twin	TT263
TT89FM	<b>♦TT89FMDC</b>	WTT89FM	<b>⊘WTT89FMDC</b>	3-conductor	TT263

1. See Mating Plugs Section.

◊ Special order only

89

JACKS AND PLUGS

C

# JACKS AND PLUGS BANTAM TYPE® JACKS

# **PHONE: 773 792-2700**


**FI** 

\* Please visit the product pages on our website for the most up-to-date product information


TT-JAX<sup>®</sup> (.173") TELEPHONE TRIPLE JACKS BANTAM TYPE<sup>®</sup>

#### FEATURES

- Steel or die-cast frames.
- TT95 Tri-Jax<sup>®</sup> Jacks: three, 3-conductor jacks on one frame. Twin jacks, (on .312" centers, LINE & EQUIPMENT functions), have strapped shunts installed. The third jack (MONITOR) is unwired. See TT95 schematic.
- **TT96 Tri-Jax Jacks:** Same as TT95 jacks, except third jack (MONITOR) has tip and ring springs, respectively, jumpered to tip and ring springs of top (LINE) jack.
- Selection of solder lugs or wire-wrapping terminals.
- Palladium welded crossbar contact are standard in switching circuits.
- TT95, TT95DC, WTT95 and WTT95DC jacks mount in Series B1700 jack panels.
- TT95FM, TT95FMDC, TT96FM, TT96FMDC and wire-wrapping versions mount in Series TT53, TT54, TT57 and TT58 jack panels.



**TT95 SCHEMATIC** 



**TT96 SCHEMATIC** 


Solder Lugs		Wire-Wrapping Terminals		Terminals		Tunical Mating
Steel	Die Cast	Steel	Die Cast	Conductors	Schematic	Typical Mating Plug'
TT95	0TT95DC	WTT95	0WTT95DC	3	TT95	TT253
TT95FM	0TT95FMDC	WTT95FM	0WTT95FMDC	Plus	TT95	and
TT96FM	0TT96FMDC	WTT96FM	0WTT96FMDC	Twin-3	TT96	TT263

◊ Special order only

#### SPECIFICATIONS

Frame: Plated (steel or diecast)
Stack Screws: Stainless Steel Plated.
Bushings: Plated (steel or copper alloy).
Contact Springs: Copper alloy.
Contacts: Welded crossbar palladium. Other precious metal alloys in various sizes available on special order.

**Mounting Hardware:** #3-48 x 1/4" mounting screws, P10834, can be ordered separately for rear mount jacks. Two mounting screws, P25424, are supplied with front mount jacks.

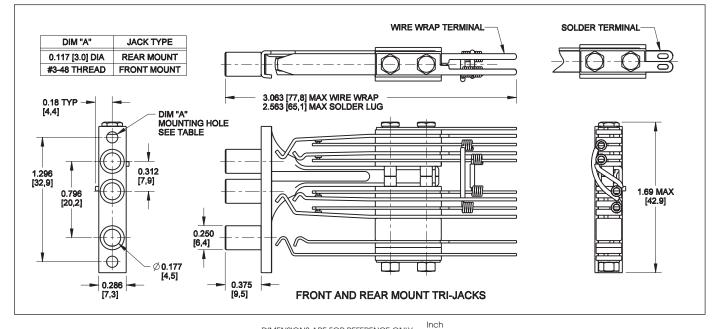

DIMENSIONS ARE FOR REFERENCE ONLY

JACKS AND PLUGS MINIATURE TELEPHONE JACKS

\* Please visit the product pages on our website for the most up-to-date product information

### MINIATURE TELEPHONE JACKS, RIGHT ANGLE, PC MOUNT





Right-angle miniature phone jacks provide low-profile packaging. Single and twin 3-conductor jacks provide plug-jack access to communication circuits for patching and/or testing. Tips and rings are shunted. These jacks mate with Switchcraft miniature TT<sup>®</sup> plugs and patch cords.

Jacks are designed for right-angle mounting on .062" (1.6 mm) maximum thickness PC boards. Snap-on covers in colors are available and can be installed or removed in the field without special tools. Covers and jacks may be ordered in different colors for color coded circuits.

#### **SPECIFICATIONS ELECTRICAL**

Dielectric Withstanding Voltage: 500 V AC **Contact Resistance:** .020  $\Omega$  maximum (initial), .030  $\Omega$  maximum (after life test). **Insulation Resistance:**  $10^{10} \Omega$  at 500 V DC (initial).

#### **MECHANICAL**

Shock: MIL-STD 202 Method 213. Vibration: MIL-STD 202 Method 201. Insertion Force: 7 pounds maximum (31.14 N). Withdrawal Force: 1.5 pounds minimum (6.67 N). Life: 10,000 cycles.

#### MATERIALS

Housing: Thermoplastic UL 94V-0. Springs: Copper alloy, plated. Contacts: Gold alloy (WEco #1) crossbar.

#### **ENVIRONMENTAL**

Temperature Limits: -55°C to +85°C (non-operating). Thermal Shock: MIL-STD 202 Method 107. Salt Sprav: MIL-STD 202 Method 101.

Humidity: MIL-STD 202 Method 106, less steps 7A and 7B.



# **DENSITY PACKAGING**

#### ORDERING INFORMATION

Jack Part No.	Cover Part No.	Color	Schem.	Cond.	Typical Mating Plug <sup>2</sup>
RTT34B01	<b>◊P286301</b>	Red			
RTT34B02	P286302	Black			
RTT34B04	<b>⊘P286304</b>	Blue	XII	3	TT-253
RTT34B05	P286305	White		3	11-200
<b>⊘RTT34B07</b>	<b>⊘P286307</b>	Orange			
<b>⊘RTT34B08</b>	<b>⊘P286308</b>	Yellow			
RTT8701	<b>⊘P286401</b>	Red			
RTT8702	P286402	Black			
RTT8704	<b>⊘P286404</b>	Blue	Twin	Twin	<b>TT</b> 000
RTT8705	P286405	White	XII	3	TT-263
<b>⊘RTT8707</b>	<b>⊘P286407</b>	Orange	]		
<b>⊘RTT8708</b>	<b>⊘P286408</b>	Yellow			

1. See schematic diagrams on pages 79 and 80.

2. See Mating Plugs Section. ◊ Special order only; contact Switchcraft for price and delivery.

#### ORDERING


- 1. Order jacks and covers separately from table.
- 2. Covers can be ordered assembled on special order.
- 3. To order RTT jack with cover installed, add the letter C after RTT in part number. Special order only.
- 4. To order RTT jack with Snap-in terminals, add the letter S to the end of the part number. Special order only.
- 5. For all special orders items, contact Switchcraft.


#### **RTT JACK PART NUMBERING SYSTEM**


Series	Cover Option		Circuitry		Jack Color	
RTT Right Angle TT Jack	Blank-	No Cover Standard	34B-	XII	01-	Red
	C-	Cover Supplied	87-	Two XII Circuits	02-	Black
					04-	Blue
					05-	White
					07-	Orange
					08-	Yellow


DIMENSIONS ARE FOR REFERENCE ONLY


### MINIATURE TELEPHONE JACKS, RIGHT ANGLE, PC MOUNT (continued)

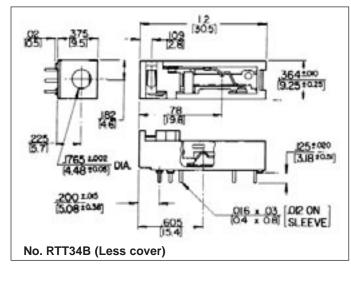


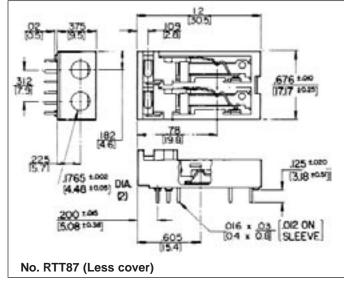

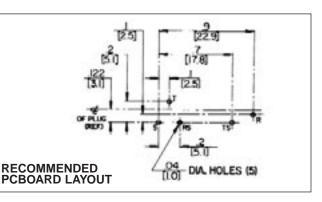

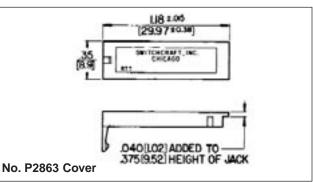

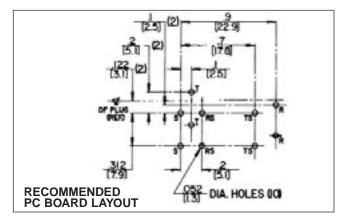

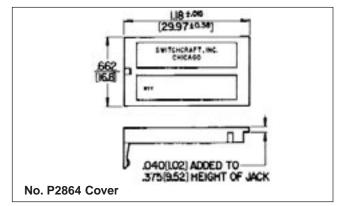

DIMENSIONS ARE FOR REFERENCE ONLY

ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

92

\* Please visit the product pages on our website for the most up-to-date product information

### .177" ENCLOSED JACKS

Two- and 3-conductor Unijax<sup>®</sup> jacks have advanced features of Hi-D Jax<sup>®</sup> jacks including chassis/panel and PC mounting and .177" bushing that mates with a variety of tini-telephone<sup>®</sup> plugs and patchcords. Bushing diameter is .281" inside diameter; panel thickness is .125". Mounts in rows or arrays on .469" centers.

#### SPECIFICATIONS MECHANICAL

**Insertion/Withdrawal:** 2-conductor, 1.25 pounds nominal, 3 pounds maximum insertion. 3-conductor, 1.5 pounds nominal, 3 pounds maximum insertion. 2-conductor, 3 pounds nominal, 1.5 pounds minimum withdrawal. 3-conductor, 3 pound nominal,

1.5 pounds minimum withdrawal.

Life: 10,000 insertion/withdrawal cycles minimum.

#### ELECTRICAL

**Contact Resistance:** .10 ohms maximum. **Insulation Resistance:** 1,000 MΩ minimum. **Dielectric Withstanding Voltage:** 500 V AC maximum.


#### MATERIAL

Housing: Thermoplastic. Mounting Bushing: Nickel-plated copper alloy. Tip and Ring Springs: Copper alloy, silver-plated. Integral contacts.

Shunt Springs: Copper alloy, silver-plated integral contacts.

Sleeve Terminal: Steel, tin-plated. Hardware: Supplied with one, Number P2060 nickel-plated copper alloy locknut, and one, Number P2061 nickel-plated copper alloy washer.



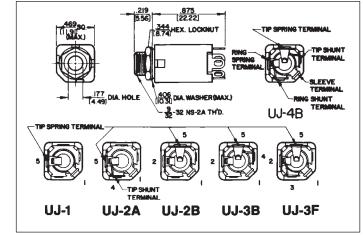

#### TWO CONDUCTOR PART NUMBERS

Part Number	Description	Jack Schematic <sup>1</sup>	Typical Mating Plug <sup>2</sup>
UJ1	Open circuit	I	TT251
UJ2A	Single closed circuit		TT251

#### THREE CONDUCTOR PART NUMBERS

UJ2B	Double Open circuit	IV	TT253
UJ4B	Double closed circuit	XII	TT253

1. See jack schematics on pages 79 and 80.

2. See Mating Plugs Section.

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" PHONE JACKS







#### LITTEL-JAX® COMMERCIAL PHONE JACKS 2- AND 3-CONDUCTOR

TERMINAL

Littel-Jax phone jacks mate with standard commercial phone plugs and are available with .25" and .21" inside diameter bushings.

#### **MIL LITTEL-JAX® PHONE JACKS** 2- AND 3-CONDUCTOR MIL-SPEC, MIL-J-641 (E)

MIL jacks mate with MIL-type phone plugs with .25" (6.35mm) or .21" (5.34mm) diameter bushings. Numbers C11 and C12B have a non-turn locating pin which keys the jack to the mounting surface. For low contact resistance applications, jack number C12A has fine silver contacts on shunts and tip springs.

#### MOUNTING

Chassis/Panel: See Mounting Data drawing below; smallhole is required only for jacks numbers C11 and C12B with non-turn locating pin.

Maximum Panel Thickness: .156" (4mm) for standard .276" (7mm) long bushing; .25" (6.35mm) for .375" (9.5mm) long bushing.

NOTE: For panels thicker than .25" see Thick Panel Phone Jax. Insulated Mount: See drawing. S1028 flatwasher and Part Number S1029 shoulder washer must be ordered separately for mounting in .437" diameter hole. NOTE: See Hi-D Jax<sup>®</sup> for jack specifically designed for insulated mounting without additional washers.

PC Board Mounting: See Recommended PC Board Layout drawing below for jacks with PC terminals. Recommended PC board thickness is .062".

Mounting Centers: 1.188" (30mm) recommended. Centers may vary with jack selected, for example, Number 11 mounts on .813" (20.6mm) and 14B mounts on 1.125" (28.6mm) minimum centers.

PREFIX	OPTIONS	SERIES	CIRCU	JITRY
Blank-	1/4" Commercial Jack	1-Littel Jax®	1-	I
C-	Accepts Mill Plug		2A-	III
FA-	.205" Faston Terminals		2B-	IV
FAL-	.205" Faston Terminals and .375" Long Bushing		3-	V
L-	.375" Long Bushing		3A-	VI
PC-	PC Terminals		3B-	VII
S-	Accepts .206 Diameter Plugs		3E-	IX
			4B-	XII

#### TWO CONDUCTOR PART NUMBERS

Part Number	Description	Jack Schematic <sup>1</sup>	Typical Mating Plug
11	Open circuit	I	250
C11	MIL Number M641/6-1	I.	440
FA11	.205 inch FASTON terminal	I.	250
FAL11	.375 inch long bushing .205 FASTON terminal	I	250
L11	.375 inch long bushing	I	250
12A	Tip shunt	III	250
C12A	MILNumber M641/12-1	III	440
L12A	.375 inch long bushing	111	250
PC12A	PC board mount	III	250
13	Isolated "make" circuit	V	250
13A	Transfer circuit	VI	250
13E	Isolated "break" circuit	IX	250


#### THREE CONDUCTOR PART NUMBERS

12B	Double open circuit	IV	267
L12B	.375 inch long bushing	IV	267
C12B	MIL number M641/5-1, .250 inch inside diameter	IV	480
13B	Tip shunt	VII	267
14B	Double closed circuit	XII	267

#### PART NUMBERS (.210" INSIDE DIAMETER BUSHING)

S11	2 conductor	I	S250
S12A	2 conductor	III	S250
S12B	3 conductor	IV	S267
S13B	3 conductor	VII	S267

1. Refer to jack schematics on pages 79 and 80. Other circuits are available; contact factory.

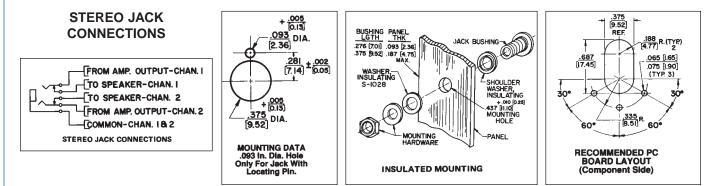

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**JACKS AND PLUG** 

# JACKS AND PLUGS LITTEL-JAX® 2- AND 3- CONDUCTOR

#### \* Please visit the product pages on our website for the most up-to-date product information

### 1/4" PHONE JACKS (continued)

#### LITTEL-JAX<sup>®</sup> COMMERCIAL PHONE JACKS - 2- AND 3-CONDUCTOR AND MIL LITTEL-JAX<sup>®</sup> PHONE JACKS - 2- AND 3-CONDUCTOR MIL-SPEC, MIL-J-641 (E)

#### SPECIFICATIONS MECHANICAL

**Life:** Commercial Jacks: 10,000 insertion/withdrawal cycles, minimum. Military Jacks: 20,000 insertions/ withdrawals, minimum.

Mechanical Shock: Military Jacks: Per MIL-STD 202, method 213, Test Condition H (75g). Vibration: Military Jacks: Per MIL-STD-202,

method 213, (10-55 Hz).

Insertion/Withdrawal Forces: (see charts below)

#### **COMMERCIAL JACKS**

Plug Diameter (inches)	.210	.250
Insertion (maximum)	7 lb.	7 lb.
Withdrawal (minimum)	1 lb.	1 lb.

#### **MILITARY JACKS**

Part Number	C11	C12A	C12B
Insertion (maximum)	6 lb.	7 lb.	6 lb.
Withdrawal (minimum)	2 lb.	3 lb.	1.5 lb.
Withdrawal (maximum)	7 lb.	7 lb.	5 lb.

#### ELECTRICAL

**Contact Resistance:** Commercial Jacks - .030 ohms maximum (initial), .050 ohms maximum (after humidity, durability exposure). Per MIL-STD-202E. Military Jacks - .010 ohms maximum (initial), .020 ohms maximum (after life), .10 ohms maximum (after salt spray).

**Insulation Resistance:** Commercial Jacks - 10,000 M $\Omega$  minimum (initial), 1,000 M $\Omega$  minimum (after humidity). Military Jacks - 10,000 M $\Omega$  minimum (initial), 1,000 M $\Omega$  minimum (after humidity, durability exposure).

**Dielectric Withstanding Voltage:** 500 V, 60 Hz (rms) AC. **Contact Rating:** 1 A, 25 V DC.

#### **ENVIRONMENTAL**

Thermal Range: Commercial Jacks; -55°C to +85°C (non-operating); -20°C to +65°C (operating). Military Jacks; -55°C to +85°C (non-operating); -40°C to+65°C (operating). Thermal Shock: Commercial Jacks - Per MIL-STD 202, method 107. Military Jacks - Per MIL-STD 202, method 107. Humidity: Commercial Jacks - Per MIL-STD 202, method 106. Military Jacks - 0% to 95% operating and non-operating. Salt Spray: Commercial Jacks - Per MIL-STD 202, method 101. Military Jacks - Per MIL-STD 202, method 101. Military Jacks - Per MIL-STD 202, method 101. Military Jacks - Per MIL-STD 202, method 101. Military Jacks - Per MIL-STD 202, method 106 (240 hours).

#### MATERIAL


**Mounting Bushing:** Nickel-plated copper alloy. **Insulation:** Rigid plastic.

**Springs:** Special copper alloy. Integral contacts are standard in the isolated switching circuits; fine silver contacts in C12A switching circuit.

Sleeve Terminal: Copper alloy.


**Hardware:** Supplied with one Number **P10001** copper alloy nickel-plated hex nut, and one Number **51022** steel nickel-plated washer - except copper alloy nickel-plated washer Number S10451 supplied on C11, C12A and C12B.


\*Commercial jacks feature integral contacts. Integral contacts should not be used where low contact resistance is a requirement.

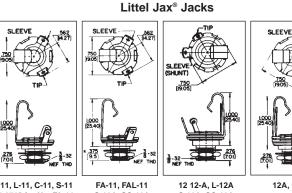


12A, L-12A

SHUNT





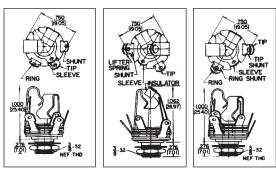

13E

13B, S-13B

14B

DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" ENCLOSED TELEPHONE JACKS



Series M11\*



Series MNS11



Series MS11\*



Series MN11\*

Compactly constructed jacks permit direct cross-patching with Switchcraft, WEco and MIL-type telephone plugs and patch cords. Series M Hi-D Jax<sup>®</sup> offer a choice of solder lugs or PC terminals. Both insulated and metal bushings can be specified, as well as .21" inside diameter sleeves for narrow plug fingers. Maximum contact resistance is .1 ohm. Springs are made of a special gold-plated copper alloy. Welded cross bar gold alloy contacts are available on special order.

#### SERIES M-11\* HI-D JAX®

Two- and 3-conductor type mate with .25" diameter finger plugs. Tip and ring springs are gold-plated. Shunts (if used) have welded crossbar palladium contacts. Ring springs (where used with shunts) have welded crossbar palladium contacts. Tip springs (when used) do not have a contact welded to the spring. Bushing has 3/8-32-NEF-2 thread; locknut and flat washer for mounting are supplied.

#### SERIES MN-11\* HI-D JAX®

Same as Series M-11\* except threaded bushing is molded thermoplastic for insulated mounting. Continuous sleeve contact assures positive sleeve connection without exposed metal on front of panel.

#### SERIES M113 AND M114 HI-D JAX®

The versatile 3-conductor M113 and M114 feature springs which accept a wide variety of 1/4" plug designs. Self-aligning PC terminals allow for easier insertion into a printed circuit board. Also feature a metric thread mounting.

#### SPECIFICATIONS MATERIALS

**Mounting Bushing:** Series M11\*, MS11\* - Nickel-plated copper alloy. Series MN11\*, MNS11\* - Molded thermoplastic. **Housing:** Molded thermoplastic, UL 94V-0.

Springs: Copper alloy.

**Contacts (mil-type):** Tip and Ring Springs are gold-plated. Shuntsprings (where used) are welded crossbar palladium. Welded crossbar gold alloy contacts are available on special order.

**Contacts (commercial):** Tin-plated integral contacts. **Sleeve Terminal:** Steel, tin-plated.

Hardware: Supplied with one P10001 copper alloy, nickel-plated locknut and one S10221 steel, nickel-plated washer.

#### **MECHANICAL**

Life: 10,000 insertion/withdrawal cycles, minimum.

**Insertion/Withdrawal Forces:** Nominal plug retention on 2-conductor jack is .75 pounds with .5 pounds minimum. Nominal plug retention on 3-conductor jack is 2 pounds with 1.5 pounds minimum. With double tips, the nominal is 1.5 pounds and 1 pound minimum.

**Maximum Recommended Mounting Torque:** 6" -lb. for thermoplastic bushing.

Mounting Torque (for Spring Lock PC Terminal):

8" -pound for thermoplastic bushings.

#### ELECTRICAL

**Contact Resistance:** .020 ohms maximum (initial), .050 ohms maximum (after humidity, durability exposure). Per MIL-STD-202E.

**Insulation Resistance:** 10,000 M $\Omega$  minimum (initial), 1,000 M $\Omega$  minimum (after humidity).

**Dielectric Withstanding Voltage:** 500 V, 60 Hz (rms) AC. Contact Rating: 0.25, 48 VDC make and break, 3A carry only.

#### ENVIRONMENTAL

Thermal Range: -55°C to +85°C (non-operating); -20°C to +65°C (operating). Thermal Shock: Per MIL-STD 202, method 107. Humidity: Per MIL-STD 202, method 106. Salt Spray: Per MIL-STD 202, method 101.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

JACKS AND PLUGS

JACKS AND PLUGS ENCLOSED JACKS

#### \* Please visit the product pages on our website for the most up-to-date product information

### 1/4" ENCLOSED TELEPHONE JACKS (CONTINUED)

#### SERIES MS11\* HI-D JAX®

3-conductor with .21" inside diameter sleeve. Mates with plugs having .206" diameter finger. Protects against accidental insertion of .25" diameter finger plugs. Gold-plated tip and ring springs. Welded crossbar palladium contacts on shunt springs standard. Bushing has 3/8-32-NEF-2 thread; locknut and flat washer for mounting are supplied.

#### ♦ SERIES MNS11\* HI-D JAX®

Same as Series MS11\* except bushing is molded thermoplastic.

#### **♦TWIN M11\* HI-D JAX®**

Two Series M11\* Hi-D Jax strapped on .625" centers. Mates with Switchcraft<sup>®</sup> Twin Plugs. 411, 412 and 413. MIL-type Littel-Plug<sup>®</sup> phone plugs, 420, 430 and 440 (2-conductor) and 482 and 483 (3-conductor) are also recommended for mating with this series.

#### **ORDERING INFORMATION**

Order by part number from table.

	2-CONDUCTOR			
Part Number Solder Lugs	Part Number PC Terms	Description	Sche- matic**	Typical Mating Plug*
M111	_	.25" I.D. sleeve, metal bushing.		
MN111	-	.25" I.D. sleeve, molded thermoplastic bushing.	I	
<b>⊘M112A</b>	<b>⊘M112APC</b>	.25" I.D. sleeve, metal bushing.		
MN112A	<b>⊘MN112APC</b>	.25" I.D. sleeve, molded thermoplastic bushing.		420
M113E	_	.25" I.D. sleeve, metal bushing.		
MN113E	-	.25" I.D. sleeve, molded thermoplastic bushing.	IX	

◊ Special Order only; contact Switchcraft.

Other mating plugs are contained in this plug section.

\*\* See pages 79 and 80.

	3-CONDUCTOR				
Part Number Solder Lugs	Part Number PC Terms	Description	Sche- matic <sup>1</sup>	Typical Mating Plug <sup>2</sup>	
M112B	· M112BPC	.25" inch I.D. sleeve, metal bushing.			
ML112B	_	.25" inch I.D. sleeve, .375 inch long metal bushing.			
MN112B	· MN112BPC	.25 inch I.D. sleeve, molded thermoplastic bushing.	IV	482	
MNL112B	-	.25 inch I.D. sleeve, .375 inch long metal bushing.			
M113B	_	.25 inch I.D. sleeve, metal bushing.			
MN113B	MN113BPC	.25 inch I.D. sleeve, molded thermoplastic bushing.	VII	482	
	M113BPC1M	.25 inch I.D. sleeve, molded thermoplastic bushing, metric hardware		482	

	3-CONDUCTOR			
Part	Part			Typical
Number	Number		Sche-	Mating
Solder Lugs	PC Terms	Description	matic <sup>1</sup>	Plug <sup>2</sup>
MNL113B	-	.25 inch I.D. sleeve, .375 inch long metal bushing.		482
M114B	· M114BPC	.25 inch I.D. sleeve, metal bushing.	VII	
	M114BPC1M	.25 inch I.D. sleeve, metal bushing, metric hardware.	XII	482
MN114B	· MN114BPC	.25 inch I.D. sleeve, molded thermoplastic bushing.		480, 484

◊ Special order only; contact Switchcraft for price and delivery.

1 See schematics, pages 79 and 80.

2 Number(s) specified are not necessarily the only mating plug(s). See Plugs Section.

97

### SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

#### \* Please visit the product pages on our website for the most up-to-date product information

### 1/4" ENCLOSED PHONE JACKS (continued)

#### HI-D<sup>®</sup> JAX 2- AND 3-CONDUCTOR



SERIES 11<sup>3</sup>





PC TERMINAL VIEW SERIES N11

Hi-D Jax<sup>®</sup> 2- and 3-conductor enclosed phone jacks are ideal for panel/chassis and PC board mounting. Unitized molded housing protects springs, provides mechanical and electrical reliability, minimizes leakage and provides low capacity between springs. Mounts on .625" minimum centers in rows or arrays. .25" or .21" inside diameter bushing types, metal or thermoplastic bushings (for insulated mounting). Insulated Hi-D Jax<sup>®</sup> jacks are specifically designed for in-circuit (insulated) mounting from mounting surface and have fully protected enclosed internal sleeve feature. Solder lugs or PC terminals may be selected.

#### MOUNTING

Jacks mount in a single .375" diameter hole on .625" minimum centers. Series 11\*, N11\*, NS11\* and S11\* mount in panels up to .156" thick. Series L11\* and NL11\* (long bushing) mount in panels up to .25" thick. Jacks with PC terminals mount on PC boards up to .094" thick. Formed "shoulders" on each terminal provide stable stand-off mount. Threaded bushing permits mechanical connection to equipment panel. Mounting hardware is supplied. Also available is a grounding spur bushing, which allows for positive grounding of the bushing to the chassis. Contact factory for details.

**SERIES 11\* -** 2- and 3-conductor types, threaded metal bushing .276" long. .25" inside diameter bushings.

**SERIES L11\*** - Same as Series 11\*, except bushing is .375" long for mounting in panels up to .25" thick.

**SERIES N11\*** - Same as Series 11\*, except bushing is molded thermoplastic for insulated mounting.

**SERIES NL11\*** - Same as Series N11\*, except bushing is .375" long for insulated mounting in panels up to .25" thick.

**SERIES S11\*** - Same as Series 11\*, except bushing has .21" inside diameter. Smaller diameter protects against accidental insertion of plugs with .25" diameter fingers.

**SERIES NS11\*** - (SPECIAL ORDER ONLY) - Same as Series N11\*, except bushing is .21" inside diameter.

**113BPC1M AND 114BPC1M** - Versatile, 3-conductor 113BPC1M and 114BPC1M feature springs which accept a wide variety of 1/4" plug designs. Self-aligning PC terminals allow for easier insertion into a printed circuit board. Also feature a metric thread mounting.

#### TWO CONDUCTOR PART NUMBERS

Solder Lug Part Number	PC Terminals Part Number	Description	Jack Schematic <sup>1</sup>	Typical Mating Plug <sup>2</sup>
111	111PC	Open circuit	I	250
N111	N111PC	Insulated bushing	I	250
NL111	-	.375 " long insulated bushing	I	250
112A	112APC	Single closed circuit	111	250
L112A	<b>⊘L112APC</b>	.375" long bushing	111	250
N112A	N112APC	Insulated bushing	111	250
NL112A	-	.375" long insulated bushing	111	250
113	113PC	Isolated "make" circuit	V	250
N113	-	Insulated bushing	V	250
<b>⊘113D</b>	<b>◊113DPC</b>	Transfer circuit (1-C)	VI 3	250
113E	113EPC	Isolated "break" circuit	IX	250

#### THREE CONDUCTOR PART NUMBERS

112B	112BPC	Double open circuit	IV	267
L112B	-	.375" long bushing	IV	267
N112B	N112BPC	Insulated bushing	IV	267
NL112B	-	.375" long bushing	IV	267
-	S112BPC	.210" inside diameter bushing	IV	S-267
113B	113BPC	Single closed circuit	VII	267
-	113BPC1M	Single closed circuit	VII	-
L113B	-	.375" long bushing	VII	267
N113B	N113BPC	Insulated bushing	VII	267
NL113B	-	.375" long bushing	VII	267
113F	113FPC	Ring circuit closed	XXVIII	267
114B	114BPC	Double closed circuit	XII	267
	114BPC1M	Double closed circuit	XII	-
L114B		.375" long bushing	XII	267
N114B	N114BPC	Insulated bushing	XII	267
NL114B	NL114BPC	.375" long bushing	XII	267

1 Other circuits available; contact factory. Schematics pages 79 and 80.

2 See Plug Section for other options.

3 Two tip springs.

◊ Special order only. Contact Switchcraft.

**SPECIFYING NOTE:** Unless otherwise shown in "Description", jacks have .276" long threaded bushings with .25" inside diameter.

#### SPECIFICATIONS MATERIAL

**Mounting Bushing:** Series 11\*, L11\*, S11\* -Nickel-plated copper alloy. Series N11\*, NL11\*, NS11\* - Molded thermoplastic over nickel-plated copper alloy sleeve.


99


ACKS


\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" ENCLOSED PHONE JACKS (continued)

#### HI-D JAX<sup>®</sup> 2- AND 3-CONDUCTOR

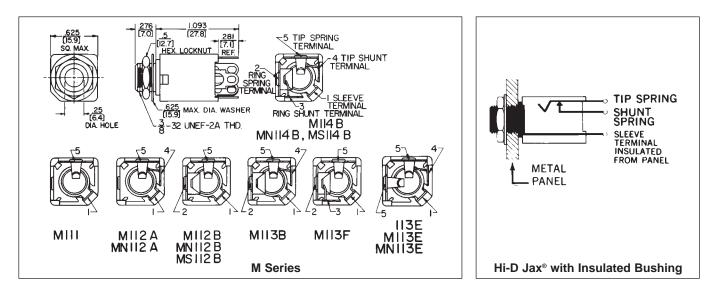

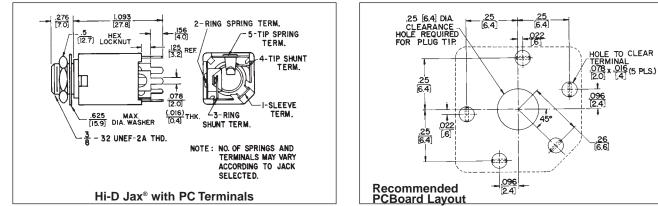

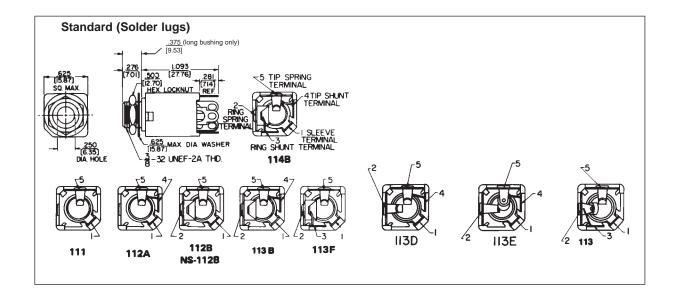

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

# JACKS AND PLUGS HI-D JAX<sup>®</sup> 2- AND 3-CONDUCTOR \* Please visit the product pages on SPRING LOCK PC TERMINIALS


\* Please visit the product pages on our website for the most up-to-date product information

# SPRING LOCK PC TERMINALS FOR HI-D JAX®


HI-D JAX<sup>®</sup> SHOWING SPRING LOCK PC TERMINALS



CLOSE-UP VIEW OF SPRING LOCK TERMINALS

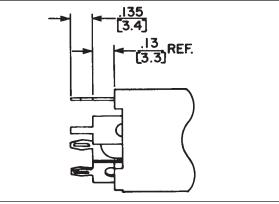

PARTIAL VIEW SHOWING SPRING LOCK TERMINALS Tip, ring and sleeve terminals are spring lock type.

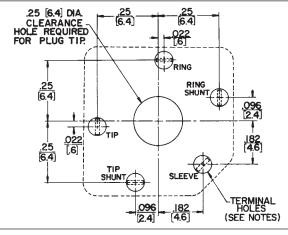

#### RECOMMENDED PC BOARD LAYOUT SPRING LOCK TERMINALS (COMPONENT SIDE)

NOTES:

1. SERIES 110PC—ALL HOLES TO CLEAR .078" X .016" TERMINAL. 2. SERIES 110PCS—TIP, RING & SLEEVE HOLES TO BE .055" DIA. RING SHUNT & TIP SHUNT HOLES TO CLEAR .078" X .016" TERMINAL. Hi-D Jax<sup>®</sup> enclosed 1/4" phone jacks offer spring lock PC terminals which close during insertion into PC board. Upon completed insertion, the terminals reopen to securely hold the jack to the PC board during soldering. Solder "fills" the terminals which provides an additional security from loosening. The spring lock terminal is available on all Hi-D Jax<sup>®</sup> which currently offer PC terminals.

**NOTE:** Tip and ground terminals can be specified with spring lock terminals (also ring terminal on 3-conductor jacks).

#### MOUNTING

Jacks mount in a single .375" diameter hole on .625" minimum centers. Series 11\*, N11\* and S11\* mount in panels up to .156 " thick. Series NL11\* (long bushing) mount in panels up to .250 " thick. Jacks with PC terminals mount on PC boards up to .094 " thick. Spring lock PC terminals hold jack securely to PC board. Threaded bushing permits mechanical connection to equipment panel. Mounting hardware is supplied. See "RECOMMENDED PC BOARD LAYOUT" for further details.

**SERIES 11\* -** 2- and 3-conductor types, threaded metal bushing .276" long. .250 inch inside diameter bushings.

**SERIES N11\*** - Same as Series 11\* except bushing is molded thermoplastic for insulated mounting.

**SERIES NL-11\*** - Same as Series N11\* except bushing is .375" long for insulated mounting in panels up to .250" thick.

**SERIES S11\*** - Same as Series 11\* except bushing has .210" inside diameter Smaller diameter protects against accidental insertion of plugs with .250" diameter fingers.

#### SPECIFICATIONS MATERIAL

**Mounting Bushing:** Series 11\*, S11\*: Nickel-plated copper alloy. Series N11\*, NL11\*: Molded thermoplastic over plated copper alloy sleeve.

#### ORDERING INFORMATION

TWO CONDUCTOR PART NUMBERS				
Part Number	Description	Jack Schematic	Typical Mating Plug <sup>1</sup>	
<b>◊111PCS</b>	Open circuit	I	250	
<b>⊘N111PCS</b>	Insulated bushing	I	250	
<b>◊112APCS</b>	Single closed circuit	III	250	
<b>⊘N112APCS</b>	Insulated bushing		250	
113PCS	Isolated "make" circuit	V	250	
<b>◊113EPCS</b>	Isolated "break" circuit	IX	250	
THF	REE CONDUCTOR PART	NUMBERS		
<b>≬112BPCS</b>	Double open circuit	IV	267	
<b>⊘N112BPCS</b>	Insulated bushing	IV	267	
<b>◊S112BPCS</b>	.210" I.D. bushing	IV	S267	
<b>◊113BPCS</b>	Single closed circuit	VII	267	
<b>⊘N113BPCS</b>	Insulated bushing	VII	267	
113FPCS	Ring closed circuit	XXVIII	267	
<b>◊114BPCS</b>	Double closed circuit	XII	267	
<b>⊘N114BPCS</b>	Insulated bushing	XII	267	
<b>◊NL114BPCS</b>	.375" long bushing	XII	267	

1 See Jack Section for other mating plugs.

◊ Special order only. Contact Switchcraft.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS Right-Angle Phone Jacks

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" RIGHT-ANGLE PHONE JACKS

SERIES SN37, SN49 AND SN70



SN37A14B with cover Number P2993



SN49B12B with cover Number P2994







SN49A12B



SN49C12B

SN70C14B

These low-profile phone jacks have "snap-in" PC mounting, right-angle plug insertion and available with 2- and 3-conductor circuits and plastic or metal bushings. Ideal for telecommunications, data processing and other high quality audio connecting applications.

**SERIES SN37A -** Right-angle PC mount phone jack with molded plastic housing. Only .375" high, this jack features a plain (non-threaded) bushing and accepts commercial standard phone plugs with .25" diameter finger.

#### Jack circuit selection:

2-conductor • Single open circuit • Shunted tip

3-conductor • Double open circuit • Shunted tip and ring

Jack housing snaps into PC boards (.062" thick) and features molded tension fingers to provide stable mount. Location pin polarizes mounting for correct insertion every time. Clearance between housing facilitates board cleaning without disturbing internal springs. SN37 without tension fingers available on special order.

Molded housing protects internal parts and allows high density packaging. Supplied with "Snap-On" cover.

**SERIES SN49A -** Similar to Series SN37A, except .492" high and insulated/plain (non-threaded) bushing. "Snap-On" cover available on special order only.

**SERIES SN49B -** Similar to Series SN37A, except .492" high and insulated threaded bushing. Washer and hex nut for bushing mount supplied. "Snap-On" cover available on special order only.

**SERIES SN49C -** Similar to Series SN37A, except .492" high and threaded metal bushing. Washer and hex nut for bushing mount supplied. "Snap-On" cover available on special order only.

**SERIES SN70B** - This series features threaded/insulated bushing and .708" in height. Circuit selection and housing features are same as Series SN49B. "Snap-On" cover not available.

**SERIES SN70C** - Same as Series SN70B, except bushing is threaded metal type.

#### SPECIFICATIONS MECHANICAL

Shock: Per MIL-STD-202, method 213. Vibration: Per MIL-STD-202, method 201. Insertion Force: 8 pounds maximum. Withdrawal Force: 1.5 pounds minimum. Life: 10,000 cycles minimum.

**SN70B12A** 

#### ELECTRICAL

**Insulation Resistance:**  $2 \times 106 \text{ M}\Omega$  at 500 V DC per MIL-STD-202, method 302 (initial). **Dielectric Withstanding Voltage:** 500 V AC.

#### **ENVIRONMENTAL**

**Thermal Range:** -55°C (-67°F) to +85°C (+185°F) Non operating. -20°C to + 65°C Operating.

Thermal Shock: Per MIL-STD-202d, method 107. Humidity: Per MIL-STD-202, method 106, less steps 7A and 7B. Salt Spray: Per MIL-STD-202, method 101.

#### MATERIAL

Housing and Cover: Black thermoplastic, UL 94V-O. Contact Springs: Copper alloy with tin-plated terminals. Hardware: Nickel-plated copper alloy. Metal Bushing: Nickel-plated copper alloy.

#### ORDERING

1. Order jacks from tables on page 103.

2. For all special order items, contact Switchcraft.



DIMENSIONS ARE FOR REFERENCE ONLY

101

# JACKS AND PLUGS Right-Angle Phone Jacks

**PHONE: 773 792-2700** 

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" RIGHT-ANGLE PHONE JACKS (continued)

SERIES - RA and RN



Series RN110







Series RA

**SERIES RA -** 2- and 3-conductor RA Jax<sup>®</sup> are designed with split terminals which provide two distinct advantages over contemporary jacks:

1. Positive retention of jack in PC board during wave soldering. 2. Split terminal permits additional solder flow paths up the

terminal for better mechanical/electrical connection

Tip spring design facilitates positive retention of differing mating plug tip shapes (industry standard and others).

**SERIES RN -** Right-angle Hi-D Jax<sup>®</sup> permits space-saving mounting on PC boards. Available in 2- and 3-conductor types with or without shunt circuits, which can mate with .25" diameter COMMERCIAL or TELEPHONE/MIL plug fingers. Right-angle jack permits tip of mating plug to be inserted parallel with PC board. Can be mounted on PC boards or combined PC board and panel/chassis.

Mounted through .375" diameter holes (locknut and washer supplied) in panels and chassis up to .141" thick. Minimum mounting centers are .625". If insulated mount is desired, mounting with flat, non-conductive washer (not supplied) is recommended.

PC terminals mount on boards up to .125" thick, and hand dip or wave soldering, is recommended. Three separate standoffs fit through board to provide stable mounting. Threaded bushing permits optional fastening to panel or chassis.

**SERIES RN110 -** 2- and 3-conductor right-angle types mount in PC boards or panel/chassis. Bushing is .278" long.

#### **SPECIFICATIONS**

Housing: Thermoplastic.

**Bushing:** Integral with housing. **Springs:** Copper alloy, silver-plated (also available with selectively gold-plated contact points and selectively tin-plated terminals).

Contacts: Integral, part of shunt springs.

**NOTE:** Specifications for Mechanical, Electrical and Environmental are the same for Hi-D<sup>®</sup> Jax. (page 98)

vitchera

DIMENSIONS ARE FOR REFERENCE ONLY

# JACKS AND PLUGS RIGHT-ANGLE PHONE JACKS — SERIES RA, RN AND SN

103

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" RIGHT-ANGLE PHONE JACKS (continued)

#### **ORDERING INFORMATION**

SERIES SN Part Numbers	Description	Jack <sup>2</sup> Schematic	Typical Mating Plug <sup>3</sup>
SN37A111	2-cond., open circuit	I	250
SN37A12A <sup>1</sup>	2-cond., single closed circuit		250
SN37A12B <sup>1</sup>	3-cond., double open circuit	IV	267
SN37A14B <sup>1</sup>	3-cond., double closed circuit	XII	207
SN49A111	2-cond., open circuit		250
SN49A12A <sup>1</sup>	2-cond., single closed circuit	III	200
SN49A12B <sup>1</sup>	3-cond., double open circuit	IV	267
SN49A14B <sup>1</sup>	3-cond., double closed circuit	XII	207
SN49B111	2-cond., open circuit	I	250
SN49B12A <sup>1</sup>	2-cond., single closed circuit	III	200
SN49B12B1	3-cond., double open circuit	IV	267
SN49B14B <sup>1</sup>	3-cond., double closed circuit	XII	207
SN49C11	2-cond., open circuit	I	250
SN49C12A	2-cond., single closed circuit	III	200
SN49C12B	3-cond., double open circuit	IV	267
SN49C14B	3-cond., double closed circuit	XII	207
SN70B11	2-cond., open circuit	I	250
SN70B12A	2-cond., single closed circuit		200
SN70B12B	3-cond., double open circuit	IV	267
SN70B14B	3-cond., double closed circuit	XII	201
SN70C11	2-cond., open circuit	I	250
SN70C12A	2-cond., single closed circuit		200
SN70C12B	3-cond., double open circuit	IV	267
SN70C14B	3-cond., double closed circuit	XII	207

1 Series SN37A supplied with Part Number P2993 cover. Series SN49A and SN49B can be supplied with Part Number P2994 cover on special order. Contact Switchcraft.

#### **ORDERING INFORMATION**

SERIES RA Part Numbers	Description	Jack <sup>2</sup> Schematic	Typical Mating Plug <sup>3</sup>
RA49B11	2-cond., open circuit	I	250
RA49B12A	2-cond., single closed circuit		250
RA49B12B	3-cond., double open circuit	IV	267
RA49B14B	3-cond., double closed circuit	XII	207
RA49C11	2-cond., open circuit	I	250
RA49C12A	2-cond., single closed circuit	III	200
RA49C12B	3-cond., double open circuit	IV	267
RA49C14B	3-cond., double closed circuit	XII	207
RA70B11	2-cond., open circuit	I	250
RA70B12A	2-cond., single closed circuit	III	250
RA70B12B	3-cond., double open circuit	IV	267
RA70B14B	3-cond., double closed circuit	XII	207
RA70C11	2-cond., open circuit	I	250
RA70C12A	2-cond., single closed circuit	III	250
RA70C12B	3-cond., double open circuit	IV	267
RA70C14B	3-cond., double closed circuit	XII	207
SERIES RN Part Numbers			
RN111PC	2-cond., single open circuit		250
RN112APC	2-cond., single closed circuit		250
RN112BPC	3-cond., double open circuit	IV	267
RN113BPC	3-cond., tip closed, ring open	VII	267
<b>⊘RN113FPC</b>	3-cond., tip open, ring closed	XXVIII	267
RN114BPC	3-cond., double closed circuit	XII	267

2 See pages 79 and 80.

3 Other mating plugs are available. ◊ Special order only. Contact Switchcraft.

ACKS AND PLUGS

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS RIGHT-ANGLE PHONE JACKS – SERIES SN


# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### 1/4" RIGHT-ANGLE PHONE JACKS (continued)

#### SERIES SN


JACK SCHEMATICS

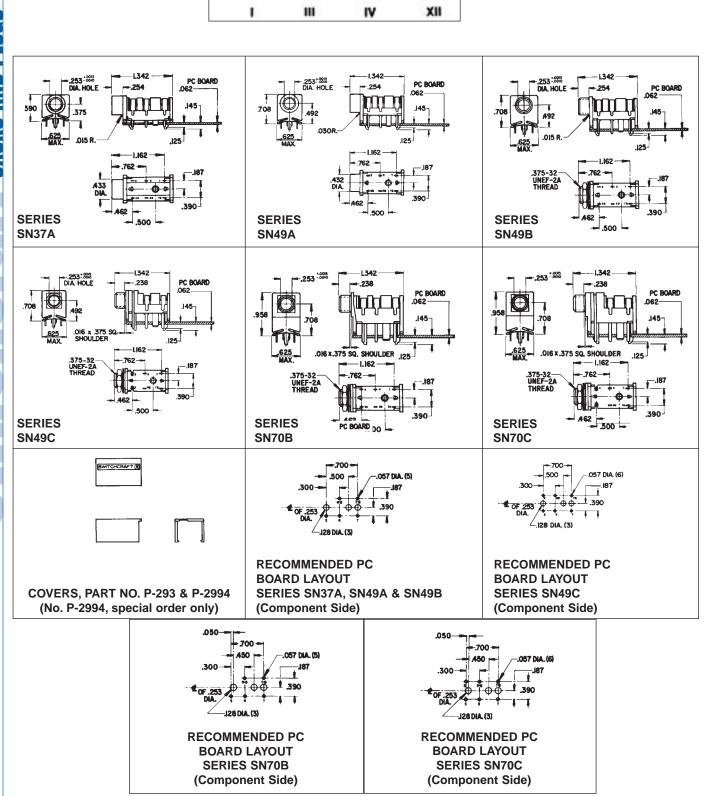

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

### 1/4" RIGHT-ANGLE PHONE JACKS (continued)

#### SERIES RA and RN

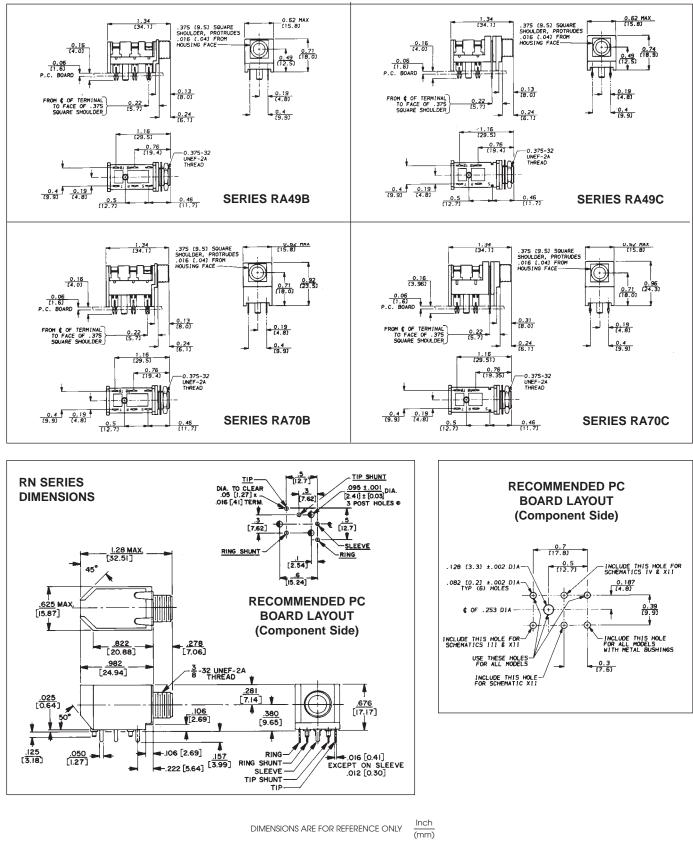

105

JACKS AND PLUGS

Switchers

# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### JACK COVERS

**JACKS AND PLUGS** 

**JACK COVERS** 

Reliable, spring-loaded covers effectively seal front panel bushing openings from dust and dirt when mating plugs are not connected to jack. Series 500 is mounted with conventional threaded bushing jacks. Special locknut (comes with Series 500 jack covers) seals tightly against rubber washer when cover is closed. Series 600 is used with certain type tip jacks. Due to variable jack dimensions, two .031" washers are supplied.

#### SPECIFICATIONS MATERIAL

Base and Cover: Steel per QQ-S-698; finish per MIL-F-14072 (Sig. C), enamel, semi-gloss. Axle: Copper alloy per QQ-W-321, Type 321, composition B. Plated per QQ-P-416, Type II, Class 3. Spring: Stainless steel per QQ-W-432, Type 302. Hex Nut: Copper alloy per QQ-B-626, composition 22. Same plating as axle.

**Gasket:** Synthetic rubber per MIL-R-6855, Type II, 35-40 Durometer.

**Washer (600 only):** Steel per QQ-S-698; plated per QQ-P-416, Type II, Class 3.

Additional Specifications for Numbers 512 and 612: Same as above, except rivet, base, cover and hex nut and washer (Number 612 only) are nickel-plated per QG-N-290.

Color	Part No.	Part No.	Color	Part No.	Part No.
Olive Drab	510	<b>◊610</b>	Black	515	615
Bright Nickel	512	612	Navy Gray	520	<b>∂620</b>


◊ Special order only. Contact Switchcraft.




515





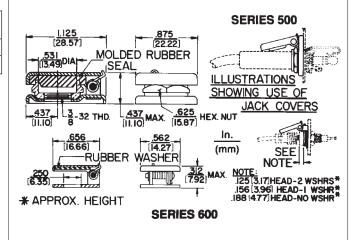



(S AND PIJICS)

#### \* Please visit the product pages on our website for the most up-to-date product information

### 1/4" PHONE JACKS (continued)

SERIES E

### LOCKING PHONE JACKS



Series E jacks provide stable, secure connections in panels where shock/vibration or accidental disconnect may occur. Plug locks-in automatically upon insertion; press "PUSH" tab to unlock and remove plug. Series E jacks have the same front panel appearance as Series E Q-G<sup>®</sup> audio connectors.

#### SPECIFICATIONS MECHANICAL

Life: 10,000 cycles minimum.

#### ELECTRICAL

Insulation Resistance:  $2 \times 106 \text{ M}\Omega$  at 500 V DC per MIL-STD-202, method 302 (initial). Dielectric Withstanding Voltage: 1,000 V AC (rms).

#### **ENVIRONMENTAL**

Thermal Range: -55°C to +85°C (non-operating); -20°C to +65°C (operating). Thermal Shock: Per MIL-STD-202, method 107. Humidity: Per MIL-STD-202, method 106. Salt Spray: Per MIL-STD-202, method 101.

#### MATERIAL

Shell: Die-cast zinc, with satin nickel-plating. Black chrome over nickel-plating on special order.

Insert and Latch: Thermoplastic, UL 94V-O. Latch Release: Nickel-plated die-cast zinc. Contact Springs: Tin-plated copper alloy.

Part Number	Description	Jack Schematic <sup>1</sup>	Typical Mating Plug <sup>2</sup>
E111L	2-cond., open circuit	I	250
E112BL	3-cond., double open circuit	IV	267

1. See Jack Schematics, pages 79 and 80 2. See Plugs Section

 $\begin{array}{c} 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1427^{(1LCA \ WOT} \\ \hline 1225^{(1)} \\ \hline 1$ 

DIMENSIONS ARE FOR REFERENCE ONLY

### THICK PANEL PHONE JACKS



Jacks are standard 2- and 3-conductor phone jacks with extra long threaded bushing for mounting in panels/chassis up to 1.25" thick. Metal bushing virtually eliminates hum pick-up, and is ideal for electric guitar and speaker connections. Jacks mate with standard commercial phone plugs. See plug section for mating plugs. Jacks mount in a single .469" diameter hole. Rugged cable clamp protects connections from twisting and pulling stresses.

#### SPECIFICATIONS

#### MATERIAL

**Mounting Bushing:** Nickel-plated copper alloy with knurled flange. **Insulating Spacer:** Rigid plastic.


Insulator/Spring Mount: Thermoplastic.

Springs: Copper alloy.

Terminals: Tip: Copper alloy. Ring: (Number 152B only) copper alloy. Sleeve: Steel, tin-plated.

Hardware: Supplied with one, Number P10531 nickel-plated copper alloy hex nut, and one, Number P14761 nickel-plated copper alloy flat washer.

Part Number	Description	Jack Schematic	Typical Mating Plug
151	2-conductor, open circuit, nickel finish	I	280
152	2-conductor, open circuit, brass finish		280
152B	3-conductor, double open circuit, nickel finish	IV	297
153	2-conductor, open circuit, gold-plated springs, electro-polish brass finish, 9/16-12 UNC wood threads	I	280
154	3-conductor, double open circuit, gold finish, no cable clamp	IV	297
155	3-conductor, double open circuit, black satin finish, no cable clamp	IV	

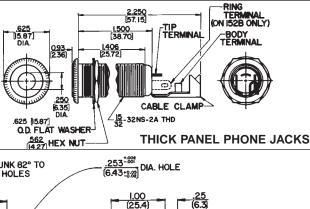


### 1/4" EXTENSION JACKS (IN-LINE)



Extension Jax<sup>®</sup> jacks are connected to the end of a cable. 2- and 3-conductor jacks mate with standard commercial phone plugs, and have a sturdy cable clamp strain relief, knurled shielded or molded black plastic handles, and a screw type solder terminal. All internal parts are interlocked. Note: See locking phone plugs section.

#### SPECIFICATIONS MATERIAL

Body, Sleeve and Shielded Handle: Nickel-plated copper alloy. Plastic Handles: Molded black thermoplastic. Springs: Special copper alloy. Bushing and Flange: Plated copper alloy. Insulation: Thermoplastic. Clamp Terminals: Tin-plated copper alloy.

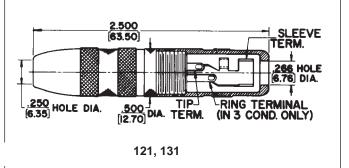

### 1/4" SPEAKER JACKS

High power 2-conductor speaker jack carries 15A (continuous) audio speaker current levels. Jack Number **Z15J** has positive detent for plug retention. Terminations are solder lug; wires accepted are up to 10 AWG. Red housing indicates high current rating. Recommended mating plugs: 70, 184, 187 series.

#### SPECIFICATIONS

Housing: Glass reinforced thermoplastic, UL 94V-O.
Tip Spring and Ground Terminals: Copper alloy.
Bushing and Hardware: Nickel-plated copper alloy (hardware supplied).
Heat Rise: 30°C with 15 A continuous carry.
Life: 10,000 (minimum) with proper plug.

Part Number	Description	
Z15J	High power speaker jack	


#### **TWO-CONDUCTOR PART NUMBERS**

Part Number	Description	Mating Plug <sup>1</sup>
80	Black handle; screw terminals	250
88	Black handle; solder lugs	250
120	Shielded handle; screw terminals	250
121	Shielded handle; solder lugs; cable clamp	250
128	Shielded handle; solder lugs	250


#### THREE-CONDUCTOR PART NUMBERS

Part Number	Description	Mating Plug <sup>1</sup>
131	Shielded handle; solder lugs	267
830	Black handle; screw terminals	267
S830	Similar to No. 830 except, .21" I.D. sleeve	480
838	Black handle; solder lugs	267
1230	1230 Shielded handle; screw terminals	
1238	Shielded handle; solder lugs	267

1. Other mating plugs are available.

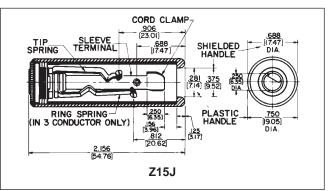



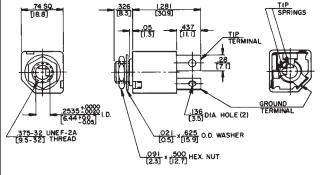

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

108

# 1/4" SHIELDED PHONE JACKS






CN12A

Shield is assembled as part of the jack; cover "snaps" into place. Shield is designed for Hi Z circuits. Mounting is through a 3/8" diameter hole in chassis/panel up to .156" thick with hex nut and flat washer (supplied). On special order, jacks with .21 inch inside diameter bushing are available.

#### SPECIFICATIONS MATERIAL

**Cover and Shield:** Copper alloy, nickel-plated. **Cable Entry Insulation:** Thermoplastic.



#### TWO CONDUCTOR PART NUMBERS

Part Number	Description	Jack Schematic <sup>1</sup>
CN11	Uses Number 11 Littel-Jax <sup>®</sup> jacks	I
<b>⊘CN12A</b>	Uses Number 12A Littel-Jax <sup>®</sup> jacks	III

 $\Diamond$  Special order only. Contact Switchcraft.

#### THREE CONDUCTOR PART NUMBERS

CN12B	Uses Number 12B Littel-Jax <sup>®</sup> jacks	IV
<b>⊘CN13B</b>	Uses Number 13B Littel-Jax <sup>®</sup> jacks	VII

1 See jack schematics on pages 79 and 80.

2 See Plug Section for mating information.

 $\Diamond$  Special order only. Contact Switchcraft.


# .141" MINIATURE PHONE JACKS



#### MINIATURE EXTENSION JACK, PHONE JACK NUMBER 125 (EIA STANDARD)

Cable-mounted Tini-Extension Jax<sup>®</sup> 2-conductor single open circuit jack has built in cable clamp/sleeve terminal. Mates with Tini-Plug<sup>®</sup> phone plugs and other plugs with .141" diameter fingers and compatible tip shape. Shielded housing/handle is knurled for positive fingertip grip; solder lug terminals. **Body and handle:** Nickel-plated copper alloy.

Insulation: Rigid plastic. Springs: Plated copper alloy.

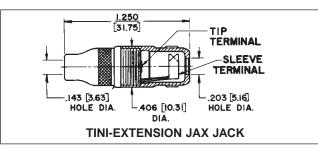

Part Number	Description	Jack Schematic	Typical Mating Plug
125	Extension Jack	I	750

# SF-JAX<sup>®</sup> SHORT FRAME JACKS

Part No.	Cond.	Schematic Number	Typical Mating Plug	MIL Type	Contacts	Rating	Mounting In. (mm)
24B	3	XII	267				
25	2	XIII	250		1		
<b>⊘53B</b>	3	VII	267		1		.375 (9.52)
<b>◊54A</b>	2	XI	250		Fine	3A 125V	hole, mounts in
<b>◊54B</b>	3	XII	267		Silver		
◊55	2	XIII	250		1	AC	to .156 (3.96) thick
<b>⊘C-55B</b>	3	XV	482	JJ-095,			
				M641/14-1			

Long spring design reliability with minimum behind-panel depth. Series 50 same as Series 20, except solder lug location requires more depth, but less panel space. Number C55B has MIL type insulation and finish.



**SERIES 20** 



**SERIES 50** 

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS Miniature Phone Jacks

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# .141" MINIATURE PHONE JACKS









142A

**PC142A** 

### **TINI-JAX® MINIATURE PHONE JACKS,** NUMBERS 41, 42A, 43A

Tini-Jax 2-conductor phone jacks, (for limited space connecting, mate with miniature phone plugs having .141 " diameter fingers and compatible tip shape) are 1/3 the size of Littel-Jax® and weigh less than 1/8 ounce. Notched insulators interlock internal parts. Unique tip spring shape mates with Switchcraft Tini-Plug® phone plugs. Mounting hole: .250" diameter in panels up to .125" thick (mounting hardware supplied). For insulated mount, order two washers separately, Number S1564 (swedged fiber washer .312" diameter mounting hole) and number S2207 (flat phenolic washer).

#### **SPECIFICATIONS MECHANICAL**

Life: 5,000 insertion/withdrawal cycles, minimum.

#### **ELECTRICAL**

Contact Resistance: .075 ohms maximum. Insulation Resistance: 5,000 MΩ minimum. Dielectric Withstanding Voltage: 250 V AC maximum. Contact Rating: .25A, 48 V DC.

#### MATERIAL

Mounting Bushing: Nickel-plated copper alloy. Insulating Spacers: Rigid plastic. Springs: Special copper alloy. Sleeve Terminal: Tin-plated copper alloy. Hardware: Supplied with one, Number P11501 nickel-plated copper alloy locknut, and one, Number S17901 nickel-plated steel flat washer.

Part Number Description		Jack Schematic <sup>1</sup>	Typical Mating Plug <sup>2</sup>
41 Open circuit		I	750
42A Shunted (closed circuit)		III	750
43A Special transfer circuit		Note 3	750
142A Shunted (closed circuit)			750
PC142A Shunted (closed circuit)			750

1. See jack schematics, pages 79 and 80.

2. See Plugs Section for mating information.

3. When inserted, plug tip contacts "make" tip spring. Further insertion allows tip to short "make" tip spring and tip spring together. Full insertion opens tip shunt circuit.

#### DIMENSIONS ARE FOR REFERENCE ONLY

Inch (mm)



#### **TINI-D-JAX® MINIATURE ENCLOSED** PHONE JACKS, NUMBERS 142A, PC142A

Tini-D Jax uses Hi-D Jax<sup>®</sup> construction and mounts on .375" centers. Weight: 3.6 grams. Number 142A mounts through .25" diameter hole in chassis/panel up to .125" thick. Four standoff dimples can be molded into housing to reduce effective length of bushing to .187" (special order). Number PC142A has special spring terminals for "snap-in" mounting to PC boards up to .125" thick - ready for hand, wave or dip-soldering.

#### **SPECIFICATIONS MECHANICAL**

Life: 5,000 insertion/withdrawal cycles, minimum. Insertion/Withdrawal: 15 ounce minimum, 40 ounce maximum, insertion. 12 ounce minimum, 25 ounce maximum, withdrawal.


#### **ELECTRICAL**


Contact Resistance: .10 ohms maximum. Dielectric Withstanding Voltage: 250 V AC maximum. Shunt Tension: 100 grams minimum.


#### MATERIAL

Housing: Molded plastic. Mounting Bushing: Plated copper alloy. Tip Spring: Plated copper alloy, bifurcated. Shunt Springs: Plated copper alloy. Sleeve Bracket: Plated steel. Insulator: Rigid plastic. Hardware: Number 142A supplied with one, Number P1975 nickel-plated copper alloy locknut, and one, Number S3997 nickel-plated steel flat washer.

### .141" MINIATURE PHONE JACKS (continued)

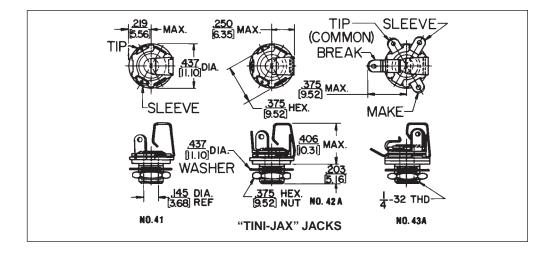

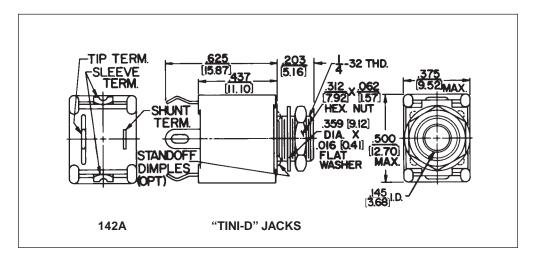

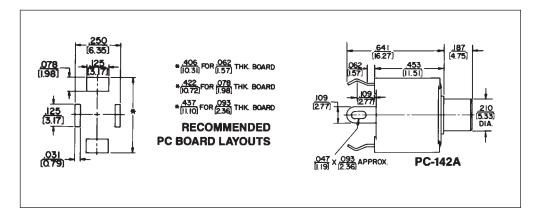


DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

# JACKS AND PLUGS 3.5MM DUAL STEREO JACK

# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

# 3.5MM DUAL STEREO JACK





**UNSHIELDED - 35RAPC7J** 



SHIELDED - 35RAPC7JS

#### FEATURES

- 3-conductor, miniature phone jack mates with 3.5 mm finger plugs.
- Saves board space...two jacks in a single vertical mount footprint.
- Ideally suited for infra-red and convection oven soldering 235°C (455°F).
- Board retention pins accommodate PC board thickness range of .050" to .080".
- Single-screw panel mounting hole is standard.
- EMI-RFI shield, optional.
- Housing UL 94V-0 rated against flammability.

#### **APPLICATIONS**

- Multi-media workstations
- Headphones/microphone sets
- Interactive TV
- Audio
- Telecommunications
- Medical
- Computer
- Instrumentation

#### MATERIALS

Housing: Thermoplastic. Tip and Ring Springs: Silver-plated copper alloy. Shunt Terminals: Silver-plated copper alloy. Sleeve Terminals: Silver-plated copper alloy. Shield: Pre-tinned copper alloy.

#### PERFORMANCE SPECIFICATIONS

Insertion/Extraction Forces, initial: 0.8 to 6 pounds. Dielectric Withstanding Voltage: 500 VAC. Insulation Resistance, initial: 100 Megaohms, min. Contact Resistance: Between plug and jack: 50 milliohms, maximum Between springs and shunts: 30 milliohms, maximum. Life: 5000 cycles, minimum.

#### **ORDERING INFORMATION**

#### Part Number:


Shielded - **35RAPC7JS** Unshielded - **35RAPC7J 1.** Order by part number.


2. Contact Switchcraft for special order information.

113

### \* Please visit the product pages on our website for the most up-to-date product information

# 3.5MM DUAL STEREO JACK (continued)

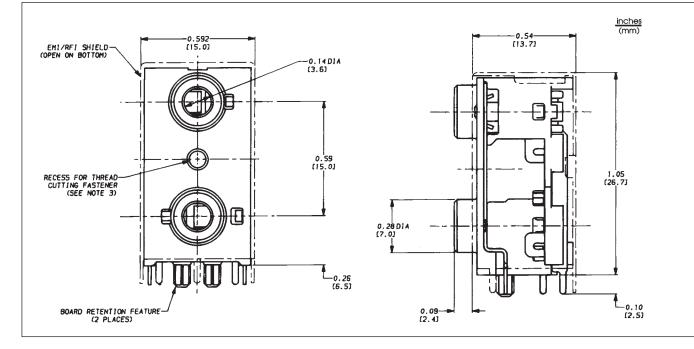

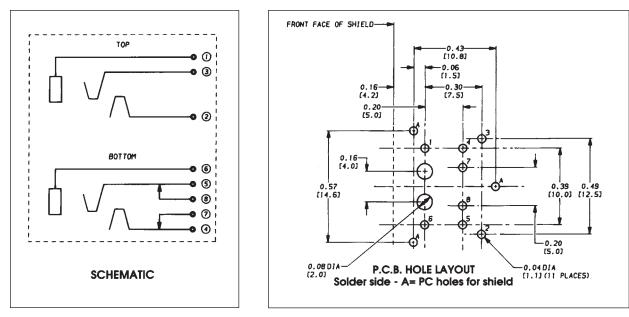

#### NOTES:

- 1. Shield isolated from terminals 1 and 6.
- **2.** Width of all terminals = 0.032" (0.814 mm).
- **3.** Use Camcar Textron S25 T8 TORX pan head "Duro-PT" thread cutting fastener of appropriate length or equivalent.

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 



#### \* Please visit the product pages on our website for the most up-to-date product information

### 3.5MM SINGLE MONO AND STEREO JACKS



35RAPC4BV4



• 2 and 3 conductor 3.5mm phone jacks

versions, and open frame panel mounts

Right angle PC mount, true SMT

· Wide variety of circuits available • Mates with all 3.5mm plugs Right angle

PC mount available in low profile,



35RAPC2AV



35RAPC2BV4

#### MATERIALS

Housing: Thermoplastic, UL94V-1 Terminals: Silver-plated, copper alloy Bushing: Nickel-plated, copper alloy **Performance Specifications:** Contact Resistance: < 50 milliohms Insulation Resistance: 100 milliohms min. **Dielectric Withstanding Voltage: 250** VAC (35RAPC2BHN2- 500 VAC) **Open Frame Versions Materials:** Housing (35PM2BV2): Thermoplastic, 94V-1 Life: 5000 cycles, min. Bushing: Nickel-plated, copper alloy



35RAPC2BHN2



35RAPC2BH3

Insulating Washers: Rigid Plastic Springs: Copper alloy Sleeve Terminal: Tin-plated, copper alloy Hardware: Supplied with one, P11501 nickel-plated brass locknut, and one, S17901 nickel-plated steel flat washer **Performance Specifications:** Contact Resistance: .075 ohms max. Insulation Resistance: 5,000 Mohms min

**Dielectric Withstanding Voltage:** 250 VAC Life: 5000 cycles, min

#### **ORDERING INFORMATION**

Part numbers which include the letter "N" designate non-threaded bushings. Part numbers without the letter "N" designate threaded bushing.

Part Number	Description	Height vs. Width	Bushing
35RAPC2AV	mono	vertical	threaded <sup>3</sup>
35RAPC2AHN2	mono	horizontal	non-threaded
35RAPC2AHN3	mono	horizontal	non-threaded
35RAPC2BHN2	stereo	horizontal	non-threaded
35RAPC2BHN3	stereo	horizontal	non-threaded
35RAPC3BHN2	stereo	horizontal	non-threaded
35RAPC3BHN3	stereo	horizontal	non-threaded
35RAPC4BHN2	stereo	horizontal	non-threaded
35RAPC4BHN3	stereo	horizontal	non-threaded
35RAPC2AH3	mono	horizontal	threaded <sup>3</sup>
35RAPC2BH3	stereo	horizontal	threaded <sup>3</sup>
35RAPC3BH3	stereo	horizontal	threaded <sup>3</sup>

Part Number	Description	Height vs. Width	Bushing
35RAPC4BH3	stereo	horizontal	threaded3
35RAPC2AV4	mono	vertical	threaded <sup>3</sup>
35RAPC2BV4	stereo	vertical	threaded <sup>3</sup>
35RAPC3BV4	stereo	vertical	threaded <sup>3</sup>
35RAPC4BV4	stereo	vertical	threaded <sup>3</sup>
35RAPC2AVN4	mono	vertical	non-threaded
35RAPC2BVN4	stereo	vertical	non-threaded
35RAPC3BVN4	stereo	vertical	non-threaded
35RAPC4BVN4	stereo	vertical	non-threaded

Replacement Knurl Nut P3345

1. Order by part number

2. Contact Switchcraft for special ordering information

3. Mounting hardware included.

JACKS AND PLUGS

witche

**FEATURES** 

horizontal styles

DIMENSIONS ARE FOR REFERENCE ONLY

Inch (mm)

### 3.5MM SINGLE, MONO AND STEREO JACKS (continued)


#### 35RAPC2AV - MONO, VERTICAL, THREADED

#### MATERIALS

Coil Spring: Steel wire. Bushing: Nickel-plated copper alloy. Terminal: Silver-plated copper alloy. Tip Spring: Silver-plated copper alloy. Shunt Terminal: Plated copper alloy. Cover: Thermoplastic, transparent UL 94V-2. Body: Thermoplastic, UL 94V-1 black color.

#### PERFORMANCE SPECIFICATIONS

Contact Resistance: 20 milliohms maximum. Insulation Resistance: 100 milliohms minimum at 250V DC. Dielectric Withstanding Voltage: 250V AC. Life: 5000 cycles, minimum. Insertion Force: 0.88 pounds - 3.5 pounds. Withdrawal Force: 0.88 pounds - 2.64 pounds.

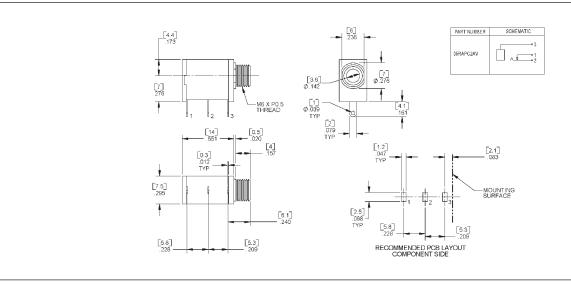


#### 35RAPC2AV4, 35RAPC2BV4, 35RAPC3BV4, 35RAPC4BV4 - STEREO, VERTICAL, THREADED

#### MATERIALS

Coil Springs: Steel Wire.
Ring Spring: Copper alloy strip, tin alloy plating.
Ground Terminal: Copper alloy strip, tin alloy plating.
Bushing: Nickel-plated copper alloy.
Cover: Thermoplastic, UL 94V-0 black color.
Body: Thermoplastic, UL 94V-0 black color.

#### PERFORMANCE SPECIFICATIONS

Contact Resistance: 20 milliohms maximum, initial 50 milliohms maximum, after life. Insulation Resistance: 50 megohms minimum at 500V DC. Dielectric Withstanding Voltage: 250V AC. Life: 5,000 cycles, minimum. Insertion Force: 0.88 lbs. to 3.50 lbs. Withdrawal Force: 0.88 lbs. to 3.10 lbs.

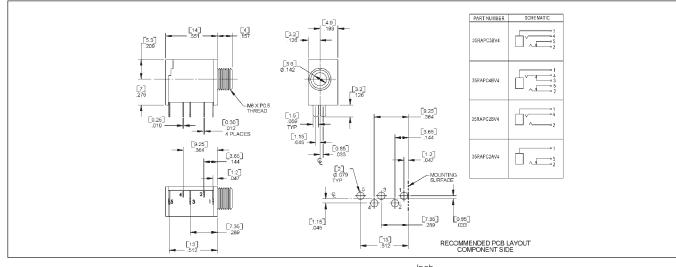

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS 3.5MM SINGLE MONO AND STEREO JACKS

# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information


# 3.5MM SINGLE, MONO AND STEREO JACKS (continued)

### 35RAPC2AHN2, 35RAPC2BHN2, 35RAPC3BHN2, 35RAPC4BHN2 - STEREO, HORIZONTAL, NON-THREADED

#### MATERIALS


Cover: Thermoplastic, UL 94V-1 black color. Ring Spring: Copper alloy. Tip Spring: Silver-plated copper alloy. Ground Terminal: Silver-plated copper alloy. Metal: Copper alloy, nickel plating. Body: Thermoplastic, UL 94V-0 black color. Contact Resistance: 30 milliohms maximum, initial 100 milliohms maximum, after life. Insulation Resistance: 100 megohms minimum at 500V DC. Dielectric Withstanding Voltage: 500V AC. Life: 5000 cycles, minimum. Insertion Force: 0.88 pounds - 6.6 pounds.

PERFORMANCE SPECIFICATIONS

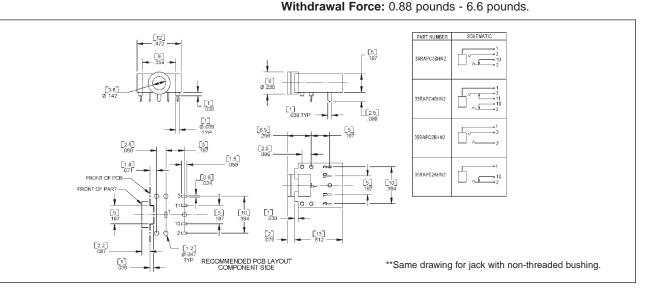

#### 35RAPC2AH3, 35RAPC2BH3, 35RAPC3BH3, 35RAPC4BH3 - STEREO, HORIZONTAL, THREADED MATERIALS PERFORMANCE SPECIFICATIONS

Coil Springs: Steel wire. Tip Spring: Silver-plated copper alloy. Ring Spring: Silver-plated copper alloy. Ground Terminal: Silver-plated copper alloy. Bushing: Nickel-plated copper alloy. Cover: Thermoplastic, transparent UL 94V-2. Body: Thermoplastic, UL 94V-1 black color. Contact Resistance: 20 milliohms maximum, initial 100 milliohms maximum, after life. Insulation Resistance: 100 megohms minimum. Dielectric Withstanding Voltage: 250V AC. Life: 5000 cycles, minimum. Insertion Force: 0.88 lbs. - 3.50 lbs. Withdrawal Force: 0.88 lbs. - 3.10 lbs.

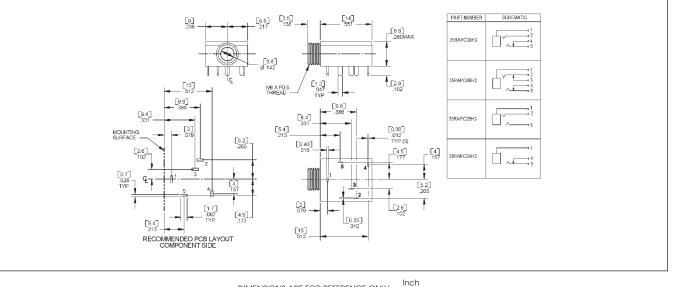

DIMENSIONS ARE FOR REFERENCE ONLY

www.switchcraft.com

116

# JACKS AND PLUGS 3.5MM SINGLE MONO AND STEREO JACKS

\* Please visit the product pages on our website for the most up-to-date product information

### 3.5MM SINGLE MONO AND STEREO JACKS

Switchcraft introduces a new series of 3.5mm jacks. These low profile jacks come in a wide variety of circuits, both 2 and 3 conductor versions. Circuits include mono closed, stereo open, stereo tip closed and ring open, and stereo closed. The 35RASMT Series is available on tape and reel only. Contact Switchcraft for exact dimensions of the reels. They're designed for use in today's electronic equipment that features remote speakers, headsets, and headphones. While they are more compact than commonly used PC mount phone jacks, they are still extremely durable. Jacks come on tape and reel, 1K per reel.

#### FEATURES AND BENEFITS

- SMT mounting
- Tape and reel packaging
- Wide variety of circuits

#### APPLICATIONS

- Computer
- Video Cameras
- Personal/Portable Audio Devices
- Multimedia

#### SPECIFICATIONS

Electrical Current Rating: 3A Contact Resistance: <50 mohms Insulation Resistance: 100 mohms (min.) Dielectric Withstanding Voltage: 250VAC @ 1 minute

#### MECHANICAL

Lifecycles: 5,000 Operating Temperature: -25°C to +85°C

#### MATERIAL

Housing: Black thermoplastic Sleeve, Ring and Tip Terminals: Copper Alloy, silver-plated Shunt Terminal: Copper Alloy, Silver-plated



35RASMT

#### 3.5MM SINGLE MONO AND STEREO JACKS

Part Number/Description
35RASMT2AHNTR

Mono, closed circuit, on tape and reel

**35RASMT2BHNTR** Stereo, dual open circuit, on tape and reel

**35RASMT3BHNTR** Stereo, tip closed and ring open circuit, on tape and reel

**35RASMT4BHNTR** Stereo, dual closed circuit, on tape and reel

(See next page for drawings.)

117

DIMENSIONS ARE FOR REFERENCE ONLY




# 118JACKS AND PLUGS<br/>3.5MM SINGLE MONO AND STEREO JACKS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information


### 3.5MM SINGLE MONO AND STEREO JACKS (continued)

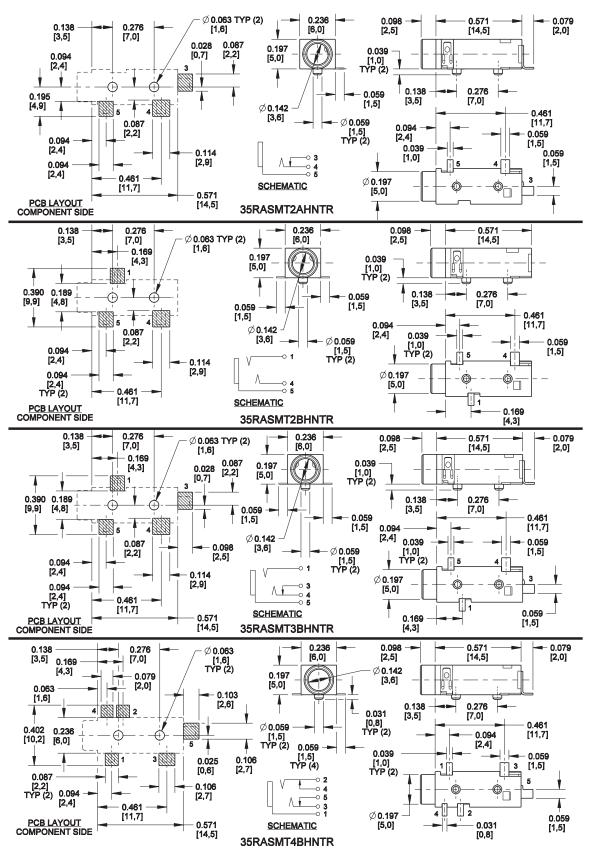

### 3.5 mm SINGLE MONO JACKS




35PM1

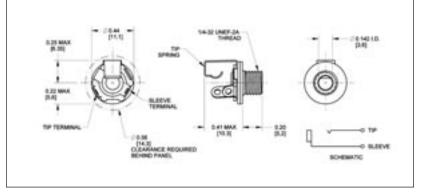



35PM2A

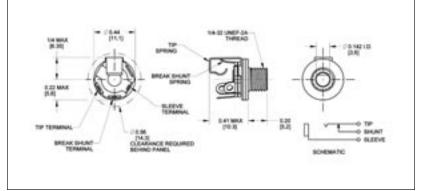

#### FEATURES

- 2-conductor phone jacks similar to Littel-Jax<sup>®</sup> phone jacks, but smaller.
- · For connecting in limited space
- Mate with 3.5 mm phone plugs
- Notched insulators interlock internal parts
- Mounting hole: .250" diameter in panels up to .125" thick (mounting hardware supplied)
- For insulated mount, order two washers separately, Number S1564 (swedged fiber washer .312" diameter mounting hole) and number S2207 (flat phenolic washer)

#### SPECIFICATIONS MECHANICAL

Life: 5,000 insertion/withdrawal cycles, minimum

#### ELECTRICAL

Contact Resistance: .075 ohms maximum Insulation Resistance: 5,000 M $\Omega$  minimum Dielectric Withstanding Voltage: 250V AC maximum Contact Rating: .25A, 48V DC

#### MATERIAL

Mounting Bushing: Nickel-plated copper alloy. Insulating Spacers: Rigid plastic. Springs: Copper alloy. Sleeve Terminal: Tin-plated copper alloy. Hardware: Supplied with one, Number P11501 nickel-plated brass locknut, and one, Number S17901 nickel-plated steel flat washer.

PART NUMBER	DESCRIPTION	JACK SCHEMATIC <sup>1</sup>	TYPICAL MATING PLUG
35PM1	Open circuit	I	750
35PM2A	Shunted (closed circuit)	III	750

1. See jack schematics on pages 79 and 80.

#### **ORDERING INFORMATION**

- 1. Order by part number.
- 2. Contact Switchcraft for more information.

JACKS AND PHIRS

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

### 2.5MM SINGLE MONO AND STEREO JACKS

Switchcraft introduces a new series of 2.5mm jacks. These low profile jacks come in a wide variety of circuits, both 2 and 3 conductor versions. Circuits include mono closed, stereo open, stereo tip closed and ring open, and stereo closed. The MDSMT Series is available on tape and reel only. Contact Switchcraft for exact dimensions of the reels. They're designed for use in today's electronic equipment that features remote speakers, headsets, and headphones. While they are more compact than commonly used PC mount phone jacks, they are still extremely durable.

#### FEATURES AND BENEFITS

- SMT mounting
- Tape and reel packaging
- Wide variety of circuits

#### **APPLICATIONS**

- Computer
- Video Cameras
- Personal/Portable Audio Devices
- Multimedia

#### **SPECIFICATIONS**

Electrical Current Rating: 3A Contact Resistance: <50 mohms Insulation Resistance: 100 mohms (min.) Dielectric Withstanding Voltage: 250VAC @ 1 minute

#### MECHANICAL

Lifecycles: 5,000 Operating Temperature: -25°C to +85°C

#### MATERIAL

Housing: Black thermoplastic Sleeve, Ring and Tip Terminals: Copper Alloy, silver-plated Shunt Terminal: Copper Alloy, Silver-plated

#### 2.5MM SINGLE MONO AND STEREO JACKS

 Part Number/Description

 MDSMT2BRATR

 Stereo, dual open circuit

 MDSMT2ARATR

 Mono, closed circuit

 MDSMT3BRATR


 Stereo, tip closed and ring open circuit

 MDSMT4BRATR

 Stereo, dual closed circuit



MDSMT4BRATR

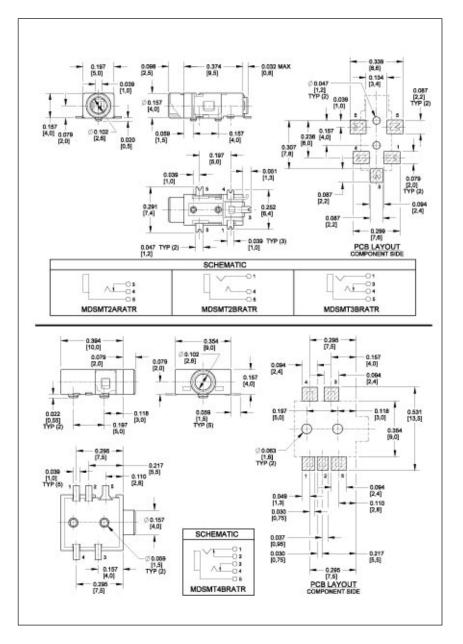

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# **JACKS AND PLUGS** SUBMINIATURE PHONE JACKS

\* Please visit the product pages on our website for the most up-to-date product information

### .101" SUBMINIATURE PHONE JACKS





TR1PC





### MDPC2A

SUBMINIATURE PHONE JACKS, TR2A AND TR1PC Extremely small, rugged, shunted Micro-Jax® 2-conductor jack is 1/4 the size of a standard phone jack and weighs less than 1/20 ounce. Can be wired for open or closed circuit operation. Internally keyed insulators interlock all parts and tip springs grip mating plugs positively. Mates with Switchcraft Micro-Plug® phone plugs. Jacks mount through .190" diameter hole in chassis/panels up to .093" thick. For insulated mounting, a .281" diameter hole and .050" maximum panel thickness applies. Order insulating washer separately. Number P1617 (flat phenolic washer) and Number P1618 (swedged fiber washer).

Number TR1PC: 2-conductor closed circuit jack with PC terminals. Open frame and enclosed versions available. Mates with Switchcraft® Micro Plug® numbers 850, 855, and 880.

#### SUBMINIATURE ENCLOSED PHONE JACKS

Micro-D Jax® 2-conductor jacks have insulated box construction and subminiature size.

Number MDPC2A: 2-conductor closed circuit jack with PC terminals. Mounts to single-, double-sided or multilayer boards either singly or in rows as close as .344" centers (+/- .01 inches). Bushing is .10" inside diameter.

Number MDSL2A: Same as MDPC2A except, 1. solder lugs, 2. bushing is #10-48 threaded (nut and washer supplied), and 3. mount ing centers are .35" or .313". When mounted on .313" centers, sleeves or adjacent jacks may be in intimate contact. Mounts through a .203" diameter hole in chassis/panels up to .063" thick.

#### SUBMINIATURE RIGHT-ANGLE PHONE JACKS

2-conductor jacks have molded housing which protects all internal parts. Panel/chassis or PC boards mounting in rows, if desired, on .351" centers. PC terminals need only .382" behind-panel clearance.

Number MDPC2ARA: PC terminals mount/terminate directly to PC or multilayer boards. Bushing clears a .156" diameter panel hole.

Number MDSL2ARA: Right-angle solder lugs and #10-48 threaded bushing for chassis/panel mount. Mounts in .203" diameter hole in chassis/panels up to .063" thick.

#### SPECIFICATIONS - MICRO-JAX® ELECTRICAL:

Contact Resistance: .10 ohms maximum (spring to plug). Shunt Resistance: .10 ohms maximum. Dielectric Withstanding Voltage: 250 V AC. Shunt Tension: 60 grams minimum.

#### MATERIAL:

Mounting Bushing: Nickel-plated copper alloy. Insulating Spacers: Rigid plastic.

Springs: Nickel-plated copper alloy. Integral contacts are plated. Tip, Shunt and Sleeve Terminals: Silver-plated copper alloy. Hardware: Supplied with one, P15331 nickel-plated copper alloy hex nut, and one S29571 nickel-plated copper alloy flat washer.

#### **MATERIAL - TR1PC**

Threaded Bushing: Nickel-plated copper alloy. Tip Spring: Copper alloy. Sleeve/Ground Terminal: Copper alloy tin-lead with nickel underplate.





MDPC2ARA

#### MDSL2A MDSL2ARA **MECHANICAL - TR1PC:**

Life: 10.000 insertion/withdrawal cycles, minimum. Insertion/Withdrawal Forces: 11 ounces insertion, 11 ounce minimum withdrawal.

#### **ENVIRONMENTAL - TR1PC:**

Thermal Range: -55°C to +85°C (non-operating); -20°C to +65°C (operating). Thermal Shock: Per MIL-STD-202, method 107. Humidity: Per MIL-STD-202, method 106. Salt Spray: Per MIL-STD-202, method 101.

#### **SPECIFICATIONS - MICRO-D JAX** MECHANICAL:

Life: 10,000 insertion/withdrawal cycles minimum. Insertion/Withdrawal Forces: 11 ounce insertion, 11 ounce minimum withdrawal.

#### **ELECTRICAL:**

Contact Resistance: .010 ohms maximum (initial), .020 ohms maximum (after humidity, durability exposure), .10 ohms maximum (after salt spray). **Insulation Resistance:** 10,000 M $\Omega$  minimum (initial),

1,000 M $\Omega$  minimum (after humidity, durability exposure). Dielectric Withstanding Voltage: 500 V AC maximum. Contact Rating: .125 A, 125 V AC.

#### ENVIRONMENTAL:

Thermal Range: -55°C to +85°C (non-operating); -20°C to +65°C (operating). Thermal Shock: Per MIL-STD-202, method 107. Humidity: Per MIL-STD-202, method 106. Salt Spray: Per MIL-STD-202, method 101.

#### MATERIAL:

Housing: Glass reinforced plastic. Insulation: Rigid plastic. Mounting Bushing (Micro-D): Nickel-plated copper alloy. Mounting Bracket (Right-Angle Micro-D): Nickel-plated copper alloy.

Tip Spring: Silver-plated copper alloy.

Shunt Terminal: Silver-plated copper alloy.

Sleeve Terminal (Micro-D): Steel, tin-plated.


Sleeve Terminal (Right-Angle Micro-D): Silver-plated copper alloy.

Hardware (Micro-D): Same as Micro-Jax (MDSL2A). Hardware (Right-Angle Micro-D): Hex nut, nickel-plated copper alloy. Number P15331: flat washer, nickel-plated copper alloy **S29571**; not supplied with MDPC2A.

Part	Jack	Typical	Part	Jack	Typical
No.	Schem. <sup>1</sup>	Mating Plug <sup>2</sup>	No.	Schem. <sup>1</sup>	Mating Plug <sup>2</sup>
TR2A TR1PC MDPC2A	} "	850	MDSL2A MDPC2ARA MDSL2ARA	} "	850

All are 2-Conductor (closed circuit). Note 1.: See Jack Schematics page 79 and 80. Note 2 .: See Plugs Section for mating information. Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

### .101" SUBMINIATURE PHONE JACKS

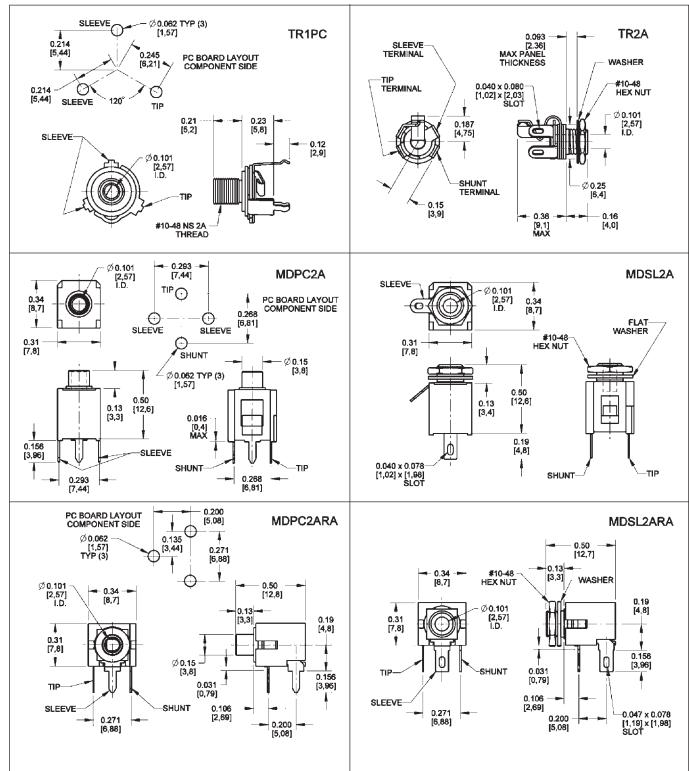

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

122

\* Please visit the product pages on our website for the most up-to-date product information

### **BULKHEAD PHONO JACKS**





3501F



**BPJR01** 



3501FR

**BPJF01** 





3515PC

3505F

3514PC



JACKS AND PLUGS PHONO JACKS

BI

BPJJ01

35(

#### 3503

#### FEATURES AND BENEFITS

- Front or rear mount configurations
- Durable plated machined brass construction
- All mounting hardware is included

#### APPLICATIONS

3517PC

- Audio
- Video
- General Purpose Electronics

#### OPTIONS

- Front or rear mount solder type receptacles
- · Jack to jack bulkhead configuration
- Insulator colors
- Gold or nickel plating

### (See next page for drawings.)

Part Number	Description
BPJR01	Rear mount, black insulator
BPJR01AU	Rear mount, black insulator, gold plated
BPJR02	Rear mount, red insulator
BPJR02AU	Rear mount, red insulator, gold plated
BPJR03	Rear mount, white insulator
BPJR03AU	Rear mount, white insulator, gold plated
BPJR04	Rear mount, yellow insulator
BPJR04AU	Rear mount, yellow insulator, gold plated
BPJR05	Rear mount, blue insulator
BPJR05AU	Rear mount, blue insulator, gold plated
BPJR06	Rear mount, green insulator
BPJR06AU	Rear mount, green insulator, gold plated
3501F	Rear mount, rigid plastic mounting flange
3501FR	Rear mount, natural insulator
For insulated mounting	g, order S1028 and S1029 insulating washers
BPJF01	Front mount, black insulator
BPJF01AU	Front mount, black insulator, gold plated
BPJF02	Front mount, red insulator
BPJF02AU	Front mount, red insulator, gold plated
BPJF03	Front mount, white insulator
BPJF03AU	Front mount, white insulator, gold plated
BPJF04	Front mount, yellow insulator
BPJF04AU	Front mount, yellow insulator, gold plated
1	

SPECIFICATIONS

Material and Platings Housing: Nickel or Gold-plated Brass

**Contact:** Nickel-plated Brass **Insulator:** ABS

**Hardware:** Nickel-plated Brass. Switchcraft introduces a complete line of bulkheadmount phono (RCA) jacks to meet the most critical audio, audio/video, and general-purpose electronic applications. These jacks are offered in front and rear mount solder type as well as jack to jack bulkhead configurations. These jacks are available with black, white, blue, green, red, and yellow insulators and nickel or gold plated bodies. All mounting hardware is included.

Housing: Nickel or gold plated, copper alloy (3514PC, 3515PC, 3517PC: Nickel plated, steel) Terminals: Nickel plated, copper alloy (3515PC: Tin plated, copper alloy)

Bushing: Nickel-plated, copper alloy (3515PC: Ceramic) Insulators: Thermoplastic


(3517PC: Ceramic and glass filled thermoplastic)

Part Number	Description	
BPJF05	Front mount, blue insulator	
BPJF05AU	Front mount, blue insulator, gold plated	
BPJF06	Front mount, green insulator	
BPJF06AU	Front mount, green insulator, gold plated	
3501FP	Front Mount, natural insulator	
3505F	RF version, uses low-loss nylon insulation	
For insulated mou	nting, order S2207 and S1564 insulating washers	
BPJJ01	Feed through, black insulator	
BPJJ01AU	Feed through, black insulator, gold plated	
BPJJ02	Feed through, red insulator	
BPJJ02AU	Feed through, red insulator, gold plated	
BPJJ03	Feed through, white insulator	
BPJJ03AU	Feed through, white insulator, gold plated	
BPJJ04	Feed through, yellow insulator	
BPJJ04AU	Feed through, yellow insulator, gold plated	
BPJJ05	Feed through, blue insulator	
BPJJ05AU	Feed through, blue insulator, gold plated	
BPJJ06	Feed through, green insulator	
BPJJ06AU	Feed through, green insulator, gold plated	
3503	Extension jack, shielded handle	
3514PC	Vertical PC mount, nickel plated steel bushing	
3515PC	Vertical PC mount, ceramic bushing	
3517PC	Horizontal PC mount, nickel plated steel bushing	

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

\* Please visit the product pages on our website for the most up-to-date product information

# PHONO JACKS (continued)

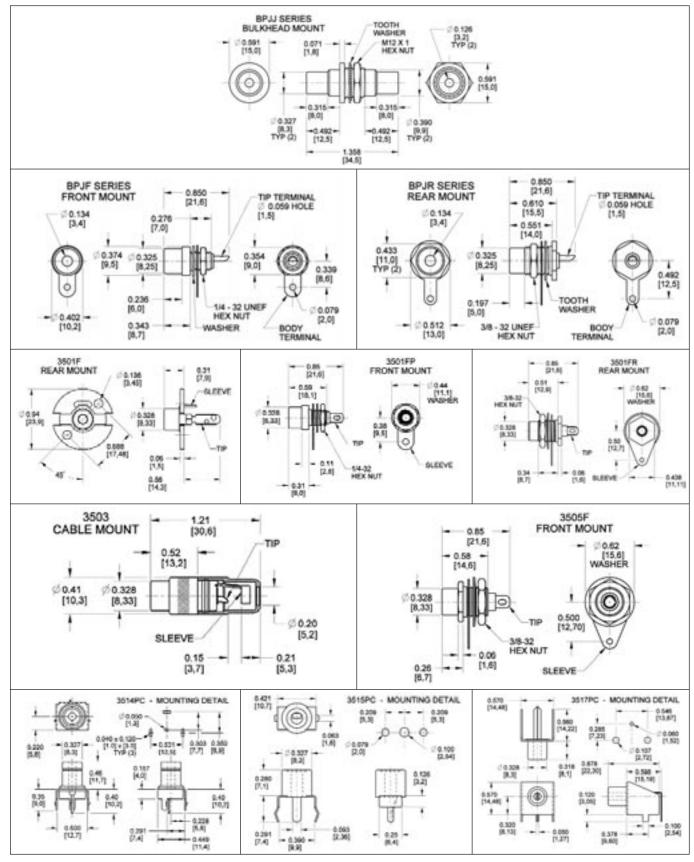

DIMENSIONS ARE FOR REFERENCE ONLY

124

# JACKS AND PLUGS Phono Jacks and Phono Jack Sets

\* Please visit the product pages on our website for the most up-to-date product information

### PHONO JACKS AND PHONO JACK SETS







PJRAS1X1S04



PJRAS1X2S02



PJRAN2X1U02



PJRAS2X1S01



PJRAN3X1U03



PJRAS3X1S01



PJRAS3X2S01



PJRAS2X2S01

PJRAS1X3U01



PJRAS4X2U01



PJRAS1X3S01



PJRAN3X1U02

Switchcraft, the industry recognized leader in audio-video connectivity, introduces the addition of a comprehensive line of PCB Mount RCA Jacks and Jack Sets. Switchcraft's newest product family addresses the requirements of the most critical audio and audio/video applications. 1, 2, 3, 4, 6, and 8 position jack sets are offered in a variety of color combinations with numerous plating, grounding, shielding, mounting, and justification options.

#### FEATURES AND BENEFITS

- High temperature plastic housings and long life contacts
- Snap fit PCB contacts and housings
- Low profile footprint
- Numerous options and configurations

#### **APPLICATIONS**

- Audio
- Video
- General Purpose Electronics

#### OPTIONS

- Right angle and straight PCB mount
- Horizontal and vertical justification

- Shielding and grounding
- Bulkhead mounting screw
- Colors
- Plating

#### SPECIFICATIONS ELECTRICAL

Temperature Range: -25 to +80°C Rated Voltage: 34V DC or AC Withstand Voltage: 500V Rated Current: 2A DC or AC Dielectric Strength: 500V AC @ 1 minute Contact Resistance: <30 mohms Insertion Force\*: <29.4N Extraction Force\*: 1N to 29.4N \* Depends Upon Mating Plug

#### MATERIAL AND PLATINGS

Housing: UL94-HB Rated, ABS Insulators: ABS Ground Shell and Terminal: Nickel or Gold Plated, Copper Alloy Terminals: Tin Plated Copper Alloy

DIMENSIONS ARE FOR REFERENCE ONLY

125

# PHONO JACKS AND PHONO JACK SETS (continued)

#### **1 POSITION PCB MOUNT**

**3 POSITION PCB MOUNT** 

Part Number

PJRAN3X1U01

PJRAS1X3S01

Part Number	Color
PJRAN1X1U01	Black
PJRAN1X1U02	White
PJRAN1X1U03	Red
PJRAN1X1U04	Yellow
Call factory	Green
Call factory	Blue
PJRAS1X1S01	Black
PJRAS1X1S02	White
PJRAS1X1S03	Red
PJRAS1X1S04	Yellow
Call factory	Green
Call factory	Blue
Call factory	Blue

Color

Red White Yellow

Green Blue Red

Red/Yellow/White

Red/White/Yellow

Red/Green/Blue

Red/Green/Blue

### **2 POSITION PCB MOUNT**

Part Number	Color
PJRAN2X1U01	Red/White
PJRAN2X1U02	White/Red
PJRAS2X1S01	Red/White
PJRAS2X1S02	White/Red
PJRAS1X2S01	<u>Red</u> White
PJRAS1X2S02	<u>White</u> Red


#### 4, 6, & 8 POSITION PCB MOUNT

Part Number	Color
PJRAS2X2S01	<u>White x 2</u> Red x 2
PJRAS3X2S01	White x 3 Red x 3
PJRAS3X2S02	<u>Red/White/Yellow</u> Red/White/Yellow
PJRAS4X2U01	<u>White x 4</u> Red x 4

#### COMBINATION PHONO AND S-VIDEO PCB MOUNT

Part Number	Color
PJRAN3X1U02	Red/White/Yellow
PJRAS1X3U01	<u>Yellow</u> <u>White</u> Red

Ordering Information (Contact factory for color, shielding, grounding, justification options.)

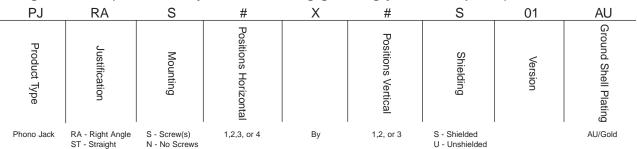


JACKS AND PLUGS 

PJRAN3X1U02 PJRAS3X1S01 PJRAS3X1U03 PJRAS1X3S02

#### DIMENSIONS ARE FOR REFERENCE ONLY


### PHONO JACKS AND PHONO JACK SETS (continued)

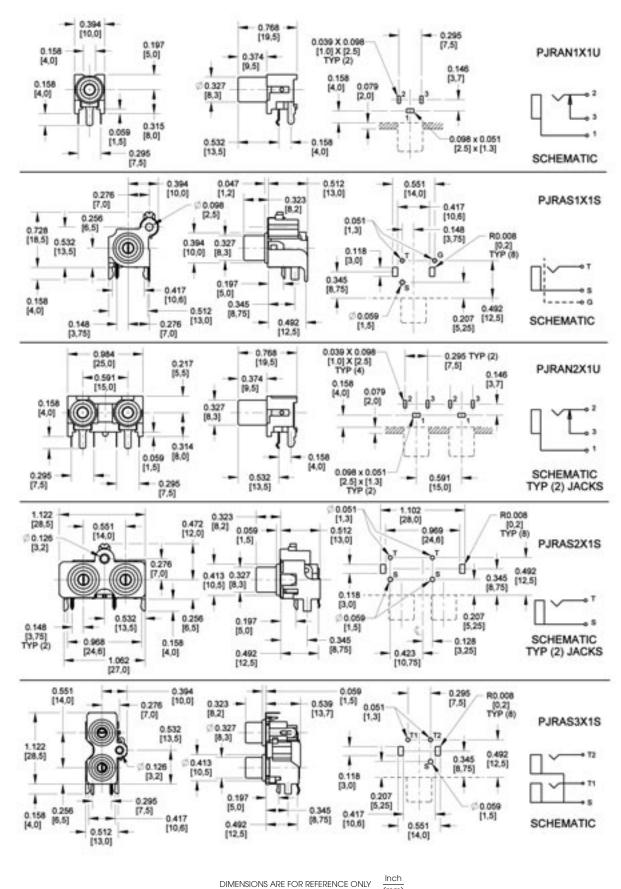

127

#### \* Please visit the product pages on our website for the most up-to-date product information

### PHONO JACKS AND PHONO JACK SETS (continued)

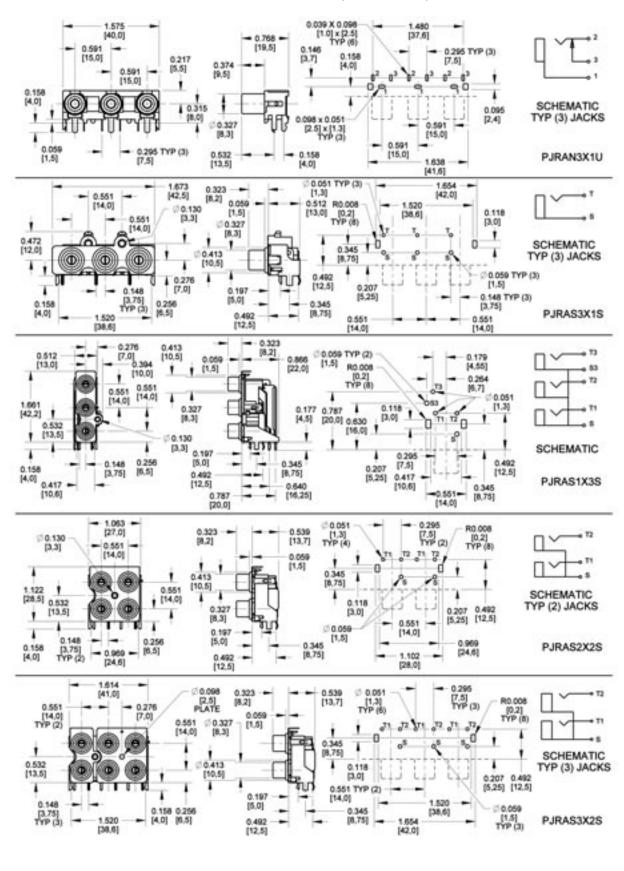


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

129

\* Please visit the product pages on our website for the most up-to-date product information


# PHONO JACKS AND PHONO JACK SETS (continued)

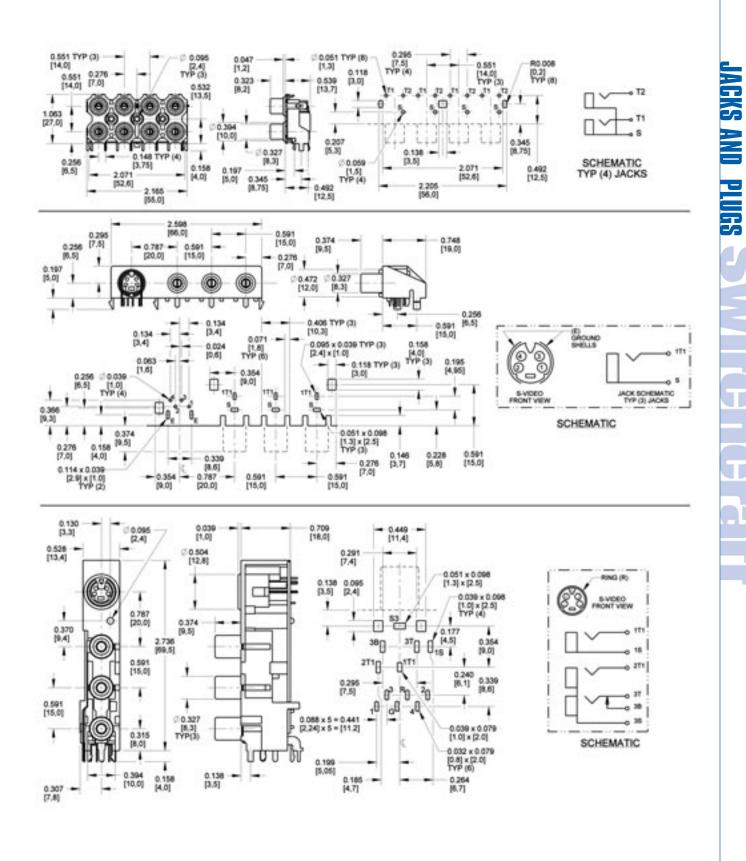

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

\* Please visit the product pages on our website for the most up-to-date product information

### RIGHT ANGLE MINIATURE POWER JACKS

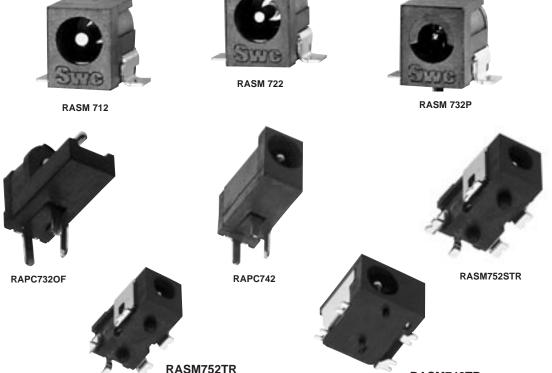

RASM742TR

#### SPECIFICATIONS:

Materials: Housing: Thermoplastic Terminals: RAPC700: Sleeve: Silver plated copper alloy Tip: Nickel plated, copper alloy RAPC742, RASM742TR, RAPC732OF, RAPC742OF, RAPC752, RAPC752S, RASM752TR, RASM752STR: Sleeve and tip: Silver plated tin Shunt: Silver plated copper alloy RASM700, RASH700: Sleeve: Tin plated copper alloy Tip: Nickel plated copper alloy

#### ELECTRICAL

Current Rating: 3A (RAPC700, RASH700, RASM700: 5A) Contact Resistance: <50 mohms Insulation Resistance: 100 mohms min. (RAPC700, RASH700, RASM700: 30 megohms @ 100V DC)

Dielectric Withstanding Voltage: 250 VAC@ 1 minute

#### **MECHANICAL:**

Lifecycles: 5,000 min.

Part Number	Pin Size*	Description
RAPC712	0.100"/2.5mm	Right Angle, PC mount
RASH712	0.100"/2.5mm	Right Angle, hybrid mount
RASM712	0.100"/2.5mm	Right Angle, SMT mount
RAPC722	0.080"/2.0mm	Right Angle, PC mount
RASH722	0.080"/2.0mm	Right Angle, hybrid mount
RASM722	0.080"/2.0mm	Right Angle, SMT mount
RAPC732	0.050"/1.3mm	Right Angle, PC mount
RAPC732OF	0.050"/1.3mm	Right Angle, PC mount <sup>1</sup>
RASH732	0.050"/1.3mm	Right Angle, SMT mount
RASM732	0.050"/1.3mm	Right Angle, hybrid mount
RAPC742	0.040"/1.0mm	Right Angle, PC mount
RAPC742OF	0.040"/1.0mm	Right Angle, PC mount <sup>1</sup>
RASM742TR	0.040"/1.0mm	Right Angle, SMT mount <sup>2</sup>
RAPC752	0.025"/0.65mm	Right Angle, PC mount
RAPC752S	0.025"/0.65mm	Right Angle, PC mount <sup>3</sup>
RASM752TR	0.025"/0.65mm	Right Angle, SMT mount <sup>2</sup>
RASM752STR	0.025"/0.65mm	Right Angle, SMT mount⁴

Note: Contact factory for specific information on tape and reel options. \*Pin Size (in/mm) 1. Open Frame 2. Tape and Reel. 3. Shielded 4. Tape and Reel, Shielded. Note: Available with P locating post as an option.


Note: Available with tin-plating as a special order.

Note: Available with Hi-temp material, contact factory for details.

# JACKS AND PLUGS RIGHT ANGLE MINIATURE POWER JACKS

\* Please visit the product pages on our website for the most up-to-date product information

### RIGHT ANGLE MINIATURE POWER JACKS (continued)

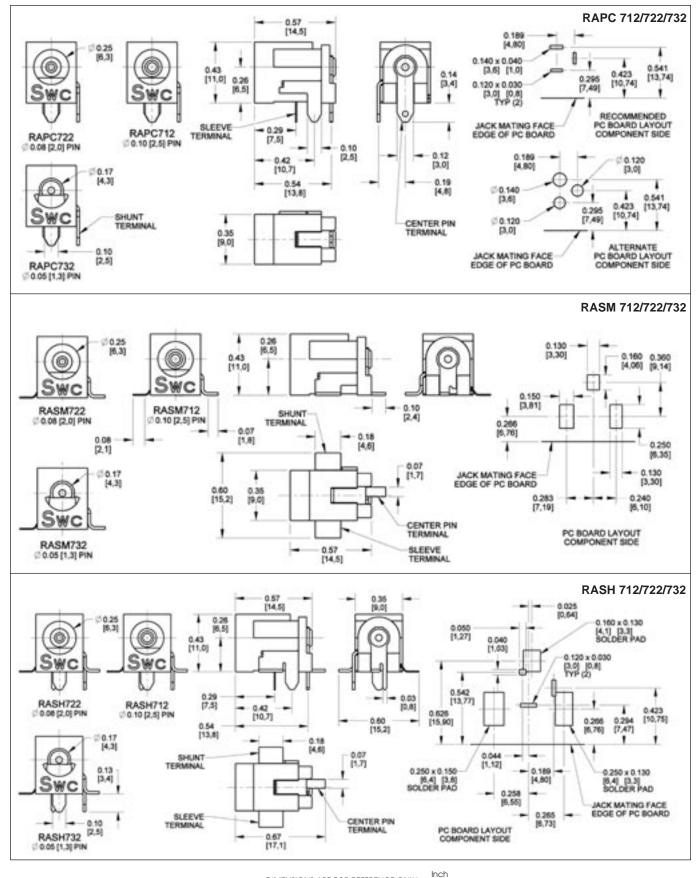

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630


VACKS AND PLUGS SWITCHCAFF

# 132 JACKS AND PLUGS RIGHT ANGLE MINIATURE POWER JACKS

# **PHONE: 773 792-2700**

<sup>f</sup> Please visit the product pages on our website for the most up-to-date product information

### RIGHT ANGLE MINIATURE POWER JACKS (continued)

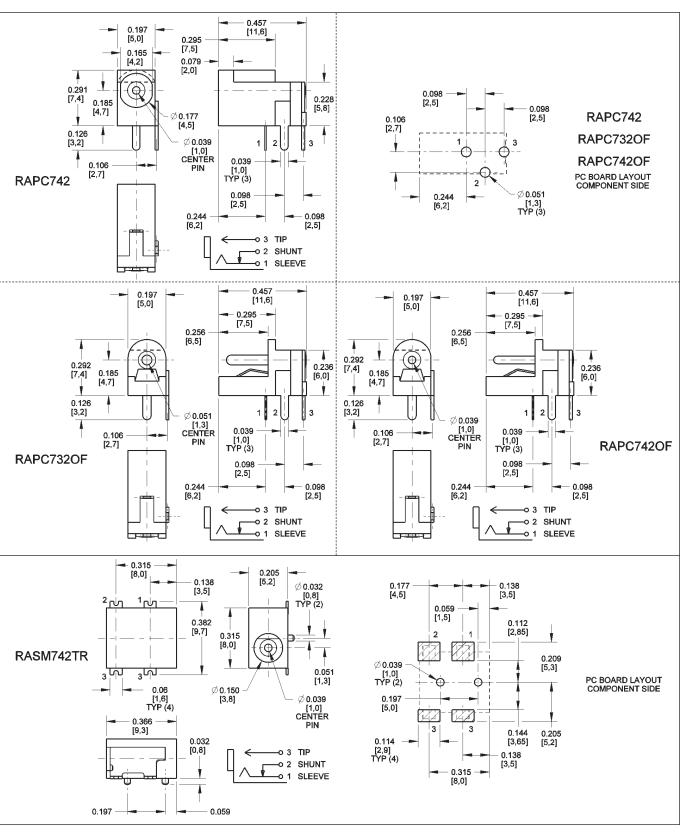


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS RIGHT ANGLE MINIATURE POWER JACKS

\* Please visit the product pages on our website for the most up-to-date product information

# RIGHT ANGLE MINIATURE POWER JACKS (continued)

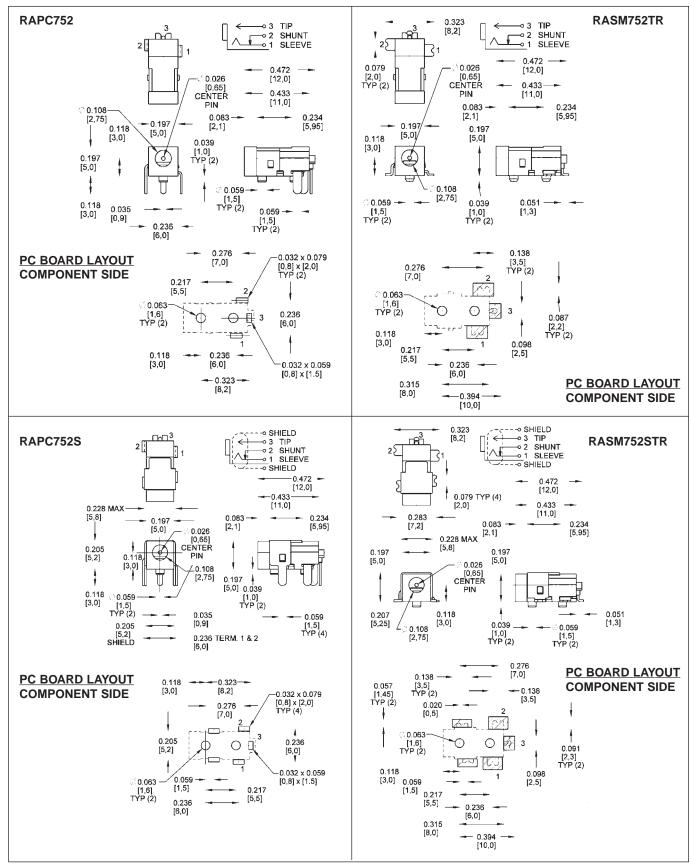

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

133

\* Please visit the product pages on our website for the most up-to-date product information

### STRAIGHT MINIATURE POWER JACKS



712A





L722A





#### **FEATURES:**

- Automatic switch over from AC to DC permitted by sleeve shunt spring.
- Split center pin shaped to hold mating plug firmly.Bushing length available as 0.219" or extended
- 0.319" to permit use in thicker panels.Non-turn mounting possible using standard "D" shape bushing.
- Insulated mounting hardware available.
- Right angle versions offer "kinked" PC terminals for added board retention.

#### MATERIALS:

Housing: Thermoplastic Bushing: Plated copper alloy Terminals: Plated copper alloy

#### Insulators: Rigid Plastic

Hardware: Supplied with one P2439 nickel plated copper alloy hex nut, and one P2441 nickel plated steel flat washer

#### **ELECTRICAL:**

Current Rating: 5A, 12V DC resistive Contact Resistance: 0.01 Ohms max. (initial), 0.02 Ohms max. (after humidity, durability exposure), 0.10 Ohms max. (after salt spray) Insulation Resistance: 10,000 Mohms min. (initial), 1,000 Mohms min. (after humidity, durability exposure) Dielectric Withstanding Voltage: 500 VAC max.

#### **MECHANICAL:**

Lifecycles: 10,000 cycles min.

Part Number	Pin Size*	Description	<b>Typical Mating Plug</b>
712A	0.100"/2.5mm	Solder lugs	760
712RA	0.100"/2.5mm	Right angle PC terminals	760
L712A	0.100"/2.5mm	Solder lugs, long bushing	761K
L712RA	0.100"/2.5mm	Right angle PC terminals, long bushing	761K
PC712A	0.100"/2.5mm	Straight PC terminals	760
PCL712A	0.100"/2.5mm	Straight PC terminals, long bushing	761K
722A	0.080"/2.0mm	Solder lugs	S760
722RA	0.080"/2.0mm	Right angle PC terminals, long bushing	S760
L722A	0.080"/2.0mm	Solder lugs, long bushing	S761K
L722RA	0.080"/2.0mm	Right angle PC terminals, long bushing	S761K
PC722A	0.080"/2.0mm	Straight PC terminals	S760
PCL722A	0.080"/2.0mm	Straight PC terminals, long bushing	S761K
732A	0.050"/1.3mm	Solder lugs	860
732RA	0.050"/1.3mm	Right angle PC terminals	860
PC732A	0.050"/1.3mm	Straight PC terminals	860
2C1072		Jack covers for 712A and 722A	


Note: For insulated mounting order P2442 phenolic flat washer and S4263 swedged fiber washer.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

PIIICS

\* Please visit the product pages on our website for the most up-to-date product information

# STRAIGHT MINIATURE POWER JACKS (continued)

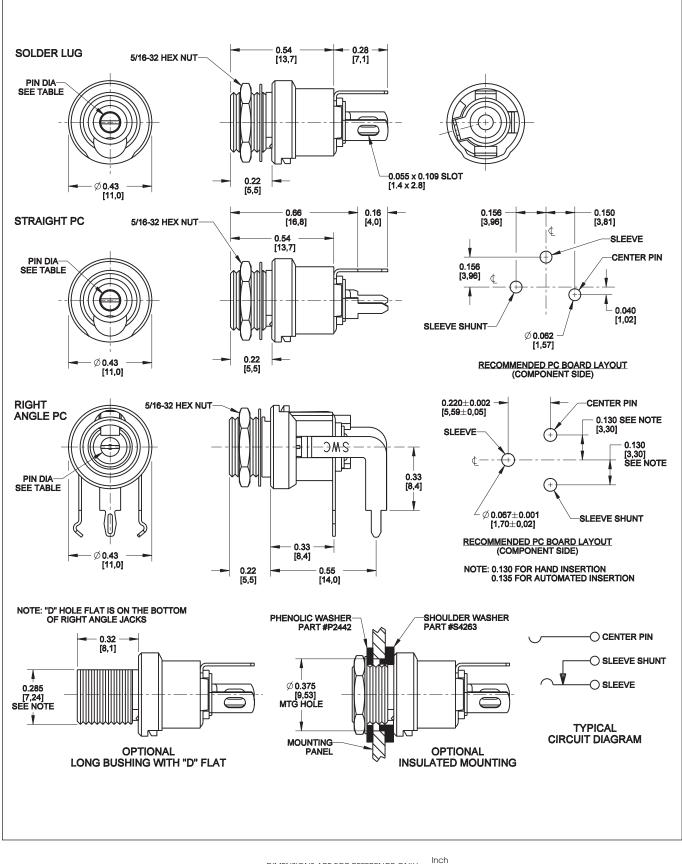

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

#### \* Please visit the product pages on our website for the most up-to-date product information

VPP24K3HD75T

#### **VJ SERIES**

See page 193 for Patch panel information.



VJHD\*75TX

**Ordering-Individual Jacks** Part Number Description Type VJHD\*75TX HD Terminated VJHD\*NTX HD Non-terminated VJSD\*75TX SD Terminated **VJSD\*NTX** SD Non-terminated \*Add "N" for non-normalled version

#### FEATURES AND BENEFITS

- HD Series meets SMPTE 292M Specifications
- SD Series has a bandwidth from DC to 1.75GHz
- Jacks feature rugged heavy duty housings

#### **VIDEO JACK SPECIFICATIONS ELECTRICAL**

Rated Bandwidth: 2.4 GHz (HD), 1.75 GHz (SD) Characteristic Impedance: 75 ohms Return Loss: Better than -15 dB Insertion Loss: Better than -.5 dB Contact Resistance: Less than 20 milliohms Termination Resistance: 75 W, ±1% Center Conductor: Accepts .090 pin diameter

#### **MECHANICAL**

Mechanical Shock: Per MIL-STD-202, Method 213, Test condition I Vibration: Per MIL-STD-202, Method 201 Insertion Force: 12 lbs. maximum Withdrawal Force: 3 lbs. minimum Life Cycle: 30,000

#### MATERIAL


Housing: Zinc alloy, nickel plated Center Contacts: Copper alloy, gold plated Switching Springs: Copper alloy, gold plated **Grounding Contacts:** 

HD Series - Copper alloy, gold plated SD Series - Copper alloy, nickel plated Insulators: Thermoplastic, UL 94V-0 rated

#### **ENVIRONMENTAL**

**Operating Temperature:** – 40°C to 65°C Storage Temperature: - 55°C to 85°C Thermal Shock: Per MIL-STD-202, Method 107 Moisture and Humidity:

Per MIL-STD-202, Method 106. The HD Series meets SMPTE 292M specifications for high definition video signaling, covering a bandwidth range from DC to 2.4GHz. The SD Series is perfect for serial digital, with a bandwidth from DC to 1.75GHZ.

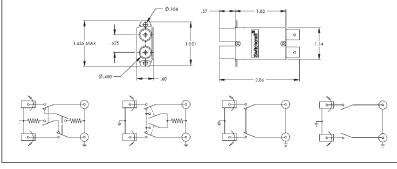

**SMITH CHART** 

(TYPICAL)

75-08


START 30 MHz


NON-NORMALLED TERMINATED

NORMALLED TERMINATED

NORMALLED NON-NORMALLED NON-TERMINATED NON-TERMINATED

STOP 3 8 GHZ





FREQUENCY (MHz)

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

136



FAX: 773 792-2129

See page 196 for Patch panel information.

MVJ\*75T



MVP32K3\*75T

#### FEATURES AND BENEFITS

- Midsize video jacks rated from DC to 3 GHz
- Available in terminated or non-terminated configurations

#### MIDSIZE VIDEO JACK SPECIFICATIONS ELECTRICAL

Rated Bandwidth: 3.0 GHz Characteristic Impedance: 75 ohms Return Loss: See Typical Return Loss Chart Insertion Loss: See Typical Insertion Loss Chart Contact Resistance: Less than 20 milliohms Termination Resistance: 75 W, ±1% Center Conductor: Accepts .048 pin diameter

#### MECHANICAL

Mechanical Shock: Per MIL-STD-202, Method 213, Test condition I Vibration: Per MIL-STD-202, Method 201 Insertion Force: 12 lbs. maximum Withdrawal Force: 3 lbs. minimum Life Cycle: 30,000


#### MATERIAL

Housing: Zinc alloy, nickel plated Center Contacts: Copper alloy, gold plated Switching Springs: Copper alloy, gold plated Grounding Contacts: Copper alloy, gold plated BNC Insulators: Teflon Actuators: Thermoplastic, UL94V-0 rated


#### **ENVIRONMENTAL**

Operating Temperature: - 40°C to 65°C Storage Temperature: - 55°C to 85°C Thermal Shock: Per MIL-STD-202, Method 107 Moisture and Humidity: Per MIL-STD-202, Method 106


#### SMITH CHART (TYPICAL)



#### **RETURN LOSS (TYPICAL)**




#### **RETURN LOSS (TYPICAL)**



FREQUENCY (MHz)


Part		
Number	Jack	Description
MVJ*75T	HD	Terminated
MVJ*NT	HD	Non-terminated

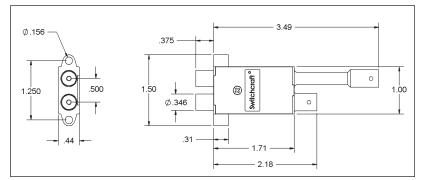


\* Please visit the product pages on our website for the most up-to-date product information


#### MIL-TYPE 1/4" PHONE PLUGS


#### 2-CONDUCTOR

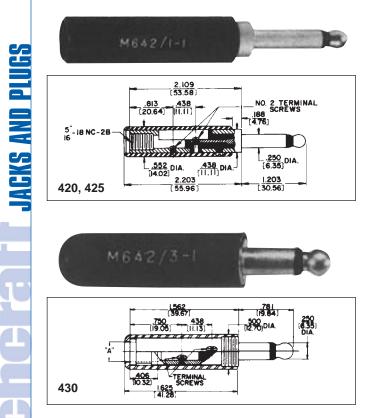

#### **3-CONDUCTOR**

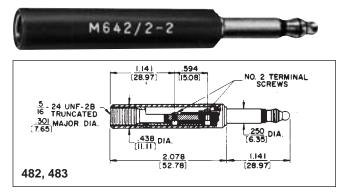

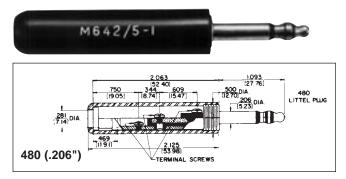

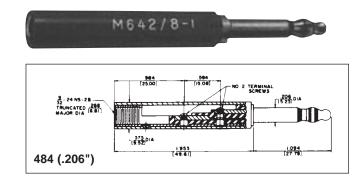

#### **FEATURES**

440, 445

M642/4-

10.32

1562

SCREWS

1.625

Designed for high quality communication equipment to meet military requirements, This series features one-piece tip rod and one-piece sleeve and plug body, assembled together into a mode as inserts, providing a finished plug with complete continuity of thermoplastic insulation between top rod and plug sleeve. Internal (invisible externally) interlock mechanically engages the metal and plastic components providing a realistic lock to prevent parts shifting. Design and material in accordance with MIL-P-642(A), MIL part number molded or stamped on handle, manufacturer's trademark (as required by MIL specification) appears on plug body.

1219

250 DIA

500 12.700 DIA

#### SPECIFICATIONS

Tip Rod, Body and Screws: Copper alloy, natural finish. Terminals: Tinned copper alloy.

Insulation: Thermoplastic, per MIL-P-22985, Type II, Class 1. Handles: Thermoplastic, Type 6, per MIL-M-20693, Type II. Shielded; machined from copper alloy, nickel-plated.

#### STRAIN RELIEF CLAMP

For MIL-type Littel-Plug phone plugs. P2380 conforms to Specification SC-A-7674-F - supplied with Plug Numbers 430, 440, 445 and 470. P2381 meets Specification MS-35762 - supplied with Plug Number 480 and Extension-Jax<sup>®</sup> phone jack, Number 820.

Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**FChCr3** 

139

\* Please visit the product pages on our website for the most up-to-date product information

# LITTEL PLUG® PHONE PLUGS



#### FEATURES AND BENEFITS


- 3 conductor plug
- Designed for high quality communication equipment
- One-piece tip rod ensures electrical continuity
- Brass plug finger versions meet MIL specifications
- 'N' and 'NC' suffix versions have nickel-plated plug fingers, excellent for audio applications
- 'NC" suffix option has rugged, heavy duty cable clamp, solder terminals for easier solderability and assembly. Metal shielded handle
- 'NCP" plastic handle

#### SPECIFICATIONS

Plug Finger: Brass, natural finish or nickel-plated Terminals: Brass, electro-tinned Insulation: Ethyl cellulose, per MIL-P-22835, Type II, Class 1, or acetal resin Handles: Plastic-nylon molding plastic, Type 6, per MIL-M-20693, Type II. Shielded metal handle with red, black or nickel finish

#### ORDERING INFORMATION

- 1. Order by part number.
- 2. Contact Switchcraft for more information.
- 3. Mating jacks available.

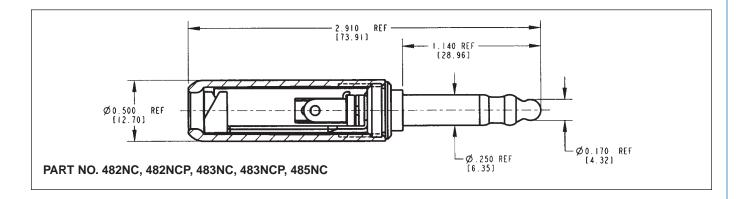

# LITTEL PLUG® PHONE PLUGS

Part Number	Conductors	Terminals	Handle	MIL Part Number	Notes
482N	3	Screw	Red	None	Plastic handle, nickel plated plug finger
482NC	3	Cable Clamp	Shielded	None	Red metal handle, nickel plated plug finger
482NCP	3	Cable Clamp	Red	None	Plastic handle,nickel plated plug finger
483N	3	Screw	Black	None	Plastic handle, nickel plated plug finger
483NC	3	Cable Clamp	Shielded	None	Black metal handle,nickel plate plug finger
483NCP	3	Cable Clamp	Black	None	Black plastic handle, nickel plated plug finger
485NC	3	Cable Clamp	Shielded	None	Nickel plated handle,nickel plated plug finger


### **480 SERIES PART NUMBERING CHART**


Part	206" dia.	1/4" dia.	Brass	Nickel	Handle	Red	Black	Nickel	Standard	Large
number	finger	finger	finger	finger	Material	handle	handle	handle	cable clamp	cable clamp
480	•		•		Plastic		•		•	
482		•	•		Plastic	٠			•	
482N		•		•	Plastic	٠			•	
482NC		•		•	Metal	٠				•
482NCP		•		•	Plastic	٠				•
483		•	•		Plastic		•		•	
483N		•		•	Plastic		•		•	
483NC		•		•	Metal		•			•
483NCP		•		•	Plastic		•			•
484	•		•		Plastic	٠			•	
485NC		•		•	Metal			•		•

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{Inch}}{(\text{mm})}$ 

\* Please visit the product pages on our website for the most up-to-date product information

# MIL-TYPE 1/4" TWIN PHONE PLUGS

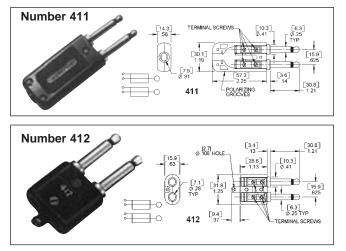

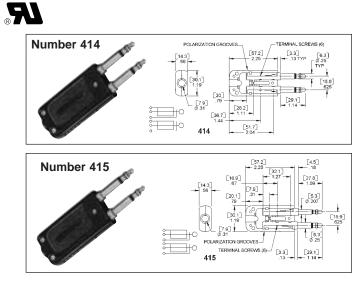

**JACKS AND PLUGS** 

MIL-TYPE 1/4" PHONE PLUGS

### FEATURES

Design and material strictly in accordance with Specification MIL-P-642(A), MIL part number molded or stamped on handle, manufacturer's trademark (as required in MIL Specification) appears on plug body. Ideal for use in broadcast and recording studios, military, industrial and telephone switchboard applications, instrumentation and telemetry.

Individual plugs, featuring one-piece tip rod and one-piece sleeve and plug body, with complete continuity of thermoplastic insulation between plug elements, are placed into handles to provide a double Twin-Plug<sup>®</sup> plug (two electrically-independent 2-conductor plugs spaced .625" center-to-center, with self-alignment feature). 411, 414 and 415 Twin-Plug plugs have provision for use of Cord Clamp **Number S2674**. 412 Twin-Plug has external Cord Anchor.

6-conductor Twin-Plug, 414 and 415, provide two electrically-independent 3-conductor plug fingers spaced on .625" centers. Fingers are insulated from each other and each provides tip, ring and sleeve connections. Black plastic handle is notched to indicate polarity. Accepts standard 6-conductor cables. Handle has provision for use of Cord Clamp, **S2674**.

Fingers of 414 are .25" diameter and mate with Switchcraft type MT389 Twin-Jax<sup>®</sup>, MT333B, MT336 MT-Jax<sup>®</sup>, and other jacks having .25" inside diameter sleeves and mounted on .625" centers. 415 has a .25" diameter finger and a .206" diameter finger to provide automatic polarization. Fingers mate with Switchcraft MT332B and MT342B MT-Jax, respectively.

### STRAIN RELIEF CLAMP

Natural brass. For use only with 411, 414, 415 Twin-Plug, **S2674**.

### **SPECIFICATIONS**

Tip, Rod, Ring Sleeve, Body, Screws: Copper alloy, natural finish. Number 412 Handle Screws - iridescent iridite overplating. **Terminals:** Tinned copper alloy. (Latest MIL Specifications no longer specify terminals; terminal furnished is the type referenced as TM-89).

**Insulation:** Thermoplastic; per MIL-P-22985, Type II, Class 1. **Handle:** Thermoplastic on 411, 412, 414 and 415, per MIL-P-22985, Type II, Class 4. Molded black thermoset plastic per MIL-M-14F.

Part No.	Conductors	Terminals	"Typical Mating Jack1"	Mil No.	Notes
411	2	Screw	MT388	M642/9-1	Provision for internal cord clamp (not included)
412	2	Screw	MT388		MILPJ289. Similar to WECo289B
414	3	Screw	MT389		6-circuit plug, 2 electrically-independent 3 conductor fingers, .25" fingers. Provision for internal cord clamp (not included) Similar to WECo 338A. 425A-3
415	3	Screw	MT332B &1, MT342B		6-circuit plug, 2 electrically-independent 3 conductor fingers, one .25" finger, one .206" finger. Provision for internal cord clamp (not included)

1. Switchcraft Part Numbers. See Jacks Section for other mating jacks.

# **JACKS AND PLUGS** MIL-TYPE 1/4" EXTENSION JACKS AND TELEPHONE PATCH ADAPTERS

**PHONE: 773 792-2700** 

### \* Please visit the product pages on our website for the most up-to-date product information

# MIL-TYPE 1/4" EXTENSION JACKS

### **FEATURES**

Cable jack meets requirements of Specification MIL-J-641(A), Type Number JJ-026. Mates only with MIL-type plugs PJ-054 and PJ-540. Switchcraft 430.

### **SPECIFICATIONS**


Body and Terminal Screws: Copper alloy, natural finish.

Springs: Punched from special copper alloy.

Stack Insulation: Rigid plastic spacers Rigid plastic tubing.

Handle: Same as plug handle above.


Stack Screws: Stainless steel.

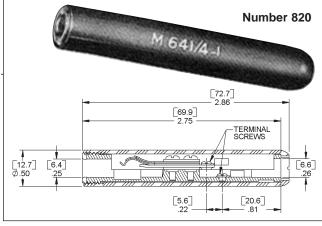

Part Number	Conductors	Terminals	Typical Mating Plug <sup>1</sup>	Handle	Handle Part Number	MIL Part Number
820	2	Screw <sup>2, 3</sup>	430	Black	M1015	M641/4-1

1. Switchcraft Part Number See Jacks Section for mating jacks. 2. Switchcraft replacement screw. P1070, Terminal P1069 (2 each required) 3. See previous page for strain relief clamp.


# TELEPHONE PATCH ADAPTERS

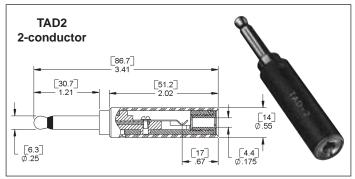

### FEATURES

Compact patch adapters convert standard full-size phone jacks to standard miniature phone jack connections with maximum convenience and reliability at a minimum cost. Eliminates cross-patching problems and need for combination patch cords with standard phone plug on one end and a miniature phone plug on the other. Adapters are 100% compatible with Switchcraft® telephone type and military phone jacks and miniaturized tini-telephone patching system components, as well as equivalent industry standard phone plugs.

TAD2 - 2-conductor adapter. Plug finger meets specifications for MIL plug PJ-047 (MIL-P-642). Fits Switchcraft T-Jax®, M-Jax®, MIL-approved MT-Jax®, and other industry-standard phone jacks with .250" inside diameter sleeves. The .552" diameter handle accommodates jacks on .625" centers. For quick identification, TAD-2 is stamped on the blue handle - will not wear off with constant use. Miniature 2-conductor jack built into plug body, accepts miniature phone plugs with .173" diameter fingers, such as Switchcraft tini-telephone® plugs, Series TT200 and TT250, and other standard miniature telephone plugs. TAD3 is a 3-conductor version of TAD2. Finger configuration meets requirements of PJ-051 (MIL-P-642). Finger incorporates dead ring to minimize plug and jack wear. Blue handle has diameter of .444".

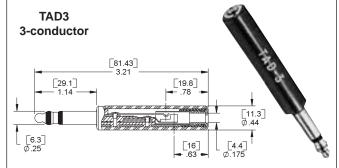

### **SPECIFICATIONS**

Tip Rod, Ring, Sleeve Body and Screws: Copper alloy, natural finish.

Insulation: Injection-molded plastic.

Jack Springs: Formed copper alloy.

Screw, Spring Retaining:

Inch

TAD2 - #2-64, steel. Part Number P1616 (one required). TAD3 - #2-64, brass. Part Number P1070 (two required). Ring Insulations (TAD3 only): Kraft paper sleeve.

Handle: Molded blue thermoplastic with die-stamped identification legend, TAD2 Handle, (Part Number M1487). and Retaining Screw, (Part Number T1677), one required.

TAD3 Handle, (Part Number M1488), and Retaining Screw, (Part Number T1990), one required.


**JACKS AND PIIGS** 

JACKS AND PLUGS MINIATURE TELEPHONE PLUGS

143

\* Please visit the product pages on our website for the most up-to-date product information

# MINIATURE TELEPHONE PLUGS

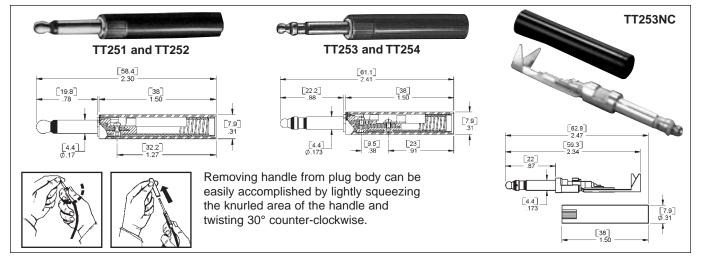

### .173" MINIATURE PHONE PLUGS FEATURES

2- and 3-conductor miniature non-shorting telephone plugs designed for use with TT-Jax<sup>®</sup>, Unijax<sup>®</sup>, and other phone jacks with a .176" inside diameter bushing. Approximately 1/2 the size of standard phone plugs, yet retains the uniformity, dependability and quality of MIL-type phone plugs.

TT-Plug<sup>®</sup> Miniature Telephone Plugs are the first to offer 2- and 3-conductors in an attachable type with twist handles for quick assembly. Series TT250 phone plug is available with red or black handles. Other color handles available on special order. Also available with nickel-plated plug fingers. (Add "N" to part number: 253N, 254N).

The TT253NC and TT254NC offer the same nickel-plated plug fingers as the 'N' versions, but also includes cable clamps and solder terminals for easy assembly.

Plugs feature a one-piece tip rod, ring and a one-piece sleeve with integral plug body, assembled together into a mold as inserts. Providing complete continuity of thermoplastic insulation between tip rod, ring and sleeve. Internal interlock of all parts prevents shifting and shorting under extreme rugged usage.

Internal 12-24 threads in end of plug body are intended for threading over outer jacket of a patch cord to provide a superior cable anchor.

Patch cords such as Switchcraft Series TT700 (or other .216" diameter cable) are easily attached to Series TT250 by screw terminals.

# FEATURES AND BENEFITS

- Designed for pro audio applications
- 3 Conductor
- .173" (4.40mm) plug finger diameter
- One-piece tip rod ensures high reliability
  Complete continuity of thermoplastic insulation between conductors
- Internal keying of all parts preventing shifting and shorting
- Solder terminals for easier termination and assembly
- Large cable clamp for shield termination and strain relief
- Black or red handles

### SPECIFICATIONS

**Tip Rod, Ring, Sleeve and Body:** Copper alloy, natural finish.

Terminals and Terminal Screws: Copper alloy, natural finish.

Insulation: Thermoplastic. Handle: Molded plastic

Part Number	Conductors	Terminals	Handle Color	Handle Part Number	Description
TT251	2	Screw	Black	T2302	
TT252	2	Screw	Red	T2315	
TT253	3	Screw	Black	T2307	Mil-type M642/13-1
TT253N	3	Screw	Black	T2324	Nickel-plated plug
TT253NC	3	Solder	Black	T2324	Nickel-plated plug,
					tinned solder terminals
TT254	3	Screw	Red	T2301	Mil-type M642/13-2
TT254N	3	Screw	Red	T2325	Nickel-plated plug
TT254NC	3	Solder	Red	T2325	Nickel-plated plug,
					tinned solder terminals
2P2003	3	Screw	None	None	

# JACKS AND PLUGS .173" MINIATURE TELEPHONE PLUGS BANTAM TYPE

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# .173" MINIATURE TELEPHONE PLUGS BANTAM TYPE

### FEATURES

Miniature telephone twin plugs with two 2-conductor or two 3-conductor fingers, designed to mate with TT Twin-Jax<sup>®</sup>, TT-Jax<sup>®</sup>, and other phone jacks with a .176" inside diameter bushing and compatible tip and ring springs. Approximately 1/2 the size of standard phone plugs; yet retains uniformity, dependability of high-quality phone plugs. The phone plugs are exceptionally light, small and rugged. Plug fingers can easily be removed and replaced.

- Minimum Space: Plugs fit .313" centers, horizontally or vertically.
- Self-Aligning: Plug fingers compensate for minor variations in jack spacing.
- Polarizing: Handle notches identify location of each finger.
- Tip Monitoring: Handle ports permit probe insertion to monitor tip circuits.
- Terminating and Looping Plugs: OEMs can fabricate cross-wired plugs, i.e., tip-to-sleeve, tip-to-ring, etc., according to individual requirements. OEMs can also wire-in resistors, RCL networks, etc. for standard and special terminating applications. Switchcraft will build looping and terminating TT-Twin Plugs on special order, where quantities warrant.
- Sleeve Plugs: For looping, terminating and single cable applications, sleeve plugs seal off unused handle open-ing(s). Sleeve plugs also make a bridged (common) sleeve connection by holding braided shield in place in second plug. On special order, TT-Twin Plugs can be supplied with one 2-conductor finger and one 3-conductor finger.
- Ease of Assembly/Disassembly: Refer to illustration below for assembly/disassembly procedure; no handle retaining screws required. Tip and ring terminations are screw-type screws supplied).

### **SPECIFICATIONS**

Tip Rod, Ring, Sleeve and Body: Copper alloy, natural finish.

**Terminals and Terminal Screws:** Copper alloy, natural finish.


Insulation: Thermoplastic.

Handle, Sleeve Plugs: Molded plastic.

- DISASSEMBLY: Place plug on edge as shown. Push down and back on metal lip on finger (inside notch) with small screwdriver and slip plug finger out of handle. Turn plug over and repeat for other finger.
- 2. CABLE INSTALLATION: Fold braided shield on cable back over insulation. Insert leads through rear of plug finger, and screw finger (clockwise) onto cable with twisting motion until lead terminations lineup with threaded tip and/or ring openings. Fasten terminals on both fingers with screws provided.
- **3.** To bridge sleeves (common connection), place free end of braided shield in remaining finger sleeve opening. Press sleeve plug firmly in place.

**TT261:** Two electrically-independent 2-conductor fingers in a black handle. Can be used with single or dual cables for independent tip circuits with common sleeve or separate sleeve circuits.

TT263

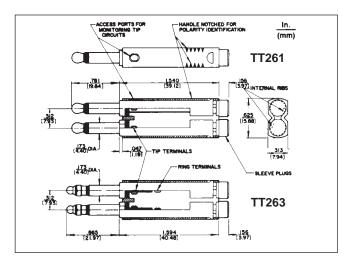


**TT263:** 6-circuit plug consists of two electrically-independent 3-conductor fingers with black handle. Can use single or dual cables for two electrically-independent 3-conductor fingers or common tip, ring and/or sleeve circuits.

Part Number <sup>1</sup>	Cond.	Terminals	Typical Mating Jack <sup>2</sup>	Handle	Handle Part Number	MIL Type Number
TT261	2	•	TT31	Black	T2300-2	-
TT263	3	Screw <sup>3</sup>	TT32B	Black	T2316	M642/13-3

1. TT-Twin Plug plugs can be supplied with one, 2-conductor plug finger and one, 3-conductor plug finger in the same handle (on special order).

2. Switchcraft Part Numbers. See additional mating jacks in this section.

- Switchcraft Replacement screw P2240, Terminal P2642. 2 each required with 2-conductor twin plugs; 4 each required with 3-conductor twin plugs.
- 4. Replacement Hole Plug Switchcraft T2318 (Black) T2319 (Red).

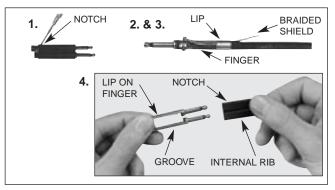

**4. ASSEMBLY:** Align grooves in fingers with internal handle ribs and insert fingers into rear of handle. Push fingers in until lips or rear of fingers snap into notches on handle.

DIMENSIONS ARE FOR REFERENCE ONLY

# www.switchcraft.com

### ® Registered trademark of Switchcraft, Inc. Note: Contact your Switchcraft Representative for price and delivery

# JACKS AND PLUGS 1/4" COMMERCIAL PHONE PLUGS – LITTEL-PLUG® PLUGS

# 1/4" COMMERCIAL PHONE PLUGS

### 2-CONDUCTOR LITTEL-PLUG® PLUGS






### FEATURES


- Heavy duty machined copper alloy handle (shielded versions), tip and body for unsurpassed ruggedness.
- Bright nickel plating on exterior surfaces will not chip or corrode.
- Solder terminals are tin electroplated for ease of soldering.
- One-piece tip rod staked into tip terminal ensures electrical continuity
- Heavy duty cable clamp provides secure strain relief.
- The proven industry standard phone plug for audio applications. Beware of imitations!
- Shielded handle versions recommended for applications where electromagnetic interference and physical abuse may occur.

### **SPECIFICATIONS**

Sleeve, Tip and Body: Nickel-plated copper alloy.
Terminals: Solder lug - Tinned copper alloy.
Screw: Tin-plated (screws size 3-48).
Handles: Molded - black or red plastic. Shielded - machined Nickel-plated copper alloy. Tubular insulator inside handle.

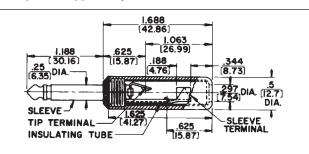

No. 280 typical – shown with solder lug terminals, cord clamp and shielded handle.

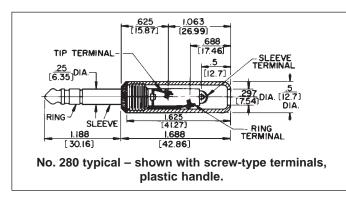

Number 260 (typical) Number 290 (typical)

3-CONDUCTOR LITTEL-PLUG<sup>®</sup> PLUGS

### 2-CONDUCTOR PLUGS PART NUMBERS

Part Number	Terminals	Typical Mating Jack <sup>2</sup>	Handle*	Handle Part Number
240	Screw <sup>3</sup>		Black	M1002
<b>⊘C240</b>	Screw <sup>3</sup> with Cable Clamp		Black	
245	Screw <sup>3</sup>		Red	
<b>⊘C245</b>	Screw <sup>3</sup> with Cable Clamp		Red	M1003
250	Solder Lug &		Black	M1002
255	Cable Clamp	11	Red	♦M1003
270	Screw <sup>3</sup>		Shielded	
<b>⊘C270</b>	Screw <sup>3</sup> with Cable Clamp		Shielded	Handle: T10581
280			Shielded <sup>1</sup>	Insulator:
281			Shielded⁴	A10071
285	Solder Lug & Cable Clamp		Shielded <sup>4,5</sup>	
288			Shielded <sup>1</sup>	
285L			Shielded <sup>4, 5, 6</sup>	T2323
2P1298	Solder Lug & Cable Clamp		Without	Handle
<b>⊘2P1495</b>	Screw <sup>3</sup>			

### **3-CONDUCTOR PLUGS PART NUMBERS**

260	Screw		Black	M1002
267	Solder Lug &		Black	M1002
269	Cable Clamp		Red	♦M1003
290	Screw <sup>3</sup>	12B	Shielded	Handle:
297	Solder Lug & Cable Clamp		Shielded	T10581 Insulator: A10071
<b>⊘2P1248</b>	Solder Lug & Cable Clamp		Without	Handle

\* Additional plug handle colors available (P2714) green, (M1111) blue,

- (**M1235**) gray. Fits any plug on which Numbers M1002, M1003 are standard. 1. Wide insulator between tip and sleeve allows use of 2-conductor plug in
- 3-conductor jack without shorting.
- 2. Switchcraft Part Numbers. See Mating Jacks Section.
- 3. Replacement Screw Part Number **P10292** (2-conductor plugs require 2 screws; 3-conductor plugs require 3 screws).

4. Unassembled.

- 5. Larger cable clamp to accommodate larger diameter cables.
- Handle has .375" (9.53mm) diameter hole to accommodate larger diameter cables.
- ◊ Special order only. Contact Switchcraft.

DIMENSIONS ARE FOR REFERENCE ONLY

# **PHONE: 773 792-2700**

### \* Please visit the product pages on our website for the most up-to-date product information

# 1/4" COMMERCIAL PHONE PLUGS (continued)

Switchcraft® commercial 2- and 3-conductor phone plugs are available with a logo handle in addition to the plain handle. The Switchcraft® name appears prominently on the shielded handle so the plugs can no longer be easily confused with "copycat" plugs found on the market today. Knurling on handles provides a convenient, positive fingertip grip for connect and disconnect. Plugs are available in the following popular variations:

- 1. 1/4" diameter finger, 2-conductors.
- 2. 1/4" diameter finger, 3-conductors.
- 3. .206" diameter finger, 2-conductors.

Plug handles accept cable up to .290" diameter.



### SPECIFICATIONS

Sleeve: Tip and Body: Plated copper alloy. Terminals: Solder lug: Copper alloy, electro-tinned; Screw: Tin-plated (screw size #3-48).

Handles: Nickel-plated zinc (tubular insulator inside handle).


### PART NUMBERS


NOTE: Plugs have 1/4" finger diameter unless otherwise specified.

Logo Handle	Plain Handle	Description	Typical Mating Jack			
2-CONDU	CTORS					
570	270	Screw terminals. Shielded handle.				
580	280	Solder lug & cable clamp. Shielded handle.				
581	281	Solder lug & cable clamp. Shielded handle. Unassembled.				
585	285					
588	288	Solder lug & cable clamp. Shielded handle. Wide insulator between tip and sleeve makes possible use as a 2-conductor plug in 3-conductor jack without shorting.				
S580	S280	Solder lug & cable clamp. Shielded handle. Plug finger has .206" diameter.	S11			
3-CONDU	CTORS					
590	290	Screw terminals. Shielded handle.	12B			
597	297	Solder lug & cable clamp. Shielded handle.				
598	298	Solder lug & cable clamp. Shielded handle. Locking feature.	12B, 133			

1. Other mating plugs are available.

2. Replacement screw, Part Number P10292 (2-conductor requires 2 screws; 3-conductor requires 3 screws).

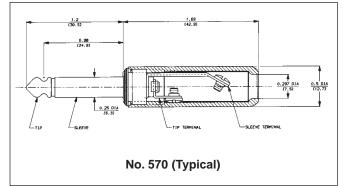

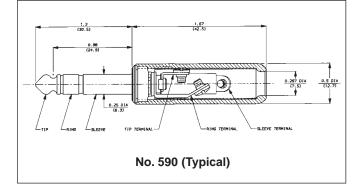

PUCS

### \* Please visit the product pages on our website for the most up-to-date product information

# 1/4" COMMERCIAL PHONE PLUGS (continued)





Numbers 70, 184





Number 170, 181





Number 40

Number 160

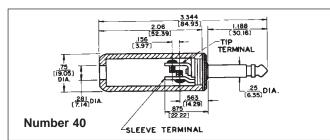

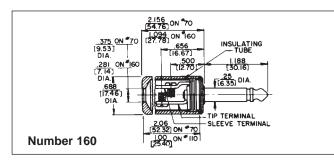

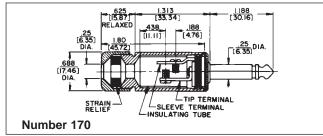

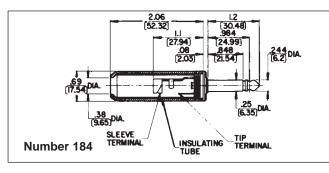

### 2-CONDUCTOR/PLASTIC OR SHIELDED HANDLES

Popular general purpose plug fits all standard jacks. Available in both 2- and 3-conductor types. Two-conductor plugs available with black or red molded plastic, or 3 different lengths of brass nickel-plated (shielded) handles. 2-Conductor Special Military Plugs are also available.

### FEATURES

- 1-piece tip rod staked into tip terminal insures tightness of plug.
- All essential conducting members are brass with external parts nickel-plated.
- Terminal screws: broad-headed. In production quantities, screws may be eliminated and terminals hot-tinned for easier soldering of wire leads to terminals (special order).
- Screw terminals have grooves which accommodate
   1 or 2 cord tips.
- Thermoplastic handle insert for greater insulation.
- Plugs accept up to .25" maximum diameter cable (parallel or shielded cable).

### SPECIFICATIONS

Sleeve, Tip and Body: Nickel-plated copper alloy. Terminals: Solder lug: copper alloy, electro-tinned. Screw: steel, tin-plated.

Handles: Shielded: Nickel-plated copper alloy. Molded: black or red plastic.

Part Number	Terminals	Typical Mating Jack <sup>2</sup>	Handle	Handle Part Number
40			Black	M1001
<b>70</b> <sup>3</sup>	Screw		Shielded	Handle: T10141 Insulator: A10063
160	(Replacement Screw Part No. P10013)		Shielded	Handle: T10451 Insulator: A10061
<b>⊘2P1251</b>	2 required	11 or Z15J	Without Handle	-
170 <sup>1</sup> 182QB 182QBD		215J -	Shielded	Handle: T11231 <sup>1</sup> Insulator: A10064
184 <sup>3</sup>	Solder Lug &		Shielded	Handle: T10141 Insulator: A11372
184L⁴	Cable Clamp		Shielded	T2322

 2-piece shielded handle with built-in cable clamp for .25" diameter cable. Handles: Number T11231, handle; Number T11241, cap; see above for insulating tube; Number T1125, rubber washer.

2. Other mating plugs are available.

3. Handle has .380" (9.65mm) diameter hole to accommodate .375" diameter cable.

4. Handle has .451" (11.51mm) diameter hole to accommodate larger diameter cables.

# JACKS AND PLUGS Silent-Plug and Lug® Plug Phone Plugs

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# SILENT-PLUG PHONE PLUGS



Silent-Plug plugs have unique circuit-closing device stops hums, squeals and pops when plug is removed from jack. One-piece tip rod assembly insures plug quality. Utilizes cables up to .25" diameter (parallel or shielded cable). U.S. Patent No. 2,664,475.


### SPECIFICATIONS

Sleeve, Tip and Body: Nickel-plated copper alloy. Terminals: Copper alloy, tin-plated. Screw: Cadmium plated (screws size 3-48). Handles: Shielded machined copper alloy nickel-plated. Tubular insulator inside handle.

### 2-CONDUCTOR PLUGS

Part Number	Terminals	Typical Mating Jack	Handle	Handle Part Number
172	Screw (Replacement Screw Part No. P-1011-3) 2 required	11	Shielded	Two-Piece <sup>1</sup> Ins. Tube A-1006-3
181 182	Solder Lug and Cable Clamp		Shielded <sup>2</sup>	Two-piece <sup>1</sup> Ins. Tube A-1137-1 T-1014-1 Handle, A-1137-2 Ins. Tub

1. 2-piece shielded handle with built-in cable clamp for .25" diameter cable. Handles: Number **T1123-1**, handle; Number **T1124-1**, cap; Number **T-1125**, rubber washer. 2. Mylar tube insulation for greater protection.

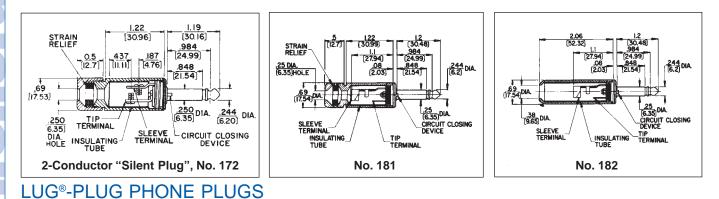

Nos. 350, 351, 355

1, 355

Similar to Littel-Plug phone plug. Same molded handles as used on Littel-Plug; metal handle, bright nickel-plated, only 1" long. Fits all standard jacks. See drawing for details.

No. 380


### **SPECIFICATIONS**

Sleeve, Tip and Body: Nickel-plated copper alloy. Terminals: Solder lug: copper alloy, tin-plated. Screw: plated steel. Handles: Shielded: Nickel-plated copper alloy. Molded: black or red plastic.

### 2-CONDUCTOR PLUGS

Part Number	Terminals	Typical Mating Jack <sup>1</sup>	Handle	Handle Part Number
350			Black	M-1002
2P-1216	Colder Luce			
380	Solder Lug	11	Shielded	Handle: T-1060-1
300			Shielded	Insulator: A-1007-2

1 Switchcraft part numbers. See Jacks Section for additional mating jacks.

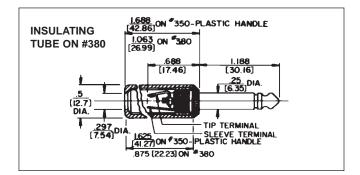

DIMENSIONS ARE FOR REFERENCE ONLY (mm)


<u>www.switchcraft.com</u>

JACKS AND PLUGS

# **JACKS AND PLUGS** AUDIO LOUDSPEAKER PLUGS AND HEAVY DUTY 1/4" PHONE PLUGS

\* Please visit the product pages on our website for the most up-to-date product information

# AUDIO LOUDSPEAKER PLUGS

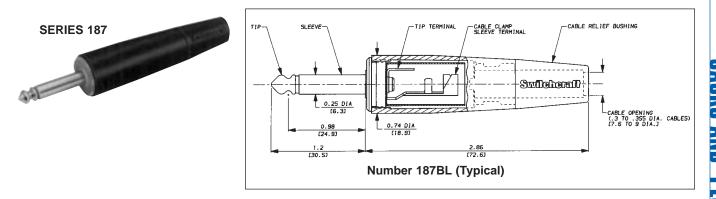

The 187 series 1/4" phone plugs are similar to the Switchcraft® 184 plugs, except that they offer an attractive tapered handle with a snap-in flex relief. Other features include:

- Larger tip terminal to accommodate wire sizes up to 14 AWG. · Choice of Satin nickel or black finish.
- Black flex relief bushing can be specified in three different cable diameter openings for maximum reliability of cable.
- Plug is rated at 15A rms (maximum) for use with audio loudspeaker applications.

### **SPECIFICATIONS**

Sleeve, Tip and Body: Nickel-plated copper alloy. Terminals: Solder lugs: tinned copper alloy; Screw: tin-plated.

Handles: Die-cast zinc. Satin nickel or black finish. Cable Relief Bushing: Black (thermoplastic elastomer).

187BD 1. Other mating plugs are available. See Jacks Section.

Black

Finish

187B

187BL

Part Number

Nickel

Finish

187

187L

187D

# HEAVY DUTY 1/4" COMMERCIAL PHONE PLUGS

Cable

Relief

**Bushing** 

diameter (inch)

.3 to .33 (regular)

.3 to .355 (large)


.2 to .30 (small)

Typical

Mating

Jack<sup>1</sup>

11 or Z15J

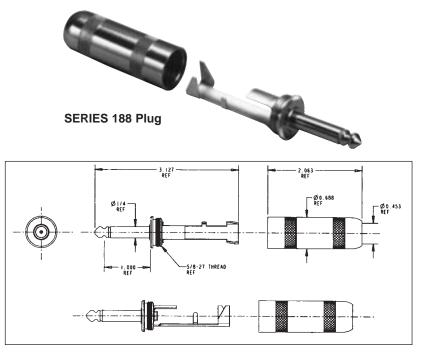

- Switchcraft's 188 is more heavy-duty than our competitor's biggest 1/4" commercial phone plugs.
- · Large curved tip solder terminal makes it easier to solder to heavy gauge wires.
- Longer sleeve terminal allows more room to make sleeve solder connections.
- Extra-large cable clamp securely grips cable of up to .450" in diameter.
- · Will easily accommodate some varieties of four conductor 14 gauge wire and parallel two conductor 12 gauge wire.
- Bendable tab on sleeve terminal makes termination easier by holding down cable while soldering. In addition, such mechanical retention makes for a superior solder connection.
- Will handle up to 15 A. rms (maximum). (continued on next page)

Inch DIMENSIONS ARE FOR REFERENCE ONLY

# **JACKS AND PLUGS** HEAVY DUTY 1/4" COMMERCIAL PHONE PLUGS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# HEAVY DUTY 1/4" COMMERCIAL PHONE PLUGS (continued)

### **SPECIFICATIONS**

Contact Resistance (typical \*D.O.M.J.):< 0.020 ohms. Dielectric Withstand Voltage: 500 VAC (minimum). Insulation Resistance @ 500 VDC: 2,000 megohms (minimum).

Insulation Resistance (after MIL-STD-202 Salt Spray): 1,000 megohms (minimum). Working Voltage: 250 VAC, 140 VDC. Current Carry @ Working Voltage For 188 Plug (typical \*D.O.M.J.): 15.0 AMPS. Current Carry @ Working Voltage For 299 Plug (typical \*D.O.M.J.): 6.0 AMPS. Insert/Withdrawal Force: \*D.O.M.J.. Soldering Requirement: ANSI/J-STD-001. Temperature Range: -40° to + 85° Centigrade U.L. Component Recognition File No.: E118169. Life: \*D.O.M.J. Maximum Cable Size For 188 Plug: 12 AWG stranded, up to .450" diameter. Maximum Cable Size For 299 Plug: .290" diameter.


### MATERIALS

Tip: Nickel-plated copper alloy. Sleeve: Nickel-plated copper alloy. Handle: Nickel-plated copper alloy. Tip Terminal: Copper alloy, electro tin-plated. Cable Clamp: Copper alloy, electro tin-plated. Insulators For 188 Plug: Thermojet plastic, thermoplastic, thermoplastic film, P.P.O. Insulators For 299 Plug: Thermoplastic, thermoplastic film, glass epoxy.



Part	Maximum	Mating
Number	Cable Size	Jack
299	.290" Diameter	

\*D.O.M.J. - Dependent On Mating Jack

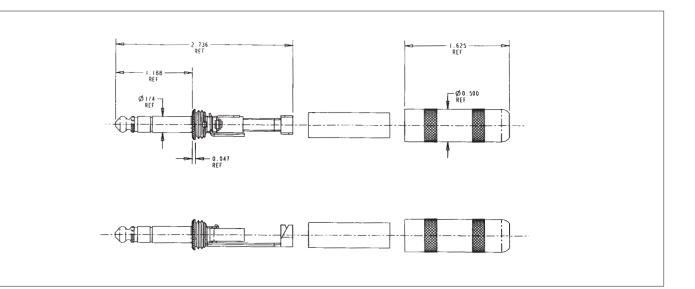

DIMENSIONS ARE FOR REFERENCE ONLY

Inch (mm)

150

www.switchcraft.com

# **JACKS AND PLUGS** 1/4" AND .206" COMMERCIAL PHONE PLUGS

\* Please visit the product pages on our website for the most up-to-date product information

# 1/4" COMMERCIAL PHONE PLUGS (continued)

### **3-CONDUCTOR/PLASTIC OR** SHIELDED HANDLES



Number 60

Number 190





Number 190A

Part Number	Terminals	Typical Mating Jack <sup>2</sup>	Handle	Handle Part Number
60			Black	M1001
<b>⊘90</b>			Shielded	T10451
190	Solder Lug	12B	Shielded	Handle: T10141 Insulator: A10063
190A,190B & 190BL			Shielded	2-piece1

1. 2-piece shielded handle with built-in cable clamp for .25" diameter cable. Anolles: Number T11231, handle; Number T11241, cap; Number A10064, insulating tube; Number T1125, rubber washer.

2. Other Mating Plugs are available.
 ◊ Special order only. Contact Switchcraft.

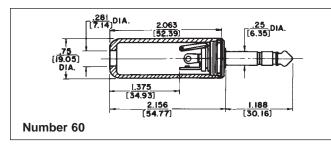

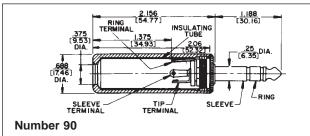

# .206" COMMERCIAL PHONE PLUGS

### PHONE PLUGS FOR POLARIZED CONNECTIONS




### **FEATURES**

For applications requiring polarization (use of plugs of different sizes) to prevent insertion of incorrect equipment Littel-Plug® phone plugs featuring a sleeve and tip diameter of .206" are available. Mate with Number S128 Extension Jax® and S11 Littel Jax® jacks. Number S260 used interchangeable with Military Type M642/51 (Switchcraft Number 480) plugs. Mate with jacks S12B, S13B, M444, MT342B, MT344B and others.


### 2-CONDUCTOR PLUGS PART NUMBERS

Part Number	Terminals	Typical Mating Jack <sup>1</sup>	Handle	Handle Part Number
S250		0.11	Black	M1002
S280	Solder Lug & Cable Clamp	S11 -	Shielded	T10581 A10071

### **3-CONDUCTOR PLUGS PART NUMBERS**

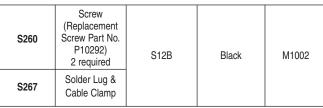

1. Switchcraft® mating jacks.

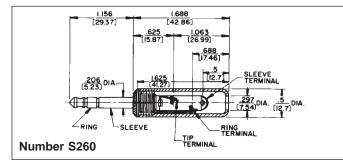

Inch DIMENSIONS ARE FOR REFERENCE ONLY

# JACKS AND PLUGS 1/4" MITI-PLUG® AUDIO PLUGS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# 1/4" MITI-PLUG® AUDIO PLUGS





### FEATURES

- 2-conductor phone plug with full shielding and resistance to extremely rough usage for electrified audio instruments such as amplifiers, synthesizers power heads and speaker systems requiring high-quality audio plugs.
- 3-WAY CABLE STRAIN/STRESS RELIEF: For hours of trouble-free operation under heavy and abusive use. Plug body internally threaded for screw-on strain relief for cables from .29" to .30" diameter, and an additional clamp for additional relief (and for smaller cables). A heavy copper alloy-plated steel spring at point of entry to plug keeps cable from folding and pinching. Flex relief spring recommended for cables with diameters of .265" maximum only.
- TERMINATING: Tip wire soldered to tip-braid folded back and secured with cable clamp.
- IDENTIFICATION: Customer or OEM name of logo can be applied to plastic handles for a minimal charge for personalization. (Contact Switchcraft for details).
- SPECIAL HANDLE COLORS: Plastic handles molded in custom colors on special order. Contact Switchcraft for details.

### SPECIFICATIONS

Tip Rod & Body: Copper alloy. Handle: Copper alloy or plastic (black). Flex Relief Spring: Plated spring steel. (Part No. P2848). Strain Relief Clamp: Plated steel. (Part No. P2380). Insulation: Thermoplastic, glass reinforced. Number 174S

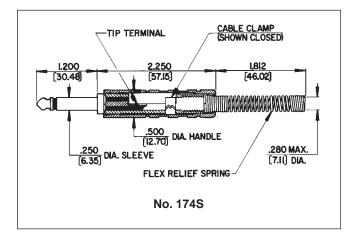

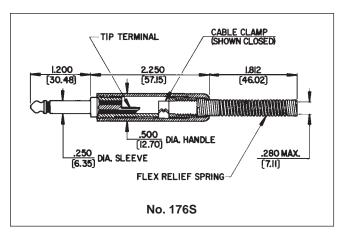

### 2-CONDUCTOR PLUGS

Part Number	Handle	Flex Relief	Typical Mating Jack <sup>1</sup>	Handle Part Number
173	Black plastic	U-Clamp		M1483
174S	Copper Alloy	Spring		T2313
175	Copper Alloy	None		T2313
176S	Black Plastic	Spring	11	M1483
177S	Red Plastic	Spring		
178	Black Plastic	None		M1483
<b>⊘179</b>	Red Plastic	None		

1. Other mating plugs are available.

◊ Special order only. Contact Switchcraft.

DIMENSIONS ARE FOR REFERENCE ONLY

NLY Inch

152

# **JACKS AND PLUGS** 1/4" FLAT PLUG PHONE PLUGS

### \* Please visit the product pages on our website for the most up-to-date product information

### 1/4" FLAT PLUG PHONE PLUGS





Series 220





No. 238

Series S230

### **FEATURES**

- · Ideal where conventional long handled plugs are not suited to design of equipment. "Chassis-hugging" phone plugs allow cables to be brought out at right angles to equipment.
- Removable plastic cap for easy assembly of wire leads to either screw or solder lug terminals. Adapter clips on types 220 and 225 make it convenient to clamp standard phone tips to terminals.
- Terminals and body of plug mechanically interlocked, eliminating probability of any shifting.
- Cover is black or red plastic; plug body is a rugged assembly of all metal parts.
- One-piece tip rod staked into tip terminal to insure tightness, no disassembly of tip during use of plug.
- High grade insulation.
- Terminal identification permanently stamped into base plate adjacent to each terminal. Letter "T" denotes tip connection; "R" denotes ring sleeve; "S" terminal is the sleeve or body connection (no identification on types 228, 238).
- · Cover molds designed so customer's name or trademark inserts can be added. Call for details.

### SPECIFICATIONS

Tip Rod and Sleeve: Nickel-plated copper alloy.

Terminals: Tinned copper alloy.

Handle: Black or red plastic. Numbers 228 and 238, steel,nickel-plated.

### 2- OR 3-CONDUCTOR/SHIELDED HANDLE

Part		Typical			Handle
No.	Terminal	Mating Jack <sup>1, 2</sup>	Conductor	Handle	Part No.
228	Solder	11	2	Shielded	S3067
238	Lug	12B	3	Sillelueu	55007

<sup>1.</sup> Nickel plated steel handle. Two screws (Part Number P15823) required to mount handle.

2. Other mating plugs are available.

3. Accommodates cables from .219" outside diameter to .250" outside diameter Ideal for music equipment use.

### **3-CONDUCTOR/PLASTIC HANDLE** .206" DIAMETER SLEEVE AND TIP

Part No.	Terminals	Typical Mating Jacks <sup>1</sup>	Handle	Handle Part No.⁴
230	Screw <sup>3</sup>		Black	M1005
<b>∂235</b>	Screw		Red	
237	Solder	12B	Black	M1005
<b>⊘239</b>	Solder		Red	
<b>♦\$230</b>	Screw <sup>3</sup>	S12B <sup>2</sup>	Black	M1005

1. Switchcraft Part Number Other mating plugs are available.

2. Part Number S230 is the commercial version of military Type PJ068 (Switchcraft Number 480) plug. Mates with S12B, S13B, M444, MT342B, MT344B Jacks and others. Other mating plugs are available. For applications where it is desirable to polarize, use plugs of different sizes to prevent insertion of incorrect equipment. Sleeve and tip diameter of these plugs is .206" Mates with S830, S1230 Extension-Jax<sup>®</sup> jacks and S12B, S13B Littel-Jax<sup>®</sup> phone jacks.

3. Switchcraft Replacement Part Number P10292. 3 screws required. 4. Three screws (Number P1039) required to mount handle.

Special order only. Contact Switchcraft.

### 2-CONDUCTOR/PLASTIC HANDLE


Part No.	Terminals	Typical Mating Jack <sup>1</sup>	Handle	Handle Part No. <sup>3</sup>
220	Screw		Black	M1005
225	Screw		Red	M1006
227	Solder Lug	11	Black	M1005
229	Solder Lug		Red	M1006
2P1509	Screw		Less Handle	-

1. Switchcraft Part Number; see jack section for additional mating jacks.

2. Switchcraft replacement Part Number P10292. 2 screws required per plug.

Clips for phone tips. Part Number S1832.

3. Three screws (Number P1039) required to mount handle.

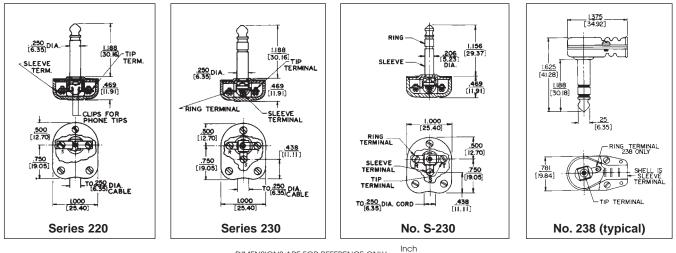

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# JACKS AND PLUGS Right-Angle Audio Phone Plugs

# **PHONE: 773 792-2700**

### \* Please visit the product pages on our website for the most up-to-date product information

# **RIGHT-ANGLE AUDIO PHONE PLUG**

### FEATURING 3-PIECE CONSTRUCTION AND FAST TERMINATION/ASSEMBLY

Switchcraft's 2- or 3-conductor right-angle audio phone plugs are designed for OEMs and users of commercial phone plugs. The plugs offer large terminals for easy wiring, and only three pieces to assemble - handle, insulator and finger/housing assembly and rugged reliability for stable, long-term, trouble-free operation.

### **FEATURES**

- · Easy Termination: Large terminals accept up to 16 AWG wiring (cables up to .25 inch diameter)
- 3-Piece Assembly: Screw on the handle for quick and easy assembly; minimizes labor costs.
- Rugged: All metal exterior construction.
- Low Profile: Only 1/2 inch wide. Ideal for crowded, multi-channel panels. Right-angle handle minimizes space required behind equipment.
- Knurled Handles: Positive grip during connect/disconnect.
- Rugged Cable Clamp: Isolates pulling and twisting strains.


### **SPECIFICATIONS**

Tip, Rod and Handle: Nickel-plated copper alloy. Housing/Sleeve: Nickel-plated. Tip Terminal: Tin-plated copper alloy. Sleeve (Clamp) Terminal: Tin-plated steel. Insulation: Thermoplastic. Dielectric Withstanding Voltage: 500 Vac. Insulation Resistance: 50,000 Megaohms minimum (initial).

Operating Temperature: -20°C to +65°C.



Part Number	Description	Typical Mating Jack
236	3-conductor 1/4" right-angle commercial plug.	12B, 13B 112B, 113B
226	2-conductor 1/4" right-angle commercial plug	11, 12A 111, 112A

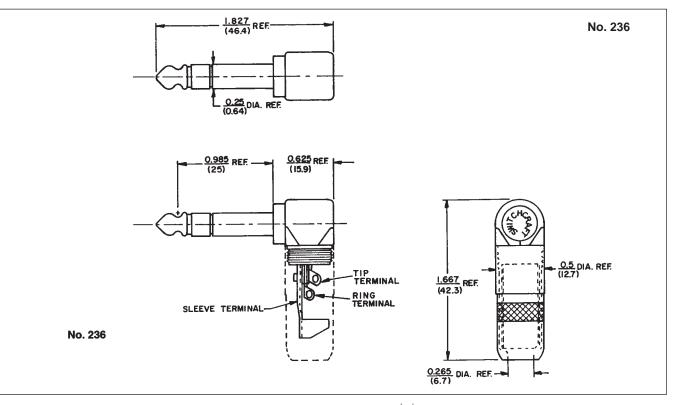

Inch DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

www.switchcraft.com

# 1/4" LOCK-EXTENSION JACKS AND PLUGS



Number 133

### FEATURES

Modified Littel-Plug<sup>®</sup> phone plug, 2- or 3-conductor, with coupling ring that can be threaded to thread projection of mating panel jack or to threaded end of the Lock-Extension Jax<sup>®</sup>. Locks connection after plug has been fully inserted into its mating panel jack or Extension Jax<sup>®</sup>.

Lock-Plug<sup>®</sup> makes proper contact to mating jack without tightening or attaching coupling ring, when rapid disconnect may be desired. Lock-Plug fits any standard jack with 3/8".-32 thread bushing with .094" of the bushing exposed. Lock-Extension Jax also will mate properly with standard phone plugs, where no "lock" requirement exists.



Number 298

### SPECIFICATIONS

### Lock-Plug Tip Rod, Body, Handle and Coupling Ring: Nickel-plated copper alloy.

**Terminals:** Brass, electro-tinned. Solder lug design, cable clamp part of sleeve terminal. **Insulation:** Rigid plastic.

LOCK-EXTENSION JAX®

Housing (or Sleeve) and Handle: Nickel-plated copper alloy.

### **TERMINALS:**


Sleeve: Plated steel. Tip and Ring: integral part of tip and ring springs. Springs: Spring tempered copper alloy. Insulation: Molded thermoplastic insert. Rigid plastic terminal washer.

### LOCK-PLUG

Part Number	Cond.	Terminals	Typical Mating Jack	Handle Part Number	Notes
282	2	Solder	12A	T10591	Similar to Switchgroft Number 207 Littel Dive
298	3	Lug & Cable Clamp	12B, 133	T10581 A10071	Similar to Switchcraft Number 297 Littel-Plug except with coupling ring.

### LOCK-EXTENSION JAX®

Part Number	Cond.	Terminals	Typical Mating Plug	Handle Part Number	Notes
133	3	Solder Lug & Cable Clamp	298	T1485	Sleeve terminal has cable clamp. Similar to Switchcraft <sup>®</sup> Number 131 Extension-Jax <sup>®</sup> .

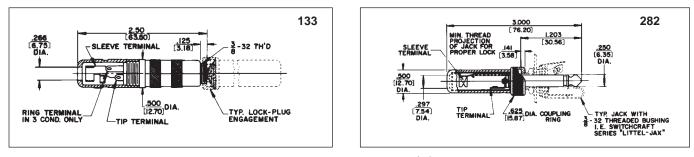

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

155

# 3.5 MM HEAVY DUTY STEREO PLUGS



### 3.5MM STEREO PLUGS FEATURES


- Heavy duty 3.5mm plugs for audio, instrument, other applications.
- Large cable clamps for rugged use.
- Available in straight or right angle.
- One piece tip rods for added durability.
- Available in nickel, gold, and black finishes.
- · Large solder terminals for easy assembly.
- Standard handle accommodates cable sizes up to 0.290" Optional 'S' versions accommodate cable sizes up to 0.175" 35HDBN - Black Handle, Nickel Plug 35HDBAU - Black Handle, Gold Plug 35HDNAU - Nickel Handle, Gold Plug 35HDNN - Nickel Handle, Nickel Plug

### BENEFITS

- One piece tip rod with flat for easy solderability.
- Compliments current line of 3.5 mm jacks.
- Insert molded plug finger.
- Heavy Duty cable clamp provides better strain relief for larger cables
- Longer cable clamp for easier plug assembly and more room for solder connections
- Knurl on the back of handle provides ergonomic gripping surface to tighten plug
- Tubular insulator included to prevent solder joints from contacting handle
- Longer handle for improved gripping surface and easy plug withdrawal from jack
- · Large solder terminal for easy solderability

### MARKETS

- Audio
- Consumer electronic equipment
- Broadcast studios
- Home recording equipment
- Audio cable assembly manufacturers
- Instrumentation
- Test equipment

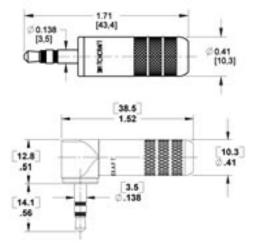

### SPECIFICATIONS

Contact Resistance: <0.020 ohms Dielectric Withstand Voltage: - 250 VAC (min.) Insulation Resistance @ 500 VDC: 2,000 megohms (min.) Working Voltage: - 250 VAC, 140 VDC Current Carry @ Working Voltage: 4 AMPS Insert/Withdrawal Force: - Typical 2.5/2 pounds Temperature Range: 0° to 66° Centigrade (operating) Passed MIL-STD-202F Method 107G (Thermal Shock), and Method 201 (Vibration) Life: - 5000 cycles Maximum Cable Size: - .250? dia.

### MATERIALS

Tip Rod: Copper alloy, tin, or gold-plated Ring: Copper alloy, nickel, or gold-plated Sleeve: - Copper alloy, nickel, or gold-plated Handle: Copper alloy, nickel, or gold-plated Cable Clamp: - C.R.S., tin-plated Solder Terminal: Copper alloy, tin-plated Tubular Insulator: Clear plastic

### ORDERING INFORMATION

- 1. Order by part number
- 2. Contact Switchcraft for more information

Part	Description		
Number	Plug Finger	Handle	Notes
35HDNN	Nickel	Nickel	
35HDNNS	Nickel	Nickel	0.175" handle opening
35HDBN	Nickel	Black	
35HDBNS	Nickel	Black	0.175" handle opening
35HDNAU	Gold	Nickel	-
35HDNAUS	Gold	Nickel	0.175" handle opening
35HDBAU	Gold	Black	
35HDBAUS	Gold	Black	0.175" handle opening
35HDRANN	Nickel	Nickel	Right angle
35HDRABAU	Gold	Black	Right angle
35HDRAAU	Gold	Nickel	Right angle

DIMENSIONS ARE FOR REFERENCE ONLY

# www.switchcraft.com

### \* Please visit the product pages on our website for the most up-to-date product information

# .141" MINIATURE PHONE PLUGS





Number 780

### FEATURES

• Miniature 2-conductor Phone Plug for use with Switchcraft Tini-Jax<sup>®</sup> miniature phone jacks. About 1/2 the size of Switchcraft Littel-Plug<sup>®</sup> phone plug. Average net weight, 1/8 ounce.

**JACKS AND PLUGS** 


.141" MINIATURE PHONE PLUGS

- Various terminal combinations: (a) Dual purpose sleeve terminal may be clamped over metal braid or shielded cables; provides cable anchor. Easily soldered for perfect electrical connection. (b) Screw terminal design (no cable clamp) for cable. Terminals that can be more suitably connected by screws.
- 1-piece tip rod staked into mating terminals; no disassembly of tip during use of plug. Terminals and body of plug interlocked mechanically.
- Available in black or red plastic handles or brass nickelplated handles for shielding. Can be used with cables up to .188" outside diameter.

### SPECIFICATIONS

Sleeve, Tip and Body: Nickel-plated copper alloy. Terminals: Copper alloy, electro-tinned. Solder lug or screw type (Screws #0-80). Handle: Molded black or red plastic. Copper alloy, nickel-plated.

Part Number	Terminals	Typical Mating Jack <sup>1</sup>	Handle	Part No.
740			Black	M1055
745	Screw <sup>2</sup>		Red	M1056
750	O a la la marca de		Black	M1055
755	Solder Lug & Cable Clamp		Red	M1056
2P1384			Less Handle	-
770	Screw <sup>2</sup>		Shielded	T13631
780	Solder Lug & Cable Clamp		Shielded	T13631

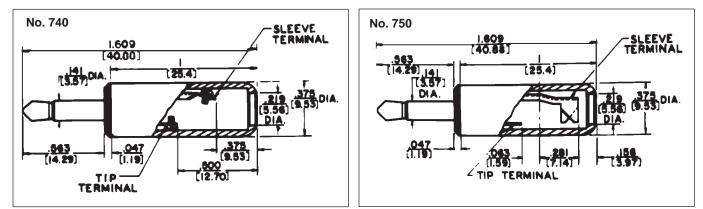

1. Other mating plugs are available.

2. Switchcraft replacement Part Number P1153. 2 screws required per plug.



157

JACKS AND PLUGS

# JACKS AND PLUGS .097" SUBMINIATURE PHONE PLUGS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# .097" SUBMINIATURE PHONE PLUGS

Numbers 850, 880





Number 851

### FEATURES

- Subminiature, 2-conductor phone plugs are 1/3 the size of standard phone plugs, with the uniformity, dependability, and quality construction of Switchcraft Littel-Plug<sup>®</sup> and Tini Plug<sup>®</sup> phone plugs. 50 W soldering with 60/40 solder recommended for terminating.
- Switchcraft's 852, 853, 857, 858, 882 and 883 have a wider insulator between the tip and the sleeve. The wide insulator prevents the tip of the plug from shorting out between the tip spring and the sleeve of the jack during insertion.

Micro-Plug<sup>®</sup> PLUG - Sleeve terminal incorporates cable clamp. May be clamped over mated braid to anchor shielded cable; solders readily for perfect electrical connection. Terminals and plug body interlocked mechanically. Accommodates cable up to .125" Combined length, handle and tip: 1.106" outside diameter, .250" outside diameter handle.

LOCK Micro-Plug<sup>®</sup> PLUG - Similar to Micro-Plug plug, with addition of integral threaded collar that fastens to bushing of mating jack to prevent accidental disconnect. Requires at least .05" of exposed and usable thread on jack bushing to lock securely. Ideal for secure connections in critical medical and sensitive scientific instruments. Combined length, handle and tip: 1.046". Various molded cable assemblies incorporating Micro-Plug Subminiature phone plugs with plastic handles are available.

### SPECIFICATIONS MATERIALS

Tip, Rod and Body (also integral Coupling Collar on Lock Micro-Plug): Nickel-plated copper alloy. Insulation: Molded thermoplastic. Sleeve Termination and Cable Clamp: Tinned copper alloy. Handle: Anodized aluminum; red, black or natural finish.

### MECHANICAL

Life rating: 5,000 insertion/withdrawals. Insertion/Withdrawal Force: 1 pound (depending on mating jack).

### ELECTRICAL

Insulation Resistance: > 100 megohms Dielectric Withstanding Voltage: 250V AC.

### ENVIRONMENTAL

Thermal Range: -55°C to +85°C (non-operating); -20°C to 65°C (operating). Thermal Shock: Mil-Std 202, Method 107. Humidity: Mil-Std 202, Method 106. Salt Spray: Mil-Std 202, Method 101.


### MICRO-PLUG

Part Number	Terminals	Mating Jacks <sup>1</sup>	Handle	Handle Part No.
850			Black	T18623
852			Black	T18623
855	Ostatestas	TDOA	Red	T18622
857	Solder Lug	TR2A	Red	T18622
880			Natural	T18621
882			Natural	T18621
2P1419			Less Handle	-

### LOCK MICRO-PLUG

Part Number	Terminals	Mating Jacks <sup>1</sup>	Handle	Handle Part No.
851			Black	T23123
853			Black	T23123
856	Solder Lug	TR2A	Red	T23122
858			Red	T23122
881			Natural	T23121
883			Natural	T23121

1. Switchcraft Part Numbers. Other mating plugs are available.

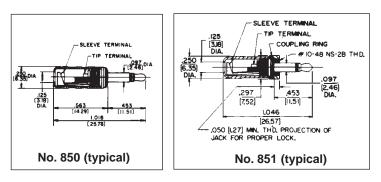

DIMENSIONS ARE FOR REFERENCE ONLY

ONLY Inch


# JACKS AND PLUGS AUDIO ADAPTERS

# 159

# JACKS AND PLUGS STATIC DOFO

### \* Please visit the product pages on our website for the most up-to-date product information

# AUDIO ADAPTERS

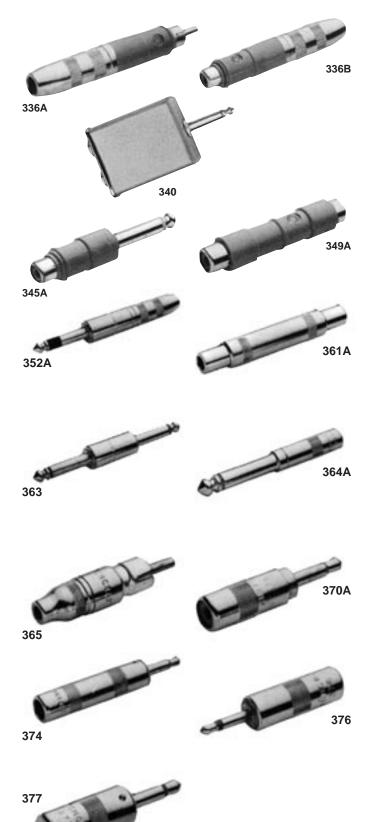

**Part Number 332A (Not shown):** 2-cond. phone jack input to old MC1M-style microphone connector output. Coupling ring can be screwed back to convert female microphone connector to male type. Shielded.

Part Number 336A: 2-conductor phone jack input to a phono plug output. Shielded.

**Part Number 336B:** 2-conductor phone jack input to phono jack output. Shielded.

**Part Number 340:** Two 2-conductor phone jack inputs connected in parallel to a 2-conductor phone plug output. Shielded.

**Part Number 345A:** Phono plug input to a standard 2-conductor phone plug output. Shielded.

**Part Number 349A:** Phono plug coupler. Phono Extension Jax<sup>®</sup> input to phono Extension Jax output. Shielded.

**Part Number 352A:** Stereo to monaural adapter. 3-conductor phone jack input to 2-conductor phone plug output. Extra-wide insulator prevents accidental damage should wrong connection be made. Shielded.

**Part Number 361A:** Phone plug coupler. Standard 1/4" inside diameter phone jack input to standard 1/4" inside diameter phone jack output. Ideal for connecting two cables terminated with 2-conductor phone plugs. Shielded.

**Part Number 362A (Not shown):** Phone plug coupler. Standard 3-cond. phone jack input to standard 3-cond. phone jack output. Ideal for connecting two cables terminated with 3-conductor phone jacks. Shielded.

**Part Number 363:** Phone jack coupler. Standard 1/4" 2-conductor phone plugs at each end to connect two cables terminated with phone Extension Jax. Shielded.

**Part Number 364A:** EIA Standard 2-conductor Tini-Jax<sup>®</sup> phone jack input to a standard 1/4" 2-conductor phone plug output. Shielded.

Part Number 365: EIA Standard 2-conductor Tini-Jax<sup>®</sup> phone jack input to a phono plug output. Shielded.

**Part Number 370A:** 2-conductor EIA Standard Tini-Plug<sup>®</sup> phone plug (.141" diameter finger) output to phono jack input. Adapts standard phono plug to small Tini-Plug. Shielded.

**Part Number 374:** 2-conductor phone jack input to a 2-conductor EIA Standard Tini-Plug (.141" diameter finger) phone plug output. Adapts standard phone plug to small Tini-Plug.

**Part Number 376:** EIA Standard Tini-Jax phone jack input to a 2-conductor Micro-Plug (.097" diameter finger) phone plug output. Adapts a Tini-Plug phone plug to a Micro-Plug phone plug.

**Part Number 377:** Micro-Jax phone jack input to a 2-conductor EIA Standard Tini-Plug (.141" diameter finger) phone plug output. Adapts a Micro-Plug phone plug to a Tini-Plug phone plug.

◊ Special order only. Contact Switchcraft.



# PHONO PLUGS



### FEATURES

- Wide variety of styles for a wide range of applications.
- 3502A and 3502RA Series offer solid pin, large solder cups.
- 3558 Series utilize plastic handles for low cost applications.
- 3507 and 3504M have low-loss nylon insulators for
- RF applications. Can be used at 1 kW at 30 MHz. • 3501M and 3501MC have the handle removed for tight spaces
- Options include nickel and gold plated, or black epoxy finishes.

### SPECIFICATIONS MATERIALS

Pin: Nickel or gold plated, copper alloy
Sleeve: Nickel or gold plated, copper alloy
Handle: Nickel or gold plated, or black epoxy finish, copper alloy
(3558 Series: Thermoplastic)
Cable Clamp: Tin, copper alloy
Insulator: Rigid Plastic

### ELECTRICAL

Current Carry @ Working Voltage (typical \*D.O.M.J.): 6A Contact Resistance (typical \*D.O.M.J.): < 0.20 Ohms Dielectric Withstanding Voltage: 500 VAC min. Insulation Resistance @ 500VDC: 2,000 megohms min Working Voltage: 250VAC, 140VDC

### **MECHANICAL**

Life: \*D.M.O.J Temperature Range: -40∞ C to +85∞ C \*D.M.O.J. –Dependent On Mating Jack


DIMENSIONS ARE FOR REFERENCE ONLY


NLY  $\frac{\text{lnch}}{(\text{mm})}$ 


160

\* Please visit the product pages on our website for the most up-to-date product information

# PHONO PLUGS (continued)

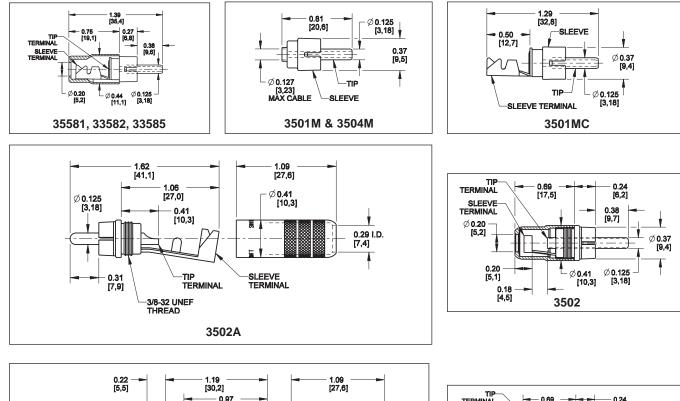

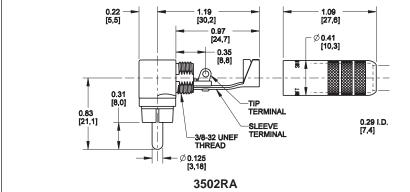



JACKS AND PLUGS PHONO PLUGS

Part Number	Description Pin	Typical Handle	Notes	Mating Jack
3502A	Nickel	Nickel		BP Series
3502AAU	Gold	Nickel		BP Series
3502ABAU	Gold	Black		BP Series
3502RA	Nickel	Nickel	Right angle	BP Series
3502RABAU	Gold	Black	Right angle	BP Series
3502RAAU	Gold	Nickel	Right angle	BP Series
35581	Nickel	Plastic	Red handle	BP Series
35582	Nickel	Plastic	Black handle	BP Series
35585	Nickel	Plastic	White handle	BP Series
3502	Nickel	Nickel		BP Series
3501M	Nickel			BP Series
3501MC	Nickel		Same as 3501M except with cable clamp	BP Series
3504M	Nickel		Same as 3507 less cable clamp and handle	3505F
3507	Nickel	Nickel	For RF applications	3505F
330F1	Nickel		2 inline jacks to 1 male plug, 4" gray shielded cable	BP Series
330F2	Nickel		1 inline jack, 1 male plug to 1 male plug, 4" gray shielded cable	BP Series

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

161


# 162 JACKS AND PLUGS MINIATURE POWER PLUGS


# PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

# MINIATURE POWER PLUGS



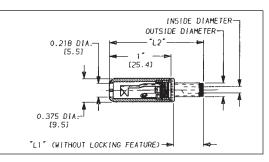

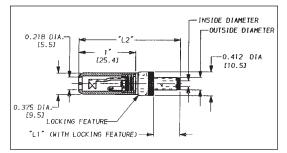

INSIDE DIAMETER TOLERANCES (PLUGS)

860/865:	.050" (.050053)						
000/003.	1.27mm (1.27 - 1.35)						
S760/S765*:	.080" (.080084)						
3700/3703.	2mm (2.03 - 2.13)						
760/765*:	.100" (.099103)						
700/703 .	2.5mm (2.52 - 2.61)						
OUTSIDE DIAMETER TOLERANCES (PLUGS)							
860/865:	.150" (.149153)						
600/665.	3.81mm (3.78 - 3.89)						
S760/S765*:	.218" (.217221)						
3700/3703 .	5.5mm (5.51 - 5.61)						
760/765*:	.218" (.217221)						
700/703 .	5.5mm (5.51 - 5.61)						
*includes locking (k) versions							

### FEATURES AND BENEFITS

### • 2-conductor power jacks.

- Hollow center pin available in 3 pin diameters and 2 finger lengths (See chart below).
- Locking option available for added security in critical applications.
- Molded plastic handles available in black or red.
- Sleeve terminal serves as cord clamp.

### **SPECIFICATIONS**

Plug Sleeve and Pin: Nickel-plated copper alloy.
Lockring: Nickel-plated copper alloy.
Lockring Thread Size: 5/16 - 32 UNEF 2B.
Finger Insulator: Molded plastic.
Insulating Washers: Rigid plastic.
Sleeve Terminal: Copper alloy, electro-tinned.
Handle: Molded plastic.
Handle Thread Size: 5/16 - 24 UNF 2B.
Electrical: Current (Carry): 5 amps.

### **ORDERING INFORMATION**

1. Order by part number. 2. Contact Switchcraft for more information. 3.  $\Diamond$  Indicates "special order" only.

### PART NUMBERING and MATING CHART (Power plugs/Power jacks)

Part Number	Inside Diameter	Outside Diameter	Length "L1"	Length "L2"	Locking Feature	Tip Insulator	Handle Color	Handle Part Number	Switchcraft® Mating Jack1
760	.100"	.218"	.375"	1.42	No	Black	Black	M1055	712A, RAPC712, RASH712, RASM712, PC712A, RA712A
765	.100"	.218"	.375"	1.42	No	Black	Red	M1056	712A, RAPC712, RASH712, RASM712, PC712A, RA712A
760K	.100"	.218"	.375"	1.7	Yes	Black	Black	M1055	712A, PC712A
761K	.100"	.218"	.475"	1.8	Yes	Black	Black	M1055	L712A, PCL712A
765K	.100"	.218"	.375"	1.7	Yes	Black	Red	M1056	712A, PC712A
766K	.100"	.218"	.475"	1.8	Yes	Black	Red	M1056	L712A, PCL712A
02P1515	.100"	.218"	.375"	1.42	No	Black	No Handle	No Handle	712A, PC712A
S760	.080"	.218"	.375"	1.42	No	White	Black	M1055	722A, RAPC722, RASH722, RASM722, PC722A, RA722A
S765	.080"	.218"	.375"	1.42	No	White	Red	M1056	722A, RAPC722, RASH722, RASM722, PC722A, RA722A
S760K	.080"	.218"	.375"	1.7	Yes	Black	Black	M1055	722A, PC722A
S761K	.080"	.218"	.475"	1.8	Yes	Black	Black	M1055	L722A, PCL722A
S765K	.080"	.218"	.375"	1.7	Yes	Black	Red	M1056	722A, PC722A
S766K	.080"	.218"	.475"	1.8	Yes	Black	Red	M1056	L722A, PCL722A
2P1624	.080"	.218"	.375"	1.42	No	White	No Handle	No Handle	722A, PC722A
860	.050"	.150"	.375"	1.42	No	Black	Black	M1055	RAPC 732, RASH 732, RASM 732
865	.050"	.150"	.375"	1.42	No	Black	Red	M1056	RAPC 732, RASH 732, RASM 732

<sup>1</sup>See pages 130-134.

DIMENSIONS ARE FOR REFERENCE ONLY

CE ONLY (mm)

# JACK PANELS PROFESSIONAL PUNCHDOWN TERMINAL

\* Please visit the product pages on our website for the most up-to-date product information

# PROFESSIONAL PUNCHDOWN TERMINAL (PPT)

### Our Patchbays Now Feature the New Professional Punchdown Terminal (PPT) Our Patchbays Have Just Rounded A New Corner

Actually, the corners we rounded belong to our patchbays' revolutionary, new Professional Punchdown Terminal (PPT), making it perfectly compatible with the industry standard. We realized that achieving a new industry standard meant we couldn't cut any corners to get there.

The PPT design incorporates a split-barrel design and a more rugged, thicker housing to minimize the impact of repeated punchdowns. The split-barrel design eliminates the problems associated with the old "V-shaped" terminal designs. The PPT design distributes pressure evenly across both sides of the terminated wire, causing improved wire retention plus more reliable connections. The serrated teeth in the plastic housing firmly grip the wires, which also greatly improves wire retention. With the PPT, multiple wires can be terminated to a single contact, and a wide range of wire gauges can be used. Look for Switchcraft's PPT in our MTP and TTP Series of audio patchbays, and in our new Backpanel Series.

All Switchcraft audio patchbays incorporate heavy gauge materials and our high quality nickel-plated, steel framed jacks. Gold-plated, crossbar contacts come standard!

### MATERIALS

**Housing:** Thermoplastic (UL 94V-0) **Contacts:** High strength copper alloy, tin plated **Wire size:** Accommodates #22, 24, or 26 AWG, stranded or solid


Accessories Part Number	Description
K459	PPT replacement kit consists of 15 of each color* (IDC/IDC)
K460	PPT replacement kit consists of 15 of each color (IDC/wirewrap)
PT1LA	PPT impact punchdown tool
PT2B	Replacement bit for PT1LA tool
*Colors consist of re	ed, black, white, yellow, blue, and orange.



163



### FRONT ACCESS MTPFA/TTPFA SERIES

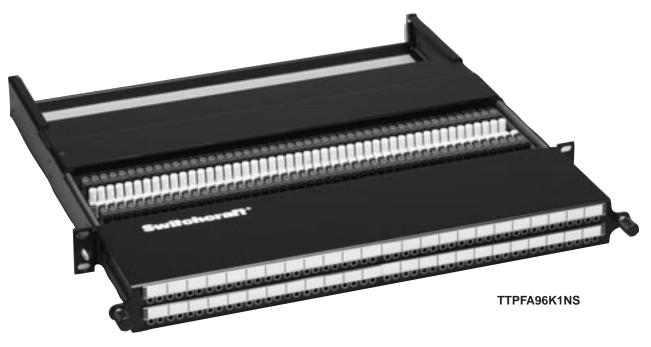

The Front Access Series offers the end user the ease of re-terminating patchpoints from the front of the rack as opposed to the back. A slide out tray allows the user to slide out the punchdown terminals, and reconfigure the unit. An easy release mechanism on either side of the unit allows it to be pushed back into place and easy to grip locking nuts tighten the unit in place.

### FEATURES AND BENEFITS

- · Easy slide-out tray slides forward for easy re-termination from the front of the rack
- Available with either 48 MT style or 96 TT style jacks in a 1RU space
- Attractive, corrosion resistant nickel-plated, steel frame jacks
- · Gold-plated switching contacts reduce contact resistance, improves reliability
- Extra wide designation strips for easy channel identification
- · Rugged, attractive black epoxy-finished steel chassis
- · Configurations available include normals strapped and normals brought out

### SPECIFICATIONS MATERIALS (JACKS)

Frame: Nickel-plated steel Bushing: Nickel-plated brass Tip, Ring and Shunt Springs: Nickel silver with welded contacts Assembly Screws: Nickel-plated steel Welded Contacts: Gold alloy

### PANEL

Frame: C.R.S. black epoxy painted Designation Strips: Black polycarbonate 94V-0 Designation Strip Covers: Clear polycarbonate Jack Inserts: Thermoplastic 94V-0

### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Operating: -20°C to +65°C

### **ELECTRICAL**

Jack Contact Resistance: 30 milliohms initial maximum; 50 milliohms after life Jack Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500V at 60 Hz AC Working Voltage: 100 milliamps or less; maximum 56.5 VDC

Ordering Infor	nation		
Part	Type of	No. of	
Number	Jack	Jacks	Description
TTPFA96K1NS	TT	96	1.75" High, normals strapped
TTPFA96K1NO	TT	96	1.75" High, normals brought out
MTPFA48K1NS	MT	48	1.75" High, normals strapped
MTPFA48K1NC	MT	48	1.75" High, normals brought out


DIMENSIONS ARE FOR REFERENCE ONLY

Inch

www.switchcraft.com


\* Please visit the product pages on our website for the most up-to-date product information

# FRONT ACCESS MTPFA/TTPFA SERIES (continued)

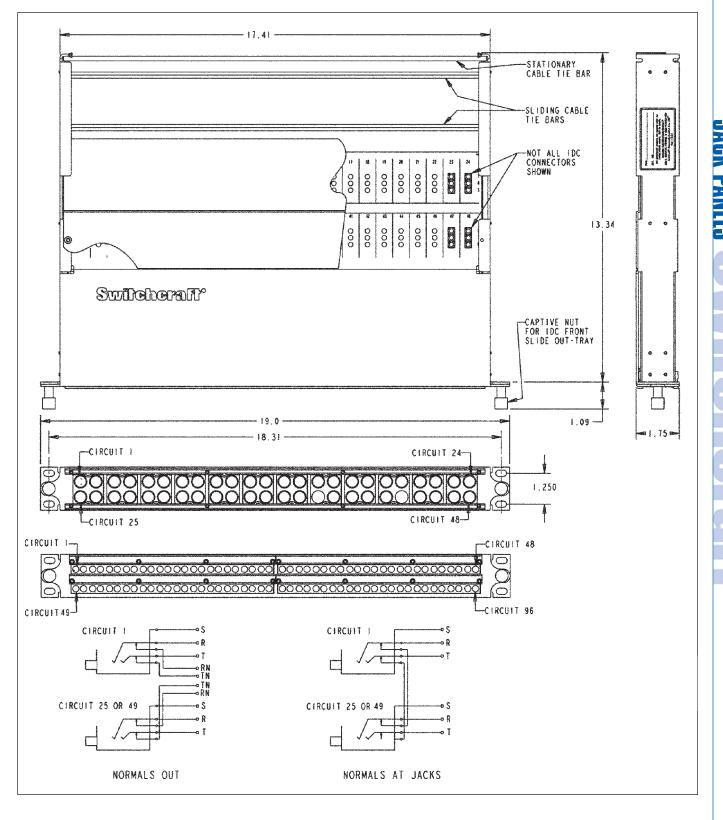

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

### MTP48K WIRED AUDIO SERIES

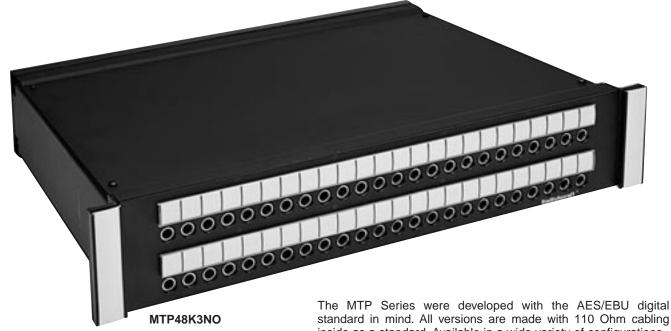

### FEATURES AND BENEFITS

- Unit features 48 MT style jacks in either 1RU (1.75"H) or 2RU (3.5"H) spaces
- All versions utilize AES/EBU wiring for complete digital compatibility
- Attractive, corrosion resistant nickel-plated, steel frame jacks
- · Gold-plated switching contacts reduce contact resistance, improve reliability
- Rugged, attractive black epoxy-finished steel chassis
- Extra wide designation strips for easy channel identification
- 1RU version configurations include normals strapped and normals brought out
- 2RU version configurations include normals strapped, normals brought out, and sleeve normals brought out

### **SPECIFICATIONS** MATERIALS JACKS

Frame: Nickel-plated steel **Bushing:** Nickel-plated brass Tip, Ring and Shunt Springs: Nickel silver with welded contacts Assembly Screws: Zinc-plated steel Welded Contacts: Gold alloy

### PANEL

Front Channel: Black anodized aluminum Frame: C.R.S. black epoxy painted Designation Strips: Black polycarbonate 94V-0 Designation Strip Covers: Clear polycarbonate Jack Inserts: Thermoplastic polyester

standard in mind. All versions are made with 110 Ohm cabling inside as a standard. Available in a wide variety of configurations.

### **MECHANICAL**

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Environmental: O°C to +50°C

### **ELECTRICAL**


Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500 VAC at 60 Hz Working Voltage: 140 VDC maximum Current Rating: 100 milliamps

Part	Type of	No. of	
Number	Jack	Jacks	Description
MTP48K1NS	MT	48	1.75" High, normals strapped
MTP48K3NS	MT	48	3.5" High, normals strapped
MTP48K1NO	MT	48	1.75" High, normals brought out
MTP48K3NO	MT	48	3.5" High, normals brought out
MTP48K3SNC	) MT	48	3.5" High, sleeve normals out

Inch DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information


# MTP48K WIRED AUDIO SERIES (continued)

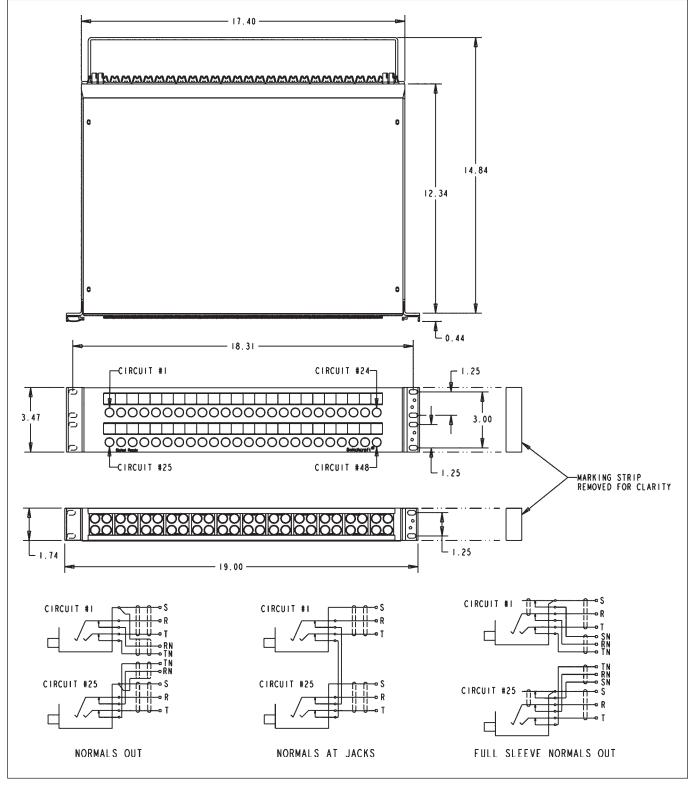

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

167

### TTP96K WIRED AUDIO SERIES

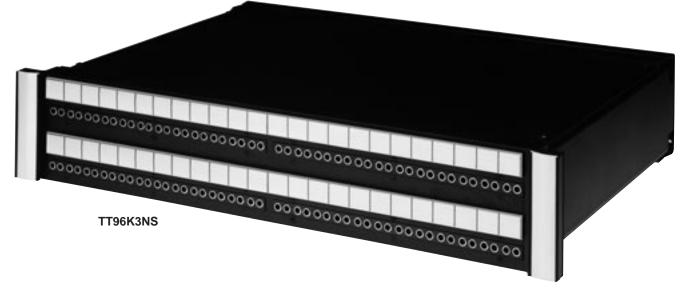

The TTP96K Series was developed with the AES/EBU digital standard in mind. As a standard the TTP96K utilizes 110 Ohm cabling inside.

### FEATURES AND BENEFITS

- Unit features 96 TT style jacks in 2RU (3.5"H) space
- Utilizes AES/EBU wiring for complete digital compatibility
- Attractive, corrosion resistant nickel-plated, steel frame jacks
- Gold-plated switching contacts reduce contact resistance, improve reliability
- Rugged, attractive black epoxy-finished steel chassis
- Extra wide designation strips for easy channel identification

### **SPECIFICATIONS**

### MATERIALS

JACKS

Frame: Nickel-plated steel Bushing: Nickel-plated brass Tip, Ring and Shunt Springs: Nickel silver with welded contacts Assembly Screws: Zinc-plated steel Welded Contacts: Gold alloy

### PANEL

Front Channel: Black anodized aluminum Frame: C.R.S. black epoxy painted Designation Strips: Black polycarbonate 94V-0 Designation Strip Covers: Clear polycarbonate Jack Inserts: Thermoplastic polyester

### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Environmental: O°C to +50°C

### **ELECTRICAL**


Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500 VAC at 60 Hz Working Voltage: 140 VDC maximum Current Rating: 100 milliamps

Ordering Information							
Part	Type of	No. of					
Number	Jack	Jacks	Description				
TTP96K3NS	TT	96	3.5" High, normals strapped				

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

# TTP96K WIRED AUDIO SERIES (continued)

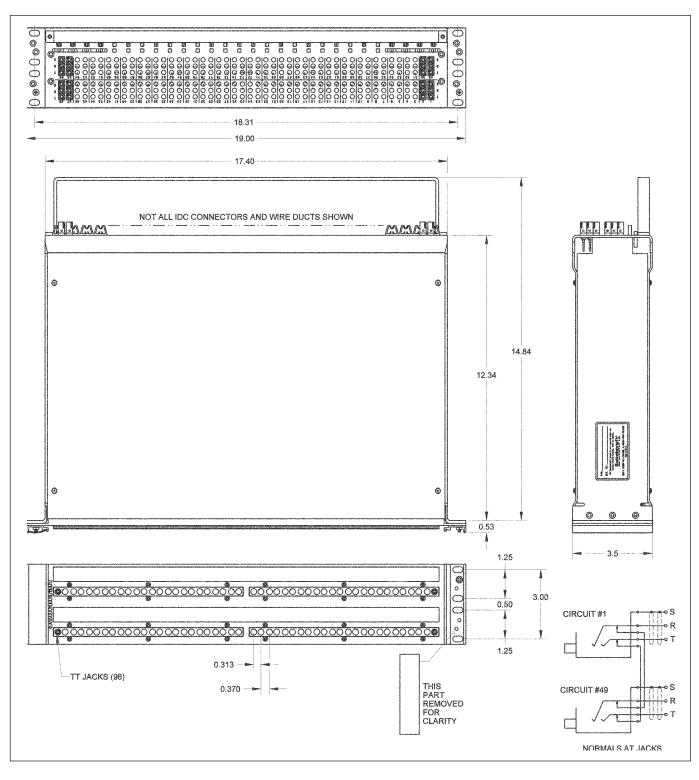

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

169

PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

MTPH/TTPH HARNESS AUDIO SERIES



### FEATURES AND BENEFITS

- Units feature either 48 MT style jacks or 96 TT style jacks on the front panels, to a 4 foot harness, out to a backpanel with PPT's
- All versions utilize AES/EBU wiring for complete digital compatibility
- Attractive, corrosion resistant nickel-plated, steel frame jacks
- Gold-plated switching contacts reduce contact resistance, improve reliability
- Rugged, attractive black epoxy-finished steel frame chassis
- Extra wide designation strips for easy channel identification

### SPECIFICATIONS MATERIALS JACKS

Frame: Nickel-plated steel Bushing: Nickel-plated brass Tip, Ring and Shunt Springs: Nickel silver with welded contacts Assembly Screws: Zinc-plated steel Welded Contacts: Gold alloy

### PANEL

Front Channel: Black anodized aluminum Frame: C.R.S. black epoxy painted Designation Strips: Black polycarbonate 94V-0 Designation Strip Covers: Clear polycarbonate Jack Inserts: Thermoplastic polyester

be mounted into a rack, or brought back to the front for easier access. Custom cable lengths can also be supplied. Contact the factory for details.

### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Environmental: O°C to +50°C

### ELECTRICAL

Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500 VAC at 60 Hz Working Voltage: 140 VDC maximum Current Rating: 100 milliamps

JACK PANELS 

DIMENSIONS ARE FOR REFERENCE ONLY

# www.switchcraft.com

### \* Please visit the product pages on our website for the most up-to-date product information


# MTPH/TTPH HARNESS AUDIO SERIES (continued)

Ordering Information				
Part Number	Type of Jack	No. of Jacks	Description	
MTPH48K1NS	MT	48	1.75" High front panel, 4' Harness,	
			3.5" High back panel, normals strapped	
MTPH48K1NO	MT	48	1.75" High front panel, 4' Harness,	
			3.5" High back panel, normals brought out	
MTPH48K3NS	MT	48	3.5" High front panel, 4' Harness,	
			3.5" High back panel, normals strapped	
MTPH48K3NO	MT	48	3.5" High front panel, 4' Harness,	
			3.5" High back panel, normals brought out	
MTPH48K3SNO	MT	48	3.5" High front panel, 4' Harness,	
			3.5" High back panel, sleeve normals brought out	
TTPH96K1NS	TT	96	1.75" High front panel, 4' Harness,	
			3.5" High back panel, normals strapped	
TTPH96K1NO	TT	96	1.75" High front panel, 4' Harness,	
			5.25" High back panel, normals brought out	
TTPH96K3NS	TT	96	3.5" High front panel, 4' Harness,	
			3.5" High back panel, normals strapped	
TTPH96K3NO	TT	96	3.5" High front panel, 4' Harness,	
			5.25" High back panel, normals brought out	

See Page 172 for Mechanical Drawings

DIMENSIONS ARE FOR REFERENCE ONLY

# MTPH/TTPH HARNESS AUDIO SERIES (continued)

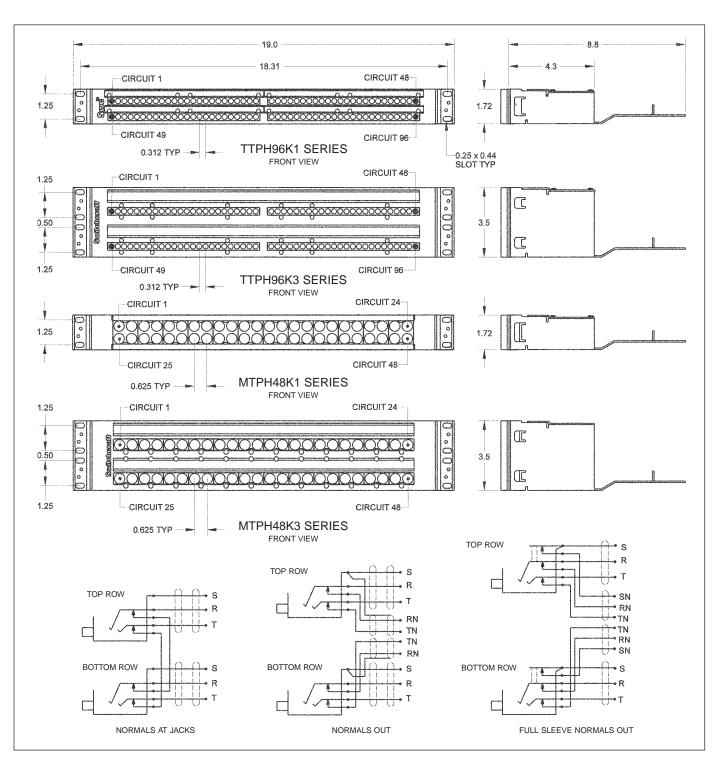


DIMENSIONS ARE FOR REFERENCE ONLY

LY Inch (mm)

www.switchcraft.com

\* Please visit the product pages on our website for the most up-to-date product information

# MTPH/TTPH HARNESS AUDIO SERIES (continued)

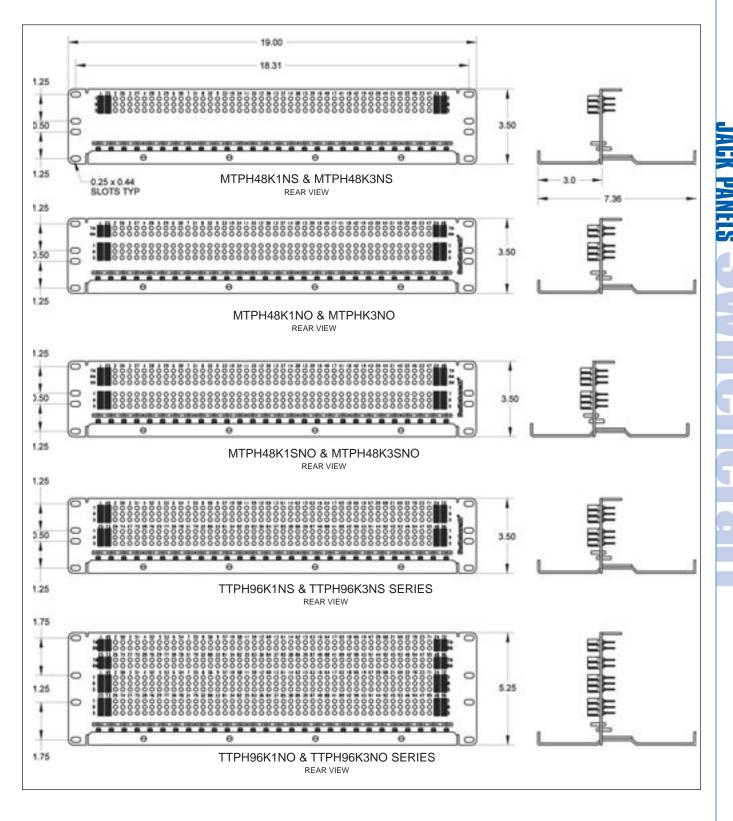

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**PHONE: 773 792-2700** 

\* Please visit the product pages on our website for the most up-to-date product information

### MTPBP/TTPBP BACKPANEL SERIES



The Backpanel Series offers the end user the flexibility of configuring their own patchbay, or to use as a central patchpoint location. The backpanels utilize the PPT punchdown and come with a rugged cable tray.

### FEATURES AND BENEFITS

- Allows for custom patchbay configurations or central patching points
- PPTs have IDCs on both sides for easy installation
- Rugged, attractive black epoxy-finished steel chassis
- Cable trays allow for mounting and securing terminated cable

### SPECIFICATIONS

Panel thickness: .093" Mounting hole diameter: .187" Mounting hole spacing (48 IDCs/row): .340" (Horizontal) x .275" (Vertical) Mounting hole spacing (52 IDCs/row): .320" (Horizontal) x .275" (Vertical) Wire size: #22, 24, 26 AWG Stranded or Solid (IDC termination)

### MATERIALS

Housing: Thermoplastic (UL 94V-0) Contacts: High strength copper alloy Backpanels: Black Epoxy coated C.R.S. Cable Tray: Black Epoxy coated C.R.S.


Ordering Information							
Part	Sets of						
Number	PPT Terminals	Height	Description				
MTP48K3BPNS	48	3.5"	T, R, S				
MTP48K3PBNO	48	3.5"	T, R, S, TN, RN				
MTP52K3BPNO	52	3.5"	T, R, S, TN, RN				
MTP24K7	24 x 2	7.0"	+, -, S				
TTP96K3BPNS	96	3.5"	T, R, S				
TTP96K5BPNS	96 x 2	5.25"	T, R, S, TN, RN				

DIMENSIONS ARE FOR REFERENCE ONLY

www.switchcraft.com

\* Please visit the product pages on our website for the most up-to-date product information

# MTPBP/TTPBP BACKPANEL SERIES (continued)

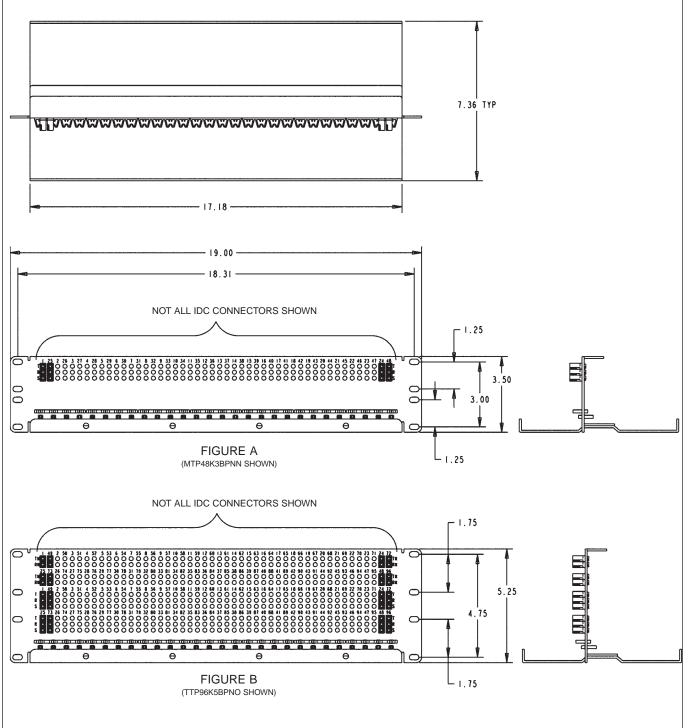

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 


175

# JACK PANELS EZ NORM PATCHBAY SERIES



\* Please visit the product pages on our website for the most up-to-date product information

### EZ NORM PATCHBAY SERIES

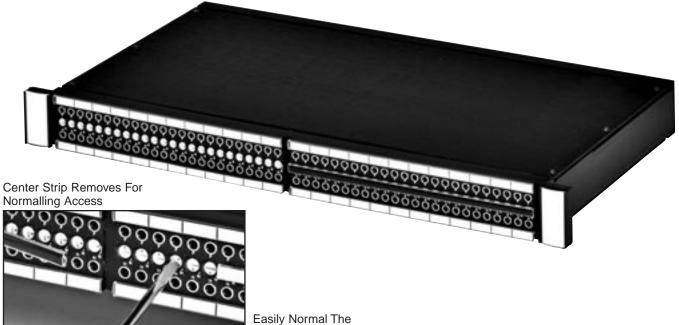

Jacks By Rotating To "Full", "Non", Or "Half" Positions

The EZ Norm offers a simplified method for setting up and changing normals to a Bantam/TT patchbay. Simply remove the middle designation strip, and rotate the center cam, using a standard screwdriver. An audible"click" can be heard as you rotate from full normals to no normals to half normals. An opaque marking strip is included to conceal the normal position, if needed.

#### **EZ NORM JACK SPECIFICATIONS MATERIALS:**

Housing & Cover: 94V-0 rated thermoplastic Sleeve Collar: Nickel plated copper alloy Tip, Ring, Shunt, & Sleeve Springs: Nickel Silver with welded contacts

Welded Contacts: Gold

**Cam Switching Springs:** Silver plated copper alloy Cam Switching Contacts: Silver plated copper alloy

#### MECHANICAL

Jack Mechanical Life: 30,000 cycles Cam Contact Mechanical Life: 30,000 cycles Insertion - Withdrawal Forces: 1 - 4 lbs. Moisture resistance: MIL-STD 202 Method 106 Thermal shock: MIL-STD 202 Method 107 Salt spray: MIL-STD Method 101 (48 hrs.) Vibration: MIL-STD 202 Method 213

#### **ELECTRICAL:**

Jack Spring Contact Resistance: 30 milliohm Maximum Cam Switch Contact Resistance: 30 milliohm Maximum Insulation Resistance: 10,000 Megaohms **Dielectric Withstanding Voltage:** 500 VAC (rms) at 60 Hz

Insertion Loss: -0.5dB up to 10 MHz

#### EZ NORM PATCHBAY OPTIONS

- 1RU can be terminated to EDAC or Cannon DL, solder terminals, or wire-wrap terminals
- 1.5RU can be terminated to EDAC/Cannon DL, solder terminals, wire-wrap terminals, plus 3 pin connectors, or our own PPT Professional Punchdown Terminal
- 2RU Same as above
- All units will be offered with or w/o docking connector
- Unwired units will be offered with either cable tie bar or cable tray

DIMENSIONS ARE FOR REFERENCE ONLY


Inch


\* Please visit the product pages on our website for the most up-to-date product information

### EZ NORM PATCHBAY SERIES (continued)

#### Racks

The EZ Norm comes in 3 different rack heights, 1RU, 1.5RU, and 2 RU.

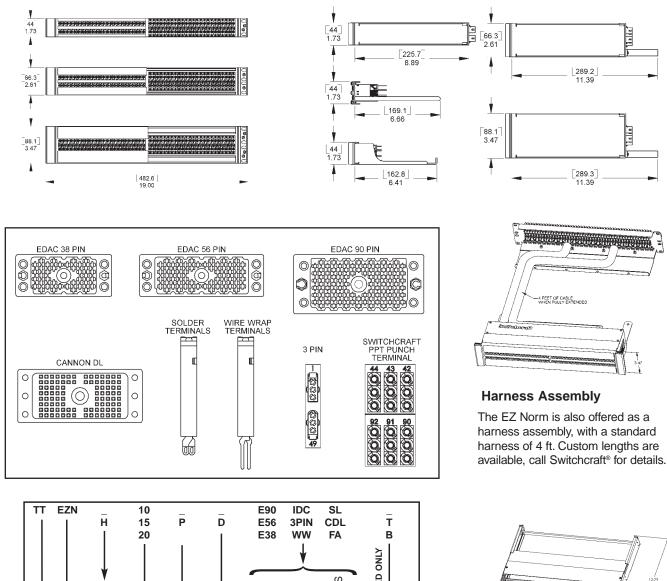

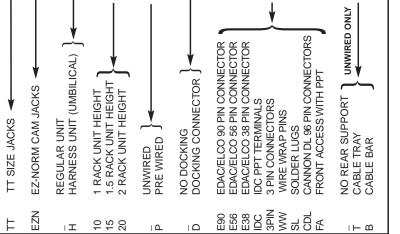

DIMENSIONS ARE FOR REFERENCE ONLY

Inch (mm) **Front Access** 

The Front Access option offers a slide-out tray, allowing the end

user to re-terminate the patchbay

from the front of the rack.



JACK PANELS TT96 EDAC SERIES



The TT96EDAC Series offers the convenience of EDAC<sup>®</sup> connectors on the back of the panel for easy installation. Available in normals strapped and normals brought out, both wired to the SAC code of wiring. We also offer custom wiring configurations. Contact the factory for details.

#### FEATURES AND BENEFITS

TT96EDACNS

- Attractive, corrosion-resistant, nickel-plated jacks
- Steel frame jacks for superior jack life
- Extra wide labeling strips provide maximum space and two vertical strips, one at each side
- Rugged, attractive black anodized aluminum face will not break
- Two configurations available:
- Normals brought out
- Normalled at jacks
- · Gold switching contacts for long-term reliability
- Jacks paired for easy identification of left and right channels
- Connectorized by EDAC<sup>®</sup> connectors for ease of termination by customer

#### SPECIFICATIONS MATERIALS JACKS

Frame: Nickel-plated steel Bushing: Nickel-plated brass Tip, Ring and Shunt Springs: Nickel silver with welded contacts Assembly Screws: Zinc-plated steel Welded Contacts: Gold alloy

#### PANEL

Front Channel: Black anodized aluminum Frame & Cover: C.R.S. black epoxy painted Designation Strips: Black polycarbonate 94V-0 Designation Strip Covers: Clear polycarbonate Jack Inserts: Polyester

#### EDAC CONNECTOR

Housing: Thermoplastic, UL94V-0 Contacts: Gold plated phosphor bronze

#### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Operating: -20°C to +65°C

#### ELECTRICAL

Contact Resistance: 30 milliohms maximum initial Insulation Resistance:10,000 megohms Dielectric Withstanding Voltage: 500VAC at 60 Hz Working Voltage: 140VDC Current Rating: 100 milliamps


EDAC Mating Plugs	
Part Number	Description
516-090-000-301	90 Pin male w/screw
516-090-000-302	90 Pin male w/nut
516-120-000-101	120 Pin male w/screw
516-120-000-102	120 Pin male w/nut
516-290-500	Terminal solder-style
516-290-590	Terminal crimp-style

Ordering Information										
Part	Type of	No. of								
Number	Jack	Jacks	Description							
TT96EDACNO	TT	96	Normals Brought Out (120 pin EDAC)							
TT96EDACNS	TT	96	Normals Strapped (90 pin EDAC)							

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

### TT96 EDAC SERIES (continued)

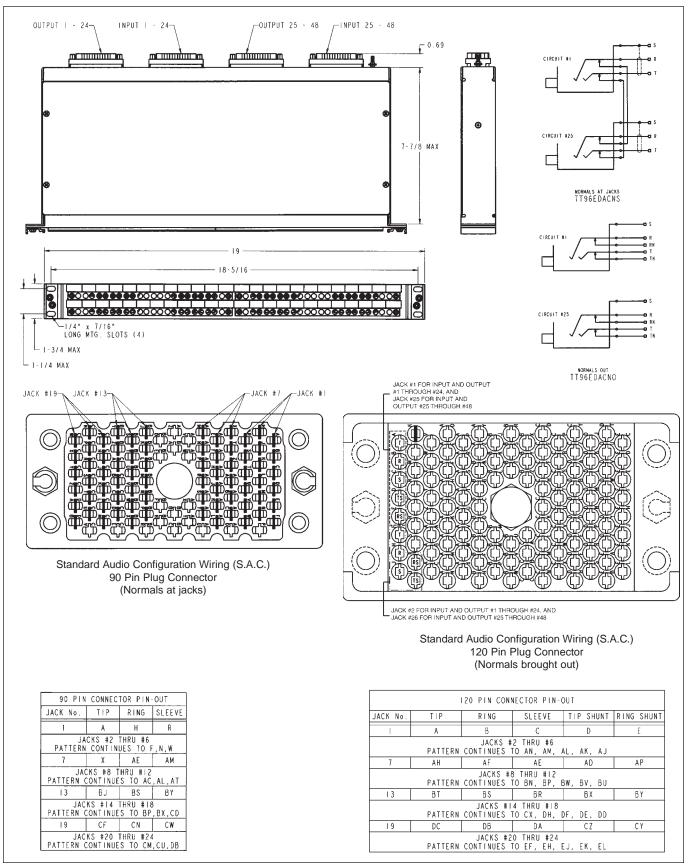

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

JACK PANELS TT96 EDAC SERIES

# JACK PANELS TT96K PATCHKIT SERIES

\* Please visit the product pages on our website for the most up-to-date product information

# TTP96K PATCHKIT SERIES

TTP96K1FN

The TTP96K Patchkit Series offers the end user a rugged cable tray to support rear cabling. Heavy duty construction takes weight off the back of the jacks for increased reliability. Available in 1.75" or 3.5" height versions.

#### FEATURES AND BENEFITS

- Kit features 96 TT jacks in one rack space (1.75" high) or two rack spaces (3.5" high)
- Jack blocks can be removed from the front for easy soldering
- Dust tray limits dirt, dust and contamination of jack terminals
- Wire management straps are adjustable and reusable
- Attractive, corrosion resistant nickel-plated jacks
- Steel frame jack for superior jack life
- Extra wide labeling strips provide maximum space
- Rugged, attractive black anodized aluminum face will not break or rust
- Three jack configurations available for the exact switching arrangement you need: full normal, half normal, and non-normal (open circuit)
- Fanned solder terminals for easier solder connections
- Gold switching contacts for long-term reliability in normal-through connections

#### SPECIFICATIONS MATERIALS JACKS

Frame: Nickel-plated steel Bushing: Nickel-plated brass Tip, Ring and Shunt Springs: Nickel silver with welded contacts Assembly Screws: Nickel-plated steel Welded Contacts: Gold alloy

#### PANEL

Front Channel: Black anodized aluminum Frame: C.R.S. black epoxy painted Designation Strips: Black polycarbonate 94V-0 Designation Strip Covers: Clear polycarbonate Jack Inserts: Thermoplastic polyester

#### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Environmental: 0°C to +50°C

#### ELECTRICAL

Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500VAC at 60 Hz Working Voltage: 140VDC maximum Current Rating: 100 milliamps


Ordering Info	Ordering Information									
Part	Type of	No. of								
Number	Jack	Jacks	Description							
TTP96K1FN	TT	96	1.75" High, full normals							
TTP96K1HN	TT	96	1.75" High, half normal							
TTP96K1NN	TT	96	1.75" High, no normals							
TTP96K3FN	TT	96	3.5" High, full normals							
TTP96K3HN	TT	96	3.5" High, half normals							
TTP96K3NN	TT	96	3.5" High, no normals							

DIMENSIONS ARE FOR REFERENCE ONLY

181

\* Please visit the product pages on our website for the most up-to-date product information

### TTP96K PATCHKIT SERIES (continued)

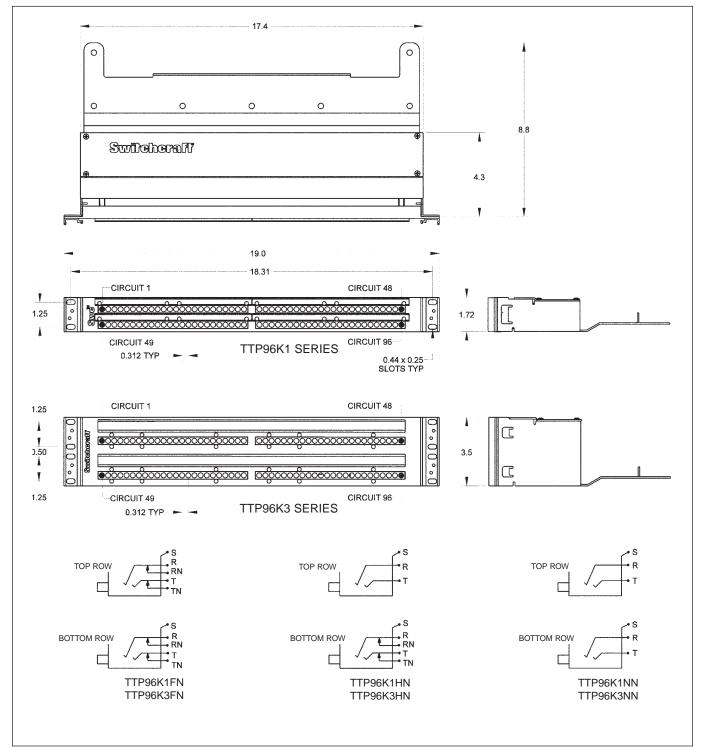

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

**JACK PANELS** 

TT96K PAT

SERIES

### MT48K/MT52K PATCHKIT SERIES

MT52K1FN

The MT48/52K Patchkit Series offers the end user a rugged cable tray to support rear cabling. Heavy duty construction takes weight off the back of the jacks for increased reliability. Available in 1.75" or 3.5" height versions.

#### FEATURES AND BENEFITS

- Kit features 48 1/4" longframe jacks in one rack space (1.75" high) or in two rack spaces (3.5" high) or 52 1/4" longframe jacks in one rack space (1.75" high)
- Allows user to add cable and termination panel · Removable jack panel from the front allows
- easy soldering of wire connections
- · Jacks have gold switching contacts
- · Fanned solder terminals for easier soldering
- · Offset ground lugs allow easy bussing of ground with one wire
- · Jacks have a nickel-plated frame and assembly screws
- Wire management straps are reusable and adjustable

#### **SPECIFICATIONS** MATERIALS JACKS

Frame: Stamped nickel-plated steel **Bushing:** Nickel-plated brass **Tip, Ring and Shunt Springs:** Nickel silver with welded contacts Assembly Screws: Nickel-plated steel Welded Contacts: Gold alloy

#### PANEL

Front Panel: Thermoplastic Frame: C.R.S. black epoxy paint Designation Strips: Black polycarbonate 94V-0 **Designation Strip Covers:** Clear polycarbonate

#### **MECHANICAL**

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Operating: 0°C to +50°C

#### **ELECTRICAL**

Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500VAC at 60 Hz Working Voltage: 140VDC maximum Current Rating: 100 milliamps

Ordering Info Part	ormation Type of	No. of		
Number	Jack	Jacks	Height	Description
MT48K1NS	MT	48	1.75"	Normals strapped
MT48K1FN	MT	48	1.75"	Full normals
MT48K1HN	MT	48	1.75"	Half normals
MT48K1NN	MT	48	1.75"	No normals
MT52K1NS	MT	52	1.75"	Normals strapped
MT52K1FN	MT	52	1.75"	Full normals
MT52K1HN	MT	52	1.75"	Half normals
MT52K1NN	MT	52	1.75"	No normals
MT48K3FN	MT	48	3.5"	Full normals
MT48K3HN	MT	48	3.5"	Half normals
MT48K3NN	MT	48	3.5"	No normals
MT52K3FN	MT	52	3.5"	Full normals
MT52K3HN	MT	52	3.5"	Half normals
MT52K3NN	MT	52	3.5"	No normals


Inch DIMENSIONS ARE FOR REFERENCE ONLY

# JACK PANELS MT48K/MT52K PATCHKIT SERIES

183

\* Please visit the product pages on our website for the most up-to-date product information

### MT48K/MT52K PATCHKIT SERIES (continued)

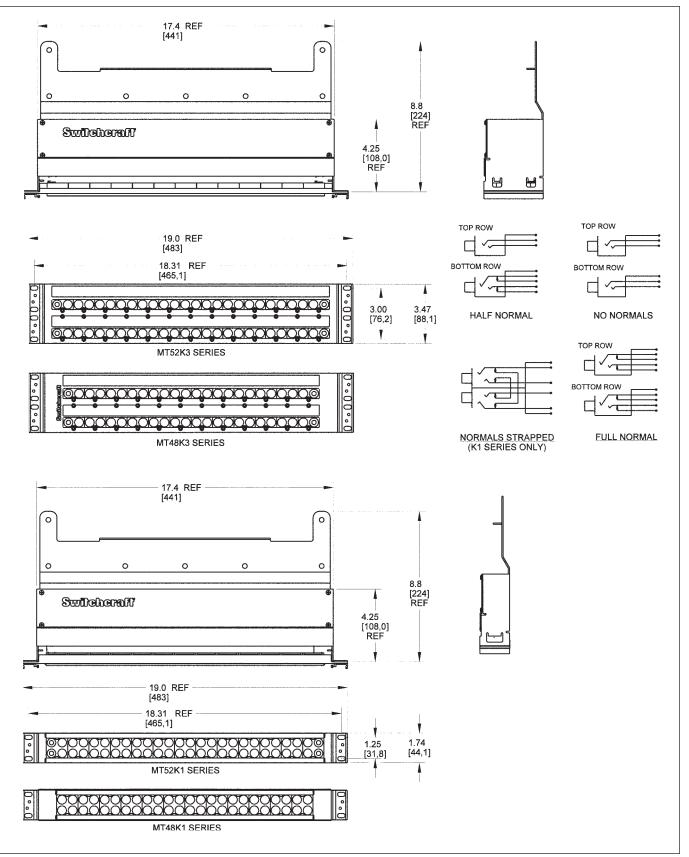


DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

# JACK PANELS MT48/MT52 PATCHBAY SERIES

PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### MT48/MT52 PATCHBAY SERIES

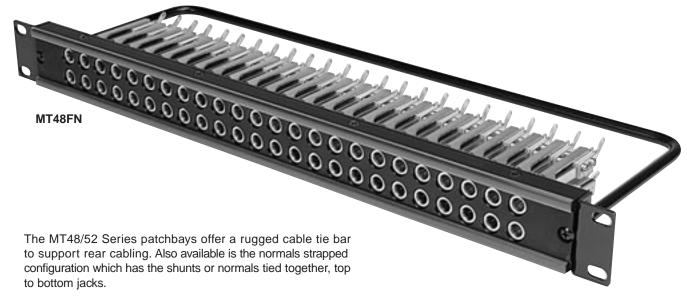

#### FEATURES AND BENEFITS

- Units feature either 48 or 52 MT Jax®
- Steel frame jacks for superior jack life
- · Attractive, corrosion resistant nickel-plated jacks
- Gold switching contacts for long-term reliability in normalthrough connections
- Offset ground terminal for ease in making common ground buss connections
- Fanned solder terminals for easier solder connections
- Cable tie bar takes the weight of cables off the jacks
- Four jack configurations available for the exact switching arrangement: full normal, half normal, non-normal, and normals strapped

#### SPECIFICATIONS MATERIALS JACKS

Frame: Steel, nickel-plated Bushing: Brass, nickel-plated Springs: Nickel silver, solder lugs Ground Terminal: Nickel silver, solder lugs Switching Contacts: Welded, gold alloy Insulation: Phenolic spacers, rigid PVC tubing through stack Screws: Steel, nickel-plated

#### PANEL

Jack Panel: Thermoplastic Cable Support Bracket: 5/16" diameter black epoxy painted steel rod Screws (designation strip): Steel, black zinc-plated Screws (mounting jack): Steel, nickel plated

# Kwik-change® Designation Strip: Extruded aluminum, black anodized

Marking Strip: White plastic, matte finish Marking Strip Cover: Clear, extruded plastic

#### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lb. minimum Operating: 0°C to +50°C

#### ELECTRICAL


Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500VAC at 60 Hz Working Voltage: 140VDC maximum Current Rating: 100 milliamps

Ordering Information									
Part	Type of	No. of							
Number	Jack	Jacks	Description						
MT48FN	MT	48	Full normals						
MT48HN	MT	48	Half normals						
MT48NN	MT	48	No normals						
MT48NS	MT	48	Normals strapped						
MT52FN	MT	52	Full normals						
MT52HN	MT	52	Half normals						
MT52NN	MT	52	No normals						
MT52NS	MT	52	Normals strapped						

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

### MT48/MT52 PATCHBAY SERIES (continued)

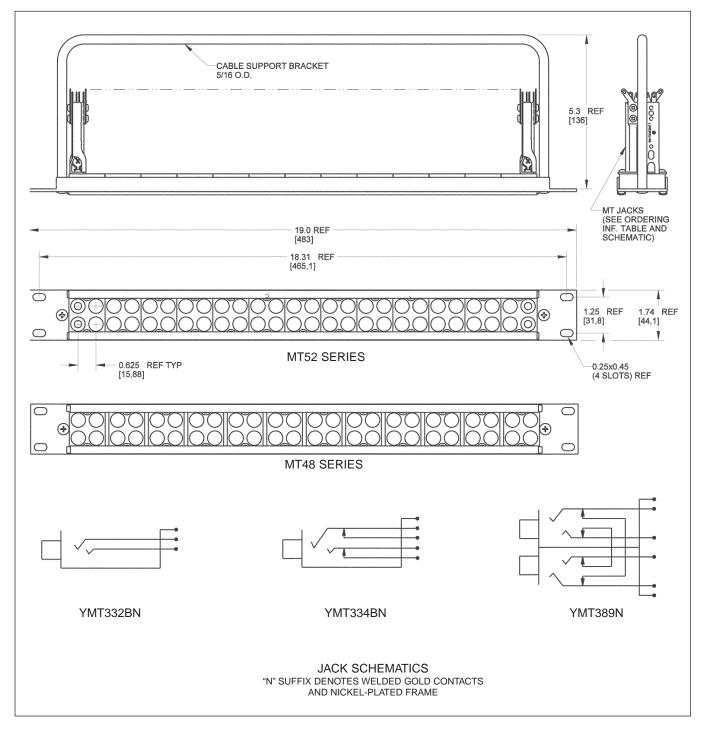


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

185

# JACK PANELS TTP96AS PATCHBAY SERIES

\* Please visit the product pages on our website for the most up-to-date product information

### **TTP96AS PATCHBAY SERIES**

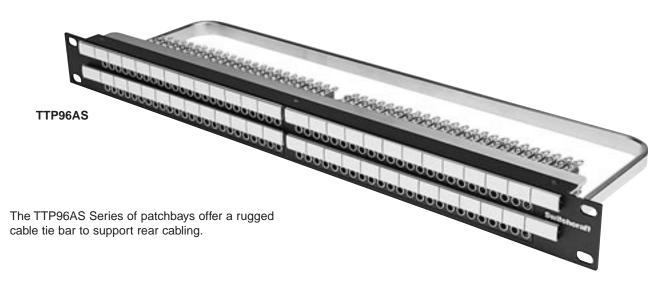

#### FEATURES AND BENEFITS

- Unit features 96 TT jacks
- Attractive, corrosion resistant nickel-plated jacks
- Steel frame jack for superior jack life
- Extra wide labeling strips provide maximum space
- Rugged cable tie bar takes the weight of cables off the jacks
- Rugged, attractive black anodized aluminum face will not break
- Three jack configurations available for the exact switching arrangement you need: full normal, half normal, and open circuit panel
- Fanned solder terminals for easier solder connections
- Offset ground terminal for ease in making common ground buss connections
- Gold switching contacts for long-term reliability in normal-through connections

#### SPECIFICATIONS MATERIALS JACKS

Frame: Steel, nickel-plated Bushing: Nickel-plated copper alloy Springs: Copper alloy solder lugs Ground Terminal: Steel, tin electrodeposited Switching Contacts: Welded, gold alloy inlay over palladium base Insulation: Rigid plastic spacers, rigid PVC tubing through stack Screws: Steel, plated

#### PANEL

Frame: Black anodized aluminum Inserts: Polyester, glass filled, 94V-0 Cable Support Bar: Cold rolled steel, nickel-plated Designation Strips: Thermoplastic, 94V-0 Designation Strip Covers: Clear thermoplastic, SE-1 Marking Strip: Rigid vinylite Jack Mounting Screws: Steel, plated Screws: Steel, black plated

#### MECHANICAL

Life: 30,000 cycles Insertion Force: 7 lbs. maximum Withdrawal Force: 1 lbs. minimum Environmental: 0°C to +50°C


#### ELECTRICAL

Contact Resistance: 30 milliohms maximum initial Insulation Resistance: 10,000 megohms maximum Dielectric Withstanding Voltage: 500VAC at 60 Hz Working Voltage: 140VDC maximum Current Rating: 100 milliamps

Ordering Information									
Type of	No. of								
Jack	Jacks	Description							
TT	96	Full normals							
TT	96	Half normals							
TT	96	No normals							
	Type of Jack TT TT	Type of JackNo. of JacksTT96TT96							

DIMENSIONS ARE FOR REFERENCE ONLY

### TTP96AS PATCHBAY SERIES (continued)

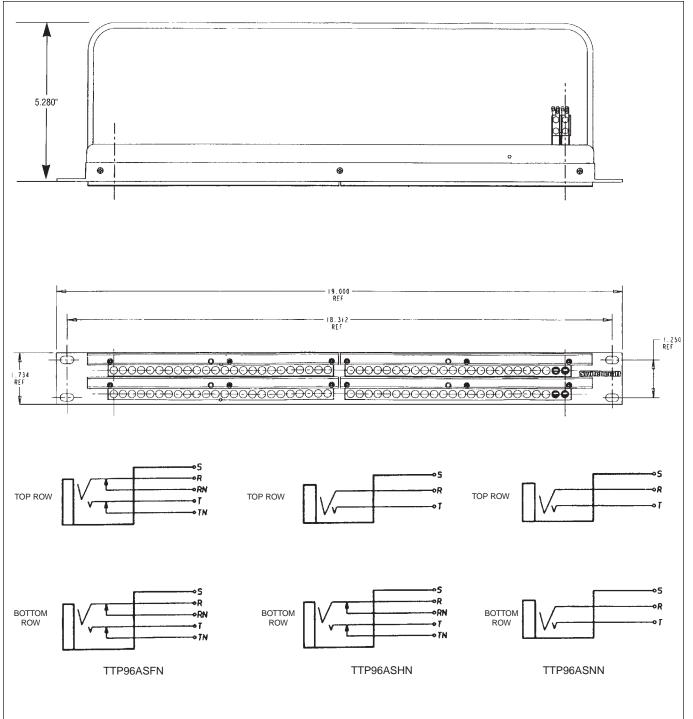

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

187

PANELS



PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### **Q-G® PATCHBAY SERIES**

QGPK332MFB

The QG Patchbay features a 19" rack unit loaded with E Series QG connectors. These XLR's have the same panel cut-out, male or female, silver-plated pins or contacts, and a black finish. All connectors have solder cup terminals for easy soldering and the inserts are removable from the back, allowing for easy changes. The one rack unit height version comes with 16 male, or 16 female, or 8 male and 8 female connectors. The two rack unit version comes with 16 male and 16 female connectors. We also offer the unit without connectors, but with the panel cut-outs already punched out. All versions have a rugged cable tie bar, which takes the weight of the cabling away from the solder connections.

#### FEATURES AND BENEFITS

- Available in 1RU or 2RU versions
- Available with or without the connectors
- E Series connectors are silver-plated, 3 pins/contacts with black finish
- Cable tie bar takes the weight of the cables off the solder terminations
- Rugged aluminum channel increases durability
- Silk-screen designation area makes it easy to re-label channels

#### SPECIFICATIONS MATERIALS CONNECTORS

Housing: Die-cast, black velvet finish Inserts: Glass-filled thermoplastic Pin/Contacts: Copper alloy, silver-plated Latch Release: Steel, nickel-plated Insert Locking Cam: Die-cast zinc

#### FRAME

Aluminum, black anodized

CABLE TIE BAR


Steel, black epoxy

Ordering Information								
Part Number	Height	Description						
QGPK116FB	1.75"	16 female						
QGPK116MB	1.75"	16 male						
QGPK18M8FB	1.75"	8 male, 8 female						
QGPK332MFB	3.5"	16 female( top), 16 male (bottom)						
QGPK1B	1.75"	Blank panel						
QGPK3B	3.5"	Blank panel						

DIMENSIONS ARE FOR REFERENCE ONLY

\* Please visit the product pages on our website for the most up-to-date product information

### Q-G® PATCHBAY SERIES (continued)

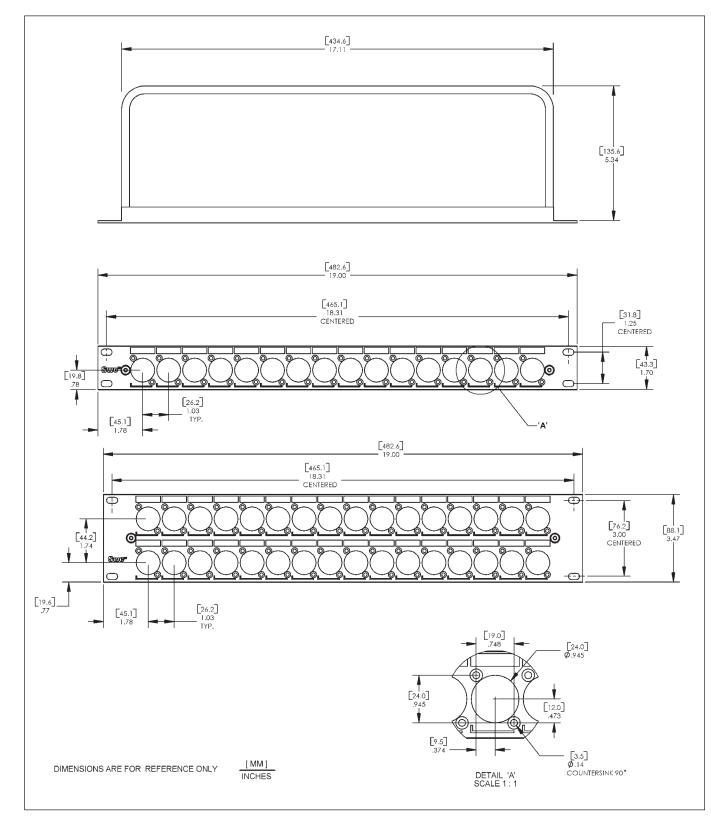

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

189

**JACK PANELS** 

**BAY SERIES** 

**D-G® PATC** 

### HPC PATCHBAY SERIES

The HPC Patchbay features a 19" rack unit loaded with HPC Series connectors. Available with either 0.250" Faston terminals or 0.187" Faston terminals. One rack unit height versions come with 12 HPC connectors, two rack unit height versions come with 24 HPC connectors. All versions have a rugged cable tie bar, which takes the weight of the cabling away from the connections.

#### FEATURES AND BENEFITS

- Available in 1RU or 2RU versions
- · Available with or without connectors
- HPC Series connectors are compatible with Neutrik
- Speakon<sup>®</sup> connectors
- · Cable tie bar takes weight of the cables off the terminations
- Rugged aluminum channel
- · Silk-screen designation area makes it easy to re-label channels

#### **HP CONNECTOR SPECIFICATIONS**


See page 38 for details


#### MATERIALS

Housing: Thermoplastic UL 94V-O rated Contacts: Silver-plated over copper alloy

FRAME Aluminum, black anodized

CABLE TIE BAR Steel, black epoxy

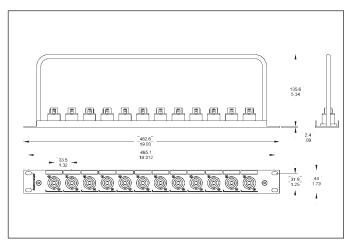

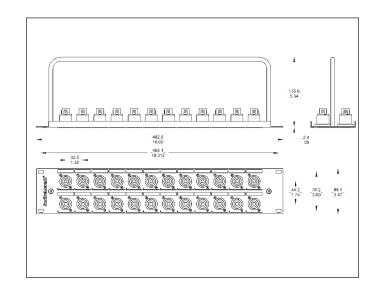

Part Number	Height	Description
HPCPK112F	1.75"	12 connectors, 0.250" Fastons
HPCPK112F1	1.75"	12 connectors, 0.187" Fastons
HPCPK1B	1.75"	Blank panel
HPCPK324F	3.50"	24 connectors, 0.250" Fastons
HPCPK324F1	3.50"	24 connectors, 0.187" Fastons
HPCPK3B	3.50"	Blank panel

Inch (mm)

\* Please visit the product pages on our website for the most up-to-date product information

### **RS 422 DATA PATCHBAY SERIES**





RS422 Ordering Information									
Part	No. of	Front Panel	Back	Rack					
Number*	Jacks	Layout	Plane	Height					
RS422H48N081	2 x 8	Horizontal	9 Pin D-Sub	1					
RS422V4N081	2 x 8	Vertical	9 Pin D-Sub	1					
RS422H4N161	2 x 16	Horizontal	9 Pin D-Sub	1					
RS422H4N162	2 x 16	Horizontal	9 Pin D-Sub	2					
RS422V4N161	2 x 16	Vertical	9 Pin D-Sub	1					
RS422V4N162	2 x 16	Vertical	9 Pin D-Sub	2					
RS422H4N242	2 x 24	Horizontal	9 Pin D-Sub	2					
RS422V4N242	2 x 24	Vertical	9 Pin D-Sub	2					
RS422V4N322	2 x 32	Vertical	9 Pin D-Sub	2					
RS422PH4N081	2 x 8	Horizontal	PPT Punchdow	n 1					
RS422PV4N081	2 x 8	Vertical	PPT Punchdow	n 1					
RS422PH4N161	2 x 16	Horizontal	PPT Punchdow	n 1					
RS422PH4N162	2 x 16	Horizontal	PPT Punchdow	n 2					
RS422PV4N161	2 x 16	Vertical	PPT Punchdow	n 1					
RS422PV4N162	2 x 16	Vertical	PPT Punchdow	n 2					
RS422PH4N242	2 x 24	Horizontal	PPT Punchdow	n 2					
RS422PV4N242	2 x 24	Vertical	PPT Punchdow	n 2					
RS422PV4N322	2 x 32	Vertical	PPT Punchdow	n 2					

\*Add "N" for non-normalled version See Page 267 for Patchcord Information

#### FEATURES AND BENEFITS

- Unit Features either 8,16, 24, or 32 TT style jacks on the front Panels, to a 9 pin D-Sub or PPT back Plane.
- All version utilize low capacitance internal wiring for maximum performance of transferring data
- All standard units are available 1 or 2 rack units high (1.5 RU available by request)
- Rugged, attractive black epoxyfinished steel frame chassis

Our standard RS data jackfield series offer a multiple combination of ports, rack heights, and back panel terminations which will easily fit into any television broadcast or video production where custom data patching is required. Custom ports and rack height combinations can be supplied. Contact the factory for details.

#### SPECIFICATIONS ELECTRICAL Internal Wiring:

24 AWG Solid TC, foils shield


**Nom Capacitance:** 11.5 pF/ft between conductors 21.3 pF/ft between one conductor and conductor connected to the shield **Nom.** Impedance: 110 Ohms

DIMENSIONS ARE FOR REFERENCE ONLY


Inch (mm) JACK PANELS DATA PATCHBAY SERIES

### **RS 422 DATA PATCHBAY SERIES**

JACK PANELS DATA PATCHBAY SERIES

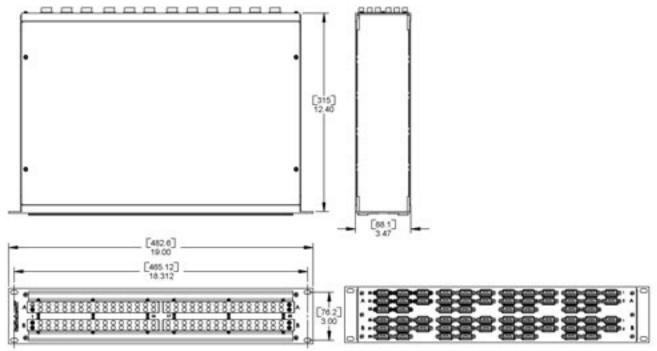

RS422V4N322 32 Vertical Paired Jacks Front and Back Views



0	ŀ		â	â.	â	۵¢	h	â	٩í	h	h	â	â	â.	Ô,	۵¢	h	â	âí	hê	â	٥.	٠	9
	ŀ		X	ĭ	Ĭ.	11	1	ž	2)	0		ž	Ĭ	X	ž.			Ĭ	Ľ	1	1	1	٠	
0		•	Ų	Ų	Ų	ŲŲ	ų	Ų	Ų	14	ĮŲ	Ų	Ų	Ų	Ų	ŲQ	14	Ų	Ų	14	Ų	İ٠	•	0

RS422H4N242 24 Horizontal Paired Jacks Front and Back Views


Ordering Information				
Part Number	No. of Jacks	Front Panel Layout	Back Plane	Rack Height
RS422H4N081	2 x 8	Horizontal	9 Pin D-Sub	1
RS422V4N081	2 x 8	Vertical	9 Pin D-Sub	1
RS422H4N162	2 x 16	Horizontal	9 Pin D-Sub	1, 2
RS422V4N162	2 x 16	Vertical	9 Pin D-Sub	1, 2
RS422H4N242	2 x 24	Horizontal	9 Pin D-Sub	2
RS422V4N242	2 x 24	Vertical	9 Pin D-Sub	2
RS422V4N322	2 x 32	Vertical	9 Pin D-Sub	2
RS422PH4N081	2 x 8	Horizontal	PPT Punchdown	1
RS422PV4N081	2 x 8	Vertical	PPT Punchdown	1
RS422PH4N162	2 x 16	Horizontal	PPT Punchdown	1, 2
RS422PV4N162	2 x 16	Vertical	PPT Punchdown	1, 2
RS422PH4N242	2 x 24	Horizontal	PPT Punchdown	2
RS422PV4N242	2 x 24	Vertical	PPT Punchdown	2
RS422PV4N322	2 x 32	Vertical	PPT Punchdown	2

Inch DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

192

# VPP VIDEO PATCHBAY SERIES

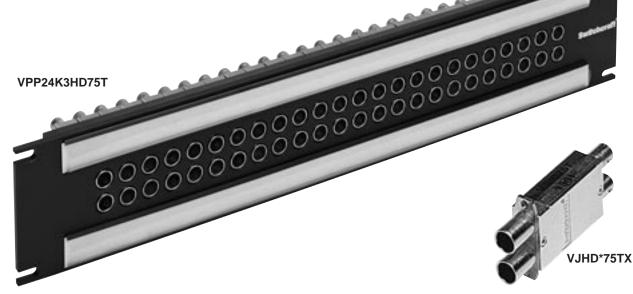

The VPP Series video patchbays offer a wide variety of options for video patching. The HD Series meets SMPTE 292M specifications for high definition video signaling, covering a bandwidth range from DC to 2.4GHz. The SD Series is perfect for serial digital, with a bandwidth from DC to 1.75GHZ. Both come in either terminated or non-terminated, 24 or 26 jacks, 1.75" or 3.5" heights.

#### FEATURES AND BENEFITS

- HD Series meets SMPTE 292M Specifications
- SD Series has a bandwidth from DC to 1.75GHz
- Black thermoplastic modules insulate jacks from chassis
- Jacks feature rugged heavy duty housings

# VIDEO JACK SPECIFICATIONS ELECTRICAL

Rated Bandwidth: 2.4 GHz (HD), 1.75 GHz (SD) Characteristic Impedance: 75 ohms Return Loss: Better than –15 dB Insertion Loss: Better than –.5 dB Contact Resistance: Less than 20 milliohms Termination Resistance: 75 W, ±1% Center Conductor: Accepts .090 pin diameter

#### MECHANICAL

Mechanical Shock: Per MIL-STD-202, Method 213, Test condition I Vibration: Per MIL-STD-202, Method 201 Insertion Force: 12 lbs. maximum Withdrawal Force: 3 lbs. minimum Life Cycle: 30,000

#### MATERIAL

Housing: Zinc alloy, nickel plated Center Contacts: Copper alloy, gold plated Switching Springs: Copper alloy, gold plated Grounding Contacts: HD Series - Copper alloy, gold plated SD Series - Copper alloy, nickel plated Insulators: Thermoplastic, UL 94V-0 rated

#### **ENVIRONMENTAL**

Operating Temperature: - 40°C to 65°C Storage Temperature: - 55°C to 85°C Thermal Shock: Per MIL-STD-202, Method 107 Moisture and Humidity: Per MIL-STD-202, Method 106

Ordering Information									
Part	Type of	No. of							
Number	Jack	Jacks	Height	Description					
VPP24K1HD*75T	HD	24	1.75"	Terminated					
VPP24K1HD*NT	HD	24	1.75"	Non-term					
VPP24K1SD*75T	SD	24	1.75"	Terminated					
VPP24K1SD*NT	SD	24	1.75"	Non-term					
VPP26K1HD*75T	HD	26	1.75"	Terminated					
VPP26K1HD*NT	HD	26	1.75"	Non-term					
VPP26K1SD*75T	SD	26	1.75"	Terminated					
VPP26K1SD*NT	SD	26	1.75"	Non-term					
VPP24K3HD*75T	HD	24	3.5"	Terminated					
VPP24K3HD*NT	HD	24	3.5"	Non-term					
VPP24K3SD*75T	SD	24	3.5"	Terminated					
VPP24K3SD*NT	SD	24	3.5"	Non-term					
VPP26K3HD*75T	HD	26	3.5"	Terminated					
VPP26K3HD*NT	HD	26	3.5"	Non-term					
VPP26K3SD*75T	SD	26	3.5"	Terminated					
VPP26K3SD*NT	SD	26	3.5"	Non-term					

JACK PANFIS


DIMENSIONS ARE FOR REFERENCE ONLY

# JACK PANELS VPP VIDEO PATCHBAY SERIES

**PHONE: 773 792-2700** 

\* Please visit the product pages on our website for the most up-to-date product information

### VPP VIDEO PATCHBAY SERIES (continued)

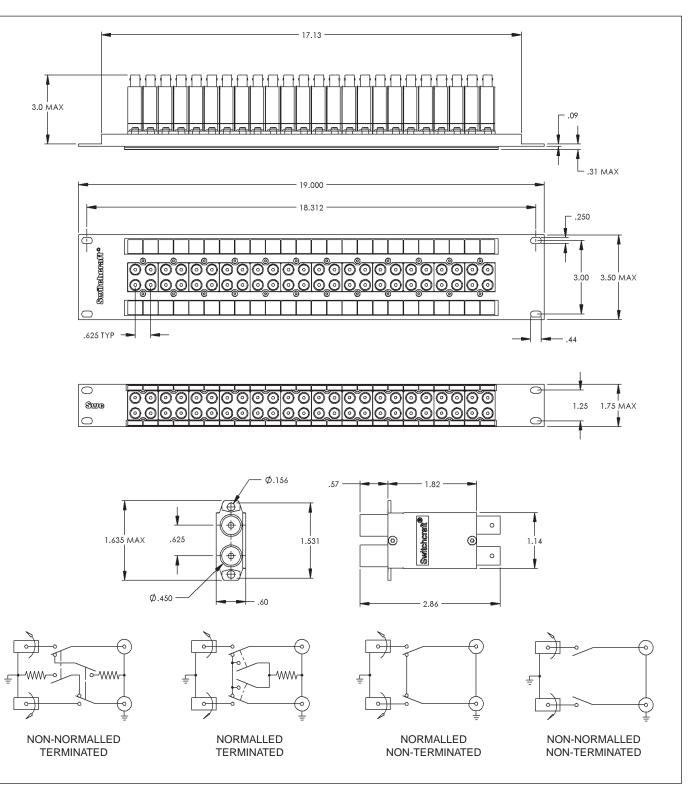


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

194


### VPP VIDEO PATCHBAY SERIES (continued)

Ordering–Individual Jacks					
Part Number	Part Number Type Description				
VJHD*75TX	VJHD*75TX HD Terminated				
VJHD*NTX	HD*NTX HD Non-terminated				
VJSD*75TX	SD*75TX SD Terminated				
VJSD*NTX SD Non-terminated					
*Add "N" for non-normalled version					

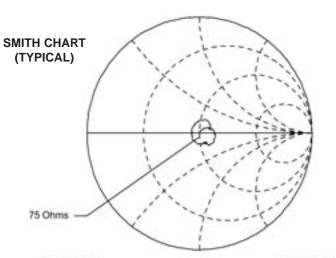

START 30 kHz



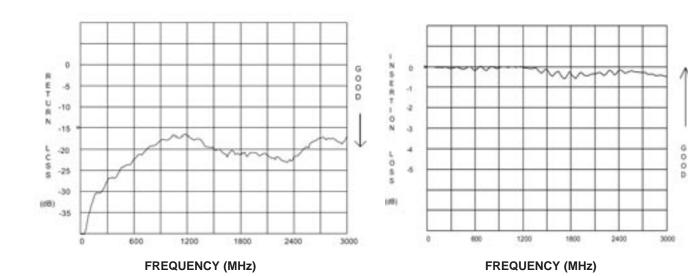

195

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

### MVP MIDSIZE VIDEO PATCHBAY SERIES



The MVP Series video patchbays offer outstanding performance and high density. Patchbays consist of 32 jacks in either 1RU or 2RU heights, jacks come either terminated or non-terminated. These jacks are rated from DC to 3 GHz, and are rated at 30,000 lifecycles.

#### FEATURES AND BENEFITS

- · Midsize video jacks rated from DC to 3 GHz
- 32 midsize jacks mounted either 1RU, 1.5RU or 2RU panel
- Available in terminated or non-terminated configurations

#### **SPECIFICATIONS** MATERIAL

Frame: Aluminum, black anodized Designation Strips: Vinylite, white Designation Strip Covers: Lexan, transparent Jack Inserts: Thermoplastic, UL 94V-0 rated

#### **MIDSIZE VIDEO JACK SPECIFICATIONS ELECTRICAL**

Rated Bandwidth: 3.0 GHz Characteristic Impedance: 75 ohms Return Loss: See Typical Return Loss Chart Insertion Loss: See Typical Insertion Loss Chart Contact Resistance: Less than 20 milliohms Termination Resistance: 75 W, ±1% Center Conductor: Accepts .048 pin diameter

#### **MECHANICAL**

Mechanical Shock: Per MIL-STD-202. Method 213, Test condition I Vibration: Per MIL-STD-202, Method 201 Insertion Force: 12 lbs. maximum Withdrawal Force: 3 lbs. minimum Life Cycle: 30,000

#### MATERIAL

Housing: Zinc alloy, nickel plated Center Contacts: Copper alloy, gold plated Switching Springs: Copper alloy, gold plated Grounding Contacts: Copper alloy, gold plated BNC Insulators: Teflon Actuators: Thermoplastic, UL94V-0 rated

#### **ENVIRONMENTAL**

Operating Temperature: - 40°C to 65°C Storage Temperature: - 55°C to 85°C Thermal Shock: Per MIL-STD-202, Method 107 Moisture and Humidity: Per MIL-STD-202, Method 106

Ordering Information				
Part	Туре			
Number	of Jack	Height	Description	
MVP32K1*75T	Midsize	1.75"	Terminated	
MVP32K1*NT	Midsize	1.75"	Non-terminated	
MVP32K3*75T	Midsize	3.5"	Terminated	
MVP32K3*NT	Midsize	3.5"	Non-terminated	
* Add "N" for non-normalled version				


Note: For 1.5RU (2.62" height), use K2

Inch DIMENSIONS ARE FOR REFERENCE ONLY

# JACK PANELS MVP MIDSIZE VIDEO PATCHBAY SERIES

\* Please visit the product pages on our website for the most up-to-date product information

### MVP MIDSIZE VIDEO PATCHBAY SERIES (continued)

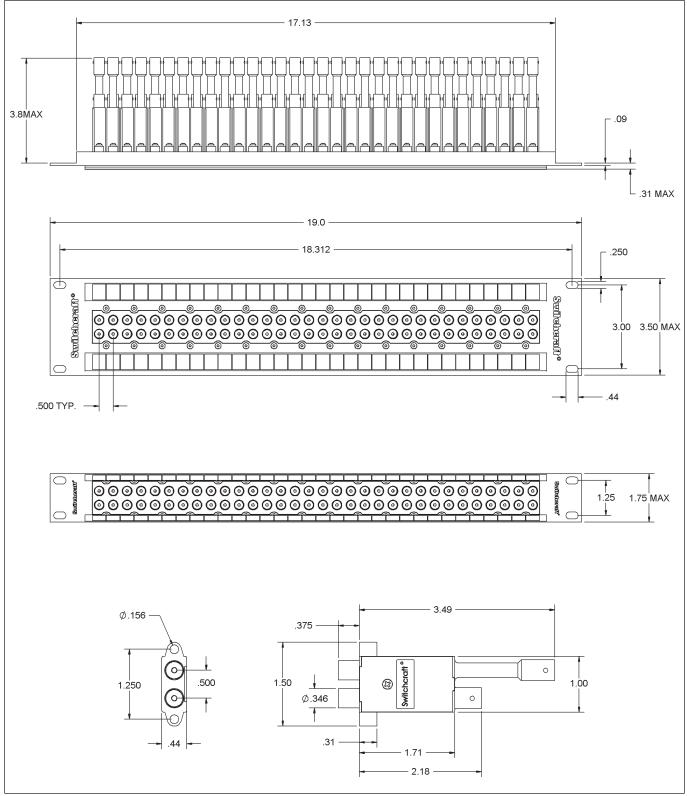

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

197


### MVP MIDSIZE VIDEO PATCHBAY SERIES (continued)

Ordering Information		
Part		
Number	Description	
MVJ*75TX	Terminated	
MVJ*NTX	Non-terminated	
*Add "N" for n	on-normalled version	

SMITH CHART (TYPICAL)	
75 Ohma	
START 30 kHz	STOP 3.0 GHZ

#### **RETURN LOSS (TYPICAL)**



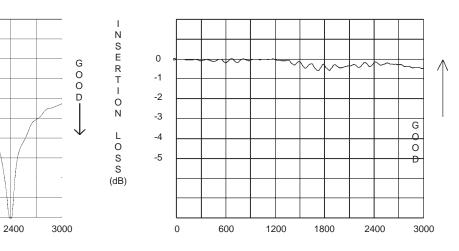

Inch DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

R E T U

R N

L

O S S -20

(dB) -30

0

-5

-10

-15

-25

-35

0

600

1200

1800

\* Please visit the product pages on our website for the most up-to-date product information

### VAP VIDEO/AUDIO PATCHBAY SERIES



VAPK3HD\*75T

The VAP Series combines audio and video in one convenient patchbay. Standard versions consist of 13 video jacks and 26 long-frame audio jacks into one unit. Options include HD Series video jacks which are rated from DC to 2.4GHz or SD Series rated from DC to 1.5GHz. Both come in either terminated or non-terminated jacks. The MT Style audio jacks all have nickel-plated steel frames and gold-plated switching contacts. Flared terminals make soldering easier. All audio jacks are T,R,S, TN, and RN. Individual modules are useful for custom configurations.

#### FEATURES AND BENEFITS

- · Combines 13 video jacks and 26 long-frame audio jacks into one patchbay
- Available with either HD Series or SD Series video jacks
- · All audio jacks are nickel-plated with steel frames and gold-plated switching contacts
- Audio modules consist of 4 YMT334BN jacks, video modules consist of 2 dual video jacks

#### **VIDEO JACK SPECIFICATIONS ELECTRICAL**

Rated Bandwidth: 2.4 GHz (HD), 1.75 GHz (SD) Characteristic Impedance: 75 ohms Return Loss: Better than -15 dB Insertion Loss: Better than -.5 dB Contact Resistance: Less than 20 milliohms Termination Resistance: 75 W, ±1% Center Conductor: Accepts .090 pin diameter

#### **MECHANICAL**

Mechanical Shock: Per MIL-STD-202, Method 213, Test condition I Vibration: Per MIL-STD-202, Method 201 Insertion Force: 12 lbs. maximum Withdrawal Force: 3 lbs. minimum Life Cycle: 30,000

#### MATERIAL

Housing: Zinc alloy, nickel plated Center Contacts: Copper alloy, gold plated Switching Springs: Copper alloy, gold plated

#### **Grounding Contacts:**

HD Series - Copper alloy, gold plated SD Series - Copper alloy, nickel plated Insulators: Thermoplastic, UL 94V-0 rated

#### **ENVIRONMENTAL**

Operating Temperature: - 40°C to 65°C Storage Temperature: - 55°C to 85°C Thermal Shock: Per MIL-STD-202, Method 107 Moisture and Humidity: Per MIL-STD-202, Method 106

Ordering Information			
Part	Type of		
Number	Jack	Height	Description
VAPK1HD*75T	HD	1.75"	Terminated
VAPK1HD*NT	HD	1.75"	Non-terminated
VAPK1SD*75T	SD	1.75"	Terminated
VAPK1SD*NT	SD	1.75"	Non-terminated
VAPK3HD*75T	HD	3.5"	Terminated
VAPK3HD*NT	HD	3.5"	Non-terminated
VAPK3SD*75T	SD	3.5"	Terminated
VAPK3SD*NT	SD	3.5"	Non-terminated
Modules			
VMAFN	MT		4- YMT334BN jacks
VMVHD*75T	HD		2- HD terminated jacks
VMVHD*NT	HD		2- HD non-terminated jacks
VMVSD*75T	SD		2- SD terminated jacks
VMVSD*NT	SD		2-SD non-terminated jacks
*Add "N" for non-normalled version			


199

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information


### VAP VIDEO/AUDIO PATCHBAY SERIES (continued)

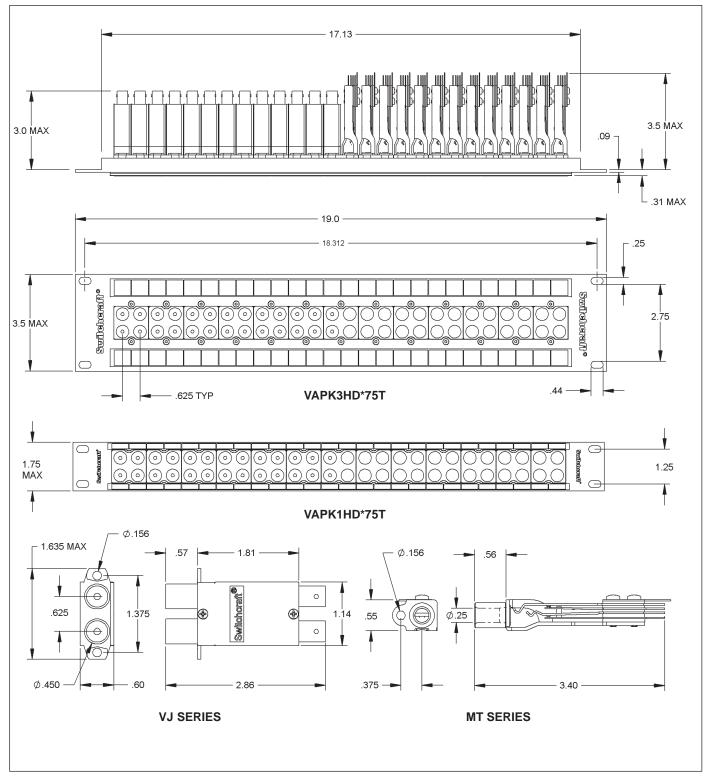

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

JACK PANELS

### MBPK VIDEO/AUDIO PATCHBAY SERIES

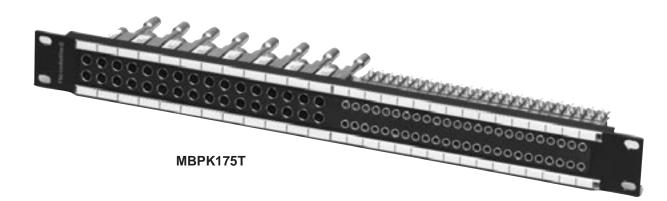

The MBPK Series combines audio and video in one convenient patchbay. The patchbay consists of 16 midsize video jacks and 48 TT bantam jacks. Options include 75 Ohm terminated or non-terminated video jacks. All TT bantam jacks have T, R, S, TN and RN solder terminals. Audio jacks have nickel-plated steel frames, gold-plated crossbar switching contacts and flared terminals for easier soldering.

#### FEATURES AND BENEFITS

Combines 16 midsize video jacks and 48 TT bantam audio jacks

Video jacks are rated from DC to 3.0 GHZ


All audio jacks are nickel-plated with steel frames and goldplated crossbar switching contacts

For non-terminated version, use part no. MBPK1NT

VIDEO JACK SPECIFICATIONS See page 196 for details

AUDIO JACK SPECIFICATIONS See page 164 for details

MATERIALS FRAME Aluminum, black anodized

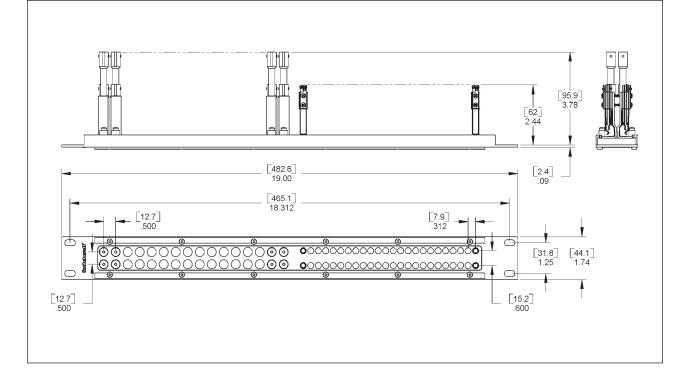

201

PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### LONG FRAME (1/4") TELEPHONE JACK PANELS

#### STANDARD SINGLE ROW JACK PANELS SERIES 1200 AND 1400

#### SERIES 1200

Panels accomodate 24 T-Jax<sup>®</sup> jacks in standard 1.75 inch x 19 inch racks. Jack openings are on alternate .625 inch and .750 inch spacing; twin plugs cannot be cross-connected between adjacent jack pairs. Includes designation strips (marking strips and transparent plastic covers).

#### SERIES 1300

Same as Series 1200, except MT-Jax<sup>®</sup> are used in panel assemblies.

#### SERIES 1400

Mounts 26 T-Jax<sup>®</sup>. Openings are on continuous .625 inch centers. Twin plug can be used on any two adjacent jacks. Single designation strip (marking strip, and plastic cover). WEco equivalent is 230B.

#### **SERIES 1400300**

Same as Series 1400, except designation strip is Kwik-Change® type which is easier to install and remove and provides larger vertical designation marking area. Strip holder is recessed into top of panel for additional panel strength. 1400301 has single height Kwik-Change® designation strip. 1400315 has a single height Kwik-Change® designation strip along bottom of panel and double height strips above jacks. Top designation strip has .188 inch overhang above 1.75 inch panel height, to help seal small opening between adjacent panels. CAUTION: Because of this overhang, 1400315 cannot be mounted one above another in a rack.

#### SERIES 1500

Same as Series 1400 except MT-Jax<sup>®</sup> are used in panel assemblies.

#### SPECIFICATIONS

Jack Panel: General purpose black phenolic resin Frame (except 1400300): Plated, steel

End Bracket and Side Strip (1400300 only): Cold rolled plated steel

Designation Strip (except 1400300): Clear plastic.

"Kwik-Change" Designation Strip (1400300): Extruded aluminum, black anodized and black thermoplastic UL 94V-0.


Marking Strip: White plastic, matte finish.

Marking Strip Cover: Clear extruded plastic.

Screws: #6-32 x .25 inch phillips RHMS (for mounting jacks).

#### ORDERING

Part number table lists blank panels and popular jack panel assemblies. If you wish to mount components on basic panels, order jacks, lamp jacks, and switches separately. (See appropriate section in this catalog.) For other panel assemblies, provide complete details with your inquiry or order. Switchcraft can build special assemblies to your requirements in small or large quantities. See wire wrapping data. Series 1200 and 1400 are available with holes pre-drilled for vertical designation strips (Series DS320). Add prefix "D" to part numbers for pre-drilled panels: D1200, D1400301, etc.

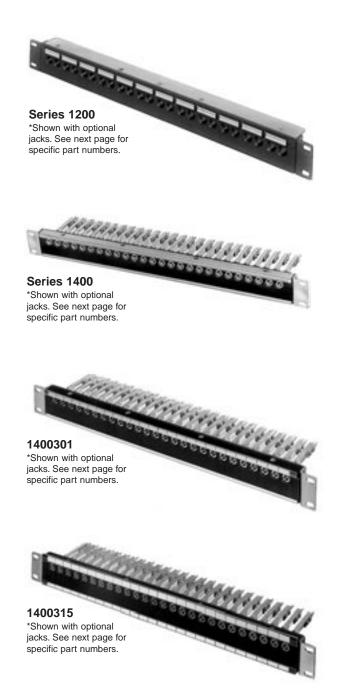

DIMENSIONS ARE FOR REFERENCE ONLY

Inch

(mm)

# **JACK PANELS** LONG FRAME 1/4" TELEPHONE JACK PANELS

(ŲL)



\* Please visit the product pages on our website for the most up-to-date product information

# LONG FRAME (1/4") TELEPHONE JACK PANELS (continued)

					<b>U</b>
Part Numbers		Part Numbers		Description	
	Assembly with Jacks With Solder Lugs		,	Number of Jacks	Type of Jacks Installed
Panel Only	Straight	Offset	Terminals		
1200	-	-	-	None	
-	1332A	<b>◊X1332A</b>	<b>⊘W1332A</b>	24	MT332A , XMT332A or WMT332A MT-Jax®
-	<b>◊1332B</b>	<b>◊X1332B</b>	-	24	MT332B or XMT332B MT-Jax®
-	<b>◊1334B</b>	<b>◊X1334B</b>	<b>⊘W1334B</b>	24	MT334B,XMT334B or WMT334B MT-Jax®
1400	-	-	-	None	
1400301	-	-	-	None	
<b>◊1400315</b>	-	-	-	None	
-	1532A	X1532A	-	26	MT332A or XMT332A MT-Jax®
-	<b>◊1532A301</b>	-	<b>⊘W1532A301</b>	26	MT332A or WMT332A MT-Jax <sup>®</sup>
-	<b>◊1532B</b>	-	-	26	MT332B MT-Jax <sup>®</sup>
-	<b>◊1532B301</b>	<b>◊X1532B301</b>	<b>⊘W1532B301</b>	26	MT332B, XMT332B or WMT332B MT-Jax <sup>®</sup>
-	<b>◊1534B</b>	<b>◊X1534B</b>	<b>⊘W1534B</b>	26	MT334B, XMT334B or WMT334B MT-Jax®
-	-	-	<b>⊘W1534B301</b>	26	WMT334B MT-Jax <sup>®</sup>
-	-	<b>◊X1542B315</b>	-	26	XMT342B MT-Jax <sup>®</sup>


Special order only; contact factory for price and delivery.

1. Prefix "X" denotes offset lugs for buss wiring.

Jack Mounting Screws: #6-32, P10725, can be ordered separately. Contact Switchcraft

Legend Cards (Series 1200, 1300) - A1029 Legend Windows (Series 1200, 1300) - A1030



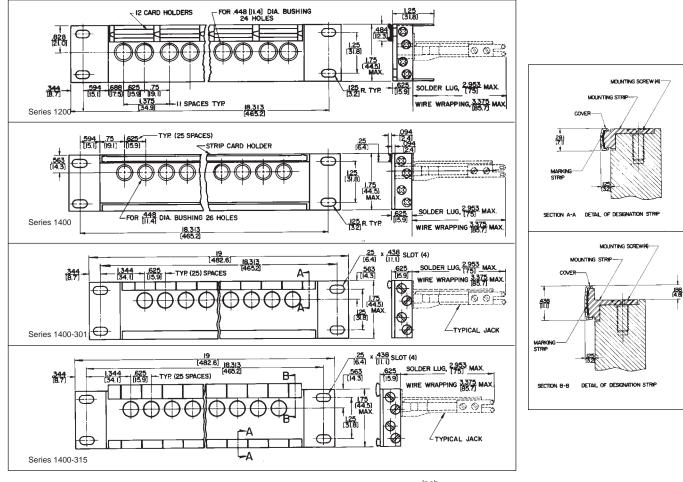

### SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

PANELS

# JACK PANELS Long Frame 1/4" Twin Row Jack Panels

**PHONE: 773 792-2700** 

MOUNTING SCREW(4)

DETAIL OF DESIGNATION STRIP

48

MOLINTING ST

COVE

<u>43</u>


SECTION B-B

\* Please visit the product pages on our website for the most up-to-date product information

LONG FRAME (1/4") TWIN ROW JACK PANELS

#### Series 2400

\*Shown with optional jacks, See next page for specific part numbers.

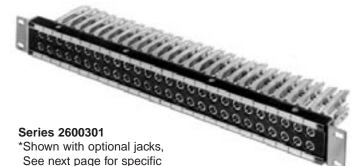

KS,

#### Series 2600

\*Shown with optional jacks, See next page for specific part numbers.

#### STANDARD TWIN ROW JACK PANELS SERIES 2400, 2600, 2600300, 2700300 – PHENOLIC

Twin row jack panels offer greater jack density - up to 52 jacks per panel. All panels fit standard 19" wide racks. Blank panels or standard assemblies can be ordered from Switchcraft. Series 2600 panels are direct equivalent to WEco #230A.

#### SERIES 2400

Twin row panel accommodates 48 T-Jax<sup>®</sup>. Openings are on alternate .625" and .75" centers. Panel is 2.125" high and fits standard 19" racks. Twin plug cannot be cross-connected between jacks in adjacent quads, but may be connected either horizontally or vertically in the same quad. Single designation strip.

#### **SERIES 2500**

Same as Series 2400 except MT-Jax<sup>®</sup> are used.

#### **SERIES 2600**

Twin row panel accommodates 52 T-Jax<sup>®</sup> in standard 1.75" x 19" racks. Jack openings are on continuous centers. Twin plug can be connected to any two adjacent jacks, either horizontally or vertically. Two designation strips. WEco equivalent is #230A.

#### **SERIES 2600300**

Same as Series 2600, except designation strips are Kwik-Change<sup>®</sup> type, providing larger vertical marking area. Top strip holder is recessed into top of panel to provide additional

strength. 2600301 has single height designation strips (one above and below each row of jacks).

#### 2600310

part numbers.

Has a double height strip above top row and a steel reinforcing strip below bottom row. Top strip has .188" overhang above 1.75" panel height, helping seal the small opening between adjacent panels. Note: overhang prevents mounting panel one above another in a rack.

#### **SERIES 2700**

Same as Series 2600 except MT-Jax<sup>®</sup> are used in panel assemblies. The series is available with cable tie bar.

#### ORDERING

- 1. Order basic panels and popular assemblies by part number from table.
- 2. For special panels provide complete details with your inquiry or order.
- 3. Series 2600 is available with hole pre-drilled for vertical designation strips, Series DS320. Add prefix "D" to part number (D2600301, etc.).
- 4. Jack Mounting Screws: #6-32, P10725, can be ordered separately. Contact Switchcraft.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)


### \* Please visit the product pages on our website for the most up-to-date product information

# LONG FRAME (1/4") TWIN ROW JACK PANELS (continued)

Part Numbers		Part Numbers		Description	
Panel Only		th Jacks Having er Lugs Offset¹	Assembly with Jacks Having Wire- Wrapping Terminals	Number of Jacks	Type of Jack Installed
2400	-	-	-	None	
-	<b>∂2432A</b>	<b>⊘X2432A</b>	-	48	T332A
-		()	-	48	T332B
-		()	-	48	T334B or XMT334B T-Jax®
-	2532A	<b>⊘X2532A</b>	<b>⊘W2532A</b>	48	MT332A, XMT332A or WMT332A MT-Jax®
-	<b>∂2532B</b>	<b>⊘X2532B</b>	-	48	MT332B or XMT332B MT-Jax®
-	<b>⊘2533</b>	-	-	48	MT333 MT-Jax <sup>®</sup>
-	<b>⊘2533B</b>	-	<b>⊘W2533B</b>	48	MT333B or WMT333B MT-Jax®
-	<b>⊘2534B</b>	X2534B	-	48	MT334B or XMT334B MT-Jax <sup>®</sup>
-	<b>⊘2542B</b>	-	-	48	MT342B MT-Jax <sup>®</sup>
-	<b>⊘2544B</b>	-	-	48	MT344B, MT-Jax <sup>®</sup>
-	<b>∂2588</b>	-	-	24	MT388, Twin MT-Jax <sup>®</sup>
-	<b>∂2589</b>	-	-	24	MT389 Twin MT-Jax <sup>®</sup>
2600	-	-	-	None	
2600301	-	-	-	None	(WEco equivalent #230A)
2600310	-	-	-	None	
-	<b>⊘2732A</b>	<b>⊘X2732A</b>	-	52	MT332A or XMT332A MT-Jax®
-	<b>⊘2732A301</b>	<b>◊X2732A301</b>	<b>⊘W2732A301</b>	52	MT332A, XMT332A or WMT332A MT-Jax®
-	<b>⊘2732B</b>	<b>◊X2732B</b>	<b>⊘W2732B</b>	52	MT332B, XMT332B or WMT332B MT-Jax®
-	<b>⊘2732B301</b>	<b>◊X2732B301</b>	<b>⊘W2732B301</b>	52	MT332B, XMT332B or WMT332B MT-Jax®
-	<b>⊘2733B</b>	-	-	52	MT333B, MT-Jax <sup>®</sup>
-	<b>⊘2734B</b>	<b>⊘X2734B</b>	-	52	MT334B or XMT334B MT-Jax®
-	<b>∂2734B301</b>	<b>◊X2734B301</b>	<b>⊘W2734B301</b>	52	MT334B, XMT334B or WMT334B MT-Jax®
-	<b>∂2789</b>	-	<b>⊘W2789</b>	26	MT389 or WMT389 Twin MT-Jax®
-	-	<b>⊘X2832A</b>	-	48	XT332A
-	-	<b>⊘X2932A</b>	-	48	XMT332A

1. Prefix "X" denotes offset lugs for buss wiring.

◊ Special order only; contact factory for price and delivery.

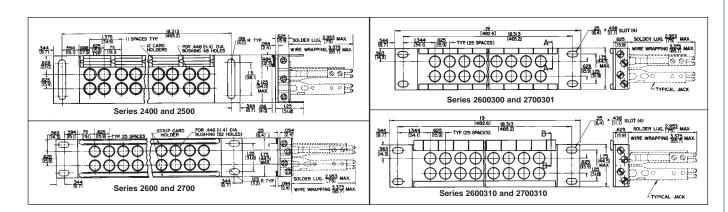

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

JACK PANELS SWITCHCHCHCH

# JACK PANELS Long Frame 1/4" Modular twin row Jack Panels

### **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

LONG FRAME (1/4") MODULAR TWIN ROW JACK PANELS

#### SERIES JP122S34B \*Shown with optional jacks, See next page for specific part numbers.

SERIES JP072S32A \*Shown with optional jacks, See next page for specific part numbers.

SERIES JP032S32B \*Shown with optional jacks, See next page for specific part numbers.

#### SERIES JP012000 THROUGH JP122000

Series JP<sup>®</sup> Modular Jack Panels feature a modular packaging concept. Jacks are mounted on inserts then complete modular insert assemblies are mounted to the panel from the rear. Mounting and wiring are quick and easy. Individual jacks or complete inserts can be removed from the panel with minimum disturbance to wiring and adjacent jacks. JP panels offer three mounting styles (standard rack mount, flush mount, and extension mount), staggered or continuous-center panel openings, two panel lengths (19" and 23"), WEco equivalents, Kwik-Change<sup>®</sup> designation strips, precision manufactured modular parts, rugged black anodized aluminum frames and quick and easy module or jack removal/installation.

Each module insert has four holes which mount four MT-Jax<sup>®</sup> or two Twin-Jax<sup>®</sup>. Each modular jack panel is supplied with two Kwik-Change<sup>®</sup> designation strips. Mounting strips are integral with panel, and marking strips and clear covers snap into place quickly and easily.

#### SERIES JP012000

Standard 1.75" x 19" size for console, rack or control panel mounting. Mounts 48 MT-Jax<sup>®</sup>. Openings are on alternate .625" and .75" centers in each row. A twin plug fits jacks horizontally or vertically in the same quad, but cross-connecting between quads is not possible. Includes 12 black module inserts, insert mounting screws and two Kwik-Change<sup>®</sup> designation strips.

#### SERIES JP022000

Same as JP012000, except 23" wide (includes 14 inserts which accommodate 56 MT-Jax®).

#### SERIES JP032000

Same as JP012000, except with 5.375" extension brackets which permit access to rear of jacks from front of panel. Brackets are supplied mounted to panel.

#### SERIES JP042000

Same as JP032000, except 23" wide (includes 14 inserts which accommodate 56 MT-Jax®).

#### SERIES JP052000

Same as JP012000, except designed for flush mounting or standoff mounting. Switchcraft Bracket Kit K107; Contact Switchcraft.

#### SERIES JP062000

Same as JP052000, except 23" wide (includes 14 inserts which accommodate 56 MT-Jax®).

#### SERIES JP072000

Same as JP012000, except mounts 52 MT-Jax<sup>®</sup> and includes 13 black module inserts. Modular equivalent of WEco #230A.

#### SERIES JP082000

Same as JP072000, except 23" wide (includes 16 inserts which accommodate 64 MT-Jax<sup>®</sup>). Modular equivalent to WEco #231A.

#### SERIES JP092000

Same as JP072000, except with 5.375" extension brackets which permit access to rear of jacks from front of panel. Brackets are supplied mounted to panel.

#### SERIES JP102000

Same as JP092000, except 23" wide (includes 16 inserts which accommodate 64 MT-Jax<sup>®</sup>).

#### SERIES JP112000

Same as JP072000, except designed for flush mounting or standoff mounting. Switchcraft Bracket Kit K107; Contact Switchcraft.

#### SERIES JP122000

Same as JP112000, except 23" wide (includes 16 inserts which accommodate 64 MT-Jax®).

#### SPECIFICATIONS

#### Panel and Integral Designation Mounting Strips:

Aluminum alloy, extruded. Black anodized per MIL-A-8625 **Module Insert:** Molded plastic, matte finish. Black standard; white, red, green, blue or yellow available on special order **Marking Strip:** White matte finish plastic **Designation Strip Cover:** Extruded clear plastic **Screws:** #6-32 x 5/15", PHMS, for jack mounting; #4-40 x 1/2" phillips PHMS, for module insert mounting **Brackets:** 5.375", aluminum alloy black anodized finish (JP032000, JP042000, JP092000, JP102000) **Screws, Mounting Bracket:** #6-32, self-tapping supplied.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# **JACK PANELS** LONG FRAME 1/4" MODULAR TWIN ROW JACK PANELS

207

#### \* Please visit the product pages on our website for the most up-to-date product information

### LONG FRAME (1/4") MODULAR TWIN ROW JACK PANELS (continued)



#### ORDERING

Order popular assemblies by part number from table. If you wish to mount components on the panels, order blank panels and refer to MODULE INSERTS below. On special order, various combinations of colored inserts mounted in basic panels, as well as many different types of complete assemblies are possible. Provide complete details with your

inquiry or order. Standard mount panels are available with holes pre-drilled for vertical designation strips, Series DS320. Add prefix "D" to part number (JPD012000, JPD022000, JPD072000, JPD082000, etc.).

Assembly with Jacks

Having Solder Lugs

# of

Jacks

Part Numbers\*

Panel Only

Part Numbers*			
Panel Only	Assembly with Jacks Having Solder Lugs	# of Jacks	MT-Jax <sup>®</sup> Installed
JP012000	-	None	
-	<b>◊JP012S32A</b>	48	MT332A
-	<b>◊JP012S32B</b> ¹	48	MT332B
-	JP012S34B1	48	MT334B
<b>⊘JP022000</b>	-	None	
-	<b>⊘JP022S32A</b>	56	MT332A
-	<b>⊘JP022S32B</b>	56	MT332B
-	<b>⊘JP022S34B</b>	56	MT334B
<b>⊘JP032000</b>	-	None	
-	<b>⊘JP032S32A</b>	48	MT332A
-	<b>⊘JP032S32B</b>	48	MT332B
-	<b>⊘JP032S34B</b>	48	MT334B
<b>⊘JP042000</b>	-	None	
-	<b>⊘JP042S32A</b>	56	MT332A
-	<b>⊘JP042S32B</b>	56	MT332B
-	<b>⊘JP042S34B</b>	56	MT334B
JP052000	-	None	
-	<b>⊘JP052S32A</b>	48	MT332A
-	<b>⊘JP052S32B</b>	48	MT332B
-	<b>⊘JP052S34B</b>	48	MT334B
<b>◊JP062000</b>	-	None	
-	<b>⊘JP062S32A</b>	56	MT332A
-	<b>⊘JP062S32B</b>	56	MT332B
-	<b>◊JP062S34B</b>	56	MT334B

T anot only	Having Coldor Edgo		motanoa
JP072000	-	None <sup>1</sup>	
-	<b>⊘JP072S32A</b>	52	MT332A
-	<b>⊘JP072S32B</b>	52	MT332B
-	JP072S34B	52	MT334B
<b>◊JP082000</b>	-	None <sup>2</sup>	
-	<b>⊘JP082S32A</b>	64	MT332A
-	<b>⊘JP082S32B</b>	64	MT332B
-	<b>⊘JP082S34B</b>	64	MT334B
<b>⊘JP092000</b>	-	None	
-	<b>⊘JP092S32A</b>	52	MT332A
-	<b>⊘JP092S32B</b>	52	MT332B
-	<b>⊘JP092S34B</b>	52	MT334B
<b>⊘JP102000</b>	-	None	
-	<b>⊘JP102S32A</b>	64	MT332A
-	<b>⊘JP102S32B</b>	64	MT332B
-	<b>⊘JP102S34B</b>	64	MT334B
<b>⊘JP112000</b>	-	None	
-	<b>⊘JP112S32A</b>	52	MT332A
-	<b>⊘JP112S32B</b>	52	MT332B
-	<b>⊘JP112S34B</b>	52	MT334B
<b>◊JP122000</b>	-	None	
-	<b>⊘JP122S32A</b>	64	MT332A
-	<b>⊘JP122S32B</b>	64	MT332B
-	<b>⊘JP122S34B</b>	64	MT334B

\* Panels with jacks having wire-wrapping terminals are approximately 10% higher in price. Contact Switchcraft.

1. Non-modularized equivalent is WEco #230A.

2. Non-modularized equivalent is WEco #231A

<b>Mounting Screws:</b> #6-32, <b>P10725</b> for jack mounting and #4-40, <b>P2435</b> for insert mounting, can be ordered separately.
$\Diamond$ Special order only; contact Switchcraft.

1. Add a "1" to the part number to specify a cable tie bar.

#### **MODULE INSERTS**







Standard color is black, matte finish plastic. Contact Switchcraft. Inserts are ideal for mounting directly in control panels and chassis where convenient jack connections are required. Applications include test outlets, remote equipment connections and headsets such as those used in telephone and telecommunications equipment.

Part Number	Description	
JP9942	Black module insert with four jack openings (less jacks). Includes two, #4-40 machine screws for mounting.	
JP9922	Black module insert with two jack openings (less jacks). Includes two, #4-40 machine screws for mounting.	
JP9902	Black module insert without holes. Includes two, #4-40 machine screws for mounting. Used where no jacks are needed.	


Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)


# **208 JACK PANELS** Long Frame (1/4") modular twin row Jack Panels

**PHONE: 773 792-2700** 

\* Please visit the product pages on our website for the most up-to-date product information

LONG FRAME (1/4") MODULAR TWIN ROW JACK PANELS (continued)

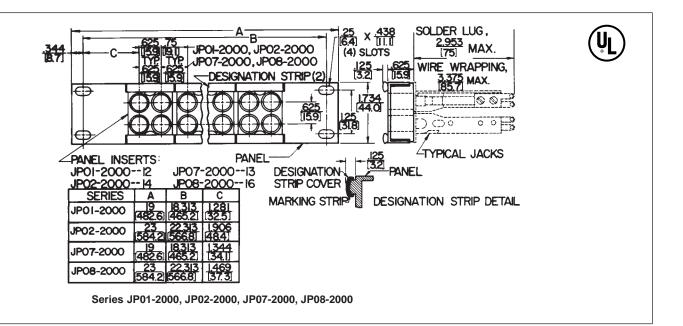

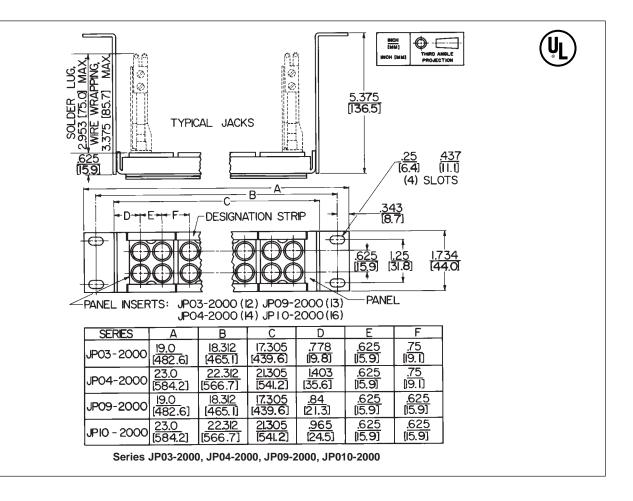


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

## JACK PANELS Long Frame 1/4" Modular twin row Jack Panels

**IACK PANELS** 

\* Please visit the product pages on our website for the most up-to-date product information

LONG FRAME (1/4") MODULAR TWIN ROW JACK PANELS (continued)

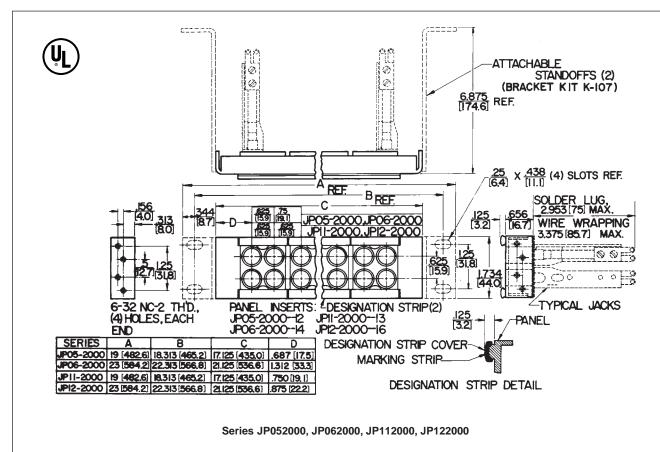



**PHONE: 773 792-2700** 

#### \* Please visit the product pages on our website for the most up-to-date product information

### LONG FRAME (1/4") MODULAR 3 ROW JACK PANELS

Four series of cross-connect jack panels are available in 19" and 23" widths. Individual modules are easily dismounted from the front. On special order, panels can be supplied with a variety of standard telephone jacks.

#### SERIES JP312000 AND JPD312000

2.655" x 19" size for console, rack or control panel mounting. Mounts 24 twin jacks and 24 single jacks. Openings are on .625" centers in each row. A twin plug fits jacks horizontally or vertically in same quad. Bottom row has 24 single jacks. Two Kwik®-Change designation strips are supplied. Series JPD31 has pre-drilled and countersunk holes for mounting vertical designation strips. See "ORDERING".

#### SERIES JP322000 AND JPD322000

Same as JP312000 and JPD312000, except 23" wide (includes 14 inserts which accommodate 28 twin jacks and 28 single jacks).

#### **MODULE INSERTS**

Available with 6 holes or blank faces. See "ORDERING" for colored modules.

#### ORDERING

Order basic assemblies by part number from table. On special order, various combinations of colored inserts mounted in basic panels, as well as many types of complete assemblies are possible. Provide complete details with your inquiry or order.

Standard mount panels are available with holes pre-drilled for vertical designation strips, Series DS320. Add prefix "D" to part number (JPD312000, JPD322000, etc.). Refer to "DESIGNATION STRIPS".

**Mounting Screws:** #6-32 **P10725** for jack mounting and #4-40 **P2435** for insert mounting can also be ordered separately. Contact Switchcraft.



#### SPECIFICATIONS


Panel and Designation Strips: Aluminum alloy, extruded. Black anodized per MIL-A-8625.

**Module Insert:** Molded plastic, matte finish. Black standard; white, red, green, blue or yellow available on special order. **Marking Strip:** White matte finish plastic.

**Designation Strip Cover:** Extruded clear plastic.

**Screws:** #6-32 x 5/16" PHMS, for jack mounting; #4-40 x 1/2" phillips FHMS, for module insert mounting.

Part Number	Description
JP312000	19" wide x 2.625" high panel with 12 black modules installed. Two, full width Kwik <sup>®</sup> -Change designation strips are included.
JPD312000	Same as JP312000, except holes pre-drilled for mounting vertical designation strips at each side.
JP322000	23" wide x 2.625" high panel with 14 black modules installed. Two, full width Kwik <sup>®</sup> -Change designation strips are included.
JPD322000	Same as JP322000, except holes pre-drilled for mounting vertical designation strips at each side.

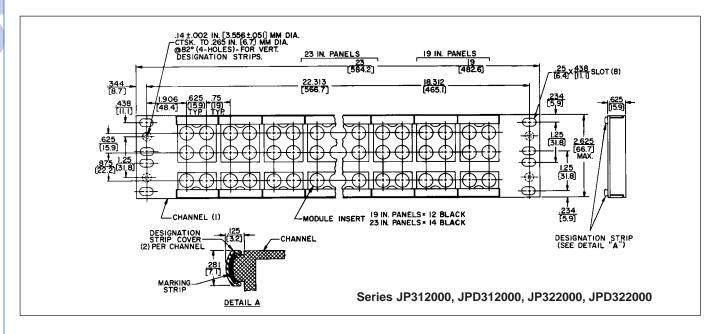

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

#### FAX: 773 792-2129 \* Please visit the product pages on

\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX<sup>®</sup> (.173") JACK PANELS SERIES 1600, A1600, B1600, C1600

SERIES 1600 and A1600 Jack Panels with optional jacks. (See next page for specific part numbers.) SERIES B1600 and C1600 Jack Panels with optional jacks. (See next page for specific part numbers.)

JACK PANELS TT-JAX® (.173") JACK PANELS

SERIES 1700 Jack Panel with optional jacks. (See next page for specific part numbers.)

#### SERIES 1600 DOUBLE ROW JACK PANELS

Black anodized panel has four inserts (24 single jacks). Double row configuration accommodates 96 total jacks (48 pairs). Jack spacing eliminates cross-patching of adjacent circuits when twin plugs are used. Panel size: 1.75" x 19". Four, Kwik-Change<sup>®</sup> designation strips for circuit identification supplied.

#### SERIES A1600 DOUBLE ROW JACK PANELS

Similar to Series 1600, except mounts 104 jacks. Jacks are spaced on .312" centers for maximum jack density. Four, Kwik-Change<sup>®</sup> designation strips supplied.

#### SERIES B1600 THREE ROW JACK PANELS

2.625" x 19" panel size yields high density (144 jacks). Jacks are paired for single or twin plugs without cross-patching. Six, Kwik-Change<sup>®</sup> designation strips supplied.

#### SERIES C1600 THREE ROW JACK PANELS

Similar to B1600, except maximum jack density (156 jacks). Six, Kwik-Change<sup>®</sup> designation strips supplied.

#### **SERIES 1700 TWIN ROW JACK PANELS**

Standard 1.75" x 19" panel accepts 48 TT-Twin-Jax<sup>®</sup> jacks. Two, Kwik-Change<sup>®</sup> designation strips supplied.

#### SERIES B1700 THREE ROW JACK PANELS

Accepts 48 Tri-Jax<sup>®</sup> with alternate mounting centers to eliminate cross-patching between adjacent circuits. Panel size: 1.75" x 19". Two, Kwik-Change<sup>®</sup> designation strips supplied.

#### SPECIFICATIONS

#### SERIES 1600, A1600, B1600, 1700, B1700

Panel and Designation Strip: Aluminum alloy, extruded. Per QQ-A-200/8. Black anodized per MIL-A-8625C.

Series B1700 Jack Panel with optional jacks. (See next page for specific part numbers.)

Black thermoplastic UL 94V-0.

Panel Insert: Thermoplastic polyester, UL 94V-0. Marking Strip: White matte finish plastic. Designation Strip Cover: Extruded clear plastic.

#### ORDERING

- Part number tables list jack panels with the most commonly used jack circuits. Custom jack panels can be built on special order to OEM requirements. Typical special order features are:
  - Lamp jack with incandescent or LED lamps.
  - Solder lug or wire-wrapping terminals.
  - Pre-printed designation strips.
  - TT-Switch® switches with wide switching selection.
- 2. Contact Switchcraft for all special order items.

#### SPECIFYING NOTE:

Prefix letter "D" on part number indicates panels are drilled for mounting vertical designation strips on both ends. EXAMPLE -D1600, AD1632B, WCD1634B (vertical designation strips not included). Order DS321 for 1.734" high panels; DS350 for 2.069" high panels. See "Designation Strips" section.

The most commonly-used combinations of panels and jacks are listed on following page. 1600, A1600, B1600, C1600 panels can be assembled with many different "bantam type" jacks.



Bussing type terminals which allow you to buss jacks quickly and easily are available on special order.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

P

JACK PANELS

witcher

# JACK PANELS TT-JAX (.173") JACK PANELS

**PHONE: 773 792-2700** \* Please visit the product pages on our website for the most up-to-date product information

## TT-JAX® (.173") JACK PANELS - SERIES 1600, A1600, B1600, C1600 (continued)

Jack Data<sup>1</sup>

Panel Data

#### **SERIES 1600 AND A1600**

Part Number	Part Number	Quantity	Dimensions	Mount
1600	w/o Jacks1			
D1600	w/o Jacks1			
1632A	TT32A			
D1632A	TT32A			
1632B	TT32B			
D1632B	TT32B	96	19"	Standard
W1632B	WTT32B		X 1 704	
WD1632B	WTT32B		1.734"	
1634B	TT34B			
D1634B	TT34B			
W1634B	WTT34B			
WD1634B	WTT34B			
A1600	w/o Jacks1			
AD1600	w/o Jacks <sup>1</sup>			
A1632B	TT32B			
AD1632B	TT32B	104		
A1634B	TT34B			
AD1634B	TT34B			
WA1634B	WTT34B			
WAD1634B	WTT34B			

#### SERIES B1600

Part Number	Part Number	Quantity	Dimensions	Mount	
B1600	w/o Jacks <sup>1</sup>				
BD1600	w/o Jacks <sup>1</sup>				
B1632B	TT32B				
BD1632B	TT32B	144	19" x 2.609"		
B1634B	TT34B				
BD1634B	TT34B				Standard
WBD1634B	WTT34B				
B1650	Note 2				
BD1650	Note 2				
WB1650	Note 3				
WBD1650	Note 3				

1. Accepts indicated number of single TT-Jax®, TT-Switches®,

TT-Lamp-Jax® or any combination.

2. Three-row panel assembly with 96 TT34B Jax (top 2 rows); and 48 TT32B Jax (bottom row).

3. Same as Note 2 above, except jacks have wire-wrapping terminals.

4. Accepts 48 TT Twin-Jax®.

5. Accepts 48 TT Tri-Jax®.

Special order only; contact Switchcraft.

Jack Data Panel Data
----------------------

#### SERIES C1600

Part Number	Part Number	Quantity	Dimensions	Mount
C1600	w/o Jacks1			
CD1600	w/o Jacks1		19" x	Standard
C1634B	TT34B	156		
CD1634B	TT34B		2.609"	
WC1634B	WTT34B			
WCD1634B	WTT34B			

#### **SERIES 1700**

Part Number	Part Number	Quantity	Dimensions	Mount
1700	w/o Jacks <sup>4</sup>			
D1700	w/o Jacks <sup>4</sup>			
1789	TT89	48	19" x	Standard
D1789	TT89	Twin-Jax <sup>®</sup>	Twin-Jax <sup>®</sup> 1.734"	
W1789	WTT89			
WD1789	WTT89			

#### SERIES B1700

Part Number	Part Number	Quantity	Dimensions	Mount	
B1700	w/o Jacks⁵				
BD1700	w/o Jacks⁵				
B1795	TT95				
BD1795	TT95				
WB1795	WTT95	48 Tri-Jax <sup>®</sup> 19"	19" St. x 1.734"	Standard	
WBD1795	WTT95			1.734"	
B1796	TT96				
BD1796	TT96				
WB1796	WTT96	1			
WBD1796	WTT96				

#### PANEL INSERTS

Inch


Part Number	Insert Description	For Panels	
TT505	Without jacks, 24 holes	A1600, B1600	
<b>◊TT506</b>	Blank	1600, B1600, C1600	
<b>♦TT507</b>	Without jacks, 48 holes	1700	
<b>♦TT508</b>	Blank 1700		
<b>♦</b> TT509	509 Without jacks, 26 holes A1600, C1600		
⟨TT511 Without jacks, 72 holes		B1700	


### www.switchcraft.com

Ú

\* Please visit the product pages on our website for the most up-to-date product information


TT-JAX<sup>®</sup> (.173") JACK PANELS –SERIES 1600, A1600, B1600, C1600 (continued)

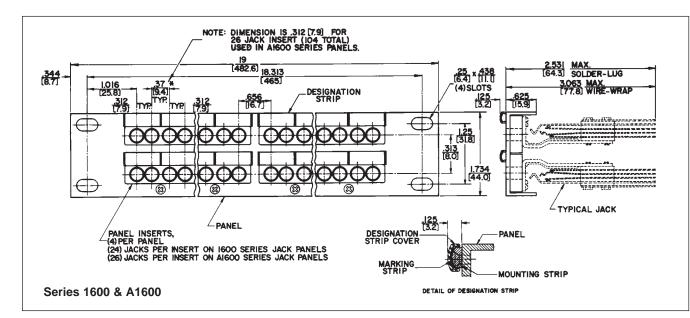


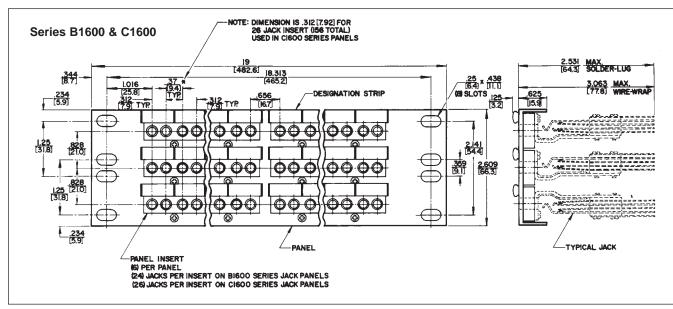

\* Please visit the product pages on our website for the most up-to-date product information

# TT-JAX<sup>®</sup> (.173") JACK PANELS – SERIES 1600, A1600, B1600, C1600 (continued)

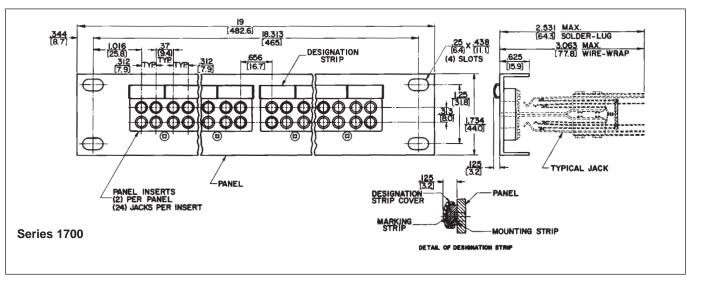

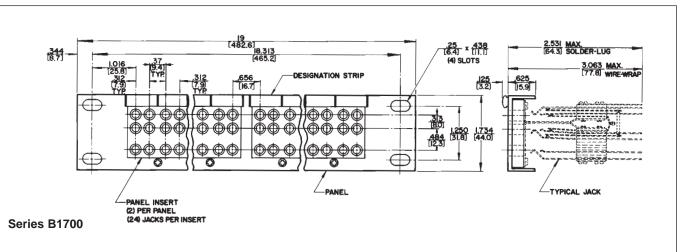


# JACK PANELS Modular TT-JAX® (.173") Panels

\* Please visit the product pages on our website for the most up-to-date product information

### MODULAR TT-JAX® (.173") PANELS - BLANK SERIES TT51, TT53, TT56, TT59



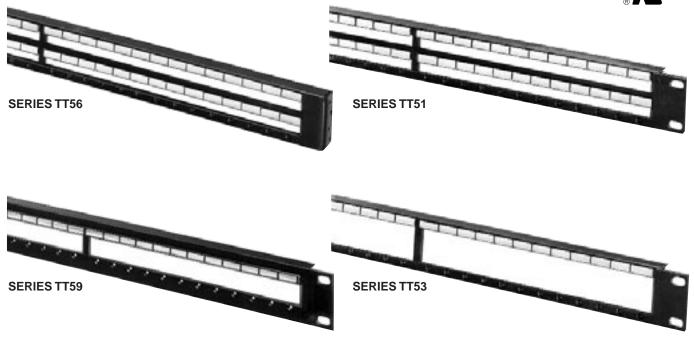

Ten series of blank panels are available in 19" and 23" widths, standard or flush mounting, and double, twin or three row configurations. OEM's can order blank components and individual modules, jacks, switches and lamp jacks for production line assembly according to standard or special front panel configurations. Kwik-Change<sup>®</sup> designation strips are supplied with panels for custom legend marking.

Flush mounting styles can use extension legs (on special order), for stand-off mounting from front of rack. Contact Switchcraft for Mounting Bracket Kit K107.

#### **SPECIFICATIONS**

**Panel and Designation Mounting Strip:** Aluminum alloy, extruded per QQ-A-200/8. Black anodized per MIL-A-8265C. **Marking Strip:** Matte finish white plastic.

Designation Strip Cover: Extruded clear plastic.

**SPECIFYING NOTE:** Part numbers in table are for blank panels only.

#### ORDERING

- 1. Order by part number from table
- Refer to jack section to specify other jacks and components.

Series Number <sup>1</sup>	Description <sup>2</sup>
TT51	19" double row standard mount panel. Mounts 96 single jacks on 24 modules.
TT53	19" three row standard mount panel. Mounts 48 Tri-Jax <sup>®</sup> jacks on 24 modules.
TT54	23" three row standard mount panel. Mounts 56 Tri-Jax <sup>®</sup> jacks on 28 modules.
TT55	19" double row flush mount panel. Mounts 96 single jacks on 24 modules.
TT56	23" double row flush mount panel. Mounts 112 single jacks on 28 modules.
TT58	23" three row flush mount panel. Mounts 56 Tri-Jax® jacks on 28 modules.
TT59	19" twin row standard mount panel. Mounts 48 TT Twin-Jax <sup>®</sup> jacks on 24 modules.
ТТ60	23" twin row standard mount panel. Mounts 56 TT Twin-Jax <sup>®</sup> jacks on 28 modules.
TT61	19" twin row flush mount panel. Mounts 48 TT Twin-Jax <sup>®</sup> jacks on 24 modules.
TT62	23" twin row flush mount panel. Mounts 56 TT Twin-Jax <sup>®</sup> jacks on 28 modules.

 $\Diamond$  Special order only. Contact Switchcraft.

- 1. Prefix TTD for standard mounting panels indicates predrilled holes for
- mounting "X Wide" vertical designation strips. See "Designation Strips" section. 2. Each panel includes integral designation mounting strip, marking strips

and clear plastic covers.

3. Contact Switchcraft for any special order items.

**SERIES TT-93** 

#### \* Please visit the product pages on our website for the most up-to-date product information

**SERIES TT92** 

TT MODULE INSERTS – SERIES TT91, TT92 AND TT93

SERIES TT91



















TT91402 TT91202 (black, 4 hole) (black, 2 hole)

TT91202 TT91002 (black, 2 hole) (black, blank)

TT92402 (black, 4 hole) TT92202 TT92002 (black, 2 hole) (black, blank)

TT93602 (black, 6 hole)

TT93302 T (black, 3 hole) (l

TT93002 (black, blank)

Module colors are black or gray (standard); red, green, blue, white and yellow available on special order. Each module has a matte finish front surface and includes two mounting screws (Switchcraft P2348).

#### **SERIES TT91**

Choice of blank, two- or four-hole modules for double row panels Series TT51, TT55 and TT56. The following components are used with Series TT91 modules:

- 1. Front mount TT-Jax<sup>®</sup> jacks.
- 2. Front mount TT-Switch<sup>®</sup> switches Series TT300FM and WTT420FM.
- 3. Front mount TT Lamp Jax<sup>®</sup> lamp jacks TT420FM and WTT420FM.

#### SERIES TT92

Blank, two- or four-hole modules for twin row panels Series TT59, TT60, TT61 and TT62. TT Twin-Jax<sup>®</sup> jacks are used with these modules.

#### **SERIES TT93**

Blank, three- or six-hole modules for three row panels Series TT53, TT54, TT57 and TT58. Tri-Jax<sup>®</sup> jacks are used with these modules.

#### SPECIFICATIONS

**Module:** Precision molded thermosetting plastic in colors. **Mounting Screws:** Black zinc, #3-48 x .312" flat head machine screws.

#### ORDERING

1. Order by part number from tables.

2. Contact Switchcraft for any special order items.

**SPECIFYING NOTE:** The part numbers listed on this page are for modules only. Refer to following page for specifying panel assemblies with components installed.

#### SERIES TT91 (For Double Row Panels)

Color	Openings					
	4 2 Blank					
Red	TT91401	<b>♦</b> TT91201	TT91001			
Black	<b>◊TT91402</b>	<b>◊TT91202</b>	<b>◊TT91002</b>			
Green	TT91403	<b>♦</b> TT91203	TT91003			
Blue	TT91404	<b>♦</b> TT91204	TT91004			
White	TT91405	<b>♦</b> TT91205	TT91005			
Yellow	TT91408	<b>♦</b> 7791208	TT91008			
Gray	TT91411	TT91211	TT91011			

#### SERIES TT92 (For Twin Row Panels)

Color	Openings					
	4 2 Blank					
Red	TT92401	<b>♦TT92201</b>	TT92001			
Black	<b>◊TT92402</b>	TT92202	<b>⊘TT92002</b>			
Green	TT92403	<b>⊘TT92203</b>	TT92003			
Blue	TT92404	<b>⊘TT92204</b>	TT92004			
White	TT92405	<b>⊘TT92205</b>	TT92005			
Yellow	TT92408	<b>♦</b> 7792208	TT92008			
Gray	TT92411	TT92211	TT92011			

#### SERIES TT93 (For Three Row Panels)

Color	Openings					
	4 2 Blank					
Red	TT93601	<b>◊TT93301</b>	TT93001			
Black	TT93602	TT93302	TT93002			
Green	TT93603	<b>⊘TT93303</b>	TT93003			
Blue	TT93604	<b>⊘TT93304</b>	TT93004			
White	TT93605	<b>⊘TT93305</b>	TT93005			
Yellow	TT93608	<b>⊘TT93308</b>	TT93008			
Gray	TT93611	TT93311	TT93011			

Special order only; contact factory for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

www.switchcraft.com

### **JACK PANELS** MODULAR TT-JAX® (.173") JACK PANELS

### \* Please visit the product pages on our website for the most up-to-date product information

MODULAR TT-JAX® (.173") JACK PANELS -SERIES TT5102000, TT5202000, TT5502000, TT5602000



Series TT5102000, TT5202000 (Typical)





Series TT5502000. TT5602000 (Typical) Shown w/mounting bracket K107 (not supplied).

#### SERIES TT5102000\*

Modular double row, 1.75" high x 19" wide, standard mount. Supplied with 24 black modules, designation strips, and covers. Mounts 96 TT-Jax® single jacks, lamp jacks and/or switches.

#### SERIES TT51020001\*

Modular double row, 1.75" high x 19" wide, standard mount. Supplied with 24 black modules, designation strips, and covers. Mounts 96 TT-Jax<sup>®</sup> single jacks, lamp jacks and/or switches. Comes supplied with cable tie bar.

#### SERIES TT5202000\*

Similar to TT5102000, except 23" wide. Supplied with 28 black modules, designation strips, and covers. Mounts 112 TT-Jax<sup>®</sup> single jacks, jack lamps and/or switches.

#### **SERIES TT5502000**

Modular double row, 1.75" high x 19" wide, flush mount. Supplied with 24 black modules, designation strips, and covers. Panels can be mounted flush with rack/control panel surface, or use with extension legs for standoff mounting with easy access to rear of jacks for testing/monitoring. Mounts 96 TT-Jax<sup>®</sup> single jacks, lamp jacks and/or switches.

#### **SERIES TT5602000**

Similar to TT5502000, except 23" wide. Supplied with 28 black modules, designation strips, and covers. Mounts 112 TT-Jax<sup>®</sup> single jacks, jack lamps and/or switches.

#### ORDERING

- 1. Order part number from table
- 2. Contact Switchcraft for any special order items.
- 3. Separate components can be ordered.
- \* Prefix TTD indicates panel is pre-drilled with countersunk holes for mounting "X-Wide" vertical designation strips. See "DESIGNATION STRIPS" section.

	Jack Data			Panel Da	ita
Part Number	Part Number	Qty.	Width	Mount	Modules
TT5102000	without jacks	0			
<b>♦TT5102S31</b>	TT31FM				
<b>⊘TT5102W31</b>	WTT31FM				
TT5102S32A	TT32AFM				
TT5102W32A	WTT32AFM				
TT5102S32B <sup>2</sup>	TT32BFM	96	19"	Stan-	24
TT5102W32B	WTT32BFM			dard	(Black)
<b>⊘TT5102S33B</b>	TT33BFM				
<b>⊘TT5102W33B</b>	WTT33BFM				
TT5102S34B <sup>2</sup>	TT34BFM				
TT5102W34B	WTT34BFM				
TTD5102000	without jacks	0			
TTD5102S31			1		
Through	Note <sup>1</sup>	96			
TTD5102W34B					
TT5202000	without jacks	0			
TTD5202000	WILLIOUT JACKS	0			
TT5202S31					
Through	Note <sup>1</sup>				
TT5202W34B		112	23"	Stan- dard	28 (Black)
TTD520231		112	20	uaru	(Diaok)
Through	Note <sup>1</sup>				
TTD5202W34B					
TT552000	without jacks	0			
TT5502S31					24
Through	Note <sup>1</sup>	96	19"	Flush	(Black)
TT5502W34B					
TT5602000	without jacks	0			
TT5602S31					28
Through	Note <sup>1</sup>	112	23"	Flush	(Black)
TT5602W34B					

Special order only; contact Switchcraft for price and delivery.

1 Complete panel part number with jacks installed can be constructed as

shown for Series TT51.

2. Add a "1" to part number to specify cable tie bar.


Inch (mm)


# 218 JACK PANELS MODULAR TT-JAX® (.173") JACK PANELS

PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### MODULAR TT-JAX<sup>®</sup> (.173") JACK PANELS – SERIES TT5102000, TT5202000, TT5502000, TT56020000 (continued)

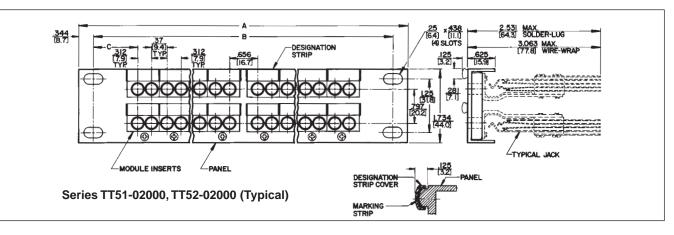

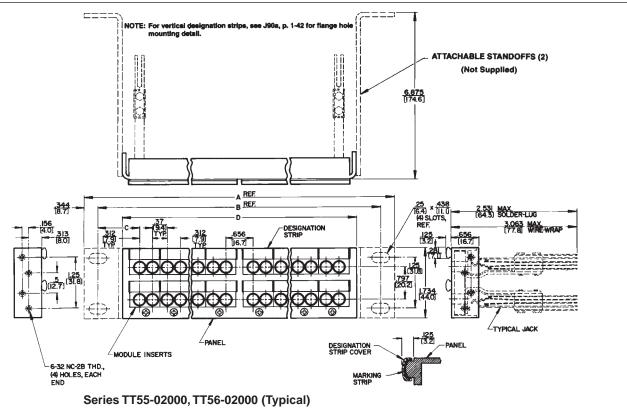

Jack Panel Dimensions - inch (mm)						
Series						
Number	Α	В	С	D		
TT51	19 (482.6)	18.3 (465.1)	1.013 (25.7)	-		
<b>♦TT52</b>	23 (584.2)	22.3 (566.7)	1.648 (41.9)	-		
TT55	19 (482.6)	18.3 (465.1)	1.013 (25.7)	17.125 (435)		
TT56	23 (584.2)	22.3 (566.7)	1.648 (41.9)	21.125 (536.6)		

 $\Diamond$  Special order only; contact Switchcraft for price and delivery.


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

www.switchcraft.com


\* Please visit the product pages on our website for the most up-to-date product information

### TT-JAX<sup>®</sup> (.173") TWIN ROW AND THREE ROW JACK PANELS

#### Series TT5902000



#### Series TT5302000, TT5402000 (Typical)



#### **SERIES TT5902000\***

Modular twin row, 1.75" high x 19" wide, standard mount. Supplied with 24 black modules, designation strips, and covers. Mounts 48 TT Twin-Jax<sup>®</sup> twin jacks.

#### **SERIES TT6002000\***

Similar to TT5902000, except 23" wide. Supplied with 28 black modules, designation strips, and covers. Mounts 56 TT Twin-Jax $^{\circ}$  twin jacks.

#### **SERIES TT6102000**

Modular twin row, 1.75" high x 19" wide, flush or standoff mount. Supplied with 24 black modules, designation strips, and covers. Mounts 48 TT Twin-Jax<sup>®</sup> twin jacks.

#### **SERIES TT6202000**

Similar to TT6102000, except 23" wide. Supplied with 28 black modules, designation strips, and covers. Mounts 56 TT Twin-Jax<sup>®</sup> twin jacks.

#### SERIES TT5302000\*

Modular three row, 1.75" high x 19" wide, standard mount. Supplied with 24 black modules, designation strips, and covers. Designed for LINE, EQUIP and MONITOR patch connections. Mounts 48 Tri-Jax<sup>®</sup> triple jacks.

#### SERIES TT5402000\*

Similar to TT5302000, except 23" wide. Supplied with 28 black modules, designation strips, and covers. Mounts 56 Tri-Jax<sup>®</sup> triple jacks.

#### **SERIES TT5702000**

Modular three row, 1.75" high x 19" wide, flush or standoff mount. Supplied with 24 black modules, designation strips, and covers. Mounts 48 Tri-Jax<sup>®</sup> triple jacks.

#### **SERIES TT5802000**

Similar to TT5702000, except 23" wide. Supplied with 28 black modules, designation strips, and covers. Mounts 56 Tri-Jax<sup>®</sup> triple jacks.

#### ORDERING

1. Order part number from table

2. Contact Switchcraft for any special order items.

\*Prefix TTD indicates panel is pre-drilled with countersunk holes for mounting "X-Wide" vertical designation strips. See "**DESIGNATION STRIPS**" section.

	Jack Data		Panel Data			
Part Number	Part Number	Qty.	Width	Mount	Modules	
TT5902000	without jacks	0				
TT5902S89	TT89FM	48				
TT5902W89	WTT89FM	40	19"			
TTD5902000	without jacks	0	13			
TTD5902S89	TT89FM	48				
TTD5902W89	WTT89FM	-10	40		24	
TT6002000	without jacks	0		dard	(Black)	
TTD6002000	Without Juono					
TT6002S89	Note <sup>1</sup>	56	23"			
TT6002W89						
TTD6002S89	Note <sup>1</sup>	56				
TTD6002W89						
TT6102000	None	0				
TT6102S89	Note <sup>1</sup>	48	19"			
TT6102W89				Flush	28	
TT6202000	without jacks	0			(Black)	
TT6202S89	Note <sup>1</sup>	56	23"		, ,	
TT6202W89						
TT5302000	without jacks	0				
♦TT5302S95	TT95FM	-		Stan- dard	24 (Black)	
TT5302W95	WTT95FM	48				
♦TT5302S96	TT96FM	-	19"			
TT5302W96	WTT96FM					
TTD5302000	without jacks	0				
TTD5302S95						
Through	Note <sup>2</sup>	48				
TTD5302W96						
TT5402000	without jacks	0				
TTD5402000						
TT5402S95	Note <sup>2</sup>					
Through		FC	23"	Ctor	00	
TT5402W96 TTD5402S95		56	23	Stan- dard	28 (Black)	
	Note <sup>2</sup>				(,	
Through						
TTD5402W96 TT5702000	without is also	-				
TT5702000	without jacks	0				
Through	Nicto <sup>2</sup>	48	19"	Flush	24	
TT5702W96	Note <sup>2</sup>				(Black)	
TT5802000	without is also					
TT5802000	without jacks	0				
Through	Note <sup>2</sup>	FG	00"	Eluch	20	
TT5802W96	NOLE-	56	23"	Flush	28 (Black)	
1120021030					(	

◊ Special order only; contact Switchcraft for price and delivery.

 Complete panel part number with jacks installed can be constructed as shown for Series TT59 or TTD59.


Complete panel part number with jacks installed can be constructed as shown for series TT53.

# JACK PANELS TT-JAX® (.173") TWIN ROW AND THREE ROW JACK PANELS


# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information


TT-JAX<sup>®</sup> (.173") TWIN ROW AND THREE ROW JACK PANELS (continued)

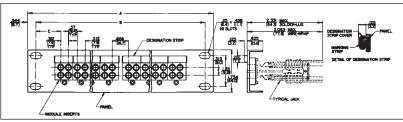


Series TT5902000 and TT6002000 (Typical)

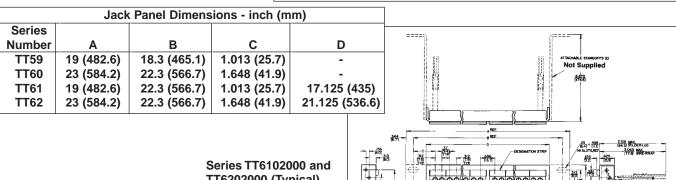

# TT6202000 (Typical)



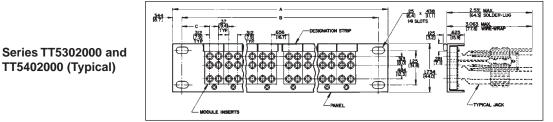

Jack Panel Dimensions - inch (mm) Series Number В С D Α **TT53** 19 (482.6) 18.3 (465.1) 1.013 (25.7) **TT54** 23 (584.2) 22.3 (566.7) 1.648 (41.9) 6.875 RE 1.013 (25.7) **TT57** 19 (482.6) 22.3 (566.7) 17.125 (435) 23 (584.2) **\TT58** 22.3 (566.7) 1.648 (41.9) 21.125 (536.6) Series TT5702000 and ß

TT5802000 (Typical)

www.switchcraft.com

6-52 NC-28 H0 HOLES, EACH END

220

# **JACK PANELS** TT-JAX® (.173") CONNECTORIZED JACKFIELDS

\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX® (.173") CONNECTORIZED JACKFIELDS -SERIES TT, 2-WIRE, 4-WIRE, 6-WIRE 2-wire TT-Connectorized Jackfield 6-wire TT-Connectorized Jackfield TT2W48VCF1 4-wire TT-Connectorized Jackfield TT4W24MCF1

#### 2-WIRE TT-CONNECTORIZED JACKFIELDS, SERIES TT

Contains 48, 2-wire circuits. Arrangements include: LINE-DROP or Signal E/M, or LINE-DROP-MON. Available with MONITOR jack row. On rear panel, LINE connectors are receptacles and DROP connectors are plugs. LINE and DROP circuits may be isolated from each other for separate monitoring. On special order, 48 circuits LINE/COMBINATION DROP/MON or 96 circuits, LINE/DROP or Signal E/M may be specified.

#### 2-WIRE TT-CONNECTORIZED PC JACKFIELD, SERIES TTPC

Same as 2-Wire TT-connectorized jackfields above, except all connections are machine-soldered on a double-sided PC board instead of hand wired.

#### 4-WIRE TT-CONNECTORIZED JACKFIELDS. SERIES TT

4-Wire jackfields have 24, 4-wire circuits for MOD-DEM/EQ IN-EQ OUT/MON patching, or may be used for other 4-wire patching applications. Can be supplied with or without MONITOR jack row. On rear panel, MOD AND EQ IN connectors are receptacles and DEM and EQ OUT connectors are plugs.

#### 6-WIRE TT-CONNECTORIZED JACKFIELDS, SERIES TT

6-Wire jackfields contain 48, 6-wire circuits for MOD-DEM/EQ IN EQ OUT/MON/SIG LINE/SIG EQ patching with toll test boards. Available with or without MONITOR jack row. On rear panel, MOD, EQ IN and SIG LINE connectors are receptacles and DEM, EQ OUT and SIG EQ connectors are plugs. The following can be specified on special order: 12 circuits, DEM-MOD/EQ IN-EQ OUT/MON/SIG E/M; 48 circuits, signal E/M leads separated; 48 circuits for D3 channel banks.

#### ORDERING

- 1. Order by part number from tables.
- 2. Contact Switchcraft for any special order items.

## JACK PANELS TT-JAX® (.173") CONNECTORIZED JACKFIELDS

# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

# TT-JAX<sup>®</sup> (.173") CONNECTORIZED JACKFIELDS – SERIES TT, 2-WIRE, 4-WIRE, 6-WIRE (continued)

#### SPECIFICATIONS

**Panel and Integral Designation Strip:** Aluminum alloy, extruded per QQ-A-200/8. Black anodized per MIL-A-8265. **Modules:** Precision-molded thermosetting plastic. Black standard. Other colors on special order.


**Mounting Screws:** Black zinc, #3-48 x 312" flat head machine screw.

**TT-Jax® Jacks:** See jacks section for TT-Jax® specifications. **Marking Strip:** Matte finish white plastic.

Vertical Designation Strip: Extruded aluminum, black anodized.

**Back Frames:** Cold rolled steel, zinc-plated with iridescent tarnish-resistant finish.

Screws, Nuts and Lockwashers: Steel, clear iridite tarnish-resistant finish over zinc-plating.
Connectors: 50-pin micro/pierce plugs and receptacles.
Cable Tie Bar: Aluminum hexagon alloy. 6061-T6, clear iridite finish per MIL-C-5541 (not hinged versions only).
Cables: 25 pair, 24 AWG solid copper wire, tinned and annealed, covered with insulating grade thermoplastic jacket.
Cable Ties: Thermoplastic, locking-non-releaseable, 30 pounds minimum loop tensile strength.

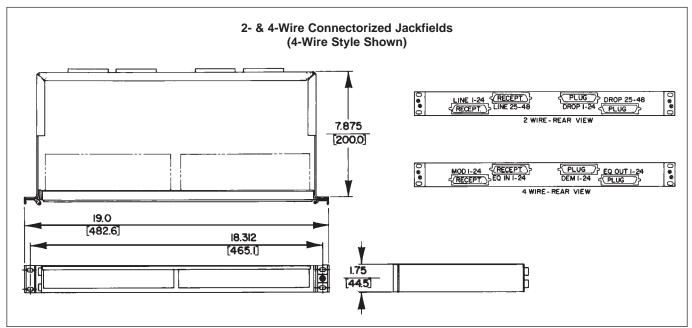

**JACK PANELS** 


\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX<sup>®</sup> (.173") CONNECTORIZED JACKFIELDS (continued) (U

### PART NUMBERS

1. Compose part numbers from data below to specify your jackfield...or use the table to order popular jackfields.

**SPECIFYING NOTE:** Any jackfield can be manufactured with AMP CHAMP connectors. Contact Switchcraft.

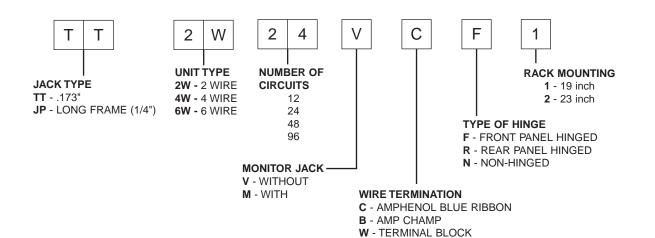

#### **TYPICAL PART NUMBERS**

2-WIRE JACKFIELDS	
Part Number	Description
TT2W48VCF1	Hinged front panel.
TT2W48VCN1	Front panel NOT hinged.
TT2W48MCF1	Same as TT2W48VCF1, except with MONITOR jack row.
TT2W48MCN1	Same as TT2W48VCN1, except with MONITOR jack row.
4-WIRE JACKFIELDS	
Part Number	Description
TT4W24MCF1	Hinged front panel with MONITOR jack row.
TT4W24MCN1	Front panel NOT hinged with MONITOR jack row.
TT4W24VCF1	Same as TT4W24MCF1, except no MONITOR jack row.
TT4W24VCN1	Same as TT4W24MCN1, except no MONITOR jack row.
6-WIRE JACKFIELDS	
Part Number	Description
TT6W48MCF1	Hinged front panel with MONITOR jack row.
16J1055	Hinged front panel with MONITOR jack row.
TT6W48MCN1	Front panel NOT hinged with MONITOR jack row.
TT6W48VCF1	Same as TT6W48MCF1, except no MONITOR jack row.
TT6W48VCN1	Same as TT6W48MCN1, except no MONITOR jack row.

### JACK PANELS TT-JAX<sup>®</sup> (.173") Connectorized Jackfields Schematics


**PHONE: 773 792-2700** 

Uı


\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX<sup>®</sup> (.173") CONNECTORIZED JACKFIELDS (continued)


**TYPICAL CIRCUIT ARRANGEMENTS - 2-WIRE** 

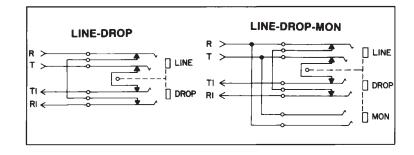

#### **TYPICAL CIRCUIT ARRANGEMENTS - 4-WIRE**

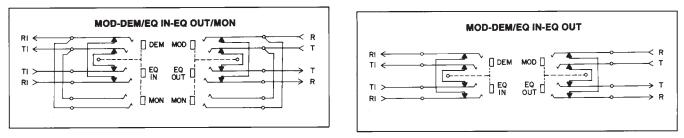

#### **TYPICAL CIRCUIT ARRANGEMENTS - 6-WIRE**

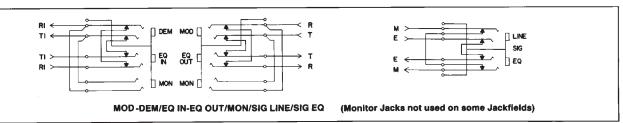


www.switchcraft.com

225

\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX<sup>®</sup> (.173") CONNECTORIZED JACKFIELDS (continued)

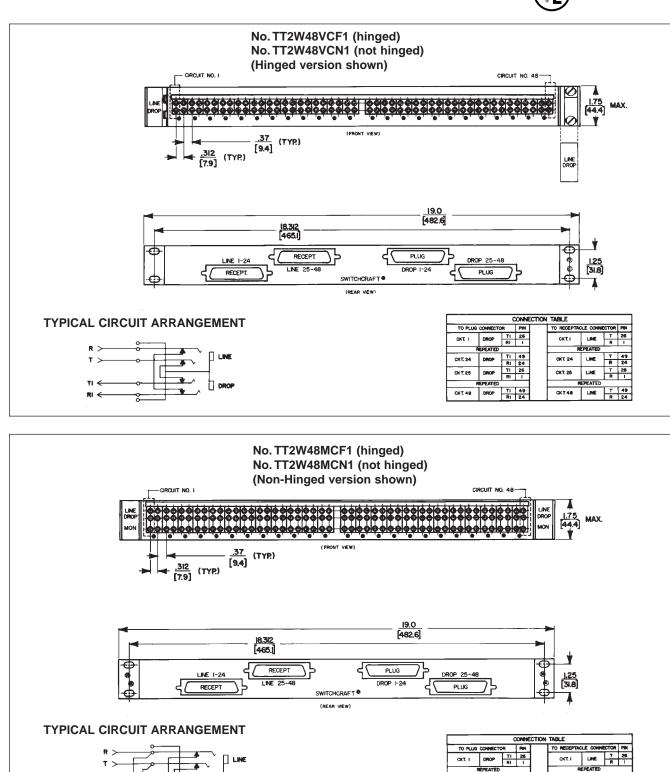

CKT. 24

 CKT. 26
 DROP
 T1
 26

 REPEATED
 RL
 I
 I

 CKT. 48
 DROP
 T1
 49

 CKT. 48
 DROP
 RI
 24

 $\frac{\text{lnch}}{(\text{mm})}$ 

DIMENSIONS ARE FOR REFERENCE ONLY

CKT. 24

CKT. 25

CKT.48

LINE

T 49 R 24

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

DROF


MON


τı

# JACK PANELS TT-JAX® (.173") CONNECTORIZED JACKFIELDS SCHEMATICS

\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX<sup>®</sup> (.173") CONNECTORIZED JACKFIELDS (continued)

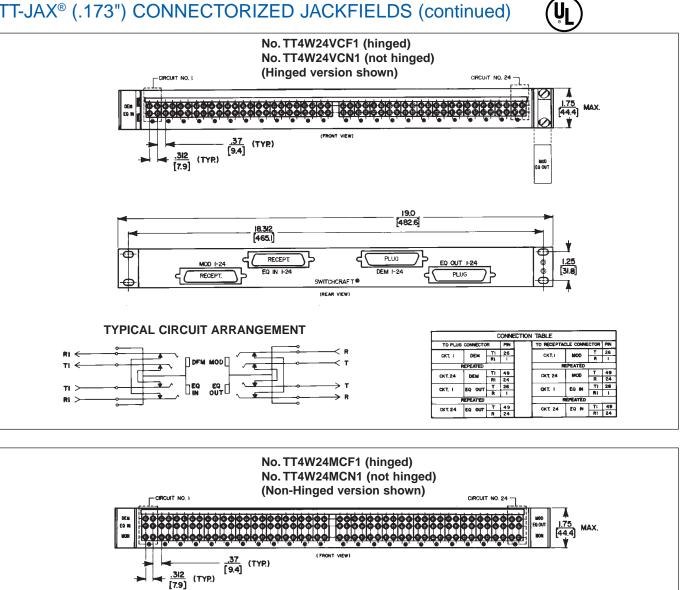

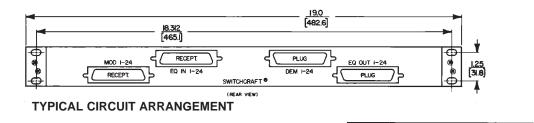

CONNECTION TABLE TO PU DEM MOD CKT. I CKT. I MOD. CKT. 24 CKT. 24 TI EQ EQ OUT CKT. I EQ. IN CKT EATE Π MON MON Г CKT. 24 CKT 24 EQ. IN

> Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**PHONE: 773 792-2700** 

226


### JACK PANELS TT-JAX® (.173") CONNECTORIZED JACKFIELDS SCHEMATICS


Ũı


227

\* Please visit the product pages on our website for the most up-to-date product information

TT-JAX<sup>®</sup> (.173") CONNECTORIZED JACKFIELDS (continued)

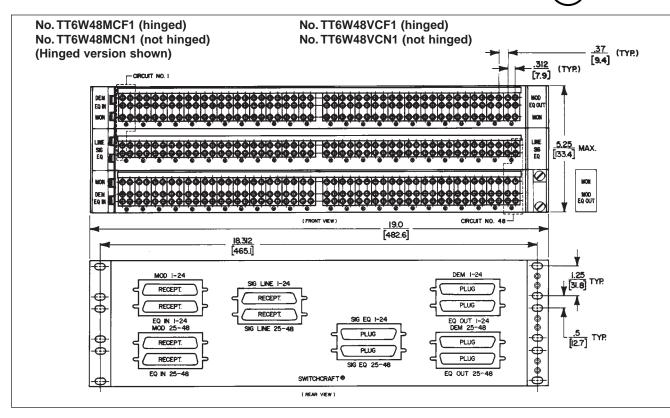

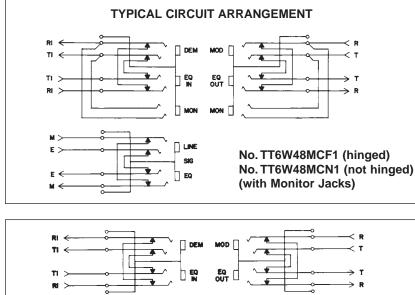

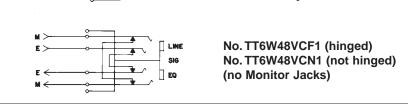

			CONNE	n table			
TO PLUG	CONNECTO	R	PIN	TO RECEPTA	CLE CONNE	CTOR	I
		TI	26			т	Ī
CKT.I DEN	DEM.	RI	1	CKT. I	NICO.	R	Ī
-	REPEATED				EPEATED		
CKT. 24 DEM	DEM.	TI	49	CKT. 24		T	I
GK1. 24		RI	24	UN1.24	MUU.	R	I
CKT. 25	DEM.	TI	26	CKT. 25	MOD.	T	I
UK I. 20	UEM.	RI	1	UKI. 20		R	Ι
	REPEATED				EPEATED		
CKT. 48	DEM.	TI	49	CKT. 48	MOD.	т	I
		RI	24			R	I
CKT. I	EQ. OUT	Ť	26	CKT. I	EQ. IN	TI	I
CKI. F	EQ. 001	R			640. IN	RI	I
	REPEATED			F F	REPEATED		
CKT. 24	EQ. OUT	т	49	CKT. 24	EQ.IN RI	TI	I
UN I. 24	E4.001	R	24	UK1. 24		RI	Ι
CKT 25	EQ. OUT	т	26	CKT.25	E0. N	Ť	I
041.20		R	1	041.20		RI.	I
	REPEATED			, P	EPEATED		_
CKT. 48	EQ. OUT	Т	49	CKT 48	EQ. IN	TI	l
		R	24			Ri	L
CKT. I	SIG. EQ.	E	26	CKT. I	SIG. LINE	E	l
		M	1			M	L
	REPEATED				EPEATED		-
CKT. 24	\$16. EQ	E	49	OKT, 24	SIG. LINE	E	Ļ
		M	24			M	Ļ
CKT 25	SIG. EQ	E	26	CKT. 25	SIG. LINE	E	Ļ
		M	1			- 18	L
	REPEATED			<u> </u>	EPEATED		
CKT. 48	SIG. EQ.	E	49	OKT, 48	SIG. LINE	E	Ļ
		M	24	1		M	L


ANELS SWITCHCTA

# JACK PANELS TT-JAX® (.173") CONNECTORIZED JACKFIELDS SCHEMATICS

**PHONE: 773 792-2700** 



TT-JAX® (.173") CONNECTORIZED JACKFIELDS

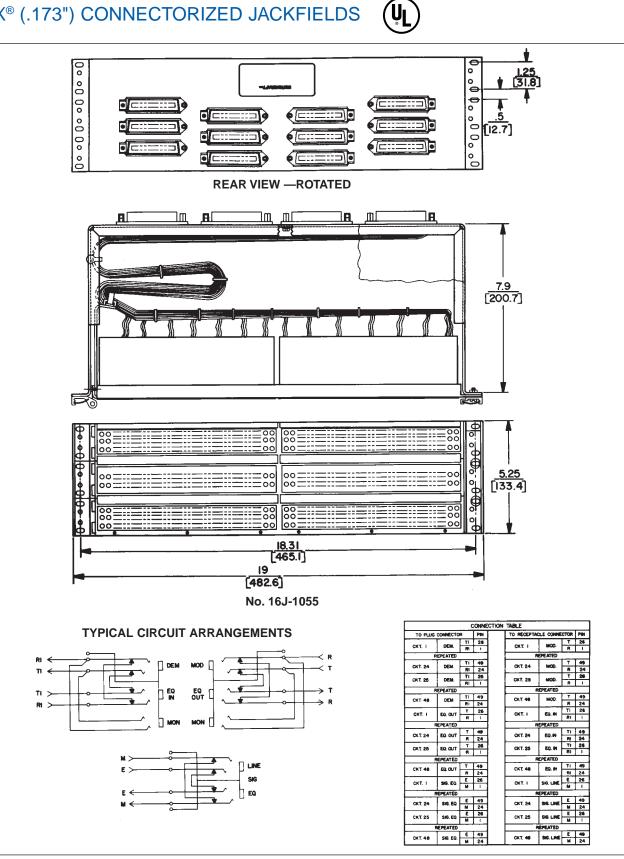

DIMENSIONS ARE FOR REFERENCE ONLY

228


# JACK PANELS TT-JAX® (.173") CONNECTORIZED JACKFIELDS

Ų

229

\* Please visit the product pages on our website for the most up-to-date product information

### TT-Jax® (.173") CONNECTORIZED JACKFIELDS

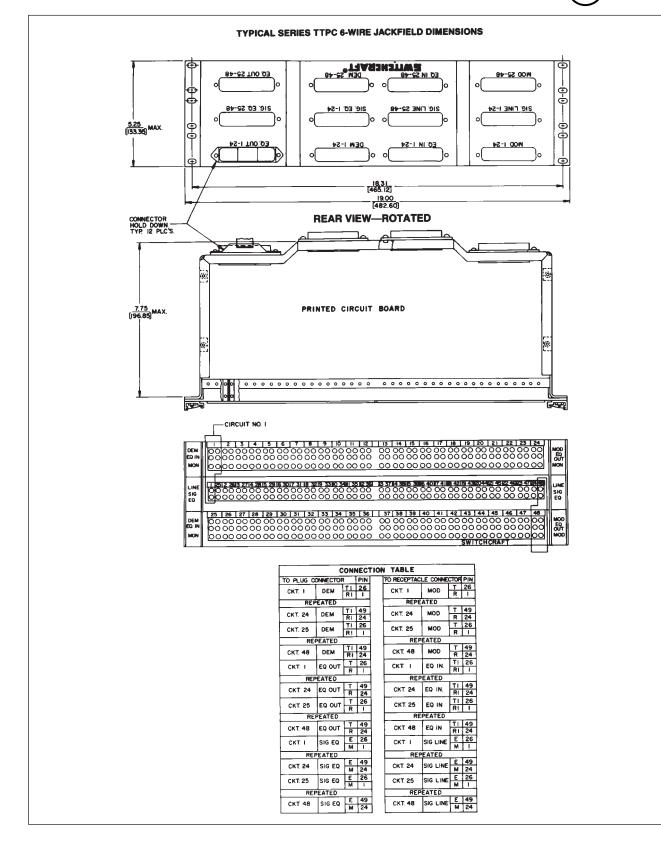

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

#### \* Please visit the product pages on our website for the most up-to-date product information

### TT® LAMPS AND JEWEL ASSEMBLIES





#### SERIES TT-450 LAMPS

Red LED and series dropping resistor are molded into compact cartridge with bi-pin terminals for use with TT Lamp-Jax<sup>®</sup> lamp jacks. Colored bezels are molded in for color coding of functions; colors are black, red, green, white and yellow. On special order, blue or other colors are available.

Standard voltages are 6, 24 and 48 V (DC only). No tools are required for lamping/relamping. Simply slip TT-LED into lamp jack with (+) terminal up. If it doesn't light, remove it, rotate it 180°, and reinsert it into jack.


#### SPECIFICATIONS


Housing: Molded black plastic. Bezel: Molded plastic in colors. LED: Red illumination. Pins: T-1 3/4 bi-pin configuration.

Part		Bezel	Part		Bezel
Number	Voltage	Color	Number	Voltage	Color
TT45106	6		<b>⊘TT45406</b>	6	
TT45124	24	Red	<b>⊘TT45424</b>	24	Blue
TT45148	48		<b>⊘TT45448</b>	48	
TT45206	6		TT45506	6	
TT45224	24	Black	TT45524	24	White
TT45248	48		TT45548	48	
TT45306	6		TT45806	6	
TT45324	24	Green	TT45824	24	Yellow
TT45348	48		TT45848	48	

#### ORDERING

- 1. Order by part number from table.
- 2. For special order items, such as other LED colors, voltages, lamps with 25% reduced power consumption, etc., contact Switchcraft.

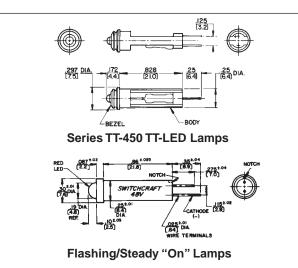

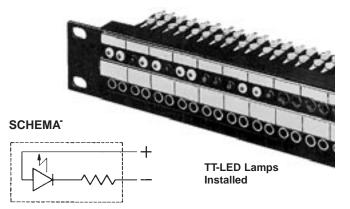

#### FLASHING/STEADY ON LEDS


Yellow, green and red LEDs are 2-pin cartridge plug-ins which operate from a 48 VDC supply. When 48 V is applied, LED flashes for 30 seconds, then changes to steady "On" condition.


#### SPECIFICATIONS

**Body:** Thermoplastic, UL 94V-0 rated. **LED Colors:** Yellow, green or red.

Part Number	Description		
15J9068	Red flashing/continuous		
15J9076	Yellow flashing/continuous		
15J9077	Green flashing/continuous		
15J9078	Amber flashing/continuous		

#### TT-JEWEL ASSEMBLY





### Panel with TT-Jewel Assemblies and TT-Switches installed

Jewel assemblies use bi-pin lamp and act as lighted jewel and lamping/relamping tool. Simply slip bi-pin lamp in brass collar and insert lamp with pins in vertical plane. Lamp automatically seats properly. Jewel is molded plastic in colors; sleeve is brass.

Part Number	Color	Part Number	Color	
TT401	Red	TT408	Yellow	
TT403	Green	TT413	Amber	
TT404	Blue	TT510 Black*		
TT405	White	*Used as hole plug where		
		no jack is installed.		

#### LAMPS

Part Number	Description
P2290	6.3 V, GE No. 7377.
P2315	6.3 V, GE No. 7381. Avg. life: 50K hrs. @ 200 mA.
P2316	28 V, GE No. 7387. Avg. life: 25K hrs. @ 40 mA.
P2456	24 V, GE No. 7001.

\* Please visit the product pages on our website for the most up-to-date product information

## LONGFRAME SWITCHBOARD SWITCHES

### SERIES 11000 and 11200

Premium quality, long frame switches, designed especially for jack panel mounted switching. Standard actuations are push-lock/pull-release, 2-position turn button and 3 position turn button. Many contact forms available. Mounts in Switchcraft Jack Panels Series 1200, 1400, 2400, 2600, 2800, modular JP<sup>®</sup> jack panels, and other standard telephone jack panels. Part numbers in table indicate "A" frame. For same switch with "C" frame, add prefix "C" to part number. Many circuit forms not shown in tables are available on special order. Long leaf springs have no forms at point of flexing, which insures long life. Welded crossbar palladium contacts rated at 2A 200W maximum are standard. Fine silver (for higher currents) or gold alloy (dry circuit to 1A) contacts are available on special order. Contact Switchcraft.

#### SPECIFICATIONS

Frame, Screws and Twin Nut: Steel, plated.

**Springs, Pressure Plate and Terminals:** Copper alloy. Solder lugs are tin-dipped.

**Contacts:** Welded crossbar palladium are standard. Fine silver or gold alloy are available on special order.

**Insulation:** Rigid plastic. Extruded plastic tubing through stack.


**Knob:** Molded black plastic. Turn-key type faced with white arrow.


Bushing: Copper alloy, nickel-plated.

#### ORDERING

1. Order by part number from table.

2. For special order items, contact Switchcraft.

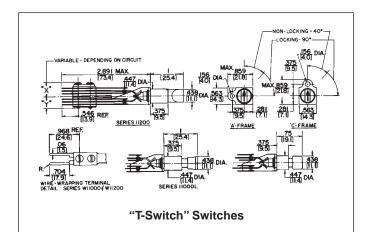

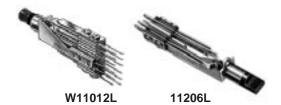

Part N	Circuit	
Locking	Circuit	


<b>PUSHBUTTONS - SERIES 11000</b>							
<b>◊11001L</b>	<b>◊11001</b>	1-A					
<b>⊘11002L</b>	<b>⊘11002</b>	1-B					
11003L	11003	1-C					
<b>⊘W11003L</b>	<b>⊘W11003</b>	1-0					
<b>⊘11003DL</b>	<b>⊘11003D</b>	1-D					
<b>⊘11004L</b>	<b>◊11004</b>	2-A					
<b>⊘11005L</b>	<b>⊘11005</b>	2-B					
11006L	11006	2-C					
<b>⊘W11006L</b>	<b>⊘W11006</b>	2-0					
<b>⊘11006DL</b>	<b>◊11006D</b>	2-D					
<b>⊘11008L</b>	<b>⊘11008</b>	4-A					
<b>⊘11009L</b>	<b>⊘11009</b>	3-C					
<b>⊘11012L</b>	11012	4-C					
<b>⊘W11012L</b>	<b>⊘W11012</b>	4-0					

#### **TURN BUTTONS - SERIES 11200**

	TORR BOTTORO - GERIEG TIZO						
<b>◊11201L</b>	<b>⊘11201</b>	1-A					
<b>⊘11202L</b>	<b>⊘11202</b>	1-B					
11203L	11203	1-C					
<b>⊘W11203L</b>	<b>⊘W11203</b>	1 1-0					
<b>⊘11203DL</b>	<b>⊘11203D</b>	1-D					
<b>⊘11204L</b>	<b>⊘11204</b>	2-A					
<b>⊘11205L</b>	<b>⊘11205</b>	2-B					
11206L	11206	2-C					
<b>⊘W11206L</b>	<b>⊘W11206</b>	2-0					
<b>◊11206DL</b>	<b>⊘11206D</b>	2-D					
<b>⊘11208L</b>	<b>⊘11208</b>	4-A					
<b>⊘11209L</b>	<b>⊘11209</b>	3-C					
<b>⊘11212L</b>	11212	4-C					
<b>⊘W11212L</b>	<b>⊘W11212</b>	4-6					

Special order only; contact Switchcraft.

**Mounting Screws:** #6-32, **P10725**, can be ordered separately. Contact Switchcraft. (Screws not supplied with switches.)

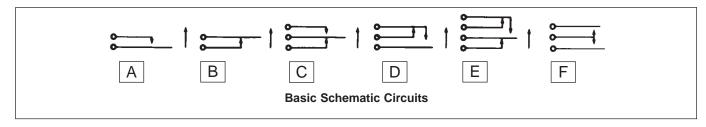

# JACK PANELS DUMMY PLUGS AND HOLE PLUGS

PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### DUMMY PLUGS AND HOLE PLUGS








When inserted into a standard size telephone jack, the dummy plug actuates springs like a normal plug, except no signal is conducted through since the plug is made of non-conducting plastic. Dummy plugs can also be used to plug-up unused jacks to prevent accidental insertion of an incorrect plug.

**SERIES 491:** 3-conductor with .206" diameter finger. Mates with MT342B and MT344B MT-Jax<sup>®</sup>, Series M Hi-D Jax<sup>®</sup>, and other standard telephone jacks having .21" inside diameter sleeves.

**SERIES 492:** 3-conductor with .25" diameter finger. Mates with 3-conductor MT-Jax<sup>®</sup> and Series M Hi-D Jax<sup>®</sup>, and other standard telephone jacks have .25" inside diameter sleeves.

**SERIES 493:** 2-conductor with .25" diameter finger. Mates with 2-conductor MT-Jax<sup>®</sup>, Series M Hi-D Jax<sup>®</sup>, and other standard telephone jacks having .25" inside diameter sleeves.


Part Number	Descri	ption	Interchangeable with		
Number	Conductors	Color	WEco	Trimm	
49101	3	Red	_	_	
49102	3	Black	_	_	
49105	3	White	-	-	
49201	3	Red	258F	558D	
49202	3	Black	258C	558C	
49205	3	White	258E	558E	
49301	2	Red	165F	556D	
49302	2	Black	165C	556C	
49305	2	White	165E	-	

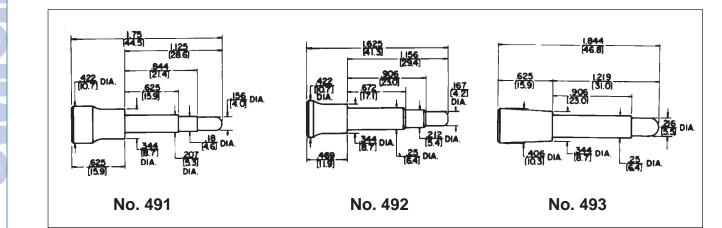



#### PLASTIC HOLE PLUG Hole Plug P1801

Used to seal off unused holes in jack panels, Series 1200, 1400, 2400, 2600 and JP012000 through JP122000. Constructed of dimensionally stable molded black plastic.



232

\* Please visit the product pages on our website for the most up-to-date product information

# TT® (BANTAM) CIRCUIT GUARD PLUGS

#### APPLICATION

Circuit guard plugs snap into TT-Jax<sup>®</sup> (bantam) jacks eliminating accidental or unauthorized insertion of a plug into a critical circuit. The circuit guards plugs do not actuate the jack springs. These plugs seal the jack bushing and provide an additional means of circuit identification.

Circuit guard plugs are available in three different designs: Series TT512, Series TT513 and Series TT514. All three designs are molded thermoplastic and are available in the following colors: red, black, green, blue, white or yellow.

#### SERIES TT512

TT512 circuit guard plugs cover an individual jack opening and insert to an virtually flush position with the front panel.

#### **SERIES TT513**

TT513 circuit guard plugs are similar to the Series TT512 except the button extends .219" from the front of the panel for easier removal.

#### **SERIES TT514**


TT514 circuit guard plugs cover both the IN and OUT jacks of two adjoining circuits while leaving the monitor jacks exposed for circuit testing. The four jack circuit guard plugs also include a matte finish white plastic marking strip and a clear extruded plastic window for additional designation.

#### SPECIFICATIONS

TT512 and TT513: Molded thermoplastic in colors. TT514: Base: Molded thermoplastic in colors. Marking Strip: Matte finish white plastic. Cover: Clear extruded plastic.


#### ORDERING

- 1. Order by part number from table.
- 2. Contact Switchcraft for any special order items.

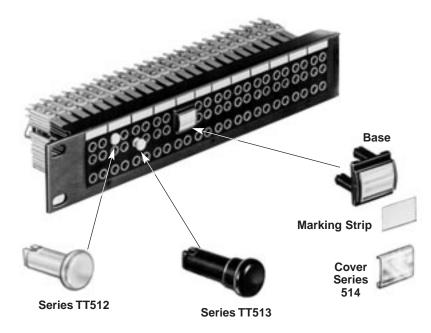

Part Number	Part Number	Part Number	Color
TT5121	TT5131	TT5141*	Red
TT5122	TT5132	TT5142*	Black
TT5123	TT5133	TT5143*	Green
TT5124	TT5134	TT5144*	Blue
TT5125	TT5135	TT5145*	White
TT5128	TT5138	TT5148*	Yellow

\*Includes base, marking strip & cover.

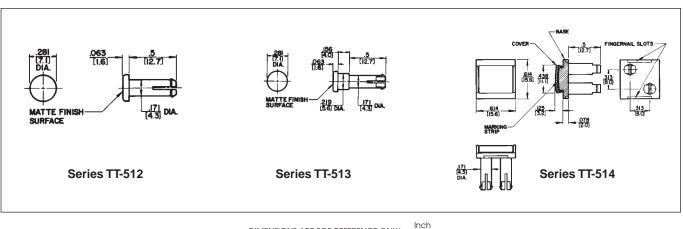

\* Please visit the product pages on our website for the most up-to-date product information

### MINIATURE, DUMMY PLUGS, HOLE PLUGS





**TT-Dummy** 

Plug



Terminating, dummy and looping plugs are designed for use with Tini-Telephone<sup>®</sup> Jacks. TT-Phone Plugs are also recommended for use on other miniature telephone jacks with same bushing inside diameter and compatible tip and/or ring spring configurations.

#### **TT-TERMINATING PLUGS**

TT-Phone Plug terminating plugs are used to terminate a circuit with a specific resistive load. A precision 1/2 watt,  $\pm$  1% resistor is molded into the handle of each terminating plug. See "PLUG SCHEMATICS" for resistor wiring. Resistance value is marked on plug handle. Other resistance values are available on special order.

#### **TT-DUMMY PLUGS**

TT-Phone Plug dummy plugs are designed to be inserted into phone jacks to actuate shunt and isolated switching circuits.

#### **TT-LOOPING PLUGS**

TT-Phone Plug looping plugs are used to loop or patch adjacent jack circuits. See "PLUG SCHEMATICS" for wiring.

#### **TT-HOLE PLUG**

TT-Hole Plugs are used to close off unused openings in all Switchcraft TT-Jack Panels. Molded of black plastic with brass sleeve.





#### ORDERING

- 1. Order by part number from table.
- 2. Contact Switchcraft for any special order items.

#### **SPECIFICATIONS**


#### Series TT200 Tip Rod, Ring and Sleeve: Brass per QQ-B-626.

Handle: Molded PVC, ivory or black.

Series TT515: Molded of dimensionally stable plastic in black, red or white.

Part No.	Description	Schematic	Color
<b>♦TT201</b>	2-conductor terminating-135 $\Omega$	1	Gray
<b>⊘TT202</b>	2-conductor terminating-600Ω	1	Gray
TT203	3-conductor terminating-135 $\Omega$	2	Gray
TT204	3-conductor terminating-600Ω	2	Gray
TT205	2-conductor dummy	5	Gray
TT206	3-conductor dummy	6	Gray
<b>♦TT207</b>	2-conductor twin looping	3	Gray
TT208	3-conductor twin looping	4	Gray
TT209	2-conductor twin dummy	5	lvory
TT210	3-conductor twin dummy	6	lvory
TT510	Hole Plug	-	Black
TT5151	2- or 3-conductor dummy	_	Red
TT5152	2- or 3-conductor dummy	-	Black
TT5155	2- or 3-conductor dummy	-	White

 $\Diamond$  Special order only; contact Switchcraft for price and delivery.

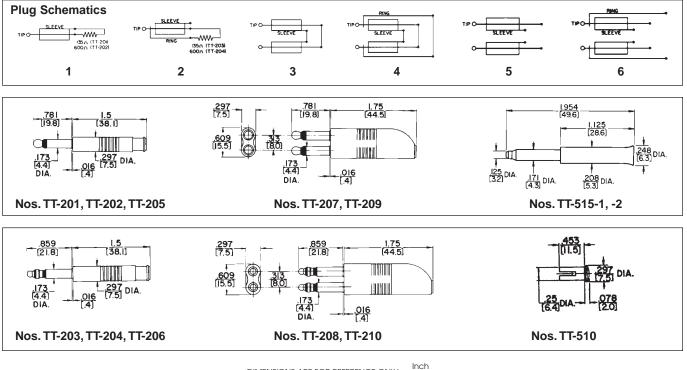

www.switchcraft.com

234

#### \* Please visit the product pages on our website for the most up-to-date product information

### DESIGNATION STRIPS



Designation strips with protective covers are supplied with all tini-telephone® jack panels, jackfields and certain standard jack panels. Replacement kits and individual parts are also available. Legends can be marked in pencil, ink, or lettering transfers. Kwik-Change<sup>®</sup> is the name of all horizontal strips. See illustration.

Three types of designation strips are available as accessories: 1. Kwik-Change single height.

- 2. Kwik-Change double height.
- 3. X-Wide vertical.

#### **KWIK-CHANGE® DESIGNATION STRIPS** (SINGLE HEIGHT)

Two types of single height designation strips are available: 1. SERIES 1600, A1600, B1600, C1600, 1700, B1700,

- 1400300, 2600300, JP012000 through JP122000
- Extruded aluminum mounting strip
- Four mounting screws
- Marking strips
- Clear plastic strip covers

Mounting strips are fastened with four mounting screws provided. Marking strip slides into the clear plastic cover, and cover is snapped into place on the mounting strip. Legends can be marked in pencil, ink, lettering transfers, typewriter, etc.

#### SPECIFICATIONS

(Used on panels 1600, A1600, B1600, C1600, 1700, B1700) Mounting Strip: Extruded aluminum black anodized

Cover: Clear extruded plastic.

Marking Strip: White matte finish plastic.

Screws: Copper alloy, plated.

(Used on panels 1400300, 1600300)

Mounting Strip: Aluminum alloy, extruded, black anodized. Cover: Clear extruded plastic.


Marking Strip: White matte finish plastic.

Screws: Steel, plated.

SERIES TT51 through TT62, TT-Connectorized (2-, 4- and 6-Wire), JP012000 through JP122000, TTPC and DSX panels. Mounting strips are extruded as part of the panel. Otherwise, use is the same as above.

#### ORDERING

Order by part number from table.

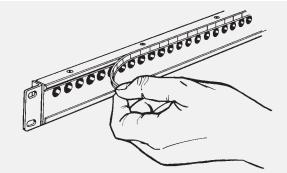



**Kwik-Change Designation Strip** Kit Number DS301 (single height)

**JACK PANELS** 

DESTINATION STRIPS



CK PANELS US

Kwik-Change Designation Strip Kit Number DS318 (single height)

WARRING STRIPS FO

Kwik-Change Designation Strip Kit Number TT501 (single height)

100 Kwik-Change Designation Strip Kit Number TT516 (single height) 235

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

#### \* Please visit the product pages on our website for the most up-to-date product information

# **DESIGNATION STRIPS (continued)**

### SINGLE HEIGHT DESIGNATION STRIPS

	LEIGHT DEGIGINATION OT	
Part No.	Description	For Panels
TT501	Kits (single height) includes: 1-mounting strip (8.375" long) 1-cover 1-marking strip sheet (5 strips per sheet) 4-mounting screws	1600, 1700 (Alternate spacing)
TT502	Marking Strip sheet (used with Kit TT501 & TT521)	-
TT503	Cover (used with Kit TT501 and TT504)	-
TT504	Kits (single height) includes: 1-mounting strip (8.375" long) 1-cover 1-marking strip sheet (5 strips per sheet) 4-mounting screws	A1600, C1600 (Continuous spacing)
TT519	Kit (single height) includes: 2-covers (9.61" long) 1- marking strip sheet (5 strips per sheet)	TT52, TT54 TT56, TT58 TT60, TT62 (23" Panels)
TT520	Marking strip sheet (used with Kit TT519)	-
TT521	Kit (single height) includes: 2-covers (8.25" long) 1- marking strip sheet (5 strips per sheet)	TT51, TT53 TT55, TT57 TT59, TT61, Connectorized Jackfields (2-, 4- and 6 wire)

# KWIK-CHANGE<sup>®</sup> DESIGNATION STRIPS (DOUBLE HEIGHT)

Double height strips allow larger legends. Can be factory installed on Series 1600, B1600, 1700 and B1700 panels, or may be ordered separately for customer installation.

- Series 1600/B1600: Four strips can be mounted, two above each row of jack openings.
- Series 1700: Two strips can be mounted, two above or two below (special order) the double row of jack openings.
- Series B1700: Two strips can be mounted (side-by-side) above top row of jacks.

**NOTE:** When TT516 kits are mounted above top row of jacks on Series 1600, B1600 and B1700, strips will overhang top edge of panel by .156 inches For most applications, the strips help seal the normal opening between adjacent panels. Series B1700 panel mounting screws may have to be loosened to facilitate removal of the panel above it in this type of installation.

#### SPECIFICATIONS


Mounting Strip: Black thermoplastic UL 94V-0.Cover: Clear plastic.Marking Strip: Matte finish white plastic.Mounting Screws: Copper alloy, plated.

#### ORDERING

- 1. Order by part number from table.
- 2. To order double height strips installed on panels, contact Switchcraft.



Part No.	Description	For Panels
D\$301	Kit (single height) includes: 1-mounting strip (17" long) 1-cover 1-marking strip sheet (5 strips per sheet) 4-mounting screws	1400301, 2600301
DS302	Cover (used with Kit DS301)	-
DS303	Marking strip sheet (used with Kit DS301 and DS316).	-
DS306	Marking strip sheet (used with Kit DS307 and DS308).	-
DS307	Kit (single height) includes: 2-covers (16.5" long) 1-marking strip sheet (5 strips per sheet)	JP012000, JP032000, JP052000
DS308	Kit (single height) includes: 2-covers (19.5" long) 1-marking strip sheet (5 strips per sheet)	JP022000, JP042000, JP062000
DS316	Kit (single height) includes: 2-covers (16.25" long) 1- marking strip sheet (5 strips per sheet)	JP072000 JP092000, JP112000
DS317	Marking strip sheet (used with Kit DS318).	_
DS318	Kit (single height) includes: 2-covers (20" long) 1- marking strip sheet (5 strips per sheet)	JP082000 JP102000, JP122000

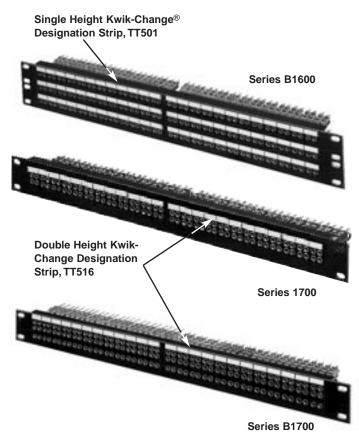


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

### www.switchcraft.com

236

\* Please visit the product pages on our website for the most up-to-date product information

### KWIK-CHANGE<sup>®</sup> DESIGNATION STRIPS (DOUBLE HEIGHT)

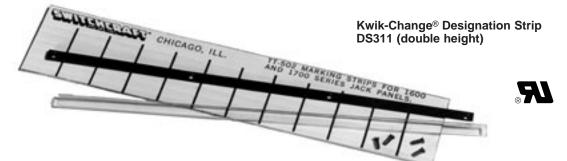

#### **DOUBLE HEIGHT DESIGNATION STRIPS**

Part No.	Description	For Panels
DS311	Kit (double height) includes:	2600310,
	1-mounting strip (17" long)	1400315
	1-cover	
	1-marking strip sheet	
	(3 strips per sheet)	
	4-mounting screws	
DS312	Cover (used with Kit DS311)	-
DS313	Marking strip sheet (used with –	
	Kit DS311)	

#### X-WIDE® VERTICAL DESIGNATION STRIPS

X-Wide designation strips mount on either side (or both) of standard 19" and 23" wide panels and do not interfere with horizontally mounted strips. Each kit contains two mounting brackets which easily fasten with mounting screws provided. Marking strips and clear plastic covers slide into place. Each kit fits onto both sides of a jack panel. X-Wide strips are used on the following panels:

UNDRILLED	PREDRILLED
1600, A1600, 1700 B1700, TT51 through TT62, 2-, 4- & 6-Wire TT-Connectorized Jackfields, 2- & 4-Wire TTPC Connectorized Jackfields, 1200, 1400, 1400320, 2600,and 2600320.	D1600, D1700, BD1700, TTD51 through TTD62, 2- 4 & 6-Wire TT-Connectorized Jackfields, 2 & 4-Wire TTPC Connectorized Jackfields.


**SPECIFYING NOTES:** Each kit fits both sides of a jack panel (Standard height 1.75". Also available in 3.5 inch and 5.25 inch heights.

Prefix letter"D" indicates panels have been predrilled countersunk holes to facilitate mounting X-Wide strips. Series 1200, 1400, & 2600 can be predrilled on special order.

Part No.	Description	For Panels
TT516	Kit (double height) includes:	1600, B1600,
	1-mounting strip (8.375" long)	1700, B1700
	1-cover	
	1-marking strip sheet	
	(3 strips per sheet)	
	4-mounting screws	
TT517	Marking strip sheet (used with	-
	Kit TT516)	
TT518	Cover (used with Kit TT516)	_




3-row Jack Panels Assembly with DS323 X-Wide Designation Strip installed

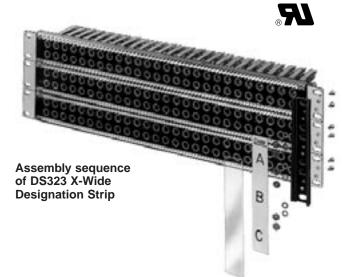


\* Please visit the product pages on our website for the most up-to-date product information

### X-WIDE® VERTICAL DESIGNATION STRIPS

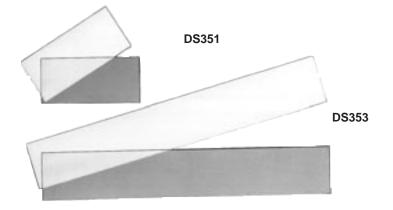

#### X-WIDE VERTICAL DESIGNATION STRIPS

Part No.	Description	For Panels
DS321	Kit (.75 x 1.75 inches) includes: 2-mounting brackets 2-marking strips 2-covers 4-mounting screws, nuts and lockwashers	1600, A1600 1700, B1700 TT51 thu TT54, TT59 thru TT62, 2- & 4-Wire TTConnectorized Jackfields, 2-, 4- & 6-Wire TTPC Conntectorized Jackfields
D\$322	Kit (.75 x 3.5 inches) includes: 2-mounting brackets 2-marking strips 2-covers 8-mounting screws, nuts and lockwashers	Same as DS321 (Mounted in pairs)
DS323	Kit (.75 x 5.25 inches) includes: 2-mounting brackets 2-marking strips 2-covers 12-mounting screws, nuts and lockwashers	6-Wire TT- Connectorized and panels for DS321
DS350	Kit (.75 x 2.265 inches) includes: 2-mounting brackets 2-marking strips 2-covers 4-mounting screws, nuts and lockwashers	B1600, C1600
DS351	Kit (.75 x 1.75 inches) includes: 1-marking strip 1-cover (Used on all 1.75 inch height connectorized jackfields except next to hinge)	2-, 4- & 6-Wire Connectorized Jackfields, TTPC Connectorized Jackfields
DS352	Kit same as DS351except narrow width. To be used next to hinge.	Same as DS351
DS353	Kit (.75 x 5.25 inches) includes: 1-marking strip 1-cover	6-Wire TT- Connectorized Jackfields

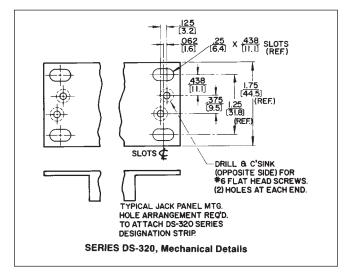

#### ORDERING

1. Order by part number from table.

Inch

(mm)

2. To order X-Wide<sup>®</sup> strips installed on panels, contact Switchcraft.

### PATCH CORDS & MOLDED CABLE ASSEMBLIES MOLDED CABLE ASSEMBLIES

### \* Please visit the product pages on our website for the most up-to-date product information

## DESIGN MATERIALS AND FEATURES

Molded cable assemblies offer many advantages over conventionally-fabricated cables:

- Improved wiring strain relief.
- Proper match of cable diameter to handle.
- Sealed junction: Less exposed area; less contamination due to moisture, dust, dirt.
- Lower weight and smaller size.
- 100% shielding on selected types.
- Color to match/complement equipment decor.
- Legends, color codes, ribs, dot, customer logo/indicia can be added.
- All molded cables are 100% tested for continuity, shorts and voltage breakdown (250 or 500V).
- $\bullet$  All Switchcraft^ molded assemblies are UL recognized.

### **OEM COST SAVINGS**

Molded cable assemblies generally cost less than your in-house conventionally-fabricated assemblies. Specific advantages are elimination of:

- 1. Your evaluation, ordering, incoming inspection, and
- stocking of individual parts. 2. Your plant/equipment needs for in-house fabrication.
- 3. Your tooling/labor costs
- 4. Your production line QA/QC.

### MOLDED CABLE RELIABILITY

In a series of OEM-conducted tests of Switchcraft versus non-molded, fabricated cables, Switchcraft cables were shown to be superior.

- 1. Fabricated cables broke at lower pull forces: OEM types 24 to 34 pounds, molded cables 37.5 to 41 pounds (molded cables did not break at terminations; the cable itself broke about one to two feet back from the connector).
- Fabricated cables suffered broken wires at low pull-out force limits. Molded cables had cable breaks before cable pulled out of the handle, in most instances. And this failure occurred, as previously noted, at higher pull-out forces.

Strengthened molded cable assemblies out-performed fabricated assemblies, and in fact, the crimp molding process makes it stronger than the wire itself.

### SPECIAL ORDER ITEMS

- Customer logo
- Panel Relief Bushing. Specify panel thickness and exact point on cable where bushing is to be installed. Standard panel opening is .50" (12.7 mm) diameter. Double flatted in panels up to .125" (3.18 mm) thick.
- Molded Cable Clamp Bands or Y-Junctions. (Refer to page 258.)
- Special Termination (see separate chart). Contact Switchcraft for specials and provide complete details.

### TYPES OF PLASTICS

Thermoplastics used for molded cable assemblies, have excellent electrical and mechanical properties, are economical, convenient for molding, and can be provided in an array of colors. They have electrical characteristics far higher than required, and provide dimensional stability, abrasion and abuse resistance, and can be molded with a smooth mirror-like finish or matte or semi-matte finishes.

#### WIRE AND CABLE

Switchcraft provides over 100 types of wire and cable from which molded cable assemblies are manufactured. Basically, 30 different cables are used for standard tooling. There are no additional charges where standard tooling exists.

Tooling is designed so cable entry openings on molded plastic handles fit tightly to the outside diameter of the cable. The tighter fit holds cable secure and is more resistant to abuse than if a larger opening were used.

#### DESIGN AND FABRICATING TECHNIQUES

Switchcraft's engineering staff is supported by a complete tool and die making facility, as well as a fully equipped and staffed molding department to fill all of Switchcraft's plastic molding requirements.

The molding department uses injection molders of semi-automatic, multiple-cavity type to obtain high production rates.

#### MANUFACTURING SEQUENCE (EXAMPLE)


**Step 1:** The 1-piece tip rod is firmly staked into the phone plug finger assembly, making a complete and mechanically secure assembly. (Refer to Figure 1) The staking process, using precision manufactured parts, keeps the tip rod assembly from working loose and causing mechanical and electrical problems later.

**Step 2:** Cable center conductor is soldered to tip rod; then the tubular bridge sleeve is slid forward, bringing the cable shield in contact with the circular notch around rear of tip rod assembly.

**Step 3:** Bridge sleeve is crimped tightly to tip rod assembly and cable. Center conductor is completely isolated from potential pulling strains, and shield makes a firm, low resistance connection with plug sleeve.

**Step 4:** A dimensionally stable plastic handle/body of the proper color, size and shape is molded into place. Features are depressions for finger grip, cable entry opening customized to cable diameter to minimize wear on cable, and handle/body molded in one place.

From start to finish, Switchcraft's molded cables are designed and built with maximum quality and reliability. There is virtually no limit to the type and characteristics of special molded cables that Switchcraft can build to special order. For all special orders, consult Switchcraft.

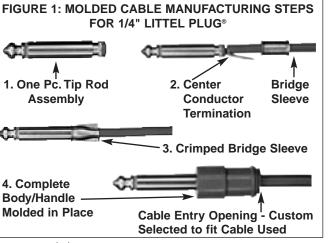

# PATCH CORDS & MOLDED CABLE ASSEMBLIES 3.5MM MOLDED CABLE ASSEMBLIES

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

### 3.5MM MOLDED CABLES







35HRXXX35

#### **36HRXXX36**

35HRXXX84

#### FEATURES AND BENEFITS

· Choose plug-to-plug or plug-to-stripped and tinned leads

0.55

- 3.5 mm plugs available as straight or right-angle
- Available in mono and stereo
- NOM.29 GA jacketed conductors (red and white) with copper spiral shield
- Cable O.D. 3.0 mm nom./.118" nom.
- Black cable

### **ORDERING INFORMATION**


- 1. Order by part number.
- 2. Contact Switchcraft for custom requirements.

Ø 0.138-END CODE: 35

SPECIFICATIONS **PLUGS** 

Tip, Ring and Sleeve: Brass with nickel-plate Flex Life: 5000 cycles minimum Plug Insulator: ACETAL

#### PART NUMBERING SYSTEM

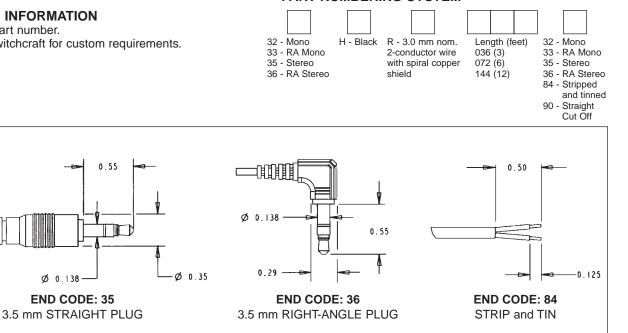



Inch


### PATCH CORDS & MOLDED CABLE ASSEMBLIES POWER PLUGS AND JACKS

#### \* Please visit the product pages on our website for the most up-to-date product information

### MOLDED CABLE ASSEMBLIES With Power-Plug Battery Charger Plugs and Jacks

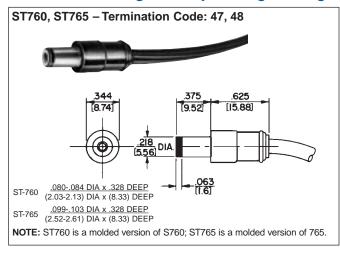

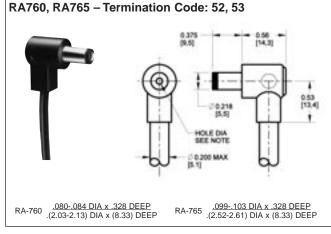

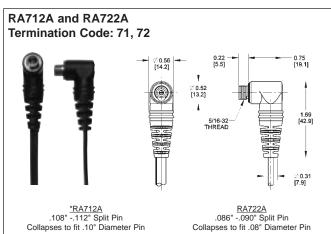

#### SPECIFICATIONS PLUG

Sleeve: Copper alloy, nickel-plated. Pin: Silver-plated copper alloy. Finger Insulator: Plastic. Insulating Washers: Rigid plastic. Sleeve Terminal: Steel, tin-plated. Molded Handle: Plastic.

#### JACK

**Bushing:** Brass, nickel-plated copper alloy. **Washers:** Rigid plastic.

**Pin, Springs, and Terminals:** Plated copper alloy. **Housings:** Thermoplastic.

#### CABLE

We will build assemblies on cable furnished by you, .156" (3.96 mm) outside diameter, or on cable we purchase to your specifications. Jacket must have temperature rating of 60° C minimum. Optional mold available for larger cable; order as ST760L or ST765L.

#### **DESIGN FEATURES**

- ST760, ST760L, RA760 accepts .08" (2.03 mm) diameter pin.
- ST765, ST765L, RA765 accepts .099" (2.54 mm) diameter pin.
- RA712A:
- Mates with ST765, ST765L, and RA765.
- 2 conductor.
- Mounts in .313" diameter hole in panels up to .125" thick.
- Pin outside diameter is .108" .112" split pin.
- Automatic switchover from AC to DC.
- RA722A:
- Mates with ST760, ST760L, and RA760.
- Pin outside diameter is .086" .090" split pin.
- Molded-in cable clamp sleeve terminal (RA plugs only).
- For use with sockets similar to those used on portable radios, tape recorders, television receivers and appliances which feature AC adapters and/or battery chargers.
- Available with terminations of another ST760, RA760 stripped and tinned ends, spade lugs, alligator clips, and more on special order.
- Jacks available with extended bushing for use with Switchcraft locking power plugs 761K, 766K, S761K, and S766K on special order.

See ordering guide on next page.

241

ASK About Our Locking Power Plugs

\* Please visit the product pages on our website for the most up-to-date product information

# MOLDED CABLE ASSEMBLIES WITH POWER PLUGS AND JACKS PART NUMBERING SYSTEM

#### TO CREATE A PART NUMBER

1. Identify Terminations (both ends)

2. Indicate Color and Type of Cable

3. Select the Length of Assembly

#### DC POWER CABLE ASSEMBLIES

Туре	Termina	tion	Color	Cable*	Len	gth (f	eet)		Termi	nation
ST760	4	7	G-Gray	С	0	1	8	(1.5)	4	7
ST765	4	8	H-Black	K	0	2	4	(2)	4	8
ST760L	5	7						( )	5	7
ST765L	5	8							5	8
ST760K	7	3							7	3
ST765K	7	4							7	4
RA760	5	2		Y	0	3	6	(3)	5	2
RA765	5	3		Z	0	4	8	(4)	5	3
RA712A	7	1			0	7	2	(6)	7	1
RA722A	7	2			1	2	0	(10)	7	2
								. ,	8	4
									9	0

\*See "Cable Types" chart on page 260. Note: Some configurations will be special orders. Contact Switchcraft.

### TYPICAL STANDARD PART NUMBERS

STRAIGHT 2-CONDUCTOR .100 PIN POWER PLUG (#48) TO:							
Termination (other end)	Cable	Length (feet)	Part Number <sup>1</sup>				
(power plug) #48	С	6	48HC07248				
(stripped wires) #84	С	6	48HC07284				
(blunt cut) #90	С	6	48HC07290				
(power jack .100 pin) #71	К	6	48HK07271				

1. All cables listed here are black.

**SFMRIFS** DS & **Witcher** 

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

\* Please visit the product pages on our website for the most up-to-date product information

### EN3<sup>™</sup> MINI WEATHERTIGHT OVERMOLDED CABLE ASSEMBLIES



#### FEATURES AND BENEFITS

- Dual purpose handle provides flex relief and finger grip design for easy insertion and withdrawal.
- Available in both cord and in-line versions.
- 2 through 8 pin configurations.
- Superior leakage protection. Contact area is double-sealed for excellent moisture and chemical resistance.
- Integral O-ring and gasket. O-ring is molded onto cord housing assembly and gasket is molded onto panel housing assembly to prevent leakage and eliminate need for additional copper case o-rings and gaskets.
- Thermoplastic rubber body simulates closed entry contact system to prevent probe damage or accidental loss of spring retention due to misaligned or bent pins.
- Housing rated UL 94V-O against flammability.
- Exceeds Coast Guard specifications for water tightness (CFR 46 Part 110.20).
- Exceeds enclosure rating IP16/IP18 when not mated or covered and IP66/IP68 when mated or covered (IEC 529).
- Exceeds enclosure rating 6P at 1000V when mated or covered (NEMA 250).

#### **APPLICATIONS**

- Process Control
- Communications
- Marine Electronics
- Transportation
- Medical Instrumentation
- General Industrial Electronics
- Geothermal Instrumentation

#### **MATERIALS**

#### Connector shells, contact locking disk:

Thermoplastic polymer glass fiber, flame retardant Coupling ring: Nylon

Connector shell interior: Thermoplastic rubber Contacts: Copper base alloy gold-plated over nickel underplate

#### PART NUMBERING GUIDE\*

Example:					
		Length	Γ		

1st Termination	Color	Cable	Length in Inches	2nd Termination		
503	Н	А	072	184		

\*In most instances the multi-conductor cable will be used - found on page 252.

The overmolded EN3<sup>™</sup> cable can accept nominal cable O.D.'s up to .300.

Tooling charges may apply for customer specified cable.



#### SPECIFICATIONS **MECHANICAL**

Shock: Mil-Std 202 Method 213B, condition K Vibration: Mil-Std 202 Method 201 Life: 600 insertion/withdrawal cycles (minimum)

#### ELECTRICAL

Voltage Rating (sea level): Tested at 600 VRMS Insulation Resistance: 100 megohms (minimum) at 77° F Contact Resistance: 5 milliohms (maximum) Current Rating: 7.5 Amps (#20 contact); 13.0 Amps (#16 contact)

#### **ENVIRONMENTAL**

Temperature Limits: -40°C to +65°C (non-operating) Moisture Resistance: Mil-Std 202 Method 106F Insulation Resistance: Mil-Std 202 Method 302 condition B Thermal Shock: Mil-Std 202 Method 107G Salt Spray: Mil-Std 202 Method 101D condition B

#### RATINGS

IP16/IP18 IP66/IP68 NEMA 250 (6P) CFR 46 Part 110.20 UL 94V-O Patent 5,485,673 File 36049

OVERMOLDED STYLE NUMBER
#20 CONTACT SIZE

Number of Pins	2	3	4	5	6	7	8
Male Cord	502	503	504	505	506	_	—
Female Cord	512	513	514	515	516	517	518
Male Inline	522	523	524	525	526	527	528
Female Inline	532	533	534	535	536	_	_

#### OVERMOLDED STYLE NUMBER **#16 CONTACT SIZE**

Number of Pins	2	3	4	5	6	7	8
Male Cord	552	553	_	_	_	_	_
Female Cord	562	563	_	_	_	_	_
Male Inline	572	573	_	_	_	_	—
Female Inline	582	583	_	_	_	_	_

Note: 9-18 versions can also be molded. Contact factory for details.

Inch (mm)

#### \* Please visit the product pages on our website for the most up-to-date product information

### CORDETTE® AND CORD SWITCH ASSEMBLIES




#### FEATURES AND BENEFITS

- Momentary, 0.5 A switching combined with 1-piece molded plastic body qualifies Cordette for all types of commercial and industrial usage.
- Available with molded-on Cordette switch or assembled Cord switch (ED series).
- Cable features PVC outer jacket and withstands rugged use.

#### **SPECIFICATIONS STYLE 97**

Body: Series ED900
Housing: Die-cast zinc, satin nickel-plated.
Switch Body and Insert Bushing: H.H. Brass, nickel-plated.
Insulation: XXXP paper-base phenolic.
Cable Relief Bushing: Black neoprene.
Pressure Plates: Stainless steel.
Cable Relief Screws: Steel, nickel-plated.

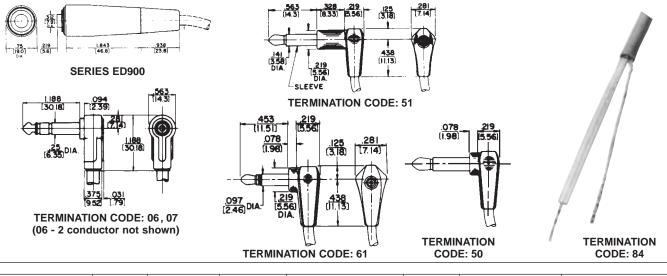

DESCRIPTION	1st Term	Housing &	CABLE	Cab	Cable Length (In.)		2nd Term	Circuitry	Button Color
Example:	Code	Cable Color	CODE	Х	X	Х	Code		
Std. Cordette (921K)	99	G	V	0	7	7	84	Std 1A (No Code)	Std. Black (No Code)
ED903 Series	97							1 - 1B	H - Black
Standard Cable		G-Gray	V (W1230-1)	.250"	PVC	18GA	06	2 - 1C	R - Red
Type for 1/4" Plugs		H-Black	V (W1230-2)	.250"	PVC	18GA	07	3 - AB	W - White
		B-Beige	V (W1230-4)	.250"	PVC	18GA			
		W-White	V (W1230-5)	.250"	PVC	18GA			
Standard Cable		G-Gray	D (W1032-1)	.109"	PVC	25GA	61		
Types for Tini® and		H-Black	D (W1032-2)	.109"	PVC	25GA	50		
Micro Plugs		W-White	D (W1032-3)	.109"	PVC	25GA	51		
		H-Black	E (W1065-2)	.100"	PVC	26GA			

# www.switchcraft.com


### PATCH CORDS & MOLDED CABLE ASSEMBLIES CORDETTE® SWITCHES


#### \* Please visit the product pages on our website for the most up-to-date product information

### MOLDED CABLE ASSEMBLIES WITH CORDETTE® SWITCHES



**ST900 Termination Code: 99** 

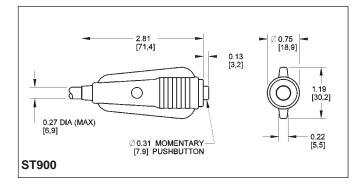

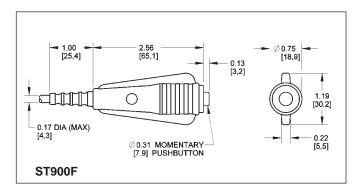



245

#### **SPECIFICATIONS** SWITCH

Housing: White plastic (standard).

Molded Body: Gray plastic (standard) with contrasting trim and gray pushbutton.

Contacts: Integral, copper alloy, hard gold-plated form 1-A, 0.5 A, 50 W maximum, AC, non-inductive load. Not recommended for high voltage circuits.

Insulation: Thermoplastic UL 94V-0.

Button Color: Black (standard). Other colors available on special order.

#### CABLE

#### Standard Unshielded—Type W-1230.

Note: See Standard Cable Chart on page 260 for details.

We will build assemblies on cable furnished by you, .27" (6.68 mm) outside diameter, or on cable we purchase to your specifications. Jacket must have temperature of 60° C minimum. ST900 (#99)

Button stroke only .063" (1.6 mm). Cable leads soldered directly to switch terminals. Standard button is with 1-A switching. Use termination number "99" with all cable numbering charts except multi-pin interconnection. Use code "198" for multi-pin interconnections.

See Switch Section of Switchcraft's Engineering Design Guide for more details on the ST900.

Part Number	Description
921	Cordette Switch, phone jack termination
921K	Same as 921, plus 6-foot, 2 conductor cable with stripped and tinned leads.

#### SPECIAL ORDER FEATURES

- 1-B, 1-C, or 1-A + 1-B switching.
- Red, green, blue, white or yellow pushbuttons.
- Legends
- Other body colors
- ST-900 Custom-molded to any of a large selection of cables. Also many cable terminations, i.e., phone plugs, extension jacks, phono plugs, spade lugs, alligator clips, stripped and tinned leads, etc.

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

### PATCH CORDS & MOLDED CABLE ASSEMBLIES MULTIPIN INTERCONNECTORS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

### MOLDED CABLE ASSEMBLIES WITH DIN PLUGS

### STYLES RA300 AND ST300 APPLICATIONS

- Computer
- Data Communications
- Instrumentation
- Medical Systems
- Process Controls
- MIDI (Musical Instrument Digital Interface)

#### FEATURES

- Long life
- 7 different pin configurations: versatile circuitry
- Fully molded plugs sealed against contamination (moisture, dust, dirt)
- Fully shielded: plugs with interference protection/ common ground-shield
- Strain relief: protects internal wire connections
- Flex relief: molded integral with handle for extra protection. No exit stress failures
   Locking: 20% twict locking for anti-vibration
- Locking: 30° twist locking for anti-vibration protection and ease of engagement
   Straight and apil pards: took and autom of
- Straight and coil cords: stock and custom styles, colors, lengths
- Shielded or unshielded cables: stock and custom styles, colors, lengths
- Molded through-panel cable relief: extra cable protection
- Custom wiring/ keying: gives extra choice in mounting and circuit selection
- Custom contact plating: precious and other metals
- Custom logo: your identification on molded plugs
- 100% tested for continuity, shorts, appearance, voltage breakdown (250 or 500 V)

#### **COMPLETE SHIELDING SYSTEMS**

Switchcraft also offers shielded DIN receptacles for use with shielded molded cable assemblies. Together they provide a valuable design tool to suppress EMI interference to permit you to meet strict requirements of FCC Docket 20780.

#### ORDERING

1. Order by part number from guide on page 251.

2. For special order items, contact Switchcraft with details. **SPECIFYING NOTE:** See Connector Section of Switchcraft's Engineering Design Guide for mating receptacles.



Style RA374 Termination Code: 374



Switchcraft DIN molded cable assemblies meet increased demand for modern, field-tested connections for a wide range of electrical/electronic applications. Connectors are DIN (Deutsche Industrie Norm) circular type, male or female (locking or non-locking) with 3 to 8 pins/contacts. Units are molded and protected with a rugged handle, and are fully shielded and equipped with advance design cable relief. Switchcraft cable assemblies and mating receptacles adhere to strict requirements of FCC Docket 20780 and offer fully shielded links for data and instrumentation applications of all kinds.

#### SHIELDING EFFECTIVENESS

Effectiveness of shielding is frequency-dependent; as frequency increases, more shielding is required to maintain comparable shielding effectiveness. The chart below delineates shielding effectiveness with molded cable assemblies with 100% foil shield cables and shielded DIN connectors.

Frequency Range MHz	Shielding Effectiveness, dB
30-500	-30
60-400	-20
500-800	-10

<u>www.switchcraft.com</u>

#### \* Please visit the product pages on our website for the most up-to-date product information

### MOLDED CABLE ASSEMBLIES WITH DIN PLUGS (continued)

#### STYLES RA300 AND ST300 SPECIFICATIONS ELECTRICAL

**Contact Resistance:** Cord Plugs and Receptacles. .010 ohms, contact spring/pin; .030 ohms, ground clip/shell. **Control and Switching Receptacles:** .015 ohms, contact spring/pin; .020 ohms, switch contacts. **Dielectric Withstanding Voltage:** 500 V (rms). **Leakage Resistance:**  $10^5$  M $\Omega$ 

#### MECHANICAL

Life: 5000 cycles

Number of Contacts	Insertion Force pound/N	Withdrawal Force pound/N
2	3.6/(16)	.45-2.7/ (2-12)
3	5.4/(24)	.67-4.1/ (3-18)
4	7.2/(32)	.90-5.4/ (4-24)
5	9.0/(40)	1.24-6.8/ (5.5-30)
6	10.8/(48)	1.46-8.1/ (6.5-36)
7	12.6/(56)	1.68-9.5/ (7.5-42)
8	14.4/(64)	1.90-10.8/ (8.5-48)

#### PLUG MATERIALS

Pin Contacts: Silver-plated, copper alloy. Insulating Washer: Thermoplastic. Locking Plug Housing: Nickel-plated, die-cast zinc alloy. Other Housings: Plated steel.

**Molded Handle:** Flexible thermoplastic. Strain relief matte finish.

**NOTE:** All connectors meet DIN specifications. Din specification numbers (except for 4-pin, 5-pin 240°) will be furnished on request.

#### ORDERING

1. See table below for termination descriptions. Termination code is the same number as the plug style (e.g. termination code for a ST305 is 305).

2. See page 251 for ordering guide.

	Part Numbers-Male (pins)						
	3@180°	4@210°	5@180°	5@240°	6@240°	7@270°	8@270°
Pin Arrangements	В	D	F	E	G	Н	N
Description							
Straight handle.	ST303	ST309	ST305	ST304	ST306	ST307	ST308
Straight handle. 30° twist lock ring fastening, mates with lock flange plugs and receptacles.	ST323	ST329	ST325	ST324	ST326	ST327	ST328
Right-angle handle.	RA353	RA359	RA355	RA354	RA356	RA357	RA358
Right-angle handle. 30° twist lock ring fastening, mates with lock flange plugs and receptacles.	RA373	RA379	RA375	RA374	RA376	RA377	RA378

1. See next page for Pin/Contact arrangements.

#### PART NUMBERS - MOLDED CABLE ASSEMBLIES

Part Number	Description	Term. A	Term. B
<b>∂305KD084184</b>	Black coil cord. 15" (381 mm) retracted; 78.74" (2 m) extended. 5 pin male with other end stripped and tinned on cable number W-1301-2.	ST305	_
<b>∂305HJ084184</b>	Black cable cord. 7 feet (2.13 m) in length. 5 pin male with other end stripped and tinned on cable number W-1279-2.	ST305	-
<b>◊306HK042306</b>	Black cable cord. 39.37" (1 m) in length. 6 pin male to 6 pin male on cable number W-1289-2.	ST306	ST306
<b>◊306HK084306</b>	Black cable cord. 78.74" (2 m) in length. 6 pin male to 6 pin male on cable number W-1289-2.	ST306	ST306

◊ Special order only; contact Switchcraft.

#### FOIL SHIELD CABLES – STRAIGHT


Part Number	Color	Length, inch (mm)
W-1279-2	Black	Length must be specified.
W-1289-2	Black	Eengin musi be specified.

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information


MOLDED CABLE ASSEMBLIES WITH DIN PLUGS (continued)



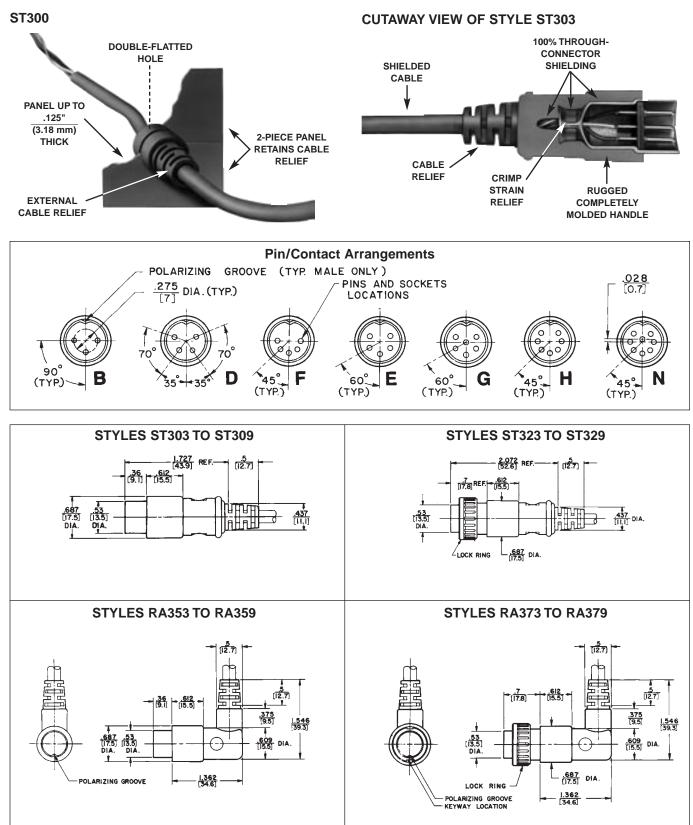

\* Please visit the product pages on our website for the most up-to-date product information

## **MIDI CABLES**

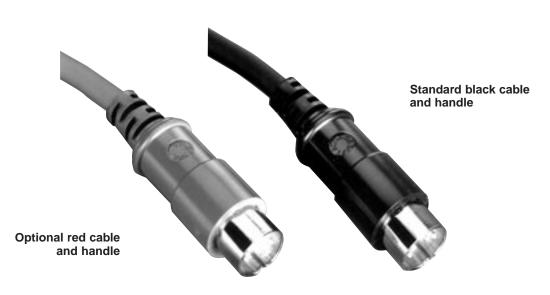

#### FEATURES AND BENEFITS

- Molded connectors provide superior pull-out retention and greater environmental protection than assembled versions.
- All five pins wired active with high definition Belden Brilliance<sup>®</sup> cable.
- Can be used with any type MIDI instrument.

#### SPECIFICATIONS

- Belden Brilliance<sup>®</sup> 24 awg, 4 conductor, braid shielded cable.
- Wiring conforms to MIDI specifications including the clock/sync capabilities on pins 1 and 3.
- Molded 180 degree 5 pin DIN connectors.
- Standard color is black with other colors available on special order.
- PVC molded handles and cable jackets.
- All molded cables are 100% tested for continuity, shorts and voltage breakdown.

#### **ORDERING INFORMATION**

- 1. Order by part number.
- 2. Contact Switchcraft for more information.

Belden Brilliance $^{\ensuremath{\oplus}}$  is a registered trademark of Belden Wire and Cable Company.

#### **MIDI CABLES**

Part number	Length	Color
MD3	3 foot	Black
MD6	6 foot	Black
MD10	10 foot	Black
MD15	15 foot	Black

#### STANDARD PRODUCT

- Silver-plated pins
- Belden Brilliance<sup>®</sup> 24 awg, 4 conductor, braid shielded cable
- Black cable
- Black handle

#### SPECIAL ORDER

- · Gold-plated pins
- Other cable types
- Optional lengths
- Color cable
- Color handle

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES WITH MINIATURE, SHIELDED, MOLDED TINI Q-G® PLUGS

#### **STYLE ST600**

Tini Q-G® miniature plugs offer 3- through 6-pin/contact connecting with full shielding, small size, RFI-protected termination of analog/digital circuits/equipment. Typical applications are for EIA RS-232C and RS-449 type connections. Plugs retain all Tini Q-G® features, including latchlock, strain relief, flex relief, polarization and "scoop-proof" construction. See Connector Section for details on features and specifications. Shielding of these plugs meets U.S. Navy Tempest requirements with proper cable and mating connector choice.

# MOLDED CABLES WITH STRAIGHT FEMALE

Tini Q-G<sup>®</sup> PLUGS (Special Order Only)

Three- through 6-contact plugs are molded into a complete cable assembly per customer requirements. Plug includes latch for secure connection, "through-ground" provision, and external cable flex relief. Plugs are molded onto shielded or unshielded cables of .180" - .215" diameter Standard cable color is gray; black, beige and other colors can also be specified. In addition, UL 94V-0 rated cables can be specified.

Styles ST603, ST604, ST605, ST626 Termination Codes: 603, 604, 605, 626

Note: Reverse gender molded male cable assembly available. Call factory for details.


Plug Style <sup>2</sup>	Description	Mating Receptacles 1
<b>⊘ST603</b>	3-contact straight female plug (molded)	ТАЗМ, ТВЗМ
<b>◊ST604</b>	4-contact straight female plug (molded)	TA4M, TB4M
<b>◊ST605</b>	5-contact straight female plug (molded)	TA5M, TB5M
<b>◊ST626</b>	6-contact straight female plug (molded)	TA6ML, TB6M


1. See Connector Section of Switchcraft's Engineering Design Guide for other mating receptacles.


2. Termination code is the same as the numbers in the plug style (e.g. termination code for a ST626 is 626). See multi-pin ordering guide on next page.


## IMPORTANT SPECIFYING NOTE

() Special 3, 4 and 5 pin/contact patterns can be tooled on special order where production quantities warrant special handling. Contact Switchcraft with your requirements.

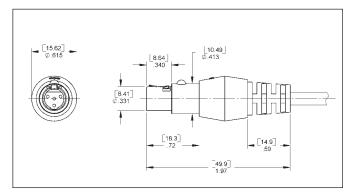







#### \* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES FOR MULTI-PIN INTERCONNECTION PART NUMBERING SYSTEM (NOT ALL NUMBERS SHOWN)

1. Identify Terminations (both ends)\*

- 2. Indicate Color and Type of Cable
- 3. Select the Length of Assembly

#### **MULTI-PIN CABLE ASSEMBLIES**

Termination	Color	Cable <sup>1</sup>	Length (feet)	Termination (examples)
303 304 305 306 307 308 309 603 604 605 606	G-Gray H-Black D-Beige	A B C D E F G H J K M G U U	036 (3) 060 (5) 072 (6) 120 (10)	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

1. See next page for cable descriptions.

\* Please refer to page 243 for EN3<sup>™</sup> weathertight connector options.

#### Note:

• Other cables available on special order. Contact Switchcraft.

#### **TYPICAL PART NUMBERS**

STRAIGHT 3-pin DIN PLUG (#303) TO:							
Termination (other	r end)	Cable	Length (feet)	Part Number <sup>2</sup>			
(3-pin DIN)	#303	А	5	303HA060303			
(3-pin Tini Q-G®)	#603	А	5	303HA0606033			
(Strip and tin)	#184	A	6	303HA072184			
(Blunt cut)	#190	A	6	303HA072190			

#### 2. All cables listed here are black.

3. .180" diameter.

#### STANDARD MULTI-PIN CABLE ASSEMBLY **TERMINATION VS. CABLE CROSS-REFERENCE**

														_
		Cal												
		W 1 2 0 3 2	W 1 0 8 9 1	W 1 7 7 1	W 1 2 0 6 #	W 1 2 7 7 6	W 1 2 3 7 2	W 1 2 9 1 6	W 1 2 8 8 2	W 1 2 7 9 #	W 1 2 8 9 #	W 1 2 9 0 #	W 1 2 8 4 2	W 1 4 2 1
т	RA353	Х						Х						
Е	RA354			Х						Х			Х	
R	RA355			Х						Х			Х	
M	RA356				Х						Х			Х
Ň	RA357					Х								
Ä	RA358						Х					Х		
Ţ	RA359		Х						Х					
1	RA373	Х						Х						
N	RA374			Х						Х			Х	
	RA375			Х						Х			Х	
	RA376				Х						Х			Х
	RA377					Х								
	RA378						Х					Х		
	RA379		Х						Х					
	ST303	Х						Х						
	ST304			Х						Х			Х	
	ST305			Х						Х			Х	
	ST306				Х						Х			Х
	ST307					Х								
	ST308						Х					Х		
	ST309		Х						Х					
	ST323	Х						Х						
	ST324			Х						Х			Х	
	ST325			Х						Х			Х	
	ST326				Х						Х			Х
	ST327					Х								
	ST328						Х					Х		
	ST329		Х						Х					
	ST603	Х						Х						
	ST604		Х						Х					
	ST605			Х						Х			Х	
	ST626										X			Х

# - Indicates any number

A relative any number
 X - Indicates that the cable in this column and the termination in this row can be used together in a standard part number
 1. - Other termination/cable combinations may be available or special order.

251

#### \* Please visit the product pages on our website for the most up-to-date product information


# STANDARD MULTI-PIN INTERCONNECTION CABLES FOR MOLDED CABLE ASSEMBLIES ON PAGES 243 THROUGH 251.


Cable Type	Color	Description	Cable Code
W1203-2	Black	3 conductor, 22 AWG stranded, unshielded	A
		.18" (4.6 mm) outside diameter, UL style 2960	A
W1089-1	Gray	4 conductor, 22 AWG stranded, unshielded	В
		.18" (4.6 mm) outside diameter, UL style 2960	b
W1077-1	Gray	5 conductor, 22 AWG stranded, unshielded	С
		.20" (5.1 mm) outside diameter, UL style 2464	C C
W1206-1	Gray	6 conductor, 22 AWG stranded, unshielded	D
W1206-2	Black	.20" (5.1 mm) outside diameter, UL style 2095	b
W1277-6	Beige	7 conductor, 22 AWG stranded, unshielded	E
	9-	.20" (5.1 mm) outside diameter, UL style 2095	L
W1237-2	Black	8 conductor, 22 AWG stranded, unshielded	F
-		.23" (5.8 mm) outside diameter, UL style 2464	I
W1291-6	Beige	3 conductor, 24 AWG stranded, foil shielded	G
	9-	.18" (4.6 mm) outside diameter	G
W1288-2	Black	4 conductor, 24 AWG stranded, foil shielded	н
		.18" (4.7 mm) outside diameter	11
W1279-1	Gray	5 conductor, 24 AWG stranded, foil shielded	
W1279-2	Black	.19" (4.8 mm) outside diameter	J
W1279-6	Beige		
W1289-2	Black	6 conductor, 24 AWG stranded, foil shielded	К
W1289-6	Beige	.22" (5.5 mm) outside diameter	K
W1290-1	Gray	8 conductor, 24 AWG stranded, foil shielded	М
W1290-6	Beige	.23" (5.7 mm) outside diameter	M
W1284-2	Black	5 conductor, 22 AWG stranded, braid shielded	Q
		.23" (5.8 mm) outside diameter	l Q

# PATCH CORDS & MOLDED CABLE ASSEMBLIES SUBMINIATURE PLUGS AND JACKS

#### \* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES With Micro Plug<sup>®</sup> Subminiature Phone Plugs

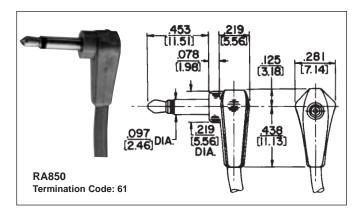

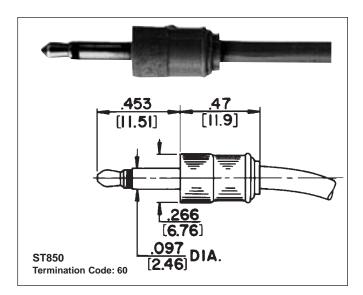

#### **DESIGN FEATURES**

- Thermoplastic insulation between tip and sleeve circuits.
- "Pear-shaped" one-piece tip rod.
- Cable clamp connects cable shield (or second conductor) to plug sleeve.

#### SPECIFICATIONS PLUG

Tip and Sleeve: Plated copper alloy.

**Insulation:** W-1032-1. Molded thermoplastic.

Sleeve Terminal: Tinned copper alloy.

Molded Handle: Plastic.

Standard Colors: Gray, white, black, brown.

Other colors available on special order.

#### CABLE

Standard Shielded Cable—Type W-1032-1.

**NOTE:** See Standard Cable Chart on page 260 for details. Order by part number from guide on page 259.

**Special Cable:** We will build assemblies on cable furnished by you, .109" (2.77 mm) diameter maximum, or on cable we purchase to your specifications. Jacket must have temperature rating of 60° C minimum.

**RA850:** Right-angle Micro-Plug<sup>®</sup> plug with plastic handle. Short body extension. Molded to cables up to .109" (2.77 mm) outside diameter.

**ST850:** Straight Micro-Plug<sup>®</sup> plug, small plastic handle, only .47" (11.9 mm) long.

**NOTE:** Micro-Plug<sup>®</sup> molded cable assemblies mate with Switchcraft Micro-Jax<sup>®</sup> TR-2A.


253



# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES With Tini Plug® Miniature Phone Plugs

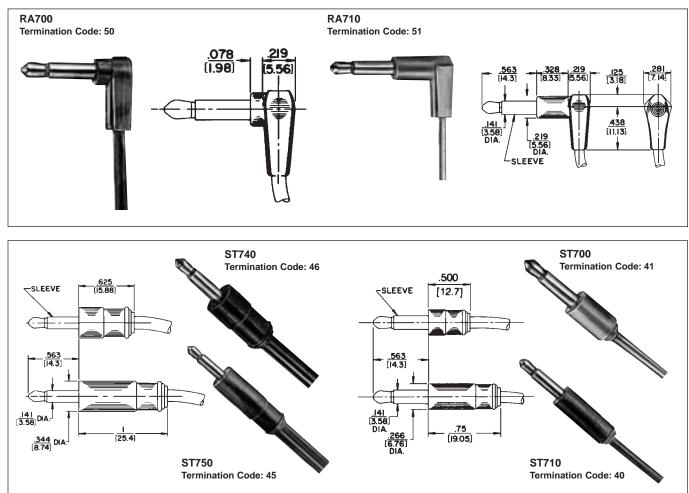

#### SPECIFICATIONS

#### PLUG

Tip and Sleeve: Nickel-plated copper alloy. Cable Clamp: Tin-plated steel. Insulation: Rigid plastic. Molded Handle: Plastic. Standard Colors: Gray, white, black, brown. Other colors available on special order.

#### CABLE

Shielded—Type W-1000-1 (suitable for ST740 and ST750 due to cable Outside Diameter). Shielded—Type W-1032-1 (suitable for all types on this page). Standard Parallel—Type W-1041-1.

**NOTE:** See Standard Cable Chart on page 260 for details. Order by part number from guide on page 259.

**Special Cable:** We will build assemblies on cable furnished by you, up to .160" (4.06 mm) (for ST740 and ST750); .120" (3.05 mm) (for ST700, ST710, RA700, RA710) outside diameter, or on cable we purchase to your specifications. Jacket must have temperature rating of 60°C minimum.

#### **DESIGN FEATURES**

- "Pear-shaped" one-piece tip rod soldered directly to cable conductor.
- Cable clamp connects cable shield (or second conductor) to the plug sleeve.

**RA700:** Right-angle Tini Plug<sup>®</sup> plug with small plastic handle. Short body extension, recommended for slightly recessed jacks. Molded to cables up to .109" (2.77 mm) outside diameter.

**RA710:** Right-angle Tini-Plug<sup>®</sup> plug similar to RA700, except longer body extension where equipment jack is deeply recessed. Molded to cables up to .109" (2.77 mm) outside diameter.

**ST700:** Straight Tini-Plug<sup>®</sup> plug offering the shortest and smallest handle.

ST710: Same as ST700, except with longer handle.


**ST740:** Straight Tini-Plug<sup>®</sup> with larger outside diameter handle desirable.

**ST750:** Straight Tini-Plug<sup>®</sup> with same diameter handle as ST740 and longer handle for easier handling.

# PATCH CORDS & MOLDED CABLE ASSEMBLIES PHONO PLUGS AND JACKS

\* Please visit the product pages on our website for the most up-to-date product information

MOLDED CABLE ASSEMBLIES With Phono Plugs and Phono Extension Jacks

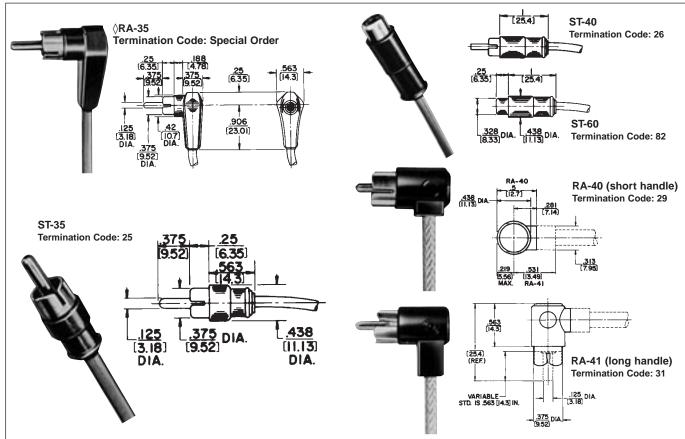

#### SPECIFICATIONS PLUG

Tip (prong): Nickel-plated, copper alloy.
Sleeve Connection: Plated copper alloy.
Insulation: Rigid plastic or thermoplastic.
Molded Handle: Thermoplastic.
Standard Colors: Gray, black, brown, red, white, tan, or blue. Other colors available on special order.

#### **EXTENSION JAX**

Tip Spring: Nickel-plated, hardened copper alloy. Sleeve Connection: Plated steel. Insulation: Rigid plastic. Molded Handle (both Plug and Jack): Plastic. Standard Colors: Gray, white, black and brown.

Other colors available on special order.

#### CABLES

RA35, ST35, ST40, ST60:

Standard Shielded Cable—Type W-1000-1. Standard Parallel Cable (lamp cord)—Type W-1033-1. RA40. RA41:

Standard Shielded Cable—Type W-1000-1 and W-1032-1. Standard Unshielded (Parallel) Cable—Type W-1041-1.

**NOTE:** See Standard Cable Chart on page 260 for details. Order by part number from guide on page 259.

**Special Cable:** We will build assemblies on cable furnished by you (maximum diameter varies for types RA35, ST35, ST40) up to .20" (5.08 mm) outside diameter for RA40 and RA41 or on cable we purchase to your specifications. Jacket must have a temperature rating of 60 C minimum.

 ${\bf RA35:}$  Right-angle phono plug with body extension for recessed jack. Cable: .188" (4.78 mm) outside diameter maximum. Completely shielded. (Available on special order only.)

**ST35:** Straight phono plug with "finger grip" handle. Handle .438" (11.13 mm) outside diameter. Completely shielded.

**ST40:** Straight phono plug, similar to ST35, except with longer handle.

**ST60:** Straight extension jack with "finger grip" handle. Handle .438" (11.13 mm) outside diameter. Completely shielded.

**RA40:** Compact right-angle phono plug with low profile, high quality insulation, and short .281" (7.14 mm) molded handle for audio and RF connections where space is at a minimum.

RA41: Same as RA40, except handle is .531" (13.49 mm) long.

#### **DESIGN FEATURES**

- Can be specified with phenolic, nylon, glass-filled Teflon or polypropylene internal insulators. Polypropylene is recommended for RF connecting applications.
- Applications include stereo, PA and intercoms, audio-visual and telecommunications, including RF connections in 2-way radio and paging systems.

DIMENSIONS ARE FOR REFERENCE ONLY

255

# PATCH CORDS & MOLDED CABLE ASSEMBLIES EXTENSION JACKS AND LITTEL® PLUGS

# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES WITH TINI-EXTENSION® JACKS

#### SPECIFICATIONS

Housing (or Sleeve): Nickel-plated, copper alloy.
Handle: Molded plastic.
Sleeve Terminal: Plated steel.
Tip Spring: Copper alloy.
Insulation: Rigid plastic. Larger design also has a molded thermoplastic insert.
Standard Colors: Gray white, black, brown. Other colors available on special order.

#### CABLE

Standard Shielded: Type W-1032-1. Standard Unshielded: Type W-1041-1. **NOTE:** See Standard Cable Chart on page 260 for details. Order by part number from guide on page 259.

# MOLDED CABLE ASSEMBLIES WITH LITTEL PLUG® PHONE PLUGS

#### SPECIFICATIONS

#### PLUG

Tip: Nickel-plated, copper alloy. Sleeve: Plated copper alloy. Insulation: Rigid plastic. Internal Shield: Plated steel. Molded Handle: Plastic. Standard Colors: Gray, white, black and brown. Other colors available on special order.

#### CABLE

#### FOR 2-CONDUCTOR PLUGS:

Standard Shielded Cable–Type W-1000-1. Standard Parallel Cable (lamp cord)–Type W-1033-1.

#### FOR 3-CONDUCTOR PLUGS:


Standard Shielded Cable-Type W-1021-1.

**NOTE:** See Standard Cable Chart on page 260 for details. Order by part number from guide on page 259.

**Special Cable:** We will build assemblies on cable furnished by you, .188" (4.78 mm) diameter maximum, or on cable we purchase to your specifications. Jacket must have a temperature rating of 60°C minimum.


#### **DESIGN FEATURES**


- Molded cables with Littel-Plug phone plugs feature one-piece tip rod assembly connecting tip directly to the soldered connection of the cable conductor.
- Unusual dual-purpose clamp terminal provides completely shielded electrical connection and a cable clamp; connects plug sleeve to cable shield or conductor.
- Right-angle phone plugs (RA202, RA203, RA207 and RA208) molded to cables up to .188" (4.78 mm) outside diameter. RA202, RA203, RA207 and RA208 molded to cables with maximum outside diameter up to .260" (6.6 mm).

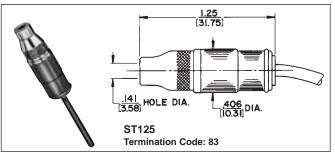

**Special Cable:** We will build assemblies on cable furnished by you, up to .160" (4.06 ram) outside diameter—or on cable we purchase to your specifications. Jacket must have temperature rating of 60° C minimum.

**ST125:** Straight Tini-Extension Jax jacks with same features as ST121, on next page (shielded, 2-conductor), except with .406" (10.31 mm) outside diameter, designed to mate with Switchcraft Tini-Plug<sup>®</sup> plugs.

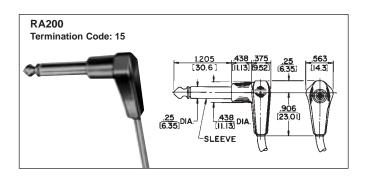

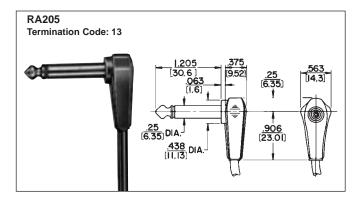

**RA200:** Right-angle phone plug with plastic handle. Body extension suitable for recessed jack. Completely shielded.


**RA205:** Right-angle phone plug, similar to RA200, except short body extension and handle for flush mounted jacks.


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

## <u>www.switchcraft.com</u>


#### \* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES WITH LITTEL PLUG<sup>®</sup> PHONE PLUGS (continued)

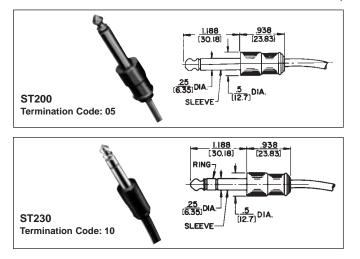

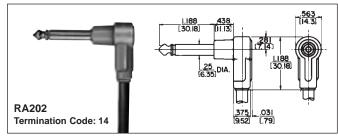


## MOLDED CABLE ASSEMBLIES WITH EXTENSION JAX® PHONE JACKS

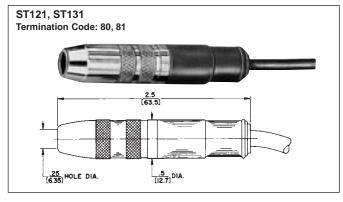

**ST121:** Straight Extension Jax<sup>®</sup> jack is a shielded 2-conductor jack with .50" (12.7 mm) outside diameter. Cable clamp connects shield or second conductor to cable. Mates with .25" (6.35 mm) diameter Switchcraft 2-conductor plugs.

**ST131:** Straight Extension Jax jack, same as ST121, except 3-conductor. Mates with .25" (6.35 mm) diameter Switchcraft 3-conductor plugs.

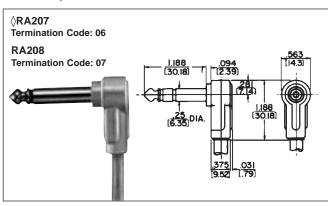

**RA202:** Right-angle phone plug with plastic handle. Body extension suitable where jack is recessed. RA203 is similar to RA202, except 3-conductor plug.

**(RA207, RA208:** Right-angle phone plug, similar to RA202, except short body extension. Recommended use with panel mounted jacks. RA208 is similar to RA207, except 3-conductor plug.

**RA217:** Special right-angle phone plug, identical to RA200 (previous page); also featuring a unique hook for hanging various types of equipment (such as pillow speakers). Completely shielded. Available on special order only.

**ST200:** Straight phone plug with "finger grip" handle, but short enough to fit in all equipment.

**ST230:** Straight 3-conductor phone plug; same features as ST200. Completely shielded.

#### **SPECIFICATIONS**

Housing (or Sleeve): Nickel-plated, copper alloy. Handle: Molded plastic. Sleeve Terminal: Plated steel.

Tip and Ring Springs: Copper alloy.

**Insulation:** Rigid plastic. Larger design also has a molded thermoplastic insert.

**Standard Colors:** Gray, white, black, brown. Other colors available on special order.

#### CABLE

Standard Shielded–Type W-1000-1 (for ST121). Type W-1021-1 (for ST131). Standard Unshielded–Type W-1033-1 (for ST121).

**NOTE:** See Standard Cable Chart on page 260 for details. Order by part number from guide on page 259.

**Special Cables:** We will build assemblies on cable furnished by you, up to .260" (6.6 mm) outside diameter, or on cables we purchase to your specifications. Jacket must have temperature rating of 60° C minimum.

# PATCH CORDS & MOLDED CABLE ASSEMBLIES CABLE CLAMP BANDS AND Y JUNCTIONS

# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES WITH CABLE CLAMP BANDS

#### **SPECIFICATIONS** MOLDED BAND


Housing: Plastic. Inserts can be added to our molds to include customer's name or trademark. Call for details. Standard Colors: Gray, white, black, brown. Other colors available on special order.

#### CABLE\*

Standard Parallel Cable (lamp cord)-Type W-1033-1. Standard Shield Cable-Type W-1072.

#### **ST-91 DESIGN FEATURES**

- · For use on stereo connecting cables and on monaural and stereo headset cables.
- Prevents further separation of individual leads on "Rip" type cordage.
- · Can be used as "Y" junction when used with standard shielded cable such as Switchcraft W-1072; or as a cable clamp for general purpose with Switchcraft W-1033 and W-1050.
- Special assemblies can be built to OEM needs, using various terminal lugs, special receptacles to phone plugs or connectors.

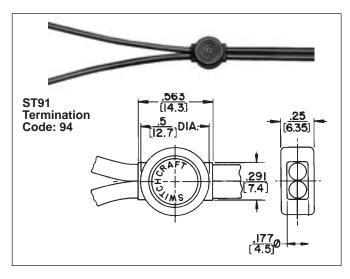

\*NOTE: See Standard Cable Chart on page 260 for details.

Special Cable: We will build assemblies on cable furnished by you (maximum diameter varies for types) or on cables we purchase to your specifications. Jacket must have temperature rating of 60°C minimum.

## MOLDED CABLE ASSEMBLIES WITH "Y" JUNCTIONS

#### **SPECIFICATIONS**

#### **Y JUNCTION**


Housing: Molded Plastic. Inserts can be added to our molds to include customer's name or trademark. Standard Colors: Gray, white, black, brown. Other colors available on special order.

#### CABLE\*

Standard Shielded Cable-Type W-1000-1. Standard Shielded Cable-Type W-1021-1.

#### **ST-90 DESIGN FEATURES**

- For use on binaural and stereophonic headphones.
- · Accommodates 1- and 2-conductor shielded cables.
- · Durable, strain and humidity resistant.
- Special assemblies can be built to OEM needs, using terminal lugs, special receptacles to phone plugs or connectors.

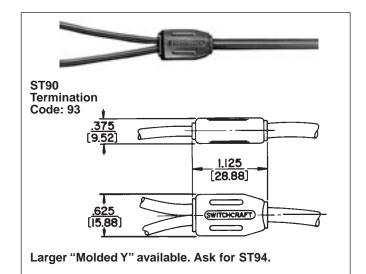

## www.switchcraft.com

## ® Registered trademark of Switchcraft. Inc.

Note: Contact your Switchcraft Representative for price and delivery

\* Please visit the product pages on our website for the most up-to-date product information

## MOLDED CABLE ASSEMBLIES PART NUMBERING SYSTEM

### TO CREATE A PART NUMBER

- 1. Identify Terminations (both ends)
- 2. Indicate Color and Type of Cable
- 3. Select the Length of Assembly

## MOLDED CABLE ASSEMBLIES (Not all numbers shown)

Termi	nation	Color	Cable*	Len	ngth (f	eet)		Termi	nation
0	5	G-Gray	А	0	1	8	(1.5)	0	5
1	5	H-Black	В	0	2	4	(2)	1	5
2	5	D-Beige	С	0	3	6	(3)	2	5
4	0	W-White	D	0	4	8	(4)	4	0
8	0		E	0	7	2	(6)	8	0
8	2		F	1	2	0	(10)	8	2
8	3		K					8	3
9	9		V					8	4
			W						
			Х						
			Y						
			Z						

\* See "Cable Types" chart on page 260.

#### Notes:

- Use any 2-number codes on previous pages for termination number.
- Some configurations will be special orders. Contact Switchcraft.
- Some configurations may not be possible.
- Larger plug (#45) will be supplied in place of #40 when used with cable "A".

#### **TYPICAL STANDARD PART NUMBERS**

STRAIGHT 2-CONDUCTOR PHONE P	LUG (#0	5) TO:	
Termination (other end)	Cable	Length (feet)	Part Number <sup>1</sup>
(phono plug) #05	A	6	05HA07205
(stripped wires) #84	A	3	05HA03684
PHONO PLUGS (#25) TO:			
(phono jack) #82	A	6	25HA07282
DUAL PHONO PLUGS (#25) TO:			
(dual phono jacks) #82	F	10	25HF12082
3.5mm MINIATURE PLUG (#40) TO:			•
(3.5 mm plug) #40	D	6	40HD07240

1. All cables listed here are black.

259

#### \* Please visit the product pages on our website for the most up-to-date product information

# STANDARD CABLE GUIDE FOR MOLDED CABLE ASSEMBLIES ON PAGE 253 THROUGH 259

Cable Type	Color	Description	Cable Code
W1000 W1000-1 W1000-2	Beige Gray Black	50Ω coax, plastic jacket over spiral shield with 22 AWG stranded center conductor; .156" (3.96 mm) outside diameter. Average capacity 31 pF/feet, UL style 1354	A
W1021-1 W1021-1	Gray Black	2 conductor, plastic jacket over shield with 2, 22 AWG conductor; .20" (5.2 mm) outside diameter. Average capacity 20 pF/feet between conductor; 55 pF/feet between shorted conductor to shield; 32 pF/feet each conductor to shield, UL style 2092	В
W1013-1 W1013-2	Gray Black	2 conductor, plastic unshielded parallel with 2, 18 AWG stranded conductor; .11" (2.8 mm) x .21" (5.3 mm) outside diameter, UL type SPT-1	к
W1032-1 W1032-2	Gray Black	48Ω coax, plastic jacket over spiral shield with 25 AWG stranded center conductor; .11" (2.8 mm) outside diameter. Average capacity 35 pF/feet	D
W1041-1 W1041-2	Gray Black	2 conductor, plastic unshielded tandem cable with 2, 24 AWG stranded conductor; .06" (1.5 mm) x .12" (2.9 mm)	Y
W1065-2	Black	50Ω coax, plastic jacket over braid shield with 26 AWG stranded center conductor; .1" (2.5 mm) outside diameter. Average capacity 30 pF/feet, RG-174	E
W1072-1	Gray	2 conductor, twin coax, plastic jacket over 2 individually shielded 25 AWG parallel conductor. Average capacity 36 pF/feet, recommended for headset applications	F
W1230-1 W1230-4 W1230-5	Gray Beige White	2 conductor,plastic unshielded with 2, 18 AWG stranded conductor; .25" (6.4 mm) outside diameter, UL type SVT	V
W1243-2	Black	<ul><li>75Ω coax, plastic jacket over shield with 27 AWG stranded center conductor;</li><li>.15" (3.8 mm) outside diameter. Average capacity 20.5 pG/feet, UL style 1354 or 1436</li></ul>	x
W1033-1 W1033-2	Gray Black	2 conductor, plastic unshielded parallel with 2, 20 AWG stranded conductor; .10" (2.54 mm) x .19" (4.7 mm) outside diameter, UL style 2433	С
W1096-2	Black	2 conductor, plastic unshielded parallel with 2, 22 AWG stranded conductor; .08" (1.9 mm) x .15" (3.8 mm) outside diameter	z

See page 251 for Cable Assembly Termination vs. Cable Cross Reference Table.

DIMENSIONS ARE FOR REFERENCE ONLY

Inch

(mm)

#### \* Please visit the product pages on our website for the most up-to-date product information

## CROSS REFERENCE GUIDE

#### STANDARD CABLE ASSEMBLY TERMINATION vs. CABLE CROSS-REFERENCE

		Cal	ole									
		W	W	W	W	W	W	W	W	W	W	W
		1	1	1	1	1	1	1	1	1	1	1
		0 0	0 2	0 1	0 3	0 4	0 6	0 7	2 3	2 4	0	0
		ő	1	3	2	1	5	2	0	3	3 3	9 6
		#	1	#	#	#	2	1	#	2	#	2
т	RA40	Х		Х	Х	1	1	2		Х	Х	1
E	RA41	Х		X	1	1	1	2		Х	Х	1
R M	RA200	Х		X	1	1	Х	2		Х	1	1
	RA202	Х		Х	1			2	Х	Х	1	1
Ň	RA205	Х		Х	1	1	Х				1	
Α	RA207	Х		Х	1			2	Х	Х	1	1
Ţ	RA700				Х	Х	Х	2				
 0	RA710				Х	Х	Х	2				
Ň	RA712A			Х							1	1
	RA722A			Х							1	1
	RA760	Х		Х	Х	1	1	2	Х	Х	Х	Х
	RA765	Х		Х	Х	1	1	2	Х	Х	Х	Х
	RA850				Х	Х	Х	2		Х		Х
	ST35	Х	Х	Х	Х	1	Х	2		Х	Х	1
	ST40	Х		Х	1	1	1	2		Х	Х	1
	ST60	Х		Х	1	1	1	2		Х	Х	1
	ST121	Х		Х	1		1	2	Х	Х	Х	1
	ST123				Х	Х	Х	2				3
	ST125	Х			Х	Х	Х	2		Х		Х
	ST131		Х									
	ST200	Х		Х	1	1	Х	2	Х	Х	1	1
	ST230		Х									
	ST700				Х	Х	Х	2				Х
	ST710				Х	Х	Х	2				Х
	ST740	Х		Х	1	1	1	2		Х	Х	Х
	ST750	Х		Х	1	1	1	2		Х	Х	Х
	ST760	Х			Х	1	1	2		Х	Х	1
	ST760L			Х					Х			
	ST765	Х			Х	1	1	2		Х	Х	1
	ST765L			Х					Х			
	ST850	3		3	Х	Х	Х	2		3	3	3
	ST900	Х	Х	Х	1	1	1		Х	Х	Х	Х

# - Indicates any number.

X - Indicates that the cable in this column and the termination in this row can be used together in a standard part number.

1 - These cable assemblies may use heat shrink tubing under overmolded terminations.

2 - These cable assemblies have two of the same termination at one end. Each termination is molded in a different color.

3 - These cable assemblies use a larger overmold than is pictured in the Engineering Design Guide.

4 - Other termination/cable combinations may be available on special order.

261

# PATCH CORDS & MOLDED CABLE ASSEMBLIES 1/4" TELEPHONE PATCH CORDS AND MIL TYPE 1/4" PATCH CORDS

**PHONE: 773 792-2700** 

\* Please visit the product pages on our website for the most up-to-date product information

Ų

## 1/4" TELEPHONE PATCH CORDS

Switchcraft premium 3-conductor single patch cords are designed for rugged, noise-free performance. **Nickel-plated** plugs eliminate the need for periodical cleaning which keeps your audio signals clear. Color cords provide instant visual identification with a choice of three lengths. All cables are fully shielded with rugged, braided thermoplastic outer jackets. Plug handles are black. Audio patch cords are available with other lengths and brass plugs, if desired. Contact Switchcraft for specifying assistance and cable length tolerances.

## MIL TYPE 1/4" PATCH CORDS

Switchcraft Patch Cords are available in a variety of types to meet requirements of communication, industrial and telephone switchboard applications. Patch cords are constructed of high quality bronze tinsel covered with thermoplastic insulating material with braided shield and black thermoplastic braid woven over the insulated conductors.

Switchcraft MIL-type Littel-Plug<sup>®</sup> and Twin-Plug<sup>®</sup> phone plugs with brass finish are attached to these quality cords. Design and material used in strict accordance with Specification MIL-P-642(A). Cords have an identifying label on cord and hot stamping on plug handle.

#### SERIES 20Q 3-CONDUCTOR TELEPHONE-TYPE PATCH CORDS

1/4" diameter plug fingers, black handle, color cable

PART NUMBERING SYSTEM

2 0	Q		2 0		
PLUG	CABLE	LENGTH*	PLUG	FINGER FINISH	CABLE COLOR*
3-cond	. Shielded 2-cond. nylon- braid sheath	D - 2' F - 3' H - 4'	3-cond.	N-Nickel plated B-Natural brass	0-Black 2-Red 5-Green 6-Blue

\* Contact Switchcraft for other lengths and colors.





**SERIES 18Q:** Used in broadcasting, studio recording, sound, and other applications where space is at a premium. Utilizes Series 88Q 2-conductor shielded cord, with a Switchcraft 482 Littel-Plug phone plug with red handle (PJ-051) connected to each end. Shield grounded to sleeve of both plugs, and two leads wired tip-to-tip, ring-to-ring. Standard cord color: black. Other lengths and colors: gray, red, green (special order). Series 18Q provides same or greater number of circuits in a given space than cords using "Twin-Plug" dual telephone plugs.

	Series 18Q	Plug Type 482
Length feet (m)	Part Number	Replacement Cord Used
0.5 (.152)	18QA18	89QA89
1 (.305)	18QB18	89QB89
2 (.610)	18QD18	89QD89
3 (.914)	18QF18	89QF89
4 (1.219)	18QH18	89QH89
6 (1.829)	18QK18	89QK89
10 (3.048)	18QN18	

# PATCH CORDS & MOLDED CABLE ASSEMBLIES COMBINATION AND MIL-TYPE PATCH CORDS

#### \* Please visit the product pages on our website for the most up-to-date product information

## COMBINATION PATCH CORDS



Series CPC Combination Patch Cords provide convenient interconnections between standard telephone-type jacks (3-conductor, .25" inside diameter sleeve) and miniature telephone-type jacks (3-conductor, .173" inside diameter). Series CPC cords are ideal for connection in telephone, data processing and other telecommunication applications where both standard and miniature jacks are available for patching.

#### **FEATURES**

- 1. Rugged, telephone-quality tinsel conductors, with slate gray, braided thermoplastic jacket with flex relief reinforcements at point of entry into each plug handle.
- 2. Series CPC cords, eliminates the need for a separate adapter or field-fabricated combination cords.
- 3. Switchcraft (on special order) can assemble cords of any practical length.

◊ SERIES CPC101: Standard 2-conductor, 413 Twin-Plug (.25" outside diameter finger) on one end; miniature, 3-conductor TT253, TT Twin-Plug (.173" outside diameter finger) on the other end. One twin plug tip to miniature plug ring. All sleeves connected to cable shield. 6, 10, 15, 20 and 25 foot lengths. ◊ **SERIES CPC103:** Standard 2-conductor, 413 Twin-Plug (.25 " outside diameter finger) on one end with cable-connected shield to sleeve; two independent tip circuits. Other end miniature, TT261, TT Twin-Plug (.173" outside diameter finger) in the same wiring. 6, 10, 15, 20 and 25 foot lengths.


SERIES CPC104: Standard 3-conductor, 414 Twin-Plug (.25 " outside diameter finger) on one end; miniature 3-conductor, TT263, TT Twin-Plug on other end. Wired at 5-conductor tips-to-tips, rings-to-rings, all sleeves to cable shield. 6, 10, 15, 20 and 25 foot lengths.

Part Number	Length	
♦CPC102A	6 inches	
♦CPC102D	2 feet	S
♦ OPC102F	3 feet	te
♦CPC102K	6 feet	dia mir
♦ CPC102N	10 feet	3
♦ CPC102R	15 feet	
♦ CPC102T	20 feet	ot
♦CPC102U	25 feet	

Standard 3-conductor (483) telephone plug (.25" outside diameter finger) on one end; niniature (253) tini-telephone® 3-conductor (.173" outside diameter. finger) plug on other end.(See Schematic).

Description

Special order only; contact factory for price and delivery.

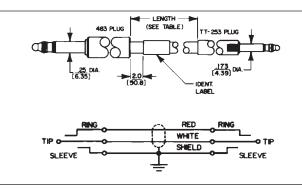



# MIL-TYPE 1/4" TWIN PATCH CORDS

**SERIES 22Q:** For use in telephone patching, broadcasting, studio recording, high-quality public address systems, telephone, telecommunications, and instrumentation systems. Uses 4-conductor shielded cord with Switchcraft Number 414 Twin-Plug® connected to each end. Shield is grounded to sleeve of each plug and individual leads wired tip-to-tip and ring-to-ring. Twin-Plug 414 is a 6-circuit plug with electrically independent tip circuits and ring circuits, with plug fingers spaced on .625" center to fit standard twin jacks. A self-aligning feature accommodates errors in jack location. Standard lengths: 1 feet to 10 feet; standard color: black. Other lengths and colors are available.

Part Number	Length, feet (m)
<b>⊘22QB22</b>	1 (.305)
<b>⊘22QD22</b>	2 (.610)
<b>⊘22QF22</b>	3 (.914)
<b>⊘22QK22</b>	6 (1.829)
<b>⊘22QN22</b>	10 (3.048)

 $\Diamond$  Special order only; contact factory for price and delivery.

# PATCH CORDS & MOLDED CABLE ASSEMBLIES MINIATURE TT® BRAIDED PATCH CORDS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

## MINIATURE TT® BRAIDED PATCH CORDS



#### CABLE AND PLUG FINGER COMBINATIONS

**2-Conductor Patch Cord**. Two-conductor Bantam-Type<sup>®</sup> plug, Switchcraft TT251 at each end. Shield (75% coverage) is grounded to each plug sleeve. Tinsel conductor is wired tip-to-tip. Standard color: black. Other colors and lengths are available on special order.

Part Number	Description	Length, feet (m)	
<b>⊘TT722</b>		1 (.305)	
<b>⊘TT724</b>	2-conductor single,	2 (.61)	
<b>⊘TT726</b>	brass finish on plug fingers,	3 (.914)	
<b>⊘TT727</b>	black handle and cord.	4 (1.219)	
<b>⊘TT728</b>	Identifying label on cord.	5 (1.524)	
<b>⊘TT729</b>		6 (1.829)	

**3-Conductor Patch Cord.** 3-conductor Bantam-Type plug (Switchcraft TT253) at each end. Wiring is the same as TT724, except also has ring-to-ring wiring.

Part Number	Description	Length, feet (m)
<b>⊘TT741</b>		0.5 (.152)
<b>⊘TT742</b>	2 conductor cinglo	1 (.305)
<b>⊘TT744</b>	3-conductor single, brass finish on plug fingers, black handle and cord. Identifying label on cord.	2 (.61)
<b>⊘TT746</b>		3 (.914)
<b>⊘TT747</b>		4 (1.219)
<b>⊘TT748</b>		5 (1.524)
<b>⊘TT749</b>		6 (1.829)
Part Number Description1, 2		Length, feet (m)
<b>⊘TT741N0</b>	0 conductor cingle	0.5 (.152)
<b>⊘TT742N0</b>	3-conductor single, nickel-plated plug fingers (brass available) black handles and cord.	1 (.305)
<b>⊘TT744N0</b>		2 (.61)
<b>⊘TT746N0</b>		3 (.914)
<b>⊘TT747N0</b>		4 (1.219)

**3-Conductor Twin Patch Cords.** 5-circuit patch cords use two 3-conductor twin Bantam-Type plugs, Switchcraft TT-263, at each end. Sleeve circuits are wired common, and tinsel conductors are wired tip-to-tip and ring-to-ring (see schematic). Polarizing handle notches indicated plug fingers with interconnected tip and rings. Standard color: black. Other colors and lengths are available on special order.


Part Number	Description	Length, feet (m)
<b>⊘TT861</b>		0.5 (.152)
<b>⊘TT862</b>	3-conductor twin,	1 (.305)
<b>⊘TT864</b>	brass finish on plug fingers,	2 (.61)
<b>⊘TT866</b>	black handle and cord.	3 (.914)
<b>⊘TT867</b>	Identifying label on cord.	4 (1.219)
<b>⊘TT868</b>	identifying laber on oord.	5 (1.524)
<b>⊘TT869</b>		6 (1.829)

1. For brass fingers, substitute "B" for "N" in part number. Special order only.

2. "0" in part number denotes black handle and cord. Substitute the following for "0" to specify other color cords:

2-Red 5-Green 6-Blue

◊ Special order only; contact Switchcraft for prices and delivery.

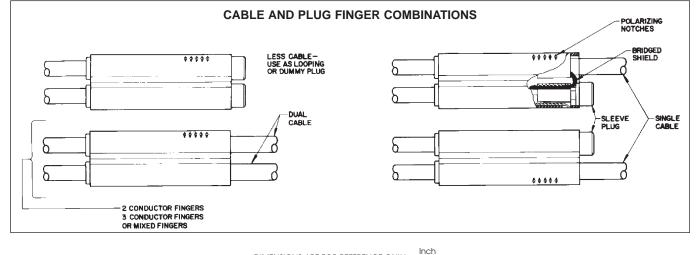

264

# PATCH CORDS & MOLDED CABLE ASSEMBLIES MINIATURE TT® MOLDED PATCH CORDS AND TELEPHONE COUPLERS

#### \* Please visit the product pages on our website for the most up-to-date product information

# MINIATURE TT<sup>®</sup> MOLDED PATCH CORDS (continued)

Part Numbers		Length	
Series TT100	Series TT120	feet (m)	
<b>♦TT101</b>	<b>⊘TT121</b>	0.5 (.152)	
<b>⊘TT102</b>	<b>⊘TT122</b>	1.0 (.305)	
<b>♦TT103</b>	<b>⊘TT123</b>	1.5 (.457)	
<b>⊘TT104</b>	<b>⊘TT124</b>	2.0 (.610)	
<b>♦TT105</b>	<b>⊘TT125</b>	2.5 (.762)	
<b>⊘TT106</b>	<b>⊘TT126</b>	3.0 (.914)	
<b>♦TT107</b>	<b>⊘TT127</b>	4.0 (1.219)	
<b>♦TT108</b>	<b>⊘TT128</b>	5.0 (1.524)	
<b>♦</b> TT109	<b>⊘TT129</b>	6.0 (1.829)	
<b>⊘TT110</b>	<b>⊘TT130</b>	7.0 (2.134)	
\\$TT111	<b>⊘TT131</b>	8.0 (2.438)	
<b>♦TT112</b>	<b>⊘TT132</b>	9.0 (2.743)	
<b>⊘TT113</b>	<b>⊘TT133</b>	10.0 (3.05)	
<b>⊘TT114</b>	<b>⊘TT134</b>	11.0 (3.353)	
<b>♦TT115</b>	<b>⊘TT135</b>	12.0 (3.658)	


Part N	umbers	Length
Series TT140	Series TT160	feet (m)
<b>⊘TT141</b>	<b>⊘TT161</b>	0.5 (.152)
<b>⊘TT142</b>	<b>⊘TT162</b>	1.0 (.305)
<b>⊘TT143</b>	<b>⊘TT163</b>	1.5 (.457)
<b>⊘TT144</b>	<b>⊘TT164</b>	2.0 (.610)
<b>⊘TT145</b>	<b>⊘TT165</b>	2.5 (.762)
<b>⊘TT146</b>	<b>⊘TT166</b>	3.0 (.914)
<b>⊘TT147</b>	<b>⊘TT167</b>	4.0 (1.219)
<b>⊘TT148</b>	<b>⊘TT168</b>	5.0 (1.524)
<b>⊘TT149</b>	<b>⊘TT169</b>	6.0 (1.829)
<b>⊘TT150</b>	<b>⊘TT170</b>	7.0 (2.134)
<b>⊘TT151</b>	<b>⊘TT171</b>	8.0 (2.438)
<b>⊘TT152</b>	<b>⊘TT172</b>	9.0 (2.743)
<b>⊘TT153</b>	<b>⊘TT173</b>	10.0 (3.05)
<b>⊘TT154</b>	<b>⊘TT174</b>	11.0 (3.353)
<b>⊘TT155</b>	<b>♦TT175</b>	12.0 (3.658)

## TELEPHONE COUPLERS AND ADAPTERS TELEPHONE PATCH COUPLERS


TT-couplers interconnect 2- or 3-conductor patch cords terminated with Switchcraft standard or tini-telephone<sup>®</sup> plugs, also similar telephone plugs with compatible finger shape and dimensions.

Part Number	Handle Color	Cond.	Input ID Inch (mm)	Output ID Inch (mm)	
<b>♦ TT281</b>	Black	2			
<b>♦ TT282</b>	Red	2	175 (4 44)	.175 (4.44)	
<b>◊ TT283</b>	Black	3	.175 (4.44)		
<b>⊘TT284</b>	Red	3			
<b>♦ TT289</b>	Metal	3	.175 (4.44)	.25 (6.35)	
361A	Metal	2		0F (C 0F)	
<b>◊ 362A</b>	Metal	3	.25 (6.35)	.25 (6.35)	


 $\Diamond$  Special order only; contact factory for prices and delivery.




#### TT100 SERIES



### TT120 SERIES

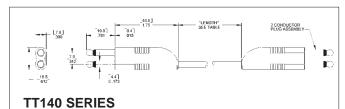

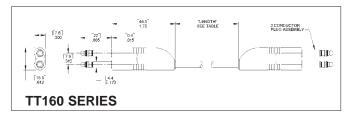

#### **TT-REPLACEMENT CORDS**

Series TT700 cords have bronze tinsel conductors covered with thermoplastic insulation. A braided shield surrounds the conductors, and the cord is finished with a braided black thermoplastic jacket. Cord ends are reinforced to accept the internal threaded end of a TT-Phone Plug® plug. Used as a replacement cord for Series TT720 and TT740 patch cords, and used on TT-Twin Plug® plugs, Series TT260, in dual cable assemblies with 2- and 3-conductor (or combinations) plug fingers requiring independent tip, ring and sleeve circuits, and for single cable assemblies where supplementary cross-over wiring is needed for common tip, ring and/or sleeve circuits.

**◊TT701** - Length 6" (152.4 mm). **◊TT709** - Length 6' (1.829 m).

# PHONE: 773 792-2700

#### \* Please visit the product pages on our website for the most up-to-date product information

# VIDEO PATCH CORDS

Switchcraft new broadcast series video patch cords are available in eight base ten color codes. Our cable is a high performance serial digital 75 Ohm RG59 type. This unique low-loss cable is ideal for "True" 75 Ohm HD patching as well as conventional analog signals.

The jacket is made flexible with very low retract memory.

#### FEATURES:

- \* Rugged nickel-plated handles knurled for positive finger grip.
- \* Flexible black "boot" placed on all cable colors for more positive grip and cable strain relief.
- \* Overall flexible jacket for easy coil and low retract memory.

#### SPECIFICATIONS:

Plug Housing: Plug Contact Pin:	Nickel-plated, copper alloy. Gold-plated, copper alloy.		
Cable:	Conductor:	22 AWG (19 x 34)	
		Stranded BC	
	Shield: 95% BC Braid		
	Dielectric: .146", 3.70mm, Cellula (Foam) PE		
	Jacket: Matte Finish PVC		
	Nom. Imp:	75 Ohm	





Part Numbering System		
Video Patch Cords	Video Patch	Length (Feet)
Standard .090 WECO	VP	
Midsize Video Patch	VMP	

Colors		Color Code	Stock Lengths
			1'
Black	=	BK	2'
Red	=	R	3'
Orange	=	0	4'
Yellow	=	Y	5'
Green	=	GN	6'
Blue	=	BL	7'
Purple	=	Р	8'
Gray	=	GY	9'
-			10'



(Custom lengths are available by request)

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

www.switchcraft.com

\* Please visit the product pages on our website for the most up-to-date product information

# 3-CONDUCTOR TT PATCH CORDS: ANALOG / AES/EBU AUDIO AND RS422 PATCHING

Switchcraft single 3-conductor TT audio patch cords have now been designed with a low capacitance cable which at 110 Ohms is ideal for digital audio AES/EBU and SMPTE Mtime code patching. The overall jacket is now flexible in eight colors. The nickel plated plugs allow for non-tarnishing and the overmolded handle-boot reduces strain off the cable when pulled.

Switchcraft dual 3-conductor TT patch cords have also been redesigned with an overall flexible cable and six colors to choose from. Like the single TT the dual plugs are nickel plated and flexible. These cords work with all Switchcraft TT stereo spaced bays for analog audio and RS422 data patching.

#### **SPECIFICATIONS**

Standard plug terminations are single 3-conductor TT. Plug handle is molded thermoplastic.

Plugs:Tip Rod, Ring and Sleeve - Copper AlloyCable:26 AWG (30x40) OFBC, 110 Ohm Low

Capacitance. Jacket is Matte PVC



Part Numbering System			
Video Patch Cords	Video Patch	Length (Feet)	Cable Color
Single Bantam TT	TT		
Dual Bantam TT	TTD		

TTD Not available in purple or gray.

Colors		Color Code	Stock Lengths
			1'
Black	=	BK	2'
Red	=	R	3'
Orange	=	0	4'
Yellow	=	Y	5'
Green	=	GN	6'
Blue	=	BL	7'
Purple	=	Р	8'
Gray	=	GY	9'
			10'

(Custom lengths are available by request)

1 Foot (12" inches) equals 3.28 meters







NOTES

# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

www.switchcraft.com

# MINIATURE KEYBOARD SWITCHES - SERIES 9800

#### \* Please visit the product pages on our website for the most up-to-date product information

## MINIATURE KEYBOARD SWITCHES

#### **IBS MINIATURE SWITCHES SERIES 98000R**

Momentary IBS switches provide cost-effective versatility for a wide range of electrical/electronic applications including switching analog and digital signals in business systems, public address, test instruments, medical, EDP (computer), input devices and peripheral equipment, local area network, telecommunication, digital transmission equipment, telephone systems and attachments and calculators. Convenient modular design allows quick assembly to PC boards. These switches are also available in multiple station assemblies (see page 308).

#### **SPECIFICATIONS MECHANICAL**

Switch Actuation: Momentary Plunger Travel: .144" (3.66 mm). Actuation Force (Full Travel): 12-15 ounce (340-425 grams). Life: 1 million operations.

#### **ELECTRICAL**


UL approved at .25 A @ 28V DC and .125 A @ 125V AC

#### MATERIALS

Housing: Molded thermoplastic UL 94V-0 Plunger: Molded thermoplastic UL 94V-0. Contactors: Copper alloy. Terminals: Copper alloy, solder-plated. Contact Surfaces: Gold-plated.

#### MOUNTING

Switches have .157" (4 mm) long PC terminals for mounting on single- or double-sided PC boards up to .094" (2.4 mm) thick on 0.394" (10 mm) minimum centers in rows or arrays. 0.394" (10 mm) PC terminals available on special order. Rugged molded-in standoff legs provide stable mounting and clearance for PC board cleaning.

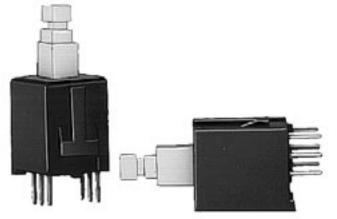

#### **ORDERING STANDARD SWITCHES**

Order switches and pushbuttons by part numbers from table. PART NUMBERS

Part No.1	Description	Circuit	Dim. A
982A01R		1-A	
982A03R	Momentary	1-C	.157" (4 mm)
982A06R		2-C	()


1 Order pushbuttons separately.

#### **ORDERING SPECIAL SWITCHES**

Contact your Switchcraft representative with full specifying details.

#### SPECIAL ORDER FEATURES


- Other circuitry 1B, 2A or 2B
- Longer terminals .394" (10 mm) long.

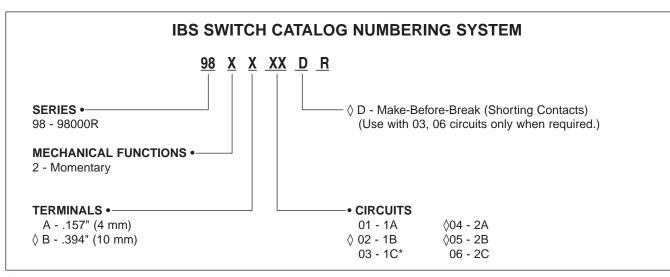

Special order only; contact Switchcraft for price and delivery. \* Non-shorting (break-before-make) contacts

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

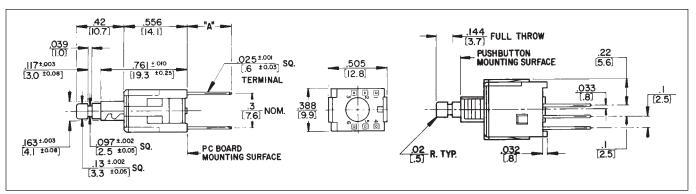

#### TERMINAL FUNCTION BY TERMINAL NUMBER

	First Pole <sup>1</sup>			Second Pole		
Circuit	N.O.	N.C.	Common	N.O.	N.C.	Common
1-A	3	-	2	-	-	5*
1-B	-	1	2	-	-	5*
1-C	3	1	2	-	-	5*
2-A	3	-	2	6	-	5
2-B	-	1	2	-	4	5
2-C	3	1	2	6	4	5

\*Pin 5 is used as a support pin for switch mounting and has no electrical connection. 1. N.O.= normally open; N.C.= normally close.

# **KEYBOARD SWITCH PUSHBUTTONS**

Pushbuttons designed for IBS switches are available in white, black, red, blue, and gray. Other colors are available on special order. Pushbutton faces are concave for operator convenience and can be mounted either horizontally or vertically. Pushbuttons must be ordered separately, but may be factory installed, if desired, at extra cost.




#### PART NUMBERS


Туре І	Type II	Color	Туре І	Туре I I	Color
P2936	P2951	White	P2941	P2956	Blue
P2937	P2952	Black	P2942	P2957	Gray
P2938	P2953	Red	◊P2943	&P2958	Brown
⊘P2939	◊P2954	Yellow	-	&P2979	Cream
⊘P2940	◊P2955	Green	-	&P2992	Tangerine

 $\Diamond$  Special order only; contact Switchcraft for price and delivery.

#### LEGENDS

Engraved letters and numbers are available on special order. A-Z, ON and OFF in Condensed Block typeface are available. Other custom legends may be supplied (please inquire). Refer to drawing and chart for legend data.

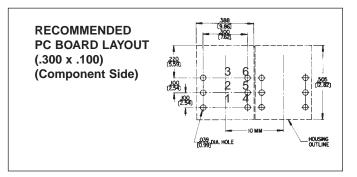

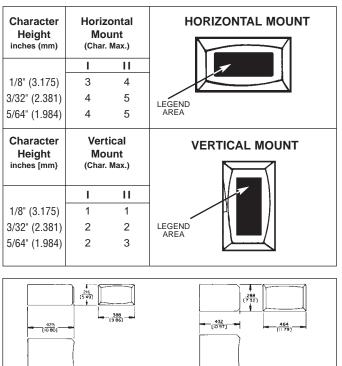





# UNISWITCH® SWITCHES - SERIES US & LUS

#### \* Please visit the product pages on our website for the most up-to-date product information

## **UNISWITCH® SWITCHES**

#### SERIES US - Non-illuminated, SERIES LUS - Illuminated

Cost-effective Uniswitch switches are lighted or non-lighted momentary switches featuring snap-in mounting in a single hole and a choice of solder/screw (#5-40), solder/quick-connect (AMP FASTON® 110) 60967-1, or stand-off PC terminals. Molded housing protects internal parts, and bezel functions as built-in escutcheon. Series LUS accepts T 1-3/4 bi-pin lamps. (Lamps not included.) <sup>®</sup>FASTON is a registered trademark of AMP INC.

#### MOUNTING

"Snap-in" mounting is in .617" (15.67 mm) minimum square hole for row or matrix mounting. Panel thickness: .047" (1.19 mm) to .266" (6.76 mm) maximum. To mount, simply press switch into panel; "Adjusto-Clip" locking tabs engage panel and hold switch securely. Behind panel distance is 1.312" (33.32 mm) minimum.

#### SPECIFICATIONS

Switch Housing: Molded plastic, charcoal gray only.
"Adjusto-Clip": Copper alloy.
Contactor: Copper alloy plated. Form 1-A rated:
250 mA, 30 W maximum, AC, non-inductive load.
Terminals: Copper alloy, silver-plated.
Pushbuttons: Molded plastic in 8 colors.
Operating Force: 12 - 16 ounce (340-454 grams).

#### SPECIAL ORDER FEATURES

- Other contactor platings.
- Engraved legends (See page 270).
- Other pushbutton colors.
- "Adjusto-Clips" set to positions 2, 3, 4, or 5.

#### PART NUMBERS (Order switches and pushbuttons separately)

Terminal Type/Part Number;		Terminal Type/Part Number;			
Series US		Series LUS <sup>1</sup>			
Solder/	Printed	Solder/	Solder/	Printed	Solder/
Screw	Circuit	Quick-Connect	Screw	Circuit	Quick-Connect
US001	US001PC	US001ST	LUS001	LUS001PC	LUS001ST

1. Lamp not included.

Special order only; contact Switchcraft for price and delivery.



#### "ADJUSTO-CLIP" MOUNTING


Position Number	Panel Thickness Inch (mm)		Position Number	Panel Th Inch	nickness (mm)
	Min.	Max.		Min.	Max.
1*	.047 (1.2)	.078 (2.0)	4	.188 (4.8)	.219 (5.6)
2	.094 (2.4)	.125 (3.2)	5	.234 (6.0)	.266 (6.8)
3	.141 (3.6)	.172 (4.4)			

 $^{\ast}$  "Adjusto-Clips" normally installed in this position unless otherwise specified.

#### **PUSHBUTTONS\*** (Pushbuttons ordered separately from switches.)

	(	e eldeled eepalatel	,
Part Number	Color	Part Number	Color
P23491	Red	P23495	White
P23492	Black	P23497	Orange
P23493	Green	P23498	Yellow
P23494	Blue	<b>⊘P234913</b>	Amber

\* Extra replacement pushbuttons can be ordered separately.

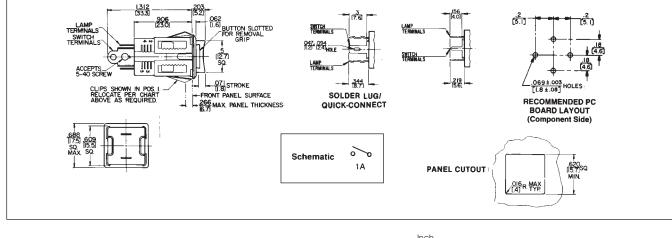

# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

## BOX SWITCH® SWITCHES

SHOWN ACTUAL SIZE



## BXR013PC

#### SERIES BXR

Economical momentary, non-illuminated switches feature "Adjusto-Clip" snap-lock mounting and selection of switching. Bezel trims mounting and enclosed construction protects against dust, dirt, and physical damage. Color pushbuttons have concave face for positive "feel".

#### MOUNTING

Front mount in .620" (15.75 mm) minimum square hole. Solder lug/quick-connect terminals accept AMP FASTON<sup>®</sup> 110 terminals; PC terminals fit boards up to .281" (7.14 mm) thick. "Adjusto-Clip" permits mounting in panels from .047 " (1.19 mm) to .281" (7.14 mm) thick.

<sup>®</sup>FASTON is a registered trademark of AMP INC.

#### **SPECIFICATIONS**

**Housing:** Molded plastic, charcoal gray only. **Pushbutton:** Molded plastic; red, black, green, and white standard.

"Adjusto-Clip" Mounting Frame: Copper alloy, plated.
Contact Springs: Copper alloy, plated.
Contacts: Integral, copper alloy, plated.
1-A, 1-C, 2-C, or 2-A + 2-C
Switching: 250 mA, 30 W max., AC, non-inductive load.
Terminals: Copper alloy, silver-plated.

#### SPECIAL ORDER FEATURES

- Other contact platings.
- Engraved legends (see page 270).
- Other pushbutton colors.
- "Adjusto-Clips" set to positions 2, 3, 4, or 5.





Rear view, BXR056 Solder Lug/Quick-Connect Terminals.

#### Rear view, BXR013PC PC Terminals.

#### PART NUMBERS


	Pushbutton Col					
	Circuits					
Red	Black	Green	White			
	Solder Lug/Quick-Connect Terminals					
BXR011	BXR021	♦BXR031	BXR051	1-A		
BXR013	BXR023	BXR033	BXR053	1-C		
BXR016	BXR026	BXR036	BXR056	2-C		
BXR0110	<b>⊘BXR0210</b>	♦BXR0310	♦BXR0510	2-A + 2-C		
		PC Terminals				
♦BXR011PC	<b>⊘BXR021PC</b>	♦BXR031PC	♦BXR051PC	1-A		
<b>BXR013P</b>	<b>BXR023P</b>	◊BXR033PC	♦BXR053PC	1-C		
BXR016PC	BXR026PC	◊BXR036PC	◊BXR056PC	2-C		
♦BXR0110PC	<b>⊘BXR0210PC</b>	♦BXR0310PC	BXR0510PC	2-A + 2-C		

Special order only; contact factory for price and delivery.

#### "ADJUSTO-CLIP" MOUNTING POSITIONS

Position	Panel Thickness Inch (mm)		
Number	Minimum	Maximum	
1*	.047 (1.2)	.094 (2.4)	
2	.094 (2.4)	.141 (3.6)	
3	.141 (3.6)	.188 (4.8)	
4	.188 (4.8)	.234 (6.0)	
5	.234 (6.0)	.281 (7.1)	

\* "Adjusto-Clips" normally installed in this position unless otherwise specified.

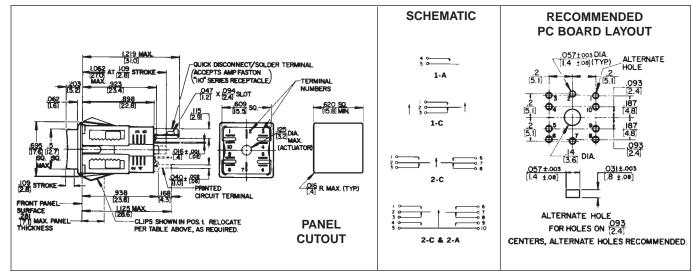

DIMENSIONS ARE FOR REFERENCE ONLY

www.switchcraft.com

# SWITCHES BUTTON-SWITCH® & TINI-SWITCH® — SERIES 903, 913, 923, 933, 950, 960

TINI-SWITCH<sup>®</sup> SWITCHES

\* Please visit the product pages on our website for the most up-to-date product information

## **BUTTON-SWITCH® SWITCHES**



#### SERIES 903, 913, 923, 933

These small momentary switches are completely enclosed in rugged metal housing. Front or rear-panel mount types offer 1-A, 1-B, 1-C, or 1-D switching. Red or black pushbuttons and solder terminals are standard. Series 903 and 913 are front mount in .469" (11.91 mm) diameter hole in panels up to .297" (7.54 mm) thick. Series 923 and 933 are rear mount in .250" (6.35 mm) diameter hole in panels up to .156" (3.96 mm) thick. Mounting hardware is supplied.

#### **SPECIFICATIONS**

Body: Copper alloy, plated.
Pushbutton: Molded red or black plastic, integral with shaft.
Insulation: Rigid plastic.
Springs: Integral contacts, plated.
Ratings: 250 mA, 30 W maximum, AC, non-inductive load.
Solder Terminals: Copper alloy, silver-plated.
Locknuts: Copper alloy, plated.
Series 903, 913: P-1053-1.
Series 923, 933: P-1150-1.
Lockwasher: Series 903, 913: Steel, P-1060-3
Flat Washer: Series 923, 933: Steel, plated. S-1790-1

#### SPECIAL ORDER FEATURES

• Other pushbutton colors. • Legends.

#### PART NUMBERS

Panel Mounting	Pushbutton Cold	or/Part Number	Circuit	Schematic <sup>1</sup>
	Red	Black		
Front	903	913	1-C	
TION	<b>⊘903D</b>	<b>⊘913D</b>	1-D	1-C
Rear	923	933	1-C	<u>و مستعد</u>
neai	<b>⊘923D</b>	<b>⊘933D</b>	1-D	<u> </u>

1. Circuits C or 1-D can be wired for either 1-A or 1-B switching ◊ Special order only; contact Switchcraft for price and delivery.



#### SERIES 950, 960

Momentary Tini-Switch<sup>®</sup> switches are miniaturized versions of Littel-Switch<sup>®</sup> switches (see page 274 for construction details). .25 A contacts are intended for low-power switching where contact resistance is not critical. Red or black pushbuttons, solder lug terminals and choice of 1-A, 1-B and 1-C switching is standard.

#### MOUNTING

Switches mount from rear in .250" (6.35 mm) diameter hole in panels up to .094" (2.39 mm) thick. Mounting washers and locknuts are supplied.

#### **SPECIFICATIONS**

Bushing: Copper alloy, plated.
Pushbutton: Molded plastic, integral with shaft.
Insulation: Rigid plastic.
Springs: Copper alloy.
Contacts: Integral contacts are standard. .25 A, 30 W maximum, AC, non-inductive load.
Washer: Steel, plated, S17901.
Locknut: Copper alloy, plated, P11501.


#### SPECIAL ORDER FEATURES

• Other pushbutton colors. • Legends.

#### PART NUMBERS

Pushbutton Color/Part Number		Circuit	Schematic
Red	Black		
951	961	1-A, SPST, (N.O.)	世 1-A
()952	<b>◊962</b>	1-B, SPST, (N.C.)	<u>н</u> 1-В
953	963	1-C, SPDT	出 1-C

◊ Special order only; contact Switchcraft for price and delivery.

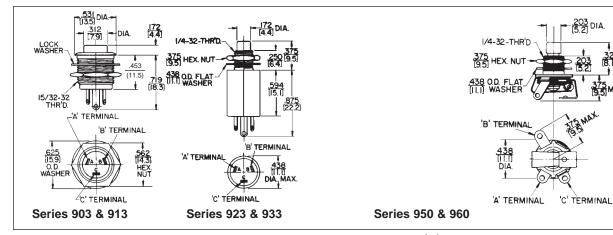


# SWITCHES LITTEL-SWITCH® SWITCH WS SERIES 100, 100S, 200, 200S

# **PHONE: 773 792-2700**

#### \* Please visit the product pages on our website for the most up-to-date product information

## LITTEL-SWITCH<sup>®</sup> SWITCHES

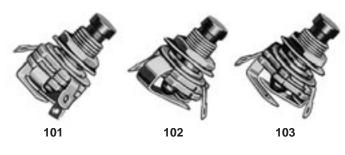

#### SERIES 100, 100S, 200, 200S

Momentary switches feature leaf springs, insulating spacers, notched insulating washers and plated copper alloy bushing assembled into a rugged, reliable, long-life switch for limited space applications. Series 100 and 200 have integral .25 A contacts intended for low power switching where contact resistance is not critical. Series 100S and 200S have 3 A fine silver contact. Red and black pushbuttons, solder lug terminals and choice of 1-A, 1-B or 1-C switching are standard. Shaft and pushbutton molded as one piece. Captive shaft extends through bushing, actuated leaf springs. Notched phenolic washers insulate springs and interlock all members, eliminating possibility of springs shifting. All springs are insulated from bushing.

#### MOUNTING

Switches mount from rear in panels up to .250" (6.35 mm) thick in .375" (9.52 mm) diameter holes. Locknuts and washers are supplied.

#### LEGENDS

Switchcraft offers a wide variety of engraved legends on special order. Contact Switchcraft for details.

#### PART NUMBERS

Pushbutton Color/Part Number		Circuit	Schematic
Red	Black		
101	201	1-A, SPST, (N.O.)	°.
<b>◊101S</b>	<b>⊘201S</b>	1-A, 51 51, (N.O.)	1-A 🗛
<b>◊102</b>	202	1-B, SPST, (N.C.)	<u>⊶ </u> ≜ •
<b>⊘102S</b>	<b>⊘202S</b>	1-0, 51 51, (N.C.)	1-B
103	203	1-C, SPDT	<u>, T.</u>
<b>≬103S</b>	<b>⊘203S</b>		1-C <b>1</b> -O

Special order only; contact Switchcraft for price and delivery.

'S" at the end of part number indicates 3H rated fine silver contacts.


#### **SPECIFICATIONS**

Bushing: Copper alloy, plated. Pushbutton: Molded plastic, integral with shaft. Insulation: Rigid plastic. Springs: Copper alloy. Contacts: Integral contacts are standard. (Series 100, 200) .250 A, 30 W maximum, AC, non-inductive load. Riveted silver contacts (Series 100S, 200S); 3A, 300 W maximum AC, non-inductive load.

Washer: Steel, plated, S10221. Locknut: Copper alloy, plated, P10001.

#### SPECIAL ORDER FEATURES

- Other pushbutton colors.
- Legends.
- Welded crossbar palladium contacts for dry circuit.

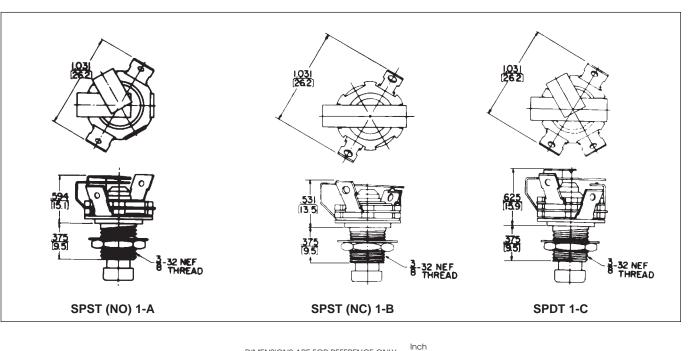

# FAX: 773 792-2129 HI-D SWITCH® SWITCHES - SERIES H-100, H-100PC, H-200, H-200PC

# 275

SWITCHES

#### \* Please visit the product pages on our website for the most up-to-date product information

# HI-D SWITCH® PC MOUNT SWITCHES

#### SERIES H-100, H-100PC, H-200, H-200PC

Compact, momentary switches mount on .625" (15.87 mm) centers in rows or matrix arrays and are the same height and panel size as Switchcraft's Hi-D Jack. Rugged "box" body protects contact springs against mechanical damage and keys them in precise alignment. Precision springs produce high contact pressure, smoother wear-reducing actuation, and positive "make-break". Recommended where contact resistance is not critical.

#### MOUNTING

Rear of panel mount in .375" (15.87 mm) diameter hole in panels up to .156" (3.96 mm) thick. Behind panel space: 1.094" (27.79 mm) minimum. Mounting hardware supplied. Switches with PC terminals mount directly to PC boards, and may also be panel mounted with threaded bushing.

#### SPECIFICATIONS

Switch Housing: Molded plastic.

Mounting Bushing: Copper alloy, plated.

**Pushbutton/Actuator:** Thermoplastic, red or black with concave face.

Contact Springs: Copper alloy, silver or gold-plated. Contacts: Integral, 1-A, 1-B, 1-C, or 1-D, 0. 25 A, 30 W

maximum, non-inductive load.

Contactor: Copper alloy, plated.

Locknut: Copper alloy, plated. P10001 (supplied). Washer: Steel, nickel-plated. S10221 (supplied).

#### SPECIAL ORDER FEATURES

- Other pushbutton colors.
- Legends (see page 270).



## **DA-SWITCH SWITCHES**


#### SERIES DA

Enclosed momentary pushbutton switch. Designed to meet switching requirements of computers, data processors, ground support systems, machine and process controls, test equipment and intercoms. Anodized aluminum body protects switch contacts from dirt, dust and bending during mounting. Terminals accept AMP Series 53 taper pins. Mount in .375" (9.5 mm) hole on .531" (13.5mm) centers. Behind panel depth .938" (23.8mm) minimum.

#### SPECIFICATIONS

Housing: Aluminum, black anodized.
Button: Thermoplastic, black.
Terminal Base: Thermoset black phenolic.
Terminals: Copper alloy, gold-plated.
Contacts: Integral. 500 mA, 5 W maximum, non-inductive load.
Contactor: Copper alloy, plated.
Hardware: Supplied with one, ◊P1970 aluminum, black anodized knurled mounting nut, and one, P1971 parkerized lockwasher.






**SERIES H100, H200** 

#### PART NUMBERS

Solder Lug	Terminals	PC Ten	PC Terminals		
Pushbutton Col	outton Color/Part Number Pushbutton Color/Part Number		or/Part Number	Circuit	Schematic
Red	Black	Red Black			
H101	H201	<b>⊘H101PC</b>	<b>⊘H201PC</b>	1-A	
<b>⊘H102</b>	<b>⊘H202</b>	♦H102PC	♦ H202PC	1-B	See Below
H103	H203	H103PC H203PC		1-C	
♦H103D	<b>⊘H203D</b>	-	-	1-D	


Special order only; contact factory for price and delivery.

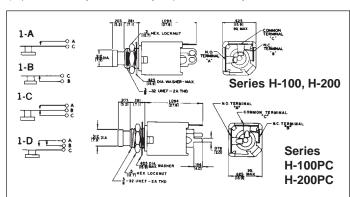

#### PART NUMBERS

	Series DA	Button Color	Circuit	Schematic
	<b>⊘DA013</b> Red		A-B	A-B contacts may be externally wired to
	<b>⊘DA023</b>	Black	A-B	provide a 1-C circuit as illustrated below.
	<b>⊘DA033</b>	Green	A-B	<u></u> B
	<b>⊘DA043</b>	Blue	A-B	c
	<b>⊘DA053</b>	White	A-B	└──- <b>० ०</b>
	<b>⊘DA083</b>	Yellow	A-B	KEY
- L				

Special order only; contact Switchcraft for price and delivery.

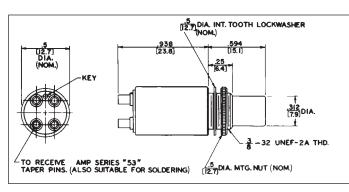

# SWITCHES CORD-SWITCH® AND CORDETTE® CORD SERIES SWITCHES

# PHONE: 773 792-2700

#### \* Please visit the product pages on our website for the most up-to-date product information

## CORD-SWITCH® CORD SWITCHES



#### SERIES E900, ED900, EP900

Momentary cord (pendant) switches can be specified with red or black pushbuttons, 1-C or 1-D switching, solder terminals and metal handle (Series E900), plastic handle (Series EP900), or metal handle with clamp and strain relief (Series ED900).

#### SPECIFICATIONS

(See page 273 for switch specs.)

#### **SERIES E900, EP900:**

Housing: Series E900 - Copper alloy, plated. Series EP900 - Molded black plastic. Switch Bushing: Copper alloy, plated. Insulation: Rigid plastic.

#### SERIES ED900:

Housing: Die-cast zinc, plated.
Switch Body and Insert Bushing: Copper alloy, plated.
Insulation: Rigid plastic.
Cable Relief Bushing: Black thermoplastic rubber.
Pressure Plates: Stainless steel.
Cable Relief Screws: Steel, plated.


#### SPECIAL ORDER FEATURES

• Other pushbutton colors. • Custom legends


#### PART NUMBERS (examples)

Pushbutton Color/Part Number		Maximum Cable Outside Diameter	Circuit
Red	Black	Outside Diameter	
E903	E913	.375" [9.5 mm]	
ED903	ED913	.375" [9.5 mm]	1-C
EP903	EP913	.250" [6.4 mm]	
<b>⊘E903D</b>	<b>⊘E913D</b>	.375" [9.5 mm]	
<b>♦ED903D</b>	♦ED913D	.375" [9.5 mm]	1-D
<b>⊘EP903D</b>	<b>⊘EP913D</b>	.250" [6.4 mm]	

 $\Diamond$  Special order only; contact Switchcraft for price and delivery.

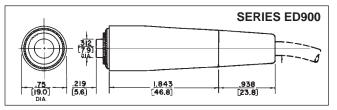

## CORDETTE® CORD SWITCHES

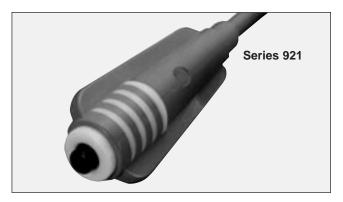

#### SERIES 921

Momentary, 0.5 A switching combined with 1-piece molded plastic body qualifies Cordette for all types of commercial and industrial usage. The 921 has a phono jack receptacle and a phono jack in handle to fit standard phono plugs. The 921K is molded with 6' (1.8 meter), 2-conductor cable (internal cable clamp).

#### **SPECIFICATIONS**

**Body:** 921 and 921K - Molded gray plastic with contrasting trim and gray pushbutton.


**Switch Contacts:** Integral copper alloy, plated, form 1-A, 0.5 A, 50 W maximum, AC, non-inductive load. Not recommended for high voltage circuits. **Insulation:** Thermoplastic UL 94V-0.


**Phono Jack Terminations:** (921): Standard phono jack, similar to 3501FP (see Jacks and Plugs Section).

#### SPECIAL ORDER FEATURES

- 1-B, 1-C, or 1-A + 1-B switching.
- Red, green, blue, white or yellow pushbuttons.
- Legends (see page 270).
- Other body colors.
- ST-900 Custom-molded to any of a large selection of cables (See Molded Cable Assembly Section). Also many cable terminations, i.e., phone plugs, extension jacks, phono plugs, spade lugs, alligator clips, stripped and tinned leads, etc.

#### PART NUMBERS

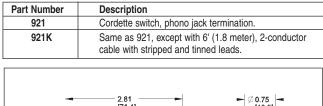

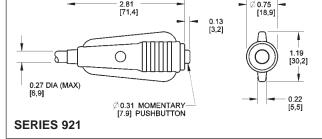

#### \* Please visit the product pages on our website for the most up-to-date product information

# PUSH-LITE® SWITCHES AND INDICATORS

Completely enclosed, lighted pushbutton switches feature long-life, highly-reliable, leaf-springs. Available with or without barriers, full or split-face display. Mounts with clamp-type bracket; no screws, washers or nuts needed. Can be mounted in vertical or horizontal rows and in matrixes. Accepts standard T 1-3/4 flange-base lamp (lamp not furnished with switch) in either 6 V to 28 V rating. Specify 1 lamp for single lamp type or 2 lamps for twin-lamp type when redundant or split-face lighting is required. Barriers and colored filter snap-inserts optional (order separately). Mounting hole (w/o barriers): 1" (25.4 mm) x .875" (22.23 mm); (w/barriers) 1.188" (30.16 mm) x .875" (22.23 mm). Panel thickness: .125" (3.18 mm) maximum. Behind panel depth 1.75" (44.45 mm) (minus panel thickness).

#### MOMENTARY

Housing/ Part Number Pushbutton Color Switching	AC Ratings (max.) non-inductive Contacts	Circuits	Terminals
--	---	----------	-----------

#### SINGLE LAMP

PL103205		SPDT			1-C	
PL106205	Black/White	DPDT	2 A, 125 V	Palladium	2-C	
PL112205	DIACK/WITILE	4PDT	Z A, 125 V	Fallauluitt	4-C	
◊PL126205		DPDT	8 A, 125V	Silver	2-C	Solder Lug
◊PL403205		SPDT			1-C	
◊PL406205	Gray/White	DPDT	2 A, 125V		2-C	
◊PL412205		4PDT		Palladium	4-C	
◊PL706205	Black/White	DPDT	2 A. 125 V		2-C	PC
0PL712205	Diack white	4PDT	2 7, 120 V		4-C	FU

#### **TWIN LAMP**

PL203205		SPDT			1-C	
PL206205	Black/White	DPDT	2 A, 125 V	Palladium	2-C	
PL212205	Diack/ White	4PDT	2 A, 123 V	Fallauluiti	4-C	
<b>⊘PL226205</b>		DPDT	8 A, 125V	Silver	2-C	Solder Lug
<b>⊘PL503205</b>		SPDT			1-C	
<b>⊘PL506205</b>	Gray/White	DPDT	2 A, 125V		2-C	
<b>⊘PL512205</b>		4PDT		Palladium	4-C	
<b>⊘PL803205</b>		SPDT		Fallauluiti	1-C	
<b>⊘PL806205</b>	Black/White	DPDT	2 A, 125 V		2-C	PC
◊PL812205		4PDT			4-C	

#### PUSH-LOCK/PUSH-RELEASE

	Part Number	Housing/ Pushbutton Color	AC Ratings (max.) non-inductive	Contacts	Circuits	Terminals
- 1						

#### SINGLE LAMP

PL103705		SPDT			1-C		
PL106705		DPDT	2 A, 125 V	Palladium	2-C		
PL112705	Black/White	4PDT			4-C		
◊PL123705		SPDT	8 A, 125V	Silver	1-C	Solder Lug	
♦PL126705		DPDT	0 A, 125V	Silver	2-C	Solder Lug	
<b>⊘PL403705</b>		SPDT			1-C		
<b>⊘PL406705</b>	Gray/White	DPDT	2 A, 125V		2-C		
◊PL412705		4PDT		Palladium	4-C		
◊PL703705		SPDT		Fallauluiti	1-C		1
◊PL706705	Black/White	DPDT	2 A, 125 V		2-C	PC	
◊PL712705		4PDT			4-C		

WITHOUT BARRIERS

#### WITH BARRIERS

#### **TWIN LAMP**

◊PL203705		SPDT			1-C	
PL206705	Black/White	DPDT	2 A, 125 V	Palladium	2-C	
PL212705	Diack/winite	4PDT		1 alladiam	4-C	Coldor Lug
◊PL226705		DPDT	8 A, 125V	Silver	2-C	Solder Lug
◊PL506705	Gray/White	DPDT			2-C	
◊PL512705	Gray/White	4PDT	2 A, 125V		4-C	
◊PL803705		SPDT		Palladium	1-C	
◊PL806705	Black/White	DPDT	2 A, 125 V	Fallauluiti	2-C	PC
◊PL812705		4PDT			4-C	

 ${\boldsymbol{\Diamond}}$  Special order only; contact Switchcraft for price and delivery.


DIMENSIONS ARE FOR REFERENCE ONLY (mm)

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

## PUSH-LITE<sup>®</sup> SWITCHES AND INDICATORS (continued)



U.L. LI3			
Part Number	Housing/ Pushbutton	Action <sup>1</sup>	
SINGLE	LAMP		
◊26U1003		М	Γ
◊26U1004	Black/White	М	
◊26U1007	Diack/White	PL/PR	
◊26U1008		PL/PR	
TWIN LA	MP		

#### U.L. LISTED. MOMENTARY & PUSH-LOCK/PUSH-RELEASE

Part Number	Housing/ Pushbutton	Action <sup>1</sup>	Switching	AC Ratings (max.) non-inductive	Contacts	Circuit	Listing	Terminals	
SINGLE	SINGLE LAMP								
		М	SPDT	8 A, 125 V		1-C	UL		
	Black/White	М	DPDT	8 A, 125V	Silver	2-C	UL	Solder Lug	
	Diack/White	PL/PR	SPDT	8 A, 125V	Silver	1-C	UL		
◊26U1008		PL/PR	DPDT	8 A, 125 V		2-C	UL		
TWIN LA	MP								
◊26U1005		M	SPDT	8 A, 125 V		1-C	UL		
◊26U1006	Black/White	М	DPDT	8 A, 125V	Silver	2-C	UL	Solder Lug	
◊26U1009	Diack/White	PL/PR	SPDT	8 A, 125V		1-C	UL	Colder Edg	
		PL/PR	DPDT	8 A, 125 V		2-C	UL		

◊ Special order only; contact Switchcraft for price and delivery. NOTE: 1 M = Momentary; PL/PR = Push-Lock/Push-Release

## SERIES PL9000 - PL® INDICATORS

Create unlimited combinations of rows and/or matrix arrays with or without Push-Lite switches. A perfect match for front panel appearance Push-Lite switches - but functions only as a lighted indicator. Mounts same as Push-Lite switches: behind panel depth 1.341" (35.55mm) maximum uses same lamp, color filter, snap inserts, light divider and optional mounting barriers as Push-Lite® switches.

## PUSHBUTTON/INDICATOR SCREENS

Series PL500 Pushbuttons/Indicator Screens are available separately for use with Push-Lite switches or PL Indicators for in-the-field substitution and/or replacement.


Part Number	Color	Part Number	Color
PL501	Red	PL508	Yellow
PL503	Green	PL512	Clear
PL504	Blue	PL513	Amber
PL505	White		

## **OPTIONAL MOUNTING BARRIERS**

Molded plastic barriers separate Push-Lite switches, PL Indicators, or combinations of Push-Lite switches and PL Indicators and prevent accidental operation of adjacent switches. Series PL100: end barrier. Series PL200: center barrier. Two required between adjacently mounted switches. Push-Lite switch is shown with two PL102 end barriers installed.

Part Number	Description
PL102	End barrier, black
◊PL111	End barrier, gray
PL202	Center barrier, black
<b>⊘PL211</b>	Center barrier, gray

Special order only: contact Switchcraft for price and delivery.

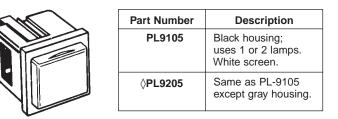


## COLOR FILTER SNAP-INSERTS

Translucent plastic filters for special color coding in Push-Lite switch and PL Indicators. Use with white or clear pushbuttons.

SERIES PL300 - Full Display Color Filters										
Part Number	Color									
PL303	Green									
PL305	White									
PL308	Yellow									

## LIGHT DIVIDER

Light divider for Push-Lite switch pushbuttons and PL Indicator screens; separates lighting from twin lamps. Order light divider for each switch or indicator specified where split-face lighting is desired. Order PL551.

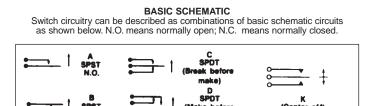


The above are strictly electrical schematics and do not necessarily indicate relative solder lug positions.


break)

# SWITCHES PUSH-LITE® SWITCHES PART NUMBERING SYSTEM

#### \* Please visit the product pages on our website for the most up-to-date product information

## PUSH-LITE® SWITCHES - PART NUMBERING SYSTEM

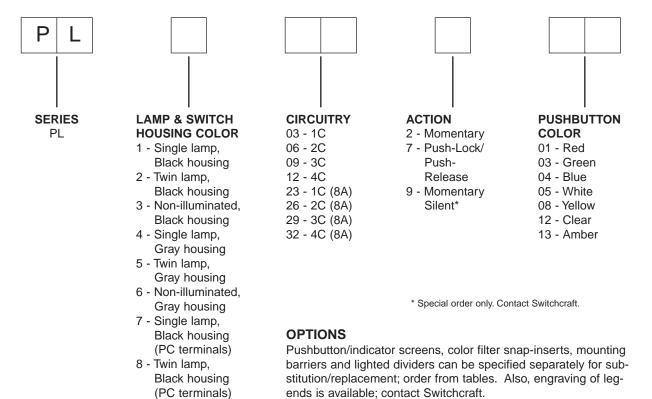

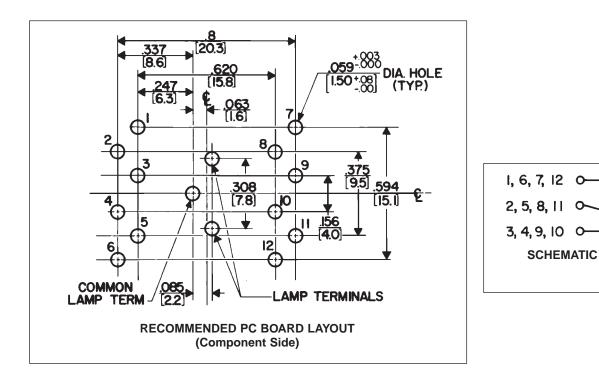


DIMENSIONS ARE FOR REFERENCE ONLY (mm)


# SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

\* Please visit the product pages on our website for the most up-to-date product information

# PUSH-LITE<sup>®</sup> SWITCHES AND INDICATORS (continued)

**OUTLINE DIMENSIONS** 

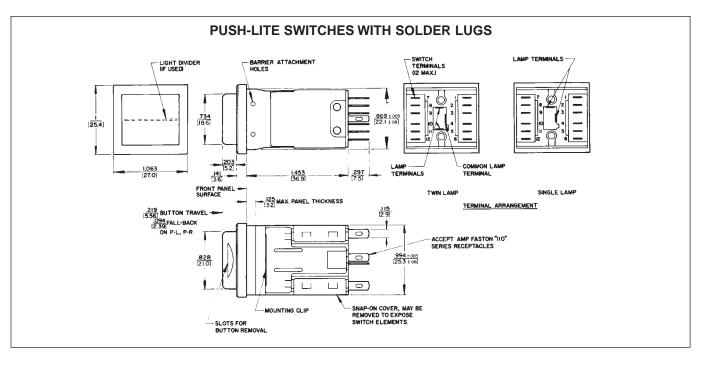

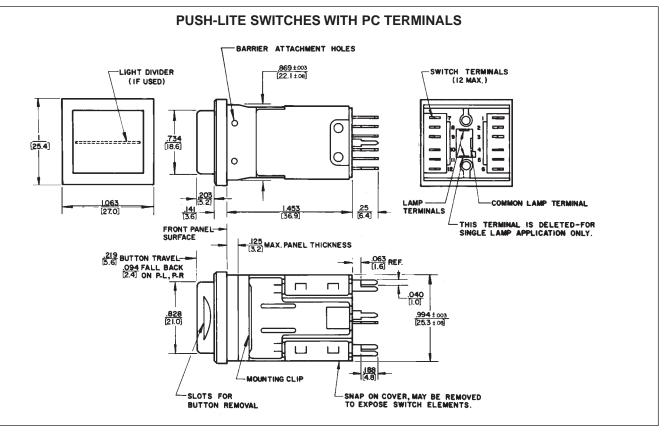

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

**SWITCHES** 

vitehera


281

\* Please visit the product pages on our website for the most up-to-date product information


# PUSH-LITE® SWITCHES AND INDICATORS (continued)


OUTLINE DIMENSIONS

#### SWITCH AND INDICATOR MOUNTING WITH BARRIERS (See Note)

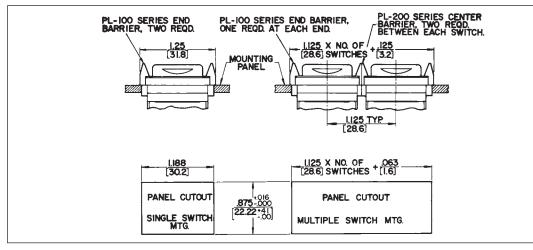

SWITCH AND INDICATOR MOUNTING WITH BARRIERS (SEE NOTE)

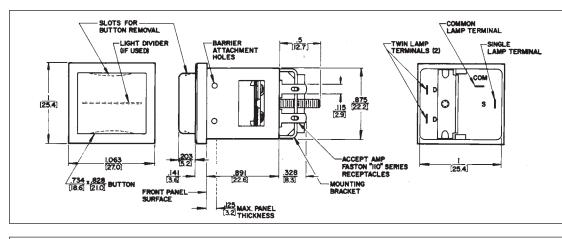

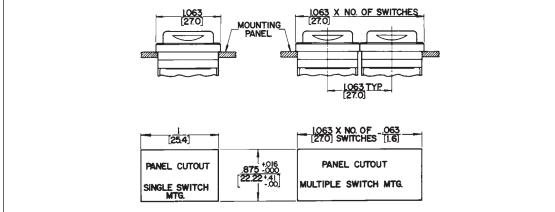

## **NOTE: PANEL OPENINGS FORM MULTIPLE ROW SWITCH MOUNTING** Leave .109" (2.77 mm) minimum width strip between panel-cutouts to assure secure mechanical mounting of adjacent clamp mounting brackets.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

SWITCHCRAFT, INC. 5555 N. Elston Ave. • Chicago, IL 60630

#### \* Please visit the product pages on our website for the most up-to-date product information

## SLIDE SWITCHES

#### **DESIGN FEATURES**

Switchcraft slide switches are completely field tested and proven in electrical/electronic equipment applications. They are among the highest-quality, lowest-cost slide switches available to "cost-to-quality ratio" conscious engineers.

Precision slide switches are designed and constructed to meet or exceed industry standards for reliability, electrical capacity and life characteristics.


Switchcraft's slide action switches are ideal for use in critical military and industrial applications such as: instrumentation, test and ground support equipment, computers, control devices. Their attractive styling will enhance the appearance of modern home entertainment equipment.

#### **UL AND CSA SWITCHES**

All slide switches in this catalog with part number suffix "E" are stamped with both UL and CSA marks. Other standard switches are UL recognized (except as noted) and are stamped with the stamped mark.

#### **TERMINALS**

Silver-plated terminals are standard; gold-plated terminals are available on special order. Printed circuit terminals in varying lengths from ("A" dimension) .078" (1.98 mm) to 1.25" (31.75 mm) are available on special order. Reference "A" on all switch drawings indicates length of PC terminals. See illustration and notes below for selection of terminals.

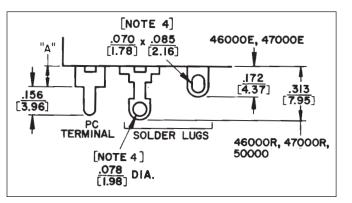

#### SPECIAL ORDER SWITCHES FOR **CSA APPLICATIONS**

The following series of switches (solder lug type) must be assembled with a fishpaper or phenolic solder guard to be CSA certified and stamped. Available on special order only. Series 46000R, 47000R, 46313R, 49000L, 50000L, Solder guards are not required on these switch series with PC terminals. However, they can only be supplied with CSA stamp on special order. Solder guards are not required on UL only versions. Contact Switchcraft for details.

#### SWITCH SERIES IDENTIFICATION

Series	Name	Number of Positions
46000	General Purpose Slide Switches	2, 3
47000	Tandem Slide Switches	2; 2 gang
49000	General Purpose Slide Switches	3
50000	General Purpose Slide Switches	2
56200, C56200	"Tini-Slide" Slide Switches	2
56300, C56300	"Tini-Slide" Slide Switches	3
C63000	Miniature Slide Switches	4
EPS1, EPS2	European Line Voltage	2
EPS3, EPS4	Selector Switches	

Series	Description
46000E	Note 1
46000R	Notes 1, 3
47000E	Note 1
47000R	Notes 1, 3
49000	Note 1
50000	Notes 1, 3
56000, C56000	See page 288
62000, C62000	See page 290
C63000	See page 290
EPS1, EPS2	See page 291
EPS3, EPS4	

#### NOTES:

1. PC terminal "A" dimension is:

Standard - .078" (1.98)

Special - .109" (2.77), .141" (3.58), .160" (4.06), .180" (4.57), .203" (5.16), .234" (5.94), .266" (6.76), .313" (7.95), .391" (9.93), .400" (10.16), .438" (11.12), .484" (12.29), .609" (15.47), .688" (17.48), .719" (18.26), .813" (20.65), .969" (24.61), 1.25" (31.75)

2. .078" (1.98) "A" dimension is not recommended for momentary switches unless clearance hole for return spring is provided in PC board.

3. Accepts up to #14 AWG wire.

# SWITCHES SLIDE SWITCHES

#### \* Please visit the product pages on our website for the most up-to-date product information

## SLIDE SWITCHES (continued)

### **DESIGN FEATURES (continued)**

#### SWITCHING

"Double-wipe" slide switches incorporate special "Sliders" to assure wiping action of terminals. This exclusive double wiping action reduces the possibility of oxidation or increased contact resistance. These longer lasting, self-cleaning sliders provide a switch with greater dependability.

The "Sliders", which are formed with precision dies, are U-shaped to give bifurcated contact reliability. "Sliders" are made from a special copper alloy, plated, which assures uniform tensile strength over the entire life of the switch.

Switch terminals are copper alloy, plated. Plating completely encloses the contact area in a silver jacket for positive and continuous electrical operation. A tarnish preventive lubricant coating is applied to the sliders and terminals.


**NOTE:** "double-wipe" action on all switches except Series 62000 and 46256LFR.

#### **BASIC SCHEMATIC CHART**

Standard arrangement is "Break" before "Make" (non-shorting). "Make" before "Break" (shorting) is available on special order in Series 46000R, 47000R, 49000 and 50000.

#### PART NUMBER SUFFIX LETTERS

Letter	Description
В	Special pushbutton type. Depressing (rather than sliding) pushbutton operates the switch.
С	Tandem switch with 2 knobs; knobs are internally (mechanically) coupled.
D	3-position switch having internal dust shield.
E	Molded terminal board.
F	Flush actuator. Screwdriver slotted. All series except 47000 series marked standard as "115/230." Other markings available as special order. Call Switchcraft for details.
L	Locking action.
М	Momentary (non-lock) action.
Р	Switch has external plunger.
R	Current ratings up to 3A, 125V AC. Phenolic terminal board.
S	Shorting type contacts, make-before-break.
Т	3-position switches only. One side of neutral has locking action; the other side has momentary action.

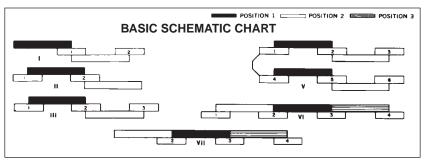

#### KNOBS KNOB HEIGHTS Inches (mm)

Series	Flush	.063 (1.6)	.087 (2.21)	.094 (2.39)	.100 (2.54)	.112 (2.84)	.125 (3.18)	.137 (3.48)	.15 (3.81)	.156 (3.96)	.187 (4.75)	.188 (4.78)	.200 (5.08)	.203 (5.16)	.219 (5.56)	.250 (6.35)	.302 (7.67)	.313 (7.95)	.315 (8)	.328 (8.33)	.344 (8.74)	.375 (9.52)	.406 (10.31)	.440 (11.18)	.453 (11.51)	.469 (11.91)	.487 (12.37)	.500 (12.7)	.531 (13.49)	.563 (14.3)	.594 (15.09)	.719 (18.26)	.750 (19.05)
46000E 46000R	* (1)			$\diamond$			\$					$\diamond$			\$	$\diamond$					*	\$	\$					$\diamond$	$\diamond$		\$	$\diamond$	$\diamond$
46300R	$\diamond$	$\diamond$		$\Diamond$						$\diamond$		$\Diamond$			$\diamond$			$\diamond$			*	$\diamond$				$\diamond$		$\diamond$		$\diamond$		$\diamond$	$\diamond$
47000	*(1)			$\diamond$			$\diamond$					$\diamond$			$\diamond$	$\diamond$					*(2)	$\Diamond$	$\diamond$					$\diamond$	$\diamond$		$\diamond$		$\diamond$
49000	$\diamond$														$\diamond$						$\diamond$							*	$\diamond$				$\diamond$
50000	$\Diamond$	$\diamond$										$\diamond$							$\diamond$							*						$\diamond$	
56200					$\diamond$		$\diamond$						*						$\diamond$	$\diamond$					$\Diamond$			$\diamond$					
56300			$\diamond$			$\diamond$		$\diamond$	$\diamond$		*						$\diamond$		$\diamond$					$\Diamond$			$\diamond$						
62000 (2)														*						$\diamond$													
C63000														*																			
EPS (3)	*																																

\* Standard,  $\Diamond$  Special order

1. Flush screwdriver actuator is standard on numbers 46206LFE, 46206LFR, 46256LFE, 46256LFR and 47227LFR.

2. Numbers 62206L and C62206L have side knob actuator (rather than top knob) standard.

3. EPS switches not available with raised knobs.

# SWITCHES GENERAL PURPOSE SLIDE SWITCHES — SERIES 46000 - 2 POSITION

**PHONE: 773 792-2700** 

### \* Please visit the product pages on our website for the most up-to-date product information

# GENERAL PURPOSE SLIDE SWITCHES

46206LFR



### SERIES 46200E, 46200R - 2 POSITION

### **SPECIFICATIONS**

Contact Ratings: 0.5A DC and 3A AC, 125V non-inductive. (Also 1.5A, 250V non-inductive for Series 46000E only). Numbers 46206LFR and 46256LFR are not designed to switch more than 125V, and must be set to desired position before power is applied to equipment, appliance, etc.

Listings: UL recognized and CSA certified. Series 46000R switches are CSA marked on special order only. Ref. UL card E40668 and CSA File 28260.

Housing: Steel, plated.

Knob: Black thermoplastic.

Terminals and Slider Contacts: Copper alloy, plated. Insulation: Series 46000E: Thermoplastic. Series 46000R: Rigid plastic.

Temperature Range: -4°F to +158°F (-20°C to +70°C). Dielectric Strength: 1 kV rms @ sea level. **Insulation Resistance:** 1 k MΩ minimum.

### SPECIAL ORDER FEATURES

- 1. .344" (8.74 mm) high knobs are standard; other heights available. See chart on page 283.
- 2. #6-32 and #4-40 tapped flanges for mounting available (except 46204MBR and 46206MP).
- 3. P.C. terminals.
- 4. Plunger length on 46206MP Other lengths from .125" (3.18 mm) to 1.844" (46.84 mm) long.
- 5. Series 46000R switches are CSA marked on special order only. See page 282.

### PART NUMBERS

Series 46200E	Series 46200R	Description	Schematic*
<b>◊46201ME</b>	46201MR	SPST NO, Momentary	I
<b>◊46202LE</b>	46202LR	SPST, Locking	П
<b>◊46202ME</b>	<b>◊46202MR</b>	SPST NC, Momentary	II
46203LE	46203LR	SPDT, Locking	III
<b>◊46203LSE</b>	<b>◊46203LSR</b>	SPDT, Locking	III Shorting
<b>◊46203ME</b>	46203MR	SPDT, Momentary	III
46204LE	<b>◊46204LR</b>	DPST, Locking	2-1
<b>◊46204ME</b>	<b>◊46204MR</b>	DPST NO, Momentary	2-1
46206LE	46206LR	DPDT, Locking	2-111
46206LFE	46206LFR	DPDT, Locking (1)	2-111
<b>◊46206LSE</b>	<b>◊46206LSR</b>	DPDT, Locking	2-III Shorting
<b>◊46206ME</b>	<b>◊46206MR</b>	DPDT, Momentary	2-111
-	<b>◊46206MP</b>	DPDT, Momentary*	2-111
46256LFE	46256LFR	DPDT, Locking (1) (2)	V
-	<b>⊘C46203LR**</b>	SPDT , Locking	III
-	<b>⊘C46204MR**</b>	DPST NO, Momentary	2-1
-	C46206LR**	DPDT, Locking	2-111
-	C46206LFR**	DPDT, Locking (1)	2-111


Contacts are non-shorting, except as noted.


\*\* "C" prefix specifies .078 inch (1.98) PC terminals, no mounting ears.

(1) Recommended for power selection, 115-230 legend, screwdriver slotted actuator minimizes tampering.

(2) Shorting bars installed.


Special order only; contact Switchcraft






1.375 [34.92]

1 (1204)



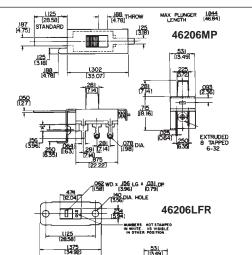



# SWITCHES **GENERAL PURPOSE SLIDE SWITCHES - SERIES 46000 - 3 POSITION**

### \* Please visit the product pages on our website for the most up-to-date product information

# GENERAL PURPOSE SLIDE SWITCHES (continued)



Three-position switches offer locking-locking, momentarymomentary and locking-momentary action for talk-listen applications. All switches have positive center detent and shutter type dust cover to prevent dirt and dust from contaminating switch contacts.

### **SPECIFICATIONS**

Contact Ratings: 0.5A DC and 3A AC, 125V non-inductive. Listings: UL recognized, card E40688 CSA certified (marked) switches available on special order only.

See page 282.

Housing: Steel, plated.

Detent Spring: Music wire.

Shim: Black vulcanized fiber.

Knob: Black thermoplastic.

Terminals & Slider Contacts: Copper alloy, silver-plated. Insulation: Phenolic.

Temperature Range: -4°F to +158°F (-20°C to +70°C). Dielectric Strength: 1 kV rms @ sea level. Insulation Resistance: 1 k MQ minimum.

### **SPECIAL ORDER FEATURES:**

- 1...344" (8.74 mm) high knobs are standard; other heights available. See chart on page 283.
- 2. Series 46000R switches are CSA marked on special order only. See page 282.

De rét**		Act	ion Positic		
Part** Number	Circuitry	#1	Center	#2	Schematic
46311LDR	SPTT	L	L	L	VI
<b>◊46311MDR</b>	SPTT	М	L	М	VI
<b>◊46311TDR</b>	SPTT	L	L	М	VI
46313LDR	DPTT	L	L	L	2-VI
46313MDR	DPTT	М	L	М	2-VI
46313TDR	DPTT	L	L	М	2-VI

### PART NUMBERS

◊ Special order only; contact Switchcraft for price and delivery.

\* L - Locking; M - Momentary. \*\* "C" prefix specifies .078" (1.98) PC terminals, no mounting ears.


### SOLDER GUARDS

Insulating Solder Guards, P-2370 (2-position); and (P-2633 (3-position); slip over solder lug terminals and prevent solder splashes from entering interior (contact area) of switch. Made of fishpaper .01" (.25 mm) thick, Solder Guard slips over terminals quickly and easily. Precision punched slots lock onto terminals, and rectangular shape conforms with dimension of switch terminal board. Minimizes costly production line rework.


### Solder Guards can be used on:

- General Purpose, Series 46000R
- Tandem, Series 47000R.



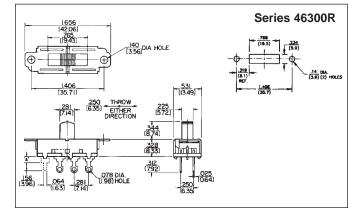



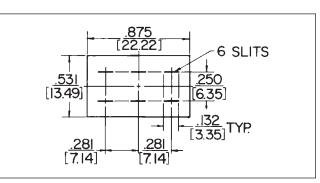

DIMENSIONS ARE FOR REFERENCE ONLY

# SWITCHES GENERAL PURPOSE SLIDE SWITCHES – TANDEM SERIES 4700

**PHONE: 773 792-2700** 

\* Please visit the product pages on our website for the most up-to-date product information

# GENERAL PURPOSE SWITCHES - TANDEM





47206LR



47227LFR

### SERIES 47200E, 47200R - 2 POSITION

Space saving, two-gang slide switches are contained in one housing. Switching is locking type with non-shorting contacts.

### SPECIAL ORDER FEATURES

- .344" (8.74 mm) high knobs or flush knobs are standard, depending on switch selected; other heights available. See chart on page 283.
- 2. Series 47000R switches are CSA marked on special order only. See page 282.

### **SPECIFICATIONS**

**Contact Ratings:** 0.5A DC and 3A AC, 125V non-inductive, (Also 1.5A, 250V non-inductive for Series 47000E only.) 47227LFR switches are not designed to switch more than 125V, and must be set to desired position before power is applied to equipment or appliance. **Listings:** UL recognized, card E40668, and CSA certified (card 28260). Series 47000R switches are CSA certified on special order only. See page 282. **Housing:** Steel, plated.

Knob: Black thermoplastic.

**Terminals and Slider Contacts:** Copper alloy, silver-plated. **Insulation:** Series 47000E - Thermoplastic.

Series 47000R - Rigid plastic.

Temperature Range:  $-4^{\circ}F$  to  $+158^{\circ}F$  ( $-20^{\circ}C$  to  $+70^{\circ}C$ ). Dielectric Strength: 1 kV rms @ sea level. Insulation Resistance: 1 k M $\Omega$  minimum.

### PART NUMBERS


Series 47200E	Series 47200R	Description	Sche	matic
<b>◊47202LE</b>	<b>◊47202LR</b>	SPST - SPST	П	П
<b>◊47203LE</b>	<b>◊47203LR</b>	SPDT - SPDT		
<b>◊47204LE</b>	<b>◊47204LR</b>	DPST - DPST	2-1	2-I
<b>◊47204LCE</b>	<b>◊47204LCR</b>	DPST - DPST	2-I	2-I
<b>⊘47206LE</b>	<b>◊47206LR</b>	DPDT - DPDT	2-111	2-111
<b>◊47206LCE</b>	<b>◊47206LCR</b>	DPDT - DPDT	2-111	2-III
-	<b>◊47215LR</b>	SPST - SPDT	П	
-	<b>◊47215LCR</b>	SPST - SPDT	II	
-	<b>◊47217LR</b>	SPST - DPST	II	2-II
-	<b>◊47217LCR</b>	SPST - DPST	П	2-II
-	<b>◊47221LR</b>	SPDT - DPST		2-II
-	<b>◊47221LCR</b>	SPDT - DPST		2-II
	<b>◊47227LFE</b>	DPDT - DPDT	2	-V
	<b>◊47227LFR</b>	DPDT - DPDT	2-	V

NOTE: Series 47200E and 47200R - All switches have two independent knobs, except:

 47204LE, 47204LCR, 47206LCE and 47206LCR have one knob and one flush actuator.

• 47227LFE and 47227LFR have internal mechanical coupling and two flush, slotted screwdriver actuators.

◊ Special order only; contact Switchcraft

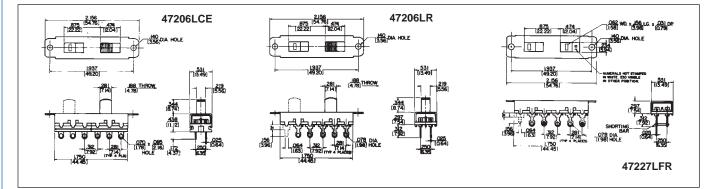

DIMENSIONS ARE FOR REFERENCE ONLY

# GENERAL PURPOSE SLIDE SWITCHES —SERIES 49000 AND 50000

### \* Please visit the product pages on our website for the most up-to-date product information

# GENERAL PURPOSE SLIDE SWITCHES (continued)





### **SERIES 49300 - 3 POSITION**

Large, heavy duty, three and four pole slide switches. Standard mounting clearance is .141" (3.58 mm). Series 49300L, non-shorting contacts; Series 49300LS, shorting contacts.

### **SPECIFICATIONS**

Contact Ratings: 0.5A DC and 3A AC, 125V non-inductive. Listings: UL recognized (card E40668); CSA certified (marked) switches available on special order only. See page 282.

Housing: Steel, plated.

Detent Shim: Copper alloy.


Knob: Black thermosetting plastic.

Terminals and Slider Contacts: Copper alloy, silver-plated. Insulation: Rigid plastic.

Temperature Range: -4°F to +158°F (-20°C to +70°C). Dielectric Strength: 1 kV rms @ sea level. **Insulation Resistance:** 1 k MΩ minimum.

### SPECIAL ORDER FEATURES

- 1...5" (12.7 mm) high knobs are standard; other heights available. See chart on page 283.
- 2. #4-40 extruded and tapped mounting holes available.
- 3. Series 49300L switches are CSA marked on special order only. See page 282.



49331L

### PART NUMBERS

Part Number	UL & CSA Listing	Description	Schematic
<b>◊49309L</b>	Yes	3-PDT, Locking*	3-VII
<b>⊘49309LS</b>	No	3-PDT, Locking*	3-VII
<b>◊49329L</b>	Yes	3-PTT, Locking	3 -VI
<b>◊49329LS</b>	No	3-PTT, Locking	3 -VI
<b>◊49312L</b>	Yes	4-PDT, Locking*	4-VII
<b>◊49312LS</b>	No	4-PDT, Locking*	4-VII
<b>◊49331L</b>	Yes	4-PTT, Locking	4 -VI
<b>◊49331LS</b>	No	4-PTT, Locking	4 -VI

\* 3rd position is off.

Special order only; contact Switchcraft.

### **SERIES 50200 - 2 POSITION**

A larger 2 position "double wipe" slide switch offering three and four poles of switching and locking or momentary action. Series 50200L and M, non-shorting; Series 50200LS and MS, with shorting contacts.

### **SPECIFICATIONS**

Contact Ratings: 0.5A DC and 3A AC, 125V non-inductive. Listings: UL recognized (card E40668); CSA certified (card 28260). Series 50200L switches are CSA marked on special order only. See page 282.

Housing: Steel, plated.

Detent Shim: Copper alloy.

Knob: Black thermosetting plastic.


Terminals and Slider Contacts: Copper alloy, plated. Insulation: Rigid plastic.

**Temperature Range:** -4°F to +158°F (-20°C to +70°C). Dielectric Strength: 1 kV rms @ sea level.

Insulation Resistance: 1 k MQ minimum.

### SPECIAL ORDER FEATURES

- 1..344" (8.74 mm) high knobs are standard; other heights available. See chart on page 283.
- 2. 50212LF available with flush, screwdriver slotted actuator and has 4 PDT locking action.
- 3. Extruded and tapped 4-40 or 6-32 holes available.
- 4. Series 50200L switches are CSA marked on special order only. See page 282.





50209L

### PART NUMBERS

Part Number	Description	Schematic
<b>◊50207L</b>	3PST - Locking	3-1
<b>◊50207M</b>	3PST, N.O. Momentary	3-1
<b>◊50208L</b>	4PST, Locking	4-1
50209L <b>⊘50209LS</b>	3PDT, Locking	3-111
()50209M ()50209MS	3PDT, Momentary	3-11
50212L <b>⊘50212LS</b>	4PDT, Locking	4-111

Special order only; contact Switchcraft.

DIMENSIONS ARE FOR REFERENCE ONLY

# SWITCHES Miniature Slide Switches — Series 56200 and C56200

PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

### MINIATURE SLIDE SWITCHES

SPECIAL ORDER



56206L1





C56206L2

C56206L2

### SERIES 56200, C56200 - 2 POSITION

"Tini-Slide" slide switches have Exclusive SNAP SLIDE lifting and wiping action. This unique, positive action combines the best features of "snap" and "slide" movements into the design of a superior switch. Pitting, burning and contamination are minimized. Contacts lift through an air gap, drop on stationary contacts, and slide, wiping themselves clean. Subminiature size is ideal where useable space is at a premium.

### **SPECIFICATIONS**

**Contact Ratings:** 0.5A, 125V AC or DC, non-inductive. Minimum life at rated load 6000 cycles. Resistance after 6000 cycles at rated load is 50 milliohms maximum.

**Terminals:** PC Type - silver-plated. Each terminal has standoff shoulder for stable mounting and space for board clearance.

**Mounting:** Flange, (56206L1 and 56206L2) - .1" (2.54 mm) holes for screw or mounting rivet. PC - Direct mounting to PC boards up to .093" (2.36 mm) thick.

Knob: Molded thermoplastic (UL 94V-1).

Terminal Board: Molded thermoplastic (UL 94V-0).

Terminals: Copper alloy, silver-plated.

Contact Sliders: Copper alloy.

**Temperature Range:** -4°F to +158°F (-20°C to +70°C). **Dielectric Strength:** 1 kV rms @ sea level.


**Insulation Resistance:**  $1 \text{ k} \text{ M}\Omega$  minimum.

### SPECIAL ORDER FEATURES

- 1. .2" (5.08 mm) high knobs are standard; other heights available on special order. See page 283.
- 2. Red and white knobs available.
- 3. Mounting flanges with .1" (2.54 mm) diameter holes on C56206L1 or C56206L2. Flange holes tapped #4-40 on 56206L1 or 56206L2 (where production quantities warrant).
- 4. UL stamped on special order.

### PART NUMBERS

Part Number	Dimension "B" Inch (mm)	Description	Schematic
56206L1	-	DPDT, Locking	2-111
56206L2	-	DPDT, Locking	2-111
C56206L1	.573 (14.55)	DPDT, Locking	2-111
C56206L2	.352 (8.94)	DPDT, Locking	2-111

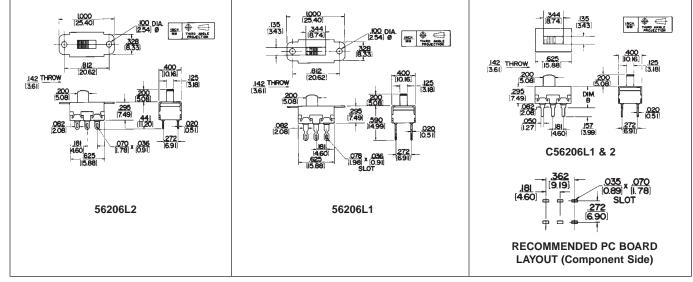

DIMENSIONS ARE FOR REFERENCE ONLY

# MINIATURE SLIDE SWITCHES - SERIES 56300 AND C56300

\* Please visit the product pages on our website for the most up-to-date product information

# MINIATURE SLIDE SWITCHES (continued)





56313L1

56313L2





C56313L1

C56313L2

SERIES 56300,C56300 - 3 POSITION

Series 56300 "Tini-Slide" switches provide ultra-reliable 3-position switching. They afford maximum space savings in military, industrial and consumer applications, such as instrumentation, test and ground support equipment, appliances, computers, and control devices.

### SPECIFICATIONS

Contact Ratings: 0.5A, 125V AC or DC, non-inductive. Minimum switch life is 6000 cycles. Resistance after 6000 cycles at rated load is 50 milliohms maximum. Terminals: Solder Lugs - 56313L1 with wrap around notch; 56313L2 with solder lug. PC - .585" (14.68 mm) "B" dimension and .364" (9.24 mm) "B" dimension. Mounting: Mounting ears for mounting to chassis of panels with screws or rivets (not supplied). Switches with PC terminals have stand-off shoulders for solid PC mount. Knob: Molded thermoplastic (UL 94HB). Terminal Board: Molded thermoplastic (UL 94V-0). Terminals: Copper alloy, silver-plated. Contact Sliders: Copper alloy.

Temperature Range: -4°F to +158°F (-20°C to +70°C).


Dielectric Strength: 1 kV rms @ sea level. Insulation Resistance: 1 k M $\Omega$  minimum.

### SPECIAL ORDER FEATURES

- 1. .187" (4.75 mm) high knob is standard; Other heights available on special order. See page 283.
- 2. Red and white knobs available.
- 3. Two mounting variations:
  - a. Tapped #4-40 holes on mounting ears for machine screws.
  - b. Mounting ears with .1" (2.54 mm) diameter holes on switches with PC terminals.

### PART NUMBERS

Part Number	Dimension "B" Inch (mm)	Description	Schematic
56313L1	-	DPTT, Locking	2-VI
56313L2	-	DPTT, Locking	2-VI
C56313L1	.585(14.85)	DPTT, Locking	2-VI
C56313L2	.364 (9.24)	DPTT, Locking	2-VI

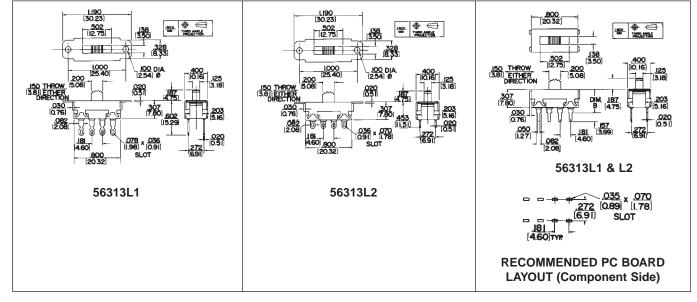

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

# PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

065

[1.65]

.272 [6.91]

DIA. HOLE

### SIDE-SLIDE<sup>®</sup>/MINIATURE SLIDE SWITCHES

.181

4.60

.362


920

• • • •


**RECOMMENDED PC BOARD** 





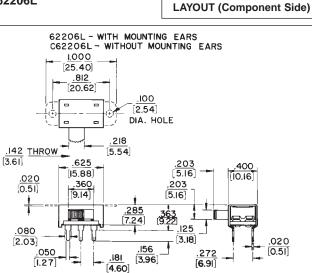

# MINIATURE SLIDE SWITCHES

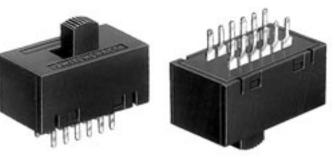

### **SERIES 62200 - 2 POSITION**

2-position locking action with side knob actuator. Side knob provides low profile, saving space on PC boards.

### **SPECIFICATIONS**

**Contact Ratings:** 0.5A, 125V AC or DC. **PC Terminals:** Copper alloy, silver plated. **Housing:** Steel, plated. **Knob:** Molded thermoplastic. **Terminal Board:** Rigid plastic. **Sliders:** Copper alloy, plated. **Dielectric Strength:** 1000 V rms. **Insulation Resistance:** 1 k MΩ minimum.

### SPECIAL ORDER FEATURES

1. Various knob heights available on special order.

2. Various lengths available on special order.


### PART NUMBERS


Part Number	Description	Schematic
<b>∂62206L</b>	DPDT, with mounting ears, Locking	2-111
C62206L	DPDT, without mounting ears, Locking	2-111

◊ Special order only; contact Switchcraft.

### SERIES C63200 - 2 POSITION, 4 POLE

C63200 switches designed for applications, such as: instrumentation, test and ground support equipment, computers, data communications and medical equipment. PC mounting on standard industry .100" (2.54 mm) x .200" (5.08 mm) centers. Mounts on PC boards up to .093" (2.36 mm) thick. Molded black thermoplastic knobs. Terminals are copper alloy, gold-plated on contact area, tinned on terminal end.





Part Number	Action	Switching	Ratings	Schematic	Terminals
C63212L	Locking	4PDT	300mA max. 30V AC	4-111	Copper alloy, gold-plated on contact area, tinned on terminal end

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# EUROPEAN LINE VOLTAGE SELECTOR SWITCHES

(SP

### \* Please visit the product pages on our website for the most up-to-date product information

# EUROPEAN LINE VOLTAGE SELECTOR SWITCHES





EPS1PC3

EPS2PC2



**RED ACTUATOR** 



RED ACTUATOR

EPS3SL1

EPS4PC3

### SERIES EPS1, EPS2, EPS3, EPS4 - 2 POSITION

European Power Selector Switches are designed for quick, easy programming/selection of 115V-230V primary power. These switches provide OEM designers with an excellent selection of PC and solder lug terminals and ratings up to 10A, 125V AC rating for electrical/electronic equipment and systems headed for the INTERNATIONAL marketplace.

### HOUSING AND ACTUATOR

Switches have positive, double detents for "sure" locking into position. Screwdriver slot actuator virtually eliminates the possibility of accidental operation and minimizes tampering. Molded-in legends are: 115-230V. Terminals are staked into housing.

### SPECIFICATIONS

**Contact Ratings:** EPS1, EPS2 - 2A, 250V AC and 4A, 125V AC. EPS3, EPS4 - UL and CSA - 10.1A, 125V; 5A, 250V. VDE - 10A, 250V.

**Listings:** UL and CSA recognized, UL card E40668; CSAcard 28260. 2A, 250V AC is VDE listed, VDE #13707 (for European applications). Designed to conform to requirements of CEE (International Commission on Rules for the Approval of Electrical Equipment, Publication 24) and the IEC (International Electrotechnical Commission). **Housing:** Molded black glass-reinforced plastic.

Actuator and Cover: Molded thermoplastic.

Terminals: Copper alloy, silver-plated.

**Slider Contacts:** EPS1, EPS2 - Bi-Metal, silver on copper alloy. EPS3, EPS4 - Copper alloy with silver cadmium oxide inlay.

Temperature Range: -4°F to +158°F (-20°C to +70°C). Dielectric Strength: 2kV rms @ sea level. Insulation Resistance:  $1 k M\Omega$  minimum.

### SPECIAL ORDER FEATURES

Series EPS actuators having legends other than 115V and 230V are available on special order. **NOTE:** Contact Switchcraft for details.

### PART NUMBERS Series EPS1

Part Number	Terminals	Dimension "B" Inch (mm)	Schematic
<b>◊EPS1PC1</b>	Straight PC	.681 (17.297)	2-111
♦ A STAND & STANDARD	Straight PC	.719 (18.263)	2-111
EPS1PC3	Right-Angle PC	-	2-111
EPS1SL1	Solder Lugs	-	2-111

Special order only; contact Switchcraft.

### Series EPS2

Part Number	Description	Dimension "B" Inch (mm)	Schematic
EPS2PC1	Straight PC	.730 (18.542)	2-111
EPS2PC2	Straight PC	.768 (19.507)	2-111
EPS2PC3	Right-Angle PC	-	2-111

### Series EPS3 Part **Dimension "B"** Terminals Schematic Number Inch (mm) EPS3PC1 Straight PC .681 (17.297) 2-III EPS3PC2 .719 (18.263) 2-111 Straight PC EPS3PC3 **Right-Angle PC** 2-III \_

Solder Lugs

### Series EPS4

EPS3SL1

Part Number	Description	Dimension "B" Inch (mm)	Schematic
EPS4PC1	Straight PC	.730 (18.542)	2-111
EPS4PC2	Straight PC	.768 (19.507)	2-111
EPS4PC3	Right-Angle PC	-	2-111

DIMENSIONS ARE FOR REFERENCE ONLY

2-III


291

# **SWITCHES** EUROPEAN LINE VOLTAGE SELECTOR SWITCHES

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# EUROPEAN LINE VOLTAGE SELECTOR SWITCHES (continued)

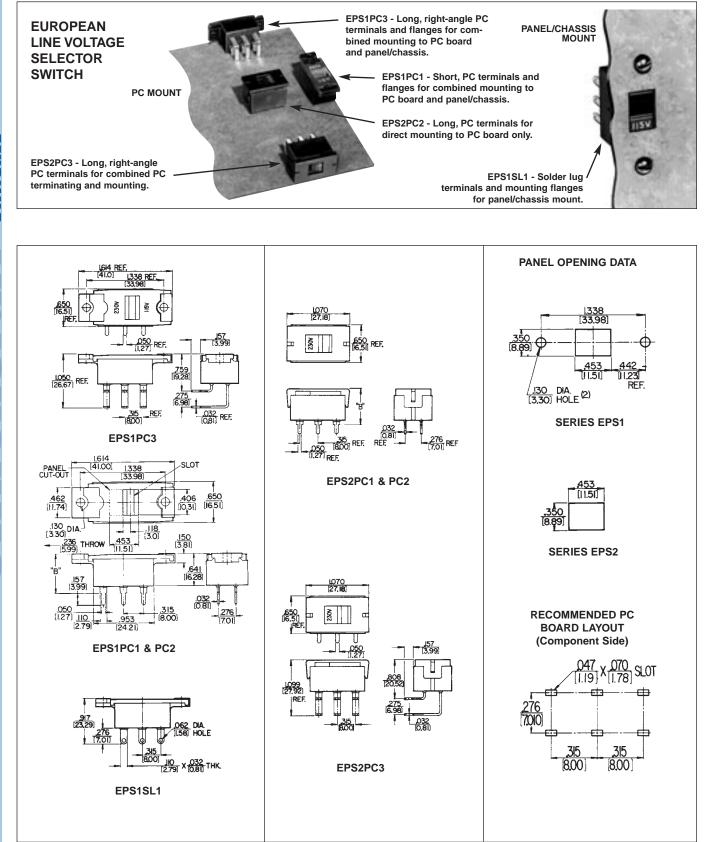


Inch DIMENSIONS ARE FOR REFERENCE ONLY (mm)

292

# SWITCHES EUROPEAN LINE VOLTAGE SELECTOR SWITCHES

### \* Please visit the product pages on our website for the most up-to-date product information

# EUROPEAN LINE VOLTAGE SELECTOR SWITCHES (continued)

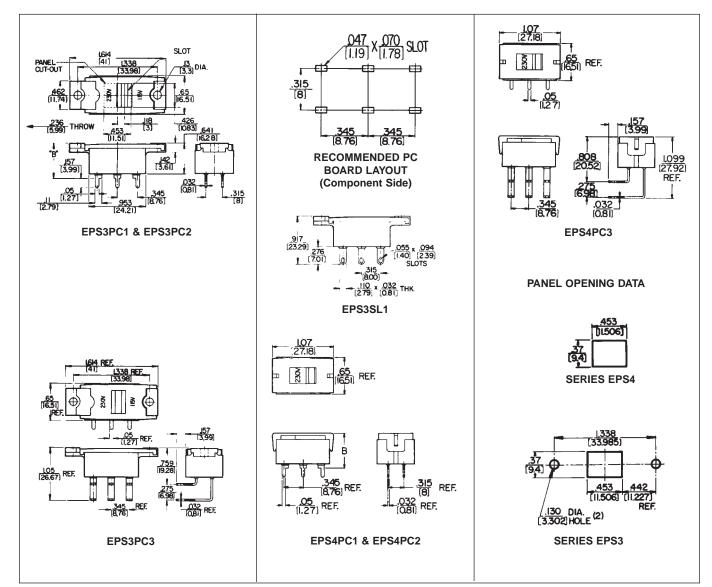

293

DIMENSIONS ARE FOR REFERENCE ONLY  $\frac{\text{lnch}}{(\text{mm})}$ 

### \* Please visit the product pages on our website for the most up-to-date product information

# LEVER SWITCHES

### **DESIGN FEATURES**

High quality, field-proven Switchcraft<sup>®</sup> lever switches are available in a wide selection of illuminated and non-illuminated versions, 2- and 3-position, locking and non-locking functions can be provided. Switchcraft illuminated lever switches feature choice of colors, wide selection of switching circuits, single lamp illumination and ease of mounting and lamp replacement.

All switches utilize nickel silver springs without "form" at point of flexing to insure long spring life. The springs are assembled into a conventional stack assembly, insulated from each other by phenolic spacers with plastic tubing press-fit through each stack, insuring correct alignment of contacts and providing high insulation resistance.

### **APPLICATIONS**

Various front panel switching applications on computers, telecommunications systems, industrial control equipment, intercoms, ground support systems, medical electronics, scientific instruments, broadcast consoles and test instrumentation.


### CONTACTS

Below are listed the basic contacts available on switches in this catalog:


- 1. Fine silver contacts rated at 2A, 200W (maximum) AC non-inductive load.
- 2. Welded cross bar silver contacts rated at 3A, 300W (maximum) AC non-inductive load.
- Welded cross bar palladium contacts rated at 2A, 200W (maximum) AC non-inductive load.
- Welded cross bar gold alloy contacts rated at up to 1A, 100W (maximum) AC non-inductive load. (Dry circuit applications.)

### **BASIC CONTACT FORMS**

Below are the basic contact forms available standard on all Switchcraft Lever Switches. Specify circuits needed by referring to the letter identification and respective location on frame. See dimensional drawings for stack switch location.



To avoid ordering special switches it is possible to use a larger standard circuit, providing the circuit fulfills your requirements. Circuit Form K is widely used in talk-listen (intercom) function applications. In normal position (neutral), switch does not contact upper or lower contact spring. During typical operation, lever is held in upper (momentary) position while speaking. Releasing lever allows switch to return to neutral. For listening, lever is moved to down (locking) position. Lever is manually returned to neutral when finished.



### **ORDERING STANDARD SWITCHES**

Order lever switches by part number from pages 295 through 298.

### LAMP DATA

Lever-Lite<sup>®</sup> switches use T-1 3/4 flange base lamps which are available from commercial sources.

### ORDERING SPECIAL SWITCHES Lever Switches

Should you desire a special version of any Switchcraft<sup>®</sup> lever switch not shown here, we require the following information:

- 1. Switch series.
- 2. Number of positions.
- 3. Mechanical action (locking, non-locking, etc.).
- 4. Contact configuration for each position.
- 5. Type of contact material.
- 6. Color sequence (Lever-Lite III).

### **UL RECOGNIZED LEVER SWITCHES**

Seven series of Switchcraft lever switches are UL recognized. These switches are available on special order to fulfill your switching requirements which specifically require UL listed switching devices.

- 1. Series 12000
- 2. Series 41000

**NOTE:** Refer to switch series in this catalog for full mechanical specifications and additional standard and special features.

# LEVER-LITE® ILLUMINATED LEVER SWITCHES — SERIES 84000

### \* Please visit the product pages on our website for the most up-to-date product information

# LEVER SWITCHES (continued)

# LEVER-LITE® III

### SERIES 84000 - ILLUMINATED LEVER SWITCHES

Lever-Lite<sup>®</sup> III illuminated lever switches are designed for front-of-panel mounting, relamping, terminating, color changes and removal. A minimum of time is required to install singly, in rows, or in matrix arrays to meet a wide variety of switching applications. 2- and 3-position types are available in non-locking functions. Mounts on .875" (22.22 mm) horizontal centers or 1.5" (38.1 mm) vertical centers. Talk-listen (intercom) function is also available. Illumination technique provides a different color for each lever position.

### LAMPS

Standard T 1-3/4" midget flange-base lamps (not supplied) are available in voltages up to 28V.

### SPECIAL ORDER FEATURES


- 1. Talk-Listen (Intercom) function.
- 2. Welded cross bar gold alloy for dry circuit and silver contacts are available. See page 294.

### MOUNTING




### **ILLUMINATION**

A single internal lamp provides brilliant lever lighting in any color required. Standard factory installed color filters are provided as follows: Series 84000, Multi-Color Illumination 2-position - Amber (neutral position); green (down position). 3-position - Red (up position); amber (neutral position); green (down position). One-color (all positions) and non-illuminated switches can be specified on special order. Switchcraft will install filters for non-standard illumination requirements at nominal cost on special order.




Grasp fingernail slots on opposite sides of escutcheon and snap out. Next, grasp lever and pull lever assembly free. Insert switch into panel hole.


### RELAMPING/REPLACING COLOR FILTERS



Remove escutcheon and lever assembly. (see "MOUNTING" above) For relamping, pull lamp out of retainer with finger-tip. Replace lamp.




Turn two internal screws clockwise with screwdriver to securely mount switch to panel.



Replace lever assembly and "snap" escutcheon into place. Installation complete!

Lever-Lite III switches are designed for simplified lamp installation and replacement, and color filter changes or custom installation in the field or on the OEM production line. Lamps and filters may be changed at any time with ease and without dismounting switch from panel or disturbing wiring.



For color filters, use fingernails or small screwdriver to remove. Gently lift (don't pry) up under edge of filter until it "pops" out.



Place new filter in position and press until it "snaps" in. Replace lever assembly and escutcheon. (see "MOUNTING" above)

PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

# LEVER SWITCHES (continued)

# LEVER-LITE® III SERIES 84000 - ILLUMINATED LEVER SWITCHES

### SPECIFYING LEVER-LITE® III SWITCHES

- 1. Basic Switch Refer to Part Number table for ordering switches. For special switches, such as talk-listen (intercom) function, special circuit forms, or non-illuminated switches, contact factory for price and delivery.
- Illumination Supplied with standard color filters installed. Switchcraft will install other combinations at nominal extra cost.
- 3. Lamps Lamps are not supplied with switches.

### SPECIFICATIONS

**Mounting/Retaining Clips and Covers:** Steel, plated. **Contact Ratings:** Welded cross bar palladium contacts rated at 1A, 200W maximum AC non-inductive load are standard. Other contacts available. See "SPECIAL ORDER FEATURES" on page 295.

### PART NUMBERS TWO POSITION

Part Nu		
Non-Locking	Locking	Switching
<b>⊘84206</b>	84206L	2-C
<b>⊘84212</b>	<b>∂84212L</b>	4-C

Springs: Copper alloy, plated. Lamp Terminals: Copper alloy, plated. Lamp Socket: Zinc, plated. Terminals: Copper alloy, plated, straight solder lugs. Housing, Escutcheon, Knob, Actuator and Switching Stacks Insulation: Molded plastic. Temperature Range: -22°F to 158°F (-30°C to +70°C). Dielectric Strength: 1 kV DC. Leakage Resistance: 1,000 MΩ or greater.

### K-131 COLOR FILTER KIT

Kit is available for changing or replacing color filters to meet illumination requirements. Each kit contains 3 filters of each color: Amber, Blue, Green, Red, White and Yellow.

### SWITCHCRAFT PART NUMBER K-131


### REPLACEMENT LEVERS

Number G6083 (for locking lever) Number G6084 (for non-locking lever)

### THREE POSITION

Part Numbers		Position 1	Position 2
<b>⊘84306</b>	84306L	1-C	1-C
<b>⊘84312</b>	84312L	2-C	2-C
<b>⊘84324</b>	84324L	4-C	4-C


Special order only; contact Switchcraft.

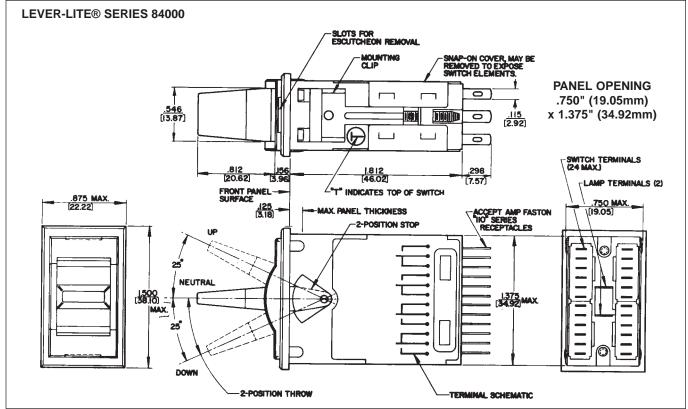

297

\* Please visit the product pages on our website for the most up-to-date product information

# LEVER SWITCHES (CONTINUED)

















### **12000 SERIES RA LEV-R SWITCHES**

### Electrical

Contact Ratings: Fine silver contacts rated at 3A, 300W maximum AC non-inductive load standard. Other contacts available Leakage Resistance: 1,000 M $\Omega$  or greater

Dielectric Strength: 250 VDC

### Material

Frame: Copper alloy, plated (3,000, 13,000); Steel, plated (12,000)

Bushing and Shaft: Copper alloy, plated

Springs: Copper alloy

Knob: Black molded thermoplastic

LEV-R<sup>®</sup> SWITCH SERIES 12000

Mounting Hardware: Knurled copper alloy locknut


T10711, supplied. P10531 hex locknut, special order Insulation: Rigid plastic spacers with plastic tubing

through stack. Rigid plastic and/or thermoplastic lifters. Thermoplastic cam on actuator end


### PART NUMBERS

TWO POSITION NON-LOCKING*+	THREE POSITION NON-LOCKING*

Part Number	Stack Hgt. "X" & "Y" (max.)	Switching	Part Number	Stack Hgt. "X" & "Y" (max.)	Switching Pos.1 Pos. 2	
<b>⊘12001</b>	.719 (18.26)	1-A	<b>⊘12010</b>	.703 (17.86)	1-B	1-B
<b>◊12002</b>	.688 (17.48)	1-B	<b>⊘12011</b>	.703 (17.86)	1-B	1-B
<b>⊘12003</b>	.750 (19.05)	1-C	<b>⊘12012</b>	.766 (19.46)	1-B	1-B
<b>◊12003D</b>	.813 (20.65)	1-D	<b>⊘12013</b>	.703 (17.86)	1-B	1-C
<b>⊘12004</b>	.906 (23.01)	2-A	<b>⊘12014</b>	.703 (17.86)	1-B	1-B
<b>⊘12005</b>	.875 (22.22)	2-B	<b></b>	1.078 (27.49)	2-B	2-B
<b>◊12006</b>	1.000 (25.40)	2-C	<b>⊘12016</b>	.703 (17.86)	1-B	1-B
<b>◊12006D</b>	1.063 (27.00)	2-D	<b>⊘12017</b>	.703 (17.86)	1-B	1-B
			<b>⊘12033</b>	.719 (18.26)	1-	-K
			<b>⊘12034</b>	.813 (20.65)	1-A	1-A
			<b>⊘12035</b>	.750 (19.05)	1-B	1-B
			<b>⊘12036</b>	.875 (22.22)	1-C	1-C
			<b>⊘12036D</b>	1.000 (25.40)	1-D	1-D
			<b>⊘12037</b>	.875 (22.22)	2-	-K

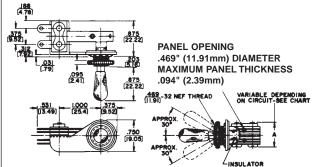

### **12000 SERIES STRAIGHT LEV-R SWITCHES**

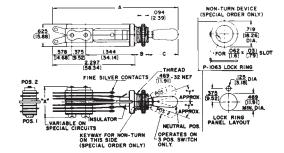

### **INTERCOM SWITCHES**

Part Number	Stack Height "X" & "Y"	Switching
<b>◊12033T</b>	.719 (18.26)	1-K
<b>⊘12037T</b>	.875 (22.22)	2-K

\* Add prefix "R" to part number if non-turn mounting is required. (Special order).

+ Add suffix "L" to part number if locking type is required.

Special order o	nly; contact	Switchcraft.
-----------------	--------------	--------------

Knobs			
T12742	Black	T127410	Ivory
T12745	White	P2912	Amber

Knobs must be ordered separately.

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# SWITCHES LT® SWITCH – SERIES 4100


# **PHONE: 773 792-2700**


### \* Please visit the product pages on our website for the most up-to-date product information


# LEVER SWITCHES (CONTINUED)



### **SERIES 41000**

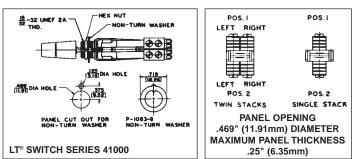

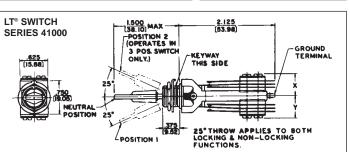

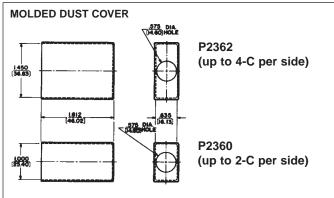

### LT<sup>®</sup> SWITCH **SPECIFICATIONS**

# Frame: Steel, plated.

Bushing and Actuator: Copper alloy, plated.

Springs: Copper alloy.

Contact Ratings: Welded cross bar palladium contacts rated at 2A, 200W maximum, AC non-inductive load are standard. See "SPECIAL ORDER FEATURES". Terminals: Tin dipped solder lugs.

Mounting Hardware: Supplied with one copper alloy-plated hex locknut (P10531); and one non-turn washer (P10639).

Insulation: Rigid plastic spacers with plastic tubing through

the stack assembly. Lifters of thermoplastic.

Lifter-Roller Assembly: Molded plastic.

Knob: Supplied with a paddle style, screw-on black plastic knob. See "SPECIAL ORDER FEATURES".

Temperature Range: -22°F to 158°F (-30°C to +70°C). Leakage Resistance: 1,000 M $\Omega$  or greater.

### MOLDED DUST COVERS

Dust cover is an environment and electrical shield, protecting and improving appearance and increasing switch dependability. Covers enshroud complete switch, preventing build-up of dust, dirt, contamination.

### SPECIAL ORDER FEATURES

- 1. Talk-Listen (Intercom) function.
- 2. Fine silver and other alloys available for contacts. See page 294.
- 3. UL recognized switches. See page 294.

### LT<sup>®</sup> SWITCH PART NUMBERS **2 POSITION NON-LOCKING\***

Part Numbers	Switching	Stack Heights Dimension "X" max.
<b>⊘41203</b>	1-C	.531 (13.49)
41206	2-C	.531 (13.49)
<b>◊41208</b>	4-A	.615 (15.62)
41212	4-C	.750 (19.05)

### **3 POSITION NON-LOCKING\***

	Position 1	Position 2	Dim. "Y"	Dim. "X"
<b>◊41306</b>	1-C	1-C	.531 (13.49)	.531 (13.49)
<b>◊41308</b>	2-A	2-A	.500 (12.7)	.500 (12.7)
41312	2-C	2-C	.531 (13.49)	.531 (13.49)
41324	4-C	4-C	.750 (19.05)	.750 (19.05)

\*Add suffix "L" to part number for locking type.

To avoid ordering special switches, order a larger standard circuit,

providing the circuit meets your requirements. Special order only; contact Switchcraft.



### \* Please visit the product pages on our website for the most up-to-date product information

# GENERAL PURPOSE STACK SWITCHES

### **GENERAL PURPOSE STACK SWITCHES** (SPECIAL ORDER ONLY)

Complete general purpose stack switch assemblies are made from a pile-up of various actuator springs, contact springs and lifters. These stack switch assemblies can be used on manually operated control devices where switching is operated by cams, push-buttons and other similar mechanical devices. The stack switch assembly is made up of an actuator spring and various contact springs. These current carrying members are insulated from each other by phenolic spacers with plastic tubing press fitted through the stack; thereby insuring correct alignment of contacts and providing high insulation resistance when mounted.

### .375" STACK SWITCHES





Thousands of switching combinations are possible. Switch mounting centers are .375" (9.52 mm) (minimum) with .25" (6.35 mm) wide switch parts. Practical spring length is 2.625" (66.68 mm) (maximum). Contact Switchcraft for selection of contacts and ratings.

### MINIATURE .188" (4.78MM) STACK SWITCHES



Many Tini-Stack<sup>®</sup> switching combinations are possible. Switch mounting centers are .188" (4.78 mm) (minimum). Practical spring length is 1.750" (44.45 mm) (maximum).

### **SPECIFICATIONS**

Springs: Copper alloy, in most standard gauge thicknesses ranging from .006" (0.15 mm) to .016" (0.41 mm). Spacers: Rigid plastic, available in thickness of .015" (0.38 mm), .032" (0.81 mm) and .046" (1.17 mm).

Contacts: Welded cross bar palladium rated at 2A, 200W AC non-inductive load. Gold alloy generally recommended for "dry" circuit applications.

Tubing: Thermoplastic.

Lifters: Thermoplastic.

Mounting Hardware: Pressure plate, twin nut and screws: Steel, plated.

The types of General Purpose Stack Switch Components available are:

- .375" (9.52 mm) mounting centers
- .250" (6.35 mm) mounting centers
- "Tini-Stack" Switches .188" (4.78 mm) mounting centers
- Telephone Relay Type Switches .250" (6.25 mm) mounting centers

### STACK SWITCH COMPONENTS

Switchcraft offers various stack switch components, such as contact springs, spacers, lifters, etc., in many lengths, thicknesses, mounting centers and other details.

Switchcraft can assemble components into innumerable different stack switch assemblies. It is impossible to catalog every type of stack that has been manufactured. Stack switch assemblies can be designed to meet UL requirements, but only as part of equipment.

### .250" (6.35 MM) STACK SWITCHES



Thousands of switching combinations are possible with slightly smaller parts. Mounting centers are .250" (6.35 mm) (minimum) with .188" (4.78 mm) wide parts. Practical spring length is 2.125" (53.98 mm) (maximum). Contact Switchcraft for selection of contacts and ratings.

### TELEPHONE RELAY TYPE SWITCHES





Compact stack switches are particularly suitable for low activating force, such as in relay and magnetic operated devices. Contact Switchcraft for selection of contacts and ratings. **SPECIFICATIONS** 

Springs: Copper alloy, in thicknesses ranging from .006" (0.15 mm) to .012" (0.30 mm).

Spacers: Rigid plastic is standard in thickness of .031" (.79 mm), .047" (1.19 mm) and .063" (1.60 mm). Contacts: Fine silver or welded cross bar palladium are standard. Palladium or gold alloy are generally recommended for "dry" circuit applications. Other contacts available for varied customer requirements on special order. Tubing: Thermoplastic.

Lifters: Thermoplastic.

### Bracket: Steel, plated.

Mounting Hardware: Pressure plate, twin nut and screws: Steel, plated.

# SWITCHES GENERAL PURPOSE STACK SWITCHES - COMPONENT SPECIFICATIONS PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

# GENERAL PURPOSE STACK SWITCHES (continued)

### STACK SWITCH COMPONENT SPECIFICATIONS

**1. SPRINGS -** Copper alloy in most standard gauge thicknesses of .006" (0.15 mm), .008" (0.20 mm), .010" (0.25 mm), .012" (0.30 mm), .016" (0.40 mm) and .020" (0.50 mm), a few designs can be made up to .031" (.079 mm) thick. All or any contact point hole can be provided; spring can be cut at any point.

**2. BRACKETS -** Standard brackets are detailed on drawing. Tools are flexible so that various lengths from same width stock can be provided.

**3. LIFTERS OR PUSHERS -** .125" (3.18 mm) and .188" (4.78 mm) diameter thermoplastic in various lengths staked into one of the contact point holds provides tandem action between blades or to serve as an actuator.

**4. MOUNTING HARDWARE -** Pressure plates (S1293 and S2300) twin nuts (S1008 and S1431) and screws available for mounting.


**5. LEAF INSULATORS -** Punched in same shape as springs in .015" (0.38 mm) thickness of fish paper or mylar.

**6. SPACERS -** Rigid plastic is standard in thicknesses of .015" (0.38 mm), .032" (0.81 mm), .051" (1.30 mm) and .062" (1.57 mm). Thickness of .093" (2.36 mm) is available for .375" (9.52 mm) mounting centers only. For longer surface creepage paths, use both large and standard sized spacers. High temperature insulation also available.

**7. THERMOPLASTIC TUBING -** .375" (9.52 mm) mounting centers pass #5 screw. .250" (6.35 mm) mounting centers pass #3 screw. .188" (4.78 mm) mounting centers pass #2 screw.

**8. CAM FOLLOWERS -** Two roller bracket designs (G1734 and G2298) available for springs .250" (6.35 mm) wide. Copper alloy standard. Can be furnished in various diameters and materials. Thermoplastic rollers also available.

**9. CONTACTS -** Welded cross bar contacts are commonly used for cost savings. However, riveted contacts are available. Size and material depend on circuit requirements (supply complete details). For low level audio circuits, we suggest gold alloy or palladium cross bar contacts. Springs can be bifurcated (two contacts per spring).

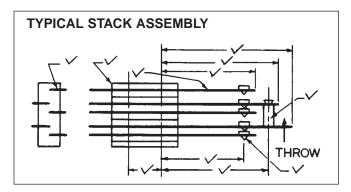


### HOW TO ORDER STACK SWITCHES

Careful consideration of the following suggestions will help specify the most economical and expeditious approach to your switching needs. On initial inquiry or order, supply the following information:

- 1. Simple sketch or drawing. See "Typical Stack Assembly" drawing. Give details checked that are available.
- 2. Current, voltage and type of switching load (resistive or inductive).
- 3. Frequency of operation; life requirements.
- 4. Details of actuator.
- 5. Maximum and minimum movement of actuator blade.
- 6. Any other important specifying details.

It is recommended that data indicated above be forwarded to Switchcraft for comments and recommendations before finalizing your design.

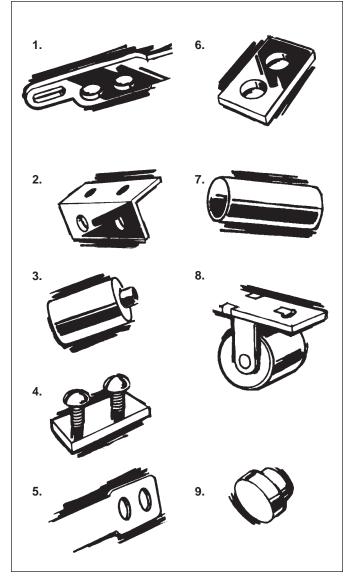

\* Please visit the product pages on our website for the most up-to-date product information


### MULTIPLE STATION SWITCHES



SERIES IBS



**SERIES 65000 DW MULTI-SWITCH** 



SERIES 66000, 67000 **DW MULTI-SWITCH** 

### **FEATURES**

Switches are designed to meet performance requirements of sophisticated equipment such as: analog and digital computers, analyzers, transmitters and receivers, intercoms, machine and process controls, ground support systems, scientific instruments and test measurement and instrumentation.

### STANDARD MECHANICAL FUNCTIONS

**INTERLOCK** - actuating a button automatically restores to normal the button previously actuated. Lock-out feature, which prevents the mechanical operation of more than one button at a time, is standard on all interlock switches.

NON-LOCK - each button has momentary action. No interaction between buttons. Lock-out available on special order only.

ALL-LOCK - all buttons, except release, lock when depressed (accumulative lock). All buttons restored to normal by activating release button which has momentary action.

PUSH-LOCK/PUSH-RELEASE - pushbutton locks when depressed and is released when again depressed.

LOCK-UP - built-in, electrically operated solenoid locks all stations (in respective positions). Limited to operation of up to 12 stations only and energized from a remote position. Not available in push-lock/push-release.

### SPECIAL ORDER MECHANICAL FUNCTIONS

Mechanical functions on selected series can be intermixed on the same frame on special order only. Contact factory for details and availability.

Multi-Switch switches have been designed to readily accommodate "special" functions at nominal cost. Special functions are described at right.

Intermixed functions - the following combinations of standard functions intermixed on the same frame are available:

- Interlock and Non-Lock
- Interlock and Push-Lock/Push-Release
- All-Lock and Non-Lock
- All-Lock and Push-Lock/Push-Release
- Push-Lock/Push-Release and Non-Lock

Lock-out function - Refer to above description under "Interlock."

Push-release cancelling function - Speeds programming

and reprogramming of equipment.

Momentary common release function - Permits one or more momentary common release stations on switch to facilitate special operating and release sequences.

"Split-interlock" function - Two separate groups of inter-lock stations on the same frame offers exceptional design latitude and reduces production line time.

### GANGED ASSEMBLIES (Special Order)

Multiple row switching (ganged assemblies) with interaction between rows are available on special order. Space-saving ganged assemblies reduce production line assembly, wiring and testing time. All features of single row switching, including all standard and special features, are available. Contact Switchcraft for specifying assistance.

### PUSHBUTTONS

Illuminated and non-illuminated switches can be specified with standard or special pushbuttons. See coverage on individual series for information.

### LEGENDS

Legends can be supplied on illuminated and non-illuminated pushbuttons. Contact Switchcraft.

SWITCHFS

# SWITCHES MULTIPLE-STATION SWITCHES

PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)



SERIES 90000, 920000 TINI DW MULTI-SWITCH



SERIES 35000 LITTEL<sup>®</sup> MULTI-SWITCH



SERIES 37000, 38000 LITTEL® MULTI-SWITCH

### CHOOSING THE RIGHT MULTIPLE-STATION SWITCH

Switch Series	Mechanical Functions <sup>1</sup>	Stations (Maximum)	Switching Per Station (Maximum)	Contact Rating <sup>2</sup>	Lighting	Accessories <sup>3</sup>
35000	ILO, N, A, PL/PR	18	6PDT	2A AC, 200W	No	C, G, M, P, S, PC/WW
36000			6PDT		No	
37000	ILO, N, A, PL/PR	18	4PDT	2A AC, 200W	Yes	C, G, M, P, S,
38000			3PDT		Yes	PC/WW, LWO
65000	ILO, N, A, PL/PR	18	4PDT	3A AC, 0.5A DC	No	C, G, M, S, PC/WW
66000	ILO, N, A, PL/PR 18	18	4PDT	3A AC, 0.5A DC	No	C, G, M, S, PC/WW
67000		10		0////0, 0.0// 20	Yes	0, 0, 11, 0, 10, 11
90000 92000	ILO, N, A	12 - ILO, A 18 - N, PL/PR	8PDT	0.5A 28V AC or DC	No	М
IBS	I, N	12	2PDT	.125A, 125 VAC or 28 VDC	No	P, M

1. I = interlock, ILO = interlock with lockout, N = non-lock (momentary), A = all-lock (special order), PL/PR = push-lock/push-release.

2. Non-inductive load.

3. C = optional switch contact, G = ganged assemblies, M = special/mixed functions, P = optional pushbuttons, S = solenoid release, PC/WW = PC and wire-wrapping terminals, LWO = lighting wiring options.


### ORDERING

Order switches by part number in this section. For any optional or special order feature, contact Switchcraft.

### \* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

LITTEL® MULTI-SWITCH **SERIES 35000** 

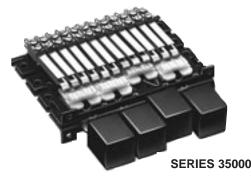

Specify 1 to 18 stations (non-illuminated) with a large selection of mechanical functions, choice of pushbuttons, and up to 6 poles of switching per station. Plungers are on .625" (15.88 mm) centers and are made from .050" (1.27 mm) x .187" (4.75 mm) steel. A square black pushbutton, A592, is supplied with each station. A wide variety of special mechanical functions, features and accessories are also available.


### **ORDERING INFORMATION** STANDARD SWITCHES

Order by part number from tables.


### SPECIAL SWITCHES


Many special mechanical functions, features and accessories are available. Contact Switchcraft.

- Ganged Assemblies Pushbuttons
- Special Mechanical Functions Legends
- Switch Stacks Accessories
- PC and Wire-Wrapping Terminals

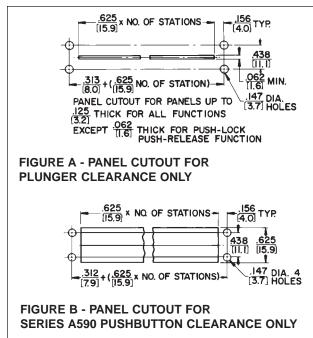

### **TYPICAL PANELS DIMENSIONS SERIES 35000**

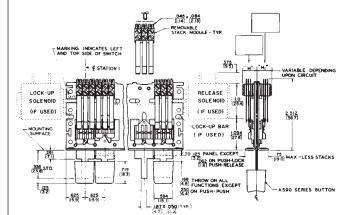

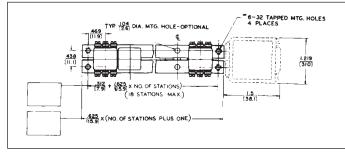

### PART NUMBERS/2-C PER STATION<sup>1</sup>

Interlock with Lock-Out	Non-Lock	Push-Lock/ Push-Release	Number of Stations <sup>2</sup>
35021K206	35022206	\disin=rkeitease	2
35041K206	◊35042206	◊35047206	4
35061K206	<b>∂35062206</b>	<b>∂35067206</b>	6
35081K206	<b>◊35082206</b>	<b>∂35087206</b>	8
35101K206	<b>◊35102206</b>	<b>∂35107206</b>	10
35121K206	<b>◊35122206</b>	<b>∂35127206</b>	12

### PART NUMBERS/4-C PER STATION<sup>1</sup>

<b>◊35021K212</b>	<b>◊35022212</b>	<b>◊35027212</b>	2				
<b>◊35041K212</b>	<b>◊35042212</b>	<b>◊35047212</b>	4				
<b>◊35061K212</b>	<b>◊35062212</b>	<b>◊35067212</b>	6				
<b>◊35081K212</b>	<b>◊35082212</b>	<b>◊35087212</b>	8				
<b>◊35101K212</b>	<b>◊35102212</b>	<b>◊35107212</b>	10				
<b>∂35121K212</b>	<b>◊35122212</b>	<b>◊35127212</b>	12				

1. Switches with all-lock function are available on special order. Contact Switchcraft.

Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations are also available. Contact Switchcraft.

◊ Special order only; Contact Switchcraft for price and delivery information.

\* Please visit the product pages on our website for the most up-to-date product information


# MULTIPLE-STATION SWITCHES (continued)

LITTEL<sup>®</sup> MULTI-SWITCHES SERIES 36000, 37000, 38000



SERIES 36000 - NON-ILLUMINATED

SERIES 37000 - SINGLE LAMP



SERIES 38000 - TWIN LAMPS

### **SERIES 36000**

Identical to Series 37000, except non-illuminated. Pushbuttons match Series 37000 and 38000 Switching up to 6PDT.

### **SERIES 37000**

Same as Series 35000, but features large, rectangular face pushbuttons, illuminated by one lamp and having large legend area. Switching is up to 4PDT. Switch stations are on .625" (15.88 mm) centers, and depth behind panel is 2.313" (58.75 mm). Black pushbutton housings have white translucent inserts, white legend insert, two support inserts, and transparent display screen. Other pushbuttons and combinations are possible; see pages 316 and 317.

On 2-C per station switches, each station includes two, 83P switch stacks and one H83P lighting stack, and one convenience lighting spring. Contact ratings: 2A, 200W maximum AC non-inductive load.

On 4-C per station switches, each station has 4, 83P switch stacks, one H83P lighting stack, and one convenience lighting spring. "L" and "M" lighting arrangements can be effected by wiring directly to the H83P and H lighting stacks.

Each switch station uses an industry standard T 1-3/4 lamp (not supplied). Special features such as ganged assemblies, solenoid release, and T-1 lamp adapter are available; contact Switchcraft. See pages 316 and 317 for special effects display screen and inserts.

### **SERIES 38000**

Similar to Series 37000, except features twin lamp illumination at each station for redundant or 2-color, split-face (alternate) lighting.

On 2-C per station switches, each station includes 3, H83P lighting switch stacks and 1 lighting spring. This provides up to 3PDT circuitry (1 pole is needed for lighting lamps; lamps not supplied). Contact ratings: 2A, 200W maximum AC non-inductive load.

On 4-C per station switches, each station has three, H83P, two, 83P switching stacks and one lighting spring. This offers

5PDT circuitry (1 pole is required for lighting lamps). two, T 1-3/4 lamps per station are used (lamps are not supplied). Ganged assemblies and solenoid releases are available; contact Switchcraft. See pages 316 and 317 for special effects display screens and inserts.

### LIGHTING

Series 37000 and 38000 can be used in control systems where the light is either "ON", or "OFF" or permanently "ON".

One or any combination of the three lighting arrangements listed below can be specified on a switch. NOTE: Standard switches ordered from tables can be wired for "L", "M" or "N" type lighting.

TYPE	DESCRIPTION
"L"	Pushbuttons light in the "IN" position.
"M"	Pushbuttons light in the "OUT" position.
"N"	Pushbuttons light in the "IN" and "OUT" positions.

### ORDERING STANDARD SWITCHES

Order by part number from tables.

### SPECIAL SWITCHES

Inch

Many special mechanical functions, features and accessories are available. Contact Switchcraft for special order items.

- Ganged Assemblies Special Mechanical Functions
- Special Color Displays 
   Pushbuttons
- Legends
   Switch Stacks
- Wiring Lighting Options PC and Wire-wrapping Terminals
- Accessories

# SWITCHES LITTEL® MULTI-SWITCH - SERIES 36000, 37000, & 38000

305

\* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

### LITTEL® MULTI-SWITCHES

SERIES 36000, 37000, 38000 (continued)

### **SERIES 37000**

### PART NUMBERS / 2-C PER STATION<sup>1</sup>

Interlock with Lock-Out	Non-Lock	Push-Lock/ Push-Release	Number of Stations <sup>2</sup>
<b>◊37021K1206</b>	<b>∂370221206</b>	<b>∂370271206</b>	2
<b>◊37041K1206</b>	<b>∂370421206</b>	<b>◊370471206</b>	4
<b>◊37061K1206</b>	<b>∂370621206</b>	<b>◊370671206</b>	6
<b>◊37081K1206</b>	<b>◊370821206</b>	<b>◊370871206</b>	8
<b>◊37101K1206</b>	<b>∂371021206</b>	<b>◊371071206</b>	10
<b>◊37121K1206</b>	<b>⊘371221206</b>	<b>∂371271206</b>	12


### PART NUMBERS / 4-C PER STATION<sup>1</sup>

<b>◊37021K1212</b>	<b>⊘370221212</b>	<b>◊370271212</b>	2
<b>⊘37041K1212</b>	<b>⊘370421212</b>	<b>∂370471212</b>	4
<b>⊘37061K1212</b>	<b>⊘370621212</b>	<b>∂370671212</b>	6
<b>⊘37081K1212</b>	<b>⊘370821212</b>	<b>∂370871212</b>	8
<b>⊘37101K1212</b>	<b>⊘371021212</b>	<b>∂371071212</b>	10
<b>◊37121K1212</b>	<b>◊371221212</b>	<b>∂371271212</b>	12

1. Switches with all-lock function are available on special order. Contact Switchcraft.

2. Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations also available. Contact Switchcraft.

Special order only; Contact Switchcraft for price and delivery information.

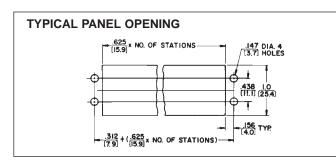

# **SERIES 38000**

### PART NUMBERS / 2-C PER STATION<sup>1</sup>

Interlock with Lock-Out	Non-Lock	Push-Lock/ Push-Release	Number of Stations <sup>2</sup>
<b>◊38021K1206</b>	<b>∂380221206</b>	<b>◊380271206</b>	2
<b>◊38041K1206</b>	<b>◊380421206</b>	<b>◊380471206</b>	4
<b>◊38061K1206</b>	<b>◊380621206</b>	<b>◊380671206</b>	6
<b>◊38081K1206</b>	<b>◊380821206</b>	<b>◊380871206</b>	8
<b>◊38101K1206</b>	<b>∂381021206</b>	<b>◊381071206</b>	10
<b>◊38121K1206</b>	<b>◊381221206</b>	<b>∂381271206</b>	12
	RS/4-C PEF		,

### PART NUMBERS / 4-C PER STATION

1							
ſ	<b>◊38021K1212</b>	<b>∂380221212</b>	<b>∂380271212</b>	2			
	<b>◊38041K1212</b>	<b>∂380421212</b>	<b>∂380471212</b>	4			
	<b>◊38061K1212</b>	<b>◊380621212</b>	<b>◊380671212</b>	6			
	<b>◊38081K1212</b>	<b>◊380821212</b>	<b>◊380871212</b>	8			
	<b>◊38101K1212</b>	<b>∂381021212</b>	<b>∂381071212</b>	10			
	<b>◊38121K1212</b>	<b>⊘381221212</b>	<b>∂381271212</b>	12			

1. Switches with all-lock function are available on special order. Contact Switchcraft.

2. Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations also available. Contact Switchcraft.

◊ Special order only; Contact Switchcraft for price and delivery information.

### MATERIAL SPECIFICATIONS


Frame: Steel, dry film lubricant.

Plungers, Stack Switch Mounting Brackets and Screws: Steel, plated.

Stack Switches: Stack switch springs are made of copper alloy. Solder lugs are hot tin-dipped.

Insulation: Stack switches: rigid plastic spacers with plastic tubing through stack.

Lifters: Thermoplastic.

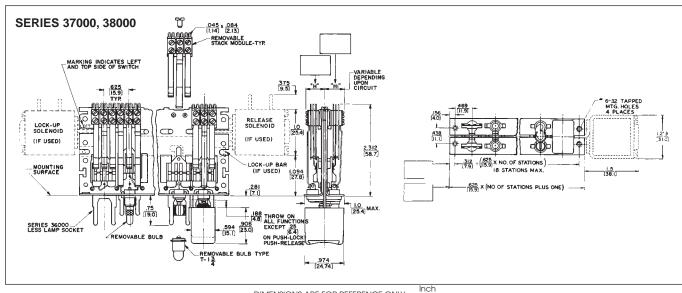

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# SWITCHES LITTEL® MULTI-SWITCH - SPECIAL EFFECTS COLOR DISPLAY & INSERTS PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

### SPECIAL EFFECTS COLOR DISPLAY SCREENS AND INSERTS

Display screens and inserts are offered in a wide choice of colors for SERIES 37000 and 38000 Littel Multi-Switch switches. Display screens with high-lights are useful in high ambient lighting; or display screens with soft, uniform, and diffused lighting for use under low ambient lighting conditions. Order display screens, inserts and filters separately. See Part Number Chart below.

### Series 401 Display Screen Α

### Series 404

В

SWITCHFS

F

Legend insert recesses into display screen. Omit when split-face inserts are used. Part Number 404 05 White legend insert has a matte finish on one side suitable for in-the-field marking.

Part Number 404 12 C **Retaining Insert** 

Clear insert snaps into display screen from rear to retain legend inserts. Omit when split-face inserts are used.

Series 407 Split-Face Insert D Use with Series 38000


Series 402 Color Filter Inserts E White insert used with blue, white and clear display screens; clear insert used with red, green and yellow. All color filters are omitted where split-face insert is used.

### Part Number 402 12 Heat Shield Insert

Clear filter insert snaps into push-button housing. Must be used in every pushbutton assembly.

Part Number 406 G Light Divider Recesses into pushbutton housing. For use with Series 38000.

### Series 405 02 Pushbutton Н Housing.



SERIES 401 DISPLAY SCREENS - Display screens with contoured face give a better operation "feel". Rectangular shape provides greater area for engraving legends and symbols. Entire screen is illuminated by single or twin lamp indication. Various brightness and color combinations are possible by use of legend filter and split face inserts. SERIES 404 LEGEND INSERTS - Small translucent inserts provide special color effects. White colored insert (40405) has a special matte

surface for in-the-field identification with ink, pencil or lettering transfers. Special color effects can be accomplished with combination of a colored insert with a clear display screen. IMPORTANT: Order legend insert (40412) with every pushbutton.

SERIES 407 SPLIT-FACE INSERTS - Split-face inserts provide separate control or indicating functions through the use of color. Ideal for use on Series 38000 Littel Multi-Switch switches where each pushbutton can serve as two indicator lights. Up to two lamps can be used per display screen which are split lengthwise by 2-color split-face inserts. Inserts may be hot-stamped. Order (406) light divider when "flip-flop" lighting is specified; or for redundant lighting where a definite visual indication of lamp failure is desired. A frequently used combination is red and green. Red might indicate danger, stop, etc. Green, go, "okay", etc. IMPORTANT: Use (40212) clear insert with a split-face insert.

SERIES 402 FILTER INSERTS - Inserts add greater color definition. Ideal for use under low ambient lighting conditions where brightness of illuminated pushbuttons must be minimized. A white filter insert (40205) is useful in cutting down the brightness of a white color insert and a white or clear display screen. However, it is omitted when color display screen is used. Filters also diffuse light evenly over entire face of display screen with no "hot spots" or darkened corners. IMPORTANT: Order clear insert (40212) for use with every color filter insert. Clear insert snaps in button housing behind a color filter insert and serves as a heat shield.

406 LIGHT DIVIDER – A light divider is used in the standard pushbutton housing to separate the illumination from the twin lamps used in the Series 38000 Littel Multi-Switch switches. Order a light divider for every pushbutton station in the Series 38000 where split-face lighting has been specified.

Series 405 PUSHBUTTON HOUSINGS - One-piece housing for all 37000 and 38000 switches. Accepts Series 401, 402, 404, 406 and 407 components. Standard color is black. Other colors available.

ORDERING - For variations in pushbutton configurations, contact Switchcraft.

40505

Part No.	Figure	Color	Part No.	Figure	Color	F	Part No.	Figure	Color
<b>◊40101</b>		Red	<b>◊40403</b>		Green		<b>◊40208</b>	Е	Yellow
<b>◊40103</b>		Green	<b>◊40404</b>	в	Blue		<b>◊40212</b>	F	Clear (heat shield insert)
<b>◊40104</b>		Blue	<b>◊40405</b>		White		<b>◊40701</b>		Red
<b>◊40105</b>	A	White	<b>◊40408</b>	1	Yellow		<b>◊40703</b>		Green
<b>◊40108</b>		Yellow	<b>◊40412</b>	С	Clear (retaining insert)		<b>◊40704</b>	D	Blue
<b>◊40112</b>		Clear	<b>◊40201</b>		Red		<b>◊40705</b>		White
<b>◊40116</b>		"Black Screen"	<b>◊40203</b>	Е	Green		<b>◊40708</b>		Yellow
<b>◊40401</b>	В	Red	<b>◊40204</b>		Blue		<b>◊406</b>	G	White (light divider)
Special order of	only; Contact S	witchcraft for	<b>◊40205</b>	1	White		40502	н	Black (housing)
	,,			1					

price and delivery information.

DIMENSIONS ARE FOR REFERENCE ONLY


Inch (mm) White

307

### \* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)



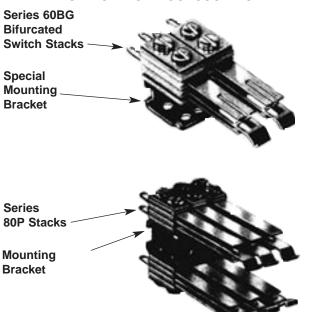

### **"TINI-STACK" SWITCHES**

Many combinations of stack switches are available on special order. Contact Switchcraft for specifying assistance, including clearances for stack heights.

SERIES 80P - Crossbar welded palladium contacts rated: 2A. 200W maximum, AC non-inductive load. For use where contacts of a released station will return to normal before contacts of a newly operated station are actuated. Not recommended for use on push-lock/push/release function.

SERIES 800P - Same as Series 80P but can be used on push-lock/push-release function, or on other functions where contacts of a newly operated station must be actuated before contacts of a released station return to normal.

SERIES 80G - Same as Series 80P, except includes cross-bar welded gold alloy contacts rated at 1A, 100W maximum, AC non-inductive load.

SERIES 800G - Same as Series 80G except for pushlock/push-release and/or other functions as described for Series 800P.

### **BIFURCATED "TINI-STACK" SWITCH STACKS**

Double reliability through use of bifurcated switch stacks featuring bifurcated leaf springs slotted at the contact end and parallel to the long axis of the leaf spring. Separate crossbar gold alloy contacts are welded to leaf springs on each side, doubling the number of contacts on each spring.

SERIES 60BG - Similar to Series 80P, except bifurcated leaf springs with welded crossbar gold alloy contacts rated at 1A, 100W maximum, AC non-inductive load.

SERIES 600BG - Same as Series 60BG, except for use on push-lock/push-release function and/or functions as described under Series 800P.


### **HIGH CURRENT "TINI-STACK" SWITCH STACKS**

Heavy duty switch stacks Series 60W for use in 120V. AC power circuits are available with large, fine silver contacts rated at 5A, non-inductive load. Stack spacer width limits mounting to one stack/station on each side of frame and requires special mounting bracket.

For 10 and 15A switching, contact Switchcraft.


### **POSITIONING SWITCH STACKS** (SERIES 80P, 800P, 80G AND 800G ONLY)

Refer to chart below for proper balancing of the switch stacks mechanical load at each station, "X" denotes correct positioning of the stack on the removable switch stack bracket.

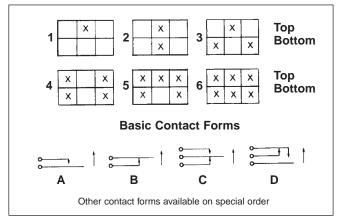

### SERIES NJ SOLENOID RELEASE

Solenoid assembly attaches to end of switch frame and provides electrical release of activated stations. Instructions and hardware furnished. Other voltages are available on special order; contact Switchcraft.

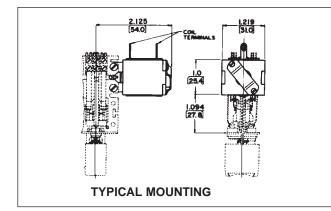

### \* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

### LITTEL® MULTI-SWITCH ACCESSORIES

### WIRE-WRAPPING TERMINALS

Special order wire-wrapping terminals optimize use of semi-automated termination equipment to save production line time. Terminal shoulders accommodate 1, 2 or 3 wrapped connections per terminal and prevent wrapping tool from "bottoming" (on first wrapped connection) and possibly shorting against other metal parts on switch stack. 4-C switching per station maximum.

NOTE: Stack height dimension will be greater when wire-wrapping terminals are specified. Stack height for 1-A and 1-B circuit is .516" (13.11 mm). For 1-C height is .594" (15.09 mm).

SHOULDER


**ORDERING:** Contact Switchcraft for details.

### **RECOMMENDED WIRE-WRAPPING TOOLS**

	(Gardner -Denver Co. Part Numbers)			
Wire Gauge	Wrapping Bit Sleeve			
#22 & #24	500131	18840		
#25	500131	18840		
#26	37006	17611-2		

### **RECOMMENDED WIRE-WRAPPING PARAMETERS**

Wire Gauge	Number of Connections	Wraps Per Connection	Wire Gauge	Number of Connections	Wraps Per Connection
#22	3	4	#25	3	4
#24	3	5	#26	3	5

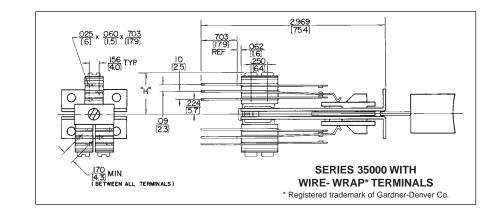

SERIES 37000 WITH WIRE- WRAPPED TERMINALS

### LAMP SOCKETS AND ADAPTERS

### LAMP SOCKET T10 ()

Standard on Series 37000, T10 accepts standard midget flange type T1-3/4 lamps.

### LAMP SOCKET T12 🛇

Standard on Series 38000, the T12 socket accepts standard midget flange type T1-3/4 lamps.


### LAMP ADAPTER T1


Converts sockets that accommodate standard T 1-3/4, (P1593) midget flange base lamps to accept T 1 subminiature lamps. Adapter fits T 1-3/4 lamp socket. The 2-piece adapter holds lamp securely in place to assure positive contact of lamp circuit in most environments. If you require extra long-life, specify a T 1 lamp adapter for each T 1-3/4 socket.

### **PC TERMINALS**

Copper alloy PC terminals are integral with associated leaf spring and feature shoulders for proper clearance from PC board and for solid mounting. Contact Switchcraft for details.

 ${\boldsymbol{\Diamond}}$  Available on special order only; Contact factory for price and delivery information.

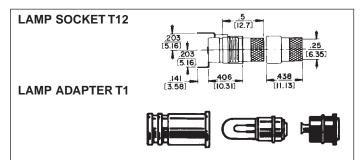

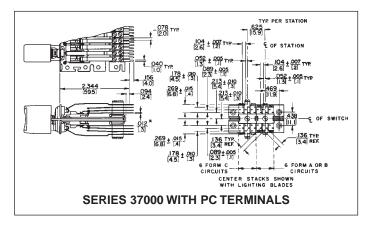

DIMENSIONS ARE FOR REFERENCE ONLY


ONLY Inch

### \* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

### DW MULTI-SWITCH SERIES 65000

Available with up to 18 non-illuminated stations in a single row. Maximum switching per station is 4-C (4PDT). Contacts are rated: 3A, AC, 0.5A DC, 125V, non-inductive load. Integral black button is supplied with each station. Switches mount with #6 screws and nut (not furnished). Contact Switchcraft for special assemblies, with ganged assemblies, solenoid release, PC or wire-wrapping terminals, or escutcheon modules.

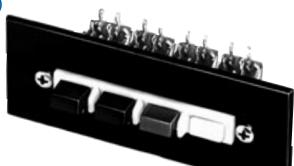

SERIES 65000 - Four-station with DW Escutcheon Modules installed

### PART NUMBERS / 2-C PER STATION<sup>1</sup>

Interlock		Push-Lock/	Number of
with Lock-Out	Non-Lock	Push-Release	Stations <sup>2</sup>
65021K206	<b>◊65022206</b>	<b>◊65027206</b>	2
65041K206	<b>◊65042206</b>	<b>◊65047206</b>	4
65061K206	<b>◊65062206</b>	<b>◊65067206</b>	6
65081K206	<b>◊65082206</b>	<b>◊65087206</b>	8
65101K206	<b>◊65102206</b>	<b>◊65107206</b>	10
65121K206	<b>◊65122206</b>	<b>◊65127206</b>	12

 Switches with all-lock function are available on special order. Contact Switchcraft.
 Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations also available. Contact Switchcraft.

Special order only; Contact Switchcraft for price and delivery information.


# PART NUMBERS / 4-C PER STATION

	Push-Lock/	Number of
Non-Lock	Push-Release	Stations <sup>2</sup>
<b>◊65022212</b>	◊65027212	2
<b>◊65042212</b>	<b>∂65047212</b>	4
<b>◊65062212</b>	<b>◊65067212</b>	6
<b>◊65082212</b>	<b>◊65087212</b>	8
<b>◊65102212</b>	◊65107212	10
<b>∂65122212</b>	<b>⊘65127212</b>	12
	\$65022212 \$65042212 \$65062212 \$65082212 \$65082212 \$65102212	Non-Lock         Push-Release           ◊65022212         ◊65027212           ◊65042212         ◊65047212           ◊65062212         ◊65067212           ◊65082212         ◊65087212           ◊65102212         ◊65107212

1. Switches with all-lock function are available on special order. Contact Switchcraft.

 Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations also available. Contact Switchcraft.
 Spacial and a station Contact Switchcraft.

 $\Diamond$  Special order only; Contact Switchcraft for price and delivery information.

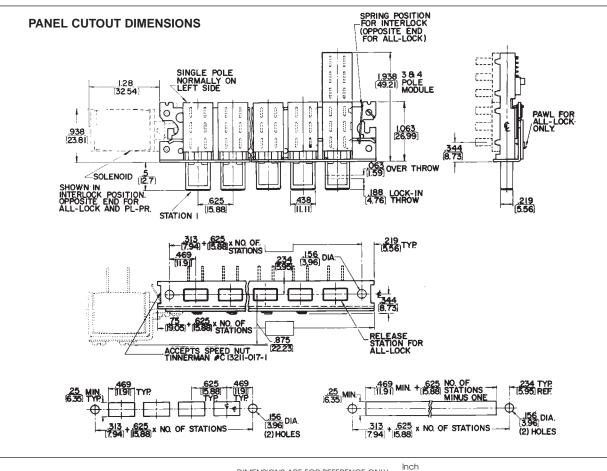

DIMENSIONS ARE FOR REFERENCE ONLY

# SWITCHES DW MULTI-SWITCH — SERIES 66000 & 67000

# PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

# **MULTIPLE-STATION SWITCHES (continued)**


DW MULTI-SWITCH SERIES 66000 and 67000



Series 66000 (non-illuminated) and 67000 (illuminated) can be supplied with up to 18 stations, including a square white pushbutton Part Number DW305 at each station. Contacts and ratings are the same as for Series 65000. Lamp sockets (67000) at each station accept 6V to 28V T 1-3/4 flange base lamps (not supplied). Mounts with 2 #6-32 machine screws (not supplied). See page 310 for pushbutton data. Accessories include solenoid release, ganged assemblies, T1 lamp adapter, and metal barriers (between stations). PC and wire-wrapping terminals are also available. Contact Switchcraft.

### NON-ILLUMINATED DW MULTI-SWITCH SWITCHES

Switchcraft offers DW Multi-Switch switches, Series 70000 and 71000 with crossbar plungers which accept a wide variety of Switchcraft and industry pushbuttons. Contact Switchcraft for specifying assistance.

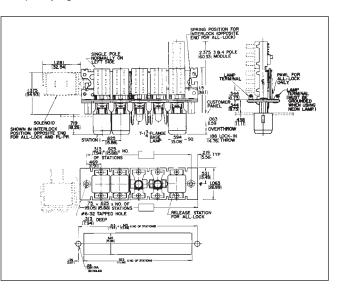

### SERIES DW40 COLOR INSERTS

Many unusual lighting effects can be created using DW40 color inserts. Molded from dimensionally stable, high-temperature plastic in six standard colors, inserts slip into standard Series DW300 pushbuttons providing unusual latitude in custom designing color and legend effects. With no wear from finger-tips, legend life is virtually unlimited.

Part No.	Color	Part No.	Color	Part No.	Color
<b>∂DW41</b>	Red	<b>∂DW44</b>	Blue	<b>⊘DW47</b>	Orange
<b>⊘DW43</b>	Green	DW45	White	<b>⊘DW48</b>	Yellow

 $\Diamond$  Special order only; Contact Switchcraft for price and delivery information.

SERIES DW300 PUSHBUTTONS (DW305 supplied standard)

Part No.	Color <sup>1</sup>	Part No.	Color <sup>1</sup>	Part No.	Color <sup>1</sup>
DW301	Red	DW304	Blue	DW312	Clear
DW302	Black	DW305	White	DW313	Amber
DW303	Green	DW308	Yellow	DW316	"Black-
					Screen"

1 Other colors available on special order. Buttons are 0.594 (15.09) x 0.594 (15.09)

### PART NUMBERS/2-C PER STATION<sup>1</sup>

Interlock		Push-Lock/	Number of
with Lock-Out	Non-Lock	Push-Release	Stations <sup>2</sup>
67021K506	<b>∂67022506</b>	<b>∂67027506</b>	2
67041K506	<b>∂67042506</b>	<b>∂67047506</b>	4
67061K506	<b>∂67062506</b>	<b>◊67067506</b>	6
67081K506	<b>⊘67082506</b>	<b>∂67087506</b>	8
67101K506	<b>⊘67102506</b>	<b>∂67107506</b>	10
67121K506	<b>◊67122506</b>	<b>∂67127506</b>	12

### PART NUMBERS/4-C PER STATION<sup>1</sup>

<b>∂67021K512</b>	<b>∂67022512</b>	<b>∂67027512</b>	2
<b>⊘67041K512</b>	<b>⊘67042512</b>	<b>∂67047512</b>	4
<b>⊘67061K512</b>	<b>⊘67062512</b>	<b>∂67067512</b>	6
<b>⊘67081K512</b>	<b>⊘67082512</b>	<b>⊘67087512</b>	8
<b>⊘67101K512</b>	<b>∂67102512</b>	<b>⊘67107512</b>	10
<b>⊘67121K512</b>	<b>⊘67122512</b>	<b>⊘67127512</b>	12


 Switches with all-lock function are available on special order. Contact Switchcraft.

2. Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations also available. Contact Switchcraft.

◊ Special order only; Contact Switchcraft for price and delivery information.



Squeeze upper and lower surfaces of pushbutton and pull free of plungers.



Next, grasp lamp with lamp removal tool or fingertips and snapout. Replace lamp and pushbutton. Finished in seconds!

DIMENSIONS ARE FOR REFERENCE ONLY

### \* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

### DW MULTI-SWITCH ACCESSORIES

### ESCUTCHEON MODULES, SERIES DW100 AND DW200


Modules are available in colors to match or contrast with Series 65000 pushbutton colors. Modules are simply slipped over the pushbuttons before the switch is mounted on the panel. Flanges on modules overlap the panel cutout and hold modules securely in place while adding only 0.02" (.051 mm) behind panel space.

One module is required for each station. Installation of the Series DW200 Modules (with barrier) is equally simple. First, place one Series DW100 Module over the pushbutton actuator on one end of the row. On the adjacent actuator, place a Series DW200 Module. Position this module so that the barrier overlaps the edge of the Series DW100 Module. Install the remaining Series DW200 modules in the same manner, with the barriers overlapping. The completed escutcheon will have barriers between adjacent pushbutton actuators, but no barriers at the ends of the rows.

Series DW-100 (without barrier)	Series DW-200 (with barrier)	Color*
<b>⊘DW101</b>	<b>⊘DW201</b>	Red
DW102	DW202	Black
DW05	DW205	White

\* Other colors available on special order.

◊ Special order only; Contact Switchcraft for price and delivery information.

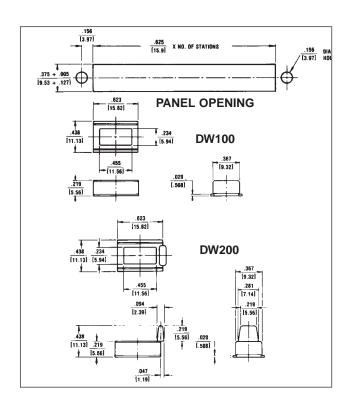



### SPECIAL SWITCHING FORMS

In addition to 2-C and 4-C switching, other circuit forms can be supplied on special order. They are: 1-A, 2-A, 3-A, 4-A, 1-B, 2-B, 3-B, 4-B, 1-C, 3-C, 1-D, 2-D, 3-D, and 4-D.

### BARRIERS (SERIES 67000 ONLY)

As an option, (field installable) barriers can be specified and installed. Sturdy wire barriers fit between pushbuttons and prevent accidental simultaneous actuation of adjacent push-buttons. When a pushbutton is depressed, the fingertip is guided away from adjacent pushbuttons, and all pressure is applied to the correct pushbutton.

Switchcraft Part Number (P2359 Barriers (package of 25)

### SOLENOID RELEASE

Solenoids provide electromechanical assistance in releasing locked switch stations in switches with up to 12 stations. Release can be effected from a local or remote position. Solenoids are available for use with switches having inter-lock, all-lock, or push-lock/push-release mechanical functions. All solenoids are "pull-type". When ordered separately, solenoids are supplied with all mounting hardware. Brass terminals accept "push-on" type clips (ARK-LES #3500M20C), or wiring can be soldered directly to the lugs.

### **SPECIFICATIONS**

Frame, Latch Bar, and Switch Housing: Steel, plated. Mounting Studs (Series 66000 and 67000): Same as frame above.

Pushbutton Actuators (Series 65000): Molded thermoplastic. Pushbuttons (Series 66000 and 67000):

Molded thermoplastic. Terminals: Copper alloy, silver-plated.

Contactors: Copper alloy, plated.

Terminal Board: Rigid plastic.

Lamp Socket (Series 67000): Copper alloy, plated.

Part Number	Switch Function	Mounting*	Voltage	Coil Res. (Ohms)	Duty Cycle
<b>∂DW1</b>	Interlock	Left	115 AC, 36 60 Hz		20%
<b>⊘DW3</b>	All-Lock	Right	115 AC, 60 Hz	130	10%
<b>⊘DW4</b>	Interlock	Left	24 DC	14.2	20%
<b>∂DW7</b>	All-Lock or Push- Lock/Push- Release	Right	24 DC	8.96	10%

\* Direction indicates side of switch frame solenoid is mounted on (solenoid terminals up)

DIMENSIONS ARE FOR REFERENCE ONLY

# SWITCHES TINI® DW MULTI-SWITCH — SERIES 90000 & 92000


# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)



SERIES 92000 Switch TDW-F Flip-Flop Pushbutton Installed

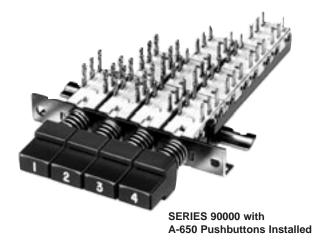

### TINI® DW MULTI-SWITCH - SERIES 90000, 92000

Subminiature, multiple station switches have pushbuttons on 0.394" (10mm), 0.590" (15mm), or 0.787" (20mm) centers. Four mechanical functions: Interlock, Non-Lock, All-Lock and Push-Lock/Push-Release. Switches mount in panels up to .343" (8.71mm) thick. Switching per station is 2-C (2PDT), 4-C (4PDT), 6-C (6PDT) or 8-C (8PDT). Contact ratings: 0.5A, 28V AC or DC non-inductive. Solder lug or PC terminals.

**SERIES 90000 -** Up to 18 stations on 0.394" (10mm) centers in a row. Switch mounts with 2, #3 screws (not supplied).

**SERIES 92000** - 15mm station centers. Wider spacing permits mounting Series TDWF pushbuttons.

### SPECIFICATIONS

### ELECTRICAL

Switching Module Rating: 0.5A, 28V AC or DC non-inductive load. Initial Contact Resistance: 10 milliohms.

### MATERIALS

Frame Switch Housing: Steel, plated.
Latch Bar: Stainless steel on all-lock function; zinc alloy on interlock function.
Latch Bar Return Spring: Tinned music wire.
Plunger: Molded thermoplastic.
Plunger Return Spring: Tinned music wire.
Terminals/Contacts: Copper alloy, silver-plated.
Contact Sliders: Bifurcated bimetal (silver on copper alloy).
Terminal Board: Molded thermoplastic (UL 94V-0).
Pushbuttons: Molded thermoplastic.

### PUSHBUTTONS

Part Number	Color	Color Part Number		
<b>∂A6501</b>	Red	<b>◊A6504</b>	Blue	
<b>∂A6502</b>	Black	<b>◊A6505</b>	White	
<b>∂A6503</b>	Green	<b>◊A6508</b>	Yellow	

Buttons are 0.386 (9.80 mm) x 0.386 (9.80 mm).

 $\Diamond$  Special order only; Contact Switchcraft for price and delivery information.

Pushbuttons for Tini DW Multi-Switch switches must be specified separately, below. Refer to page 316 for data on TWDF pushbuttons.

Series A650 pushbuttons can be specified for both Series 90000 and 92000. Legends can be specified; contact Switchcraft.

### PART NUMBERS/2-C PER STATION<sup>1</sup>

Interlock with Lock-Out	Non-Lock	Push-Lock/ Push-Release	Number of Stations <sup>2</sup>
<b>◊90024B06</b>	<b>⊘90022B06</b>	<b>◊90027B06</b>	2
<b>◊90044B06</b>	<b>◊90042B06</b>	<b>◊90047B06</b>	4
<b>◊90064B06</b>	<b>◊90062B06</b>	<b>◊90067B06</b>	6
<b>◊90084B06</b>	<b>◊90082B06</b>	<b>◊90087B06</b>	8
<b>◊90104B06</b>	<b>◊90102B06</b>	<b>◊90117B06</b>	10
<b>◊90124B06</b>	<b>◊90122B06</b>	<b>◊90127B06</b>	12

### PART NUMBERS/4-C PER STATION<sup>1</sup>

<b>◊90024B12</b>	<b>⊘90022B12</b>	<b>◊90027B12</b>	2
<b>◊90044B12</b>	<b>◊90042B12</b>	<b>◊90047B12</b>	4
<b>◊90064B12</b>	<b>◊90062B12</b>	<b>◊90067B12</b>	6
<b>◊90084B12</b>	<b>◊90082B12</b>	<b>◊90087B12</b>	8
<b>◊90104B12</b>	<b>◊90102B12</b>	<b>◊90117B12</b>	10
<b>◊90124B12</b>	<b>◊90122B12</b>	<b>◊90127B12</b>	12

1 Switches with all-lock function are available on special order. Contact Switchcraft. 2 Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through

18 stations also available. Contact Switchcraft.


 $\Diamond$  Special order only; Contact Switchcraft for price and delivery information.

### SPECIFYING NOTE:

Series 90000 Part Numbers are given in table. To order Series 92000 switches, substitute "2" for "0" for second digit of Part Number. Example; Part Number 92024B06 in the Series 92000 version 0.590" (15mm centers) of Part Number 90024B06 0.394" (10mm centers) interlock with lock-out, 2-C switching per station.

# SWITCHES TINI® DW MULTI-SWITCH — SERIES 90000 & 92000

313

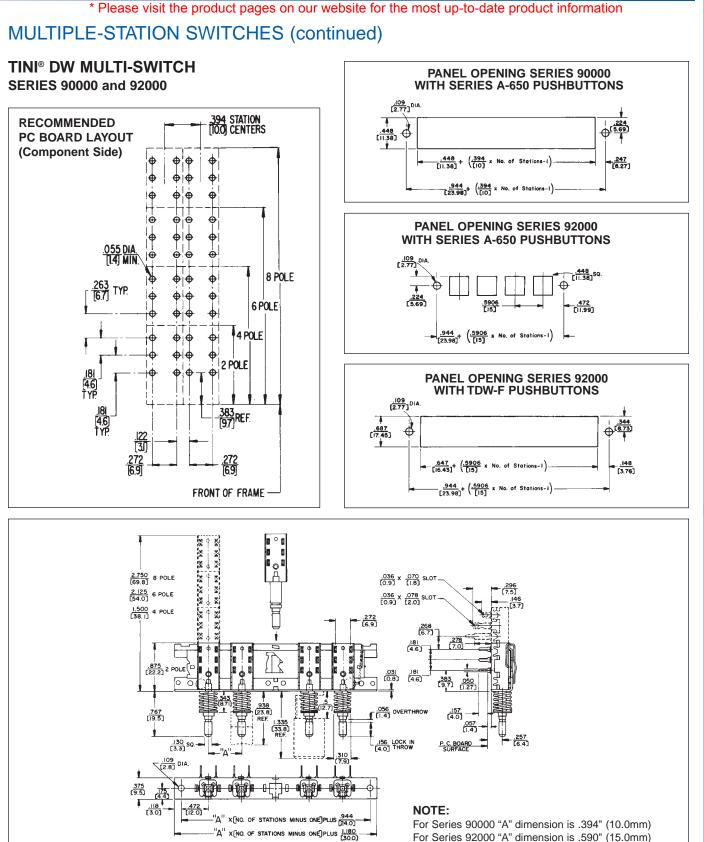


# SWITCHES IBS MULTI-SWITCH — SERIES IBS

# **PHONE: 773 792-2700**

\* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

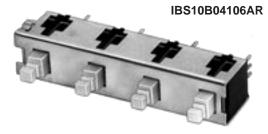





**TYPE I** 0.388 (9.86) x 0.216 (5.49)

**TYPE II** 0.464 (11.79) x 0.288 (7.32)

### PART NUMBERS/0.394" (10MM) CENTERS<sup>1</sup>

-
Number of Stations <sup>2</sup>
2
4
6
8
10
12

### PART NUMBERS/0.590" (15MM) CENTERS<sup>1</sup>

<b>◊IBS15B02106AR</b>	2
<b>⊘IBS15B04106AR</b>	4
<b>⊘IBS15B06106AR</b>	6
<b>⊘IBS15B08106AR</b>	8
<b>⊘IBS15B10106AR</b>	10
<b>◊IBS15B12106AR</b>	12

### PART NUMBERS/0.787" (20MM) CENTERS1

<b>◊IBS20B02106AR</b>	2
<b>◊IBS20B04106AR</b>	4
<b>◊IBS20B06106AR</b>	6
<b>◊IBS20B08106AR</b>	8
<b>◊IBS20B10106AR</b>	10
<b>◊IBS20B12106AR</b>	12

1. Switches with all-lock function are available on special order. Contact Switchcraft.

2. Odd number of stations (3, 5, 7, 9, 11) are available. Switches with 13 through 18 stations also available. Contact Switchcraft.

 $\Diamond$  Special order only; Contact Switchcraft for price and delivery information.

### **PUSHBUTTON PART NUMBERS**

Туре І	Type II	Color	
P2936	P2951	White	
P2937	P2952	Black	
P2938	P2953	Red	
<b>⊘</b> P2939	<b>⊘P2954</b>	Yellow	
<b>⊘P2940</b>	<b>⊘P2955</b>	Green	
P2941	P2956	Blue Gray	
P2942	P2957		
<b>⊘P2943</b>	<b>⊘P2958</b>	Brown	
-	<b>⊘P2979</b>	Cream	
-	<b>⊘P2992</b>	Tangerine	

◊ Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

### IBS MULTI-SWITCH SWITCHES SERIES IBS

Series IBS miniature pushbutton switches are mounted on common frames, up to 12 stations long with center-to-center spacing of 0.394" (10mm), 0.590" (15mm) or 0.787" (20mm). Available with interlock, non-lock (momentary) or push-lock/push-release mechanical functions. .130" (3.30mm) x .130" (3.30mm) square plungers accept a full line of industry standard pushbuttons. Switches are stocked without pushbuttons due to wide variety that can be used. Order pushbuttons separately. Switches have .157" (4mm) long PC terminals for mounting single- or double-sided PC boards up to .094" (2.39mm) thick. Close stacking (centers) permits high density within minimum front panel space.

### PUSHBUTTONS

Pushbuttons designed for IBS switches are available in white, black, red, blue and gray. Others colors are available on special order. Pushbutton faces are concave for operator convenience and can be mounted either horizontally or vertically. Pushbuttons must be ordered separately, but may be factory installed, if desired, at nominal extra cost.

### SPECIFICATIONS MECHANICAL

Switch Actuation: Momentary, interlock and push-lock/ push-release.

Plunger Travel: .144" (3.66 mm). Actuation Force: At .135" (3.43mm) travel: 12-15 oz.

### ELECTRICAL

0.125A resistive @ 125 V AC, .25 AMP at 28V DC.

### MATERIALS


Housing: Thermoplastic 94V-0. Plunger: Thermoplastic UL 94V-0. Contactors: Copper alloy. Terminals: Copper alloy, solder plated. Tin-dipped available on special order. Contact Surfaces: Plated. Frame: Copper alloy. Latch Bar: Thermoplastic.

\* Please visit the product pages on our website for the most up-to-date product information

# **MULTIPLE-STATION SWITCHES (continued)**

### IBS MULTI-SWITCH SWITCHES SERIES IBS

### **IBS PART NUMBERING CODE**

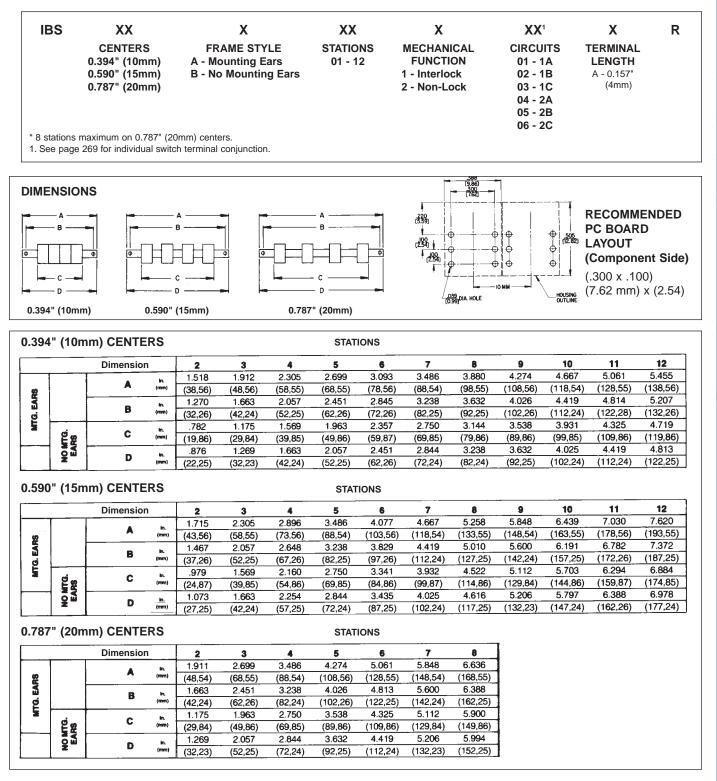

DIMENSIONS ARE FOR REFERENCE ONLY (mm)

# SWITCHES Multi-Switch Pushbuttons

\* Please visit the product pages on our website for the most up-to-date product information

### **MULTIPLE-STATION SWITCHES** (continued)

# **MULTI-SWITCH PUSHBUTTONS**

	Illuminated		Non-Illuminated						
Switch Series	Fig. 1	Fig. 2	Fig. 3	Fig. 4	Fig. 5	Fig. 6	Fig. 7	Fig. 8	Fig. 9
	Ð		P				Í		
Pushbutton Series <sup>1</sup>	<b>400</b> ⁴	<b>409</b> ⁵	DW300 <sup>6</sup>	A-590	E-590⁵	A-650	TDW-F	Type I	Type II
35000				X-(Std.)	Х				
37000	X (Std.)	X							
38000	X (Std.)	X							
65000 <sup>2</sup>									
67000			X (Std.)						
<b>90000</b> <sup>3</sup>						Х			
<b>92000</b> <sup>3</sup>						Х	Х		
IBS <sup>3</sup>								Х	Х

1. Any pushbutton series can be specified with engraved legends.

2. Buttons are an integral part of switch assembly on Series 65000.

3. Switches stocked without pushbuttons due to wide variety that can be used. Order buttons separately.

 Display screens and inserts are also available in a wide choice of colors; see "SPECIAL EFFECTS COLOR DISPLAY SCREENS AND INSERTS".

5. Double width button

 Colored inserts are available in a wide choice of colors; see "SERIES DW40 COLOR INSERTS".


### SPECIFYING NOTE:

Most pushbuttons can be specified in red, black, green, blue, white or yellow. "Black-Screen", amber, clear, and other colors are also possible. Contact Switchcraft with your requirements.

### **SERIES TDWF - "FLIP-FLOP" PUSHBUTTONS**

Unique internal "flip-flop" mechanism permits button face to change colors without electrical energy, lamps or wiring. When pushbutton is operated, highly reflective panels inside housing change position and use ambient light to give a bright illuminated effect. Black pushbuttons are .59" (15mm) high x .63" (16mm) wide. Display window is .315" (8mm) x .374" (9.5mm) wide.

**NOTE:** "FLIP-FLOP" PUSHBUTTONS ARE DESIGNED FOR USE WITH SERIES 92000 SWITCHES ONLY. Order "flip-flop" pushbuttons with Series 92000 switches. **TDW-F "Flip-Flop" Pushbutton Part Numbering** 

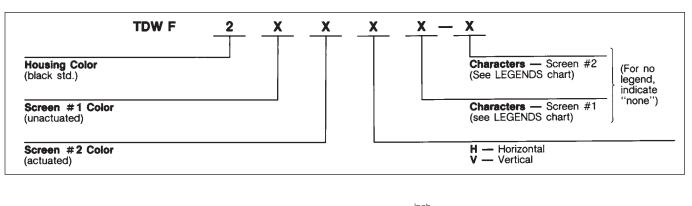

TDW-F "FLIP-FLOP" PUSHBUTTON PART NUMBERING

# MULTI-SWITCH PUSHBUTTONS - SERIES X, Y, & Z GLO-BUTTON

317

HES

\* Please visit the product pages on our website for the most up-to-date product information

# MULTIPLE-STATION SWITCHES (continued)

### MULTI-SWITCH PUSHBUTTONS TDWF PUSHBUTTON LEGENDS (special order)

Horizontally Mounted Switches: Three, .125" (3.18 mm) high characters, each pushbutton. Vertically Mounted Switches: Three, .125" (3.18 mm)

high characters, each pushbutton.

### LEGEND CHARACTERS AVAILABLE

1 through 999		A through ZZZ	
	Period	"	Quotes
-	Short Dash		Long Dash
-	Arrow	&	Ampersand
#	Number or Pound	1	Slash
\$	Dollar	¢	Cent
1	Vertical Bar		

**NOTE:** Recommended minimum standoff for switches mounted with TDW-F pushbutton is .5" (12.7mm).

### SERIES X, Y AND Z "GLO-BUTTON"

Non-illuminated pushbuttons provide a clearly visible legend like illuminated pushbuttons - without lamps, wiring or power. With button depressed, illuminator moves up behind front screen, and legend "lights up" by efficient reflection of external ambient light. With button in "out" position, illuminator retracts and legend appears non-luminous. Series X - specify for horizontal or vertical mount switches. Series Y - legends marked across .625" (15.88 mm) dimension. For horizontal mount switches. Series Z - legends marked across .75" (19.05 mm) dimension. For vertical mount switches.

Part		Screen	Illuminator	Size inches (mm)			
Number	Figure	Color	Color	Width	Height		
X21248⊘	10	Black	Orange-Red	.5	.5		
<b>X51248</b> ◊	10	White	Orange-Reu	(12.7)	(12.7)		
Y21248◊	11	Black	Orange-Red				
Y28248⊘	11	Black	Chartreuse	.625 (15.88)	.75		
Y51248⊘	11	White	Orange-Red	(15.00)	(19.05)		
Z21248◊	12	Black	Orange-Red				
<b>Z28248</b> ◊	12	Black	Chartreuse	.75 (19.05)	.625		
Z51248	12	White	Orange-Red	(19.05)	(15.88)		

### MULTI-SWITCH PUSHBUTTON PART NUMBERS

Use the information below to specify colors of the pushbutton series desired. Series TDWF must be specified separately (see page 316).

PART			Overall Size Inch (mm)			
NUMBER	FIGURE	COLOR	Width	Height		
<b>◊40001</b>		Red				
<b>◊40002</b>		Black				
<b>◊40003</b>		Green				
<b>◊40004</b>	1	Blue	.594 (15.09)	.974 (24.7)		
40005		White				
<b>◊40008</b>		Yellow				
40012		Clear				
<b>◊40901</b>		Red				
<b>◊40902</b>		Black				
<b>◊40903</b>		Green				
<b>◊40904</b>	2	Blue	1.219 (30.96)	.719 (18.26)		
<b>◊40905</b>		White				
<b>◊40908</b>		Yellow				
<b>◊40912</b>		Clear				
A591		Red				
A592		Black				
<b>⊘A593</b>		Green				
<b>◊A594</b>	4	Blue	.594 (15.09)	.594 (15.09)		
A595		White				
<b>◊A596</b>		Brown				
<b>◊A598</b>		Yellow				
<b>⊘E591</b>		Red				
<b>⊘E592</b>		Black				
<b>⊘E594</b>		Blue				
<b>◊E595</b>	1	White	1.234 (31.34)	.594 (15.09)		
<b>⊘E596</b>		Brown				
<b>◊E598</b>		Yellow				

◊ Available on special order only; contact Switchcraft for price and delivery.

DIMENSIONS ARE FOR REFERENCE ONLY

(mm)

NOTES

# PHONE: 773 792-2700

\* Please visit the product pages on our website for the most up-to-date product information

### \* Please visit the product pages on our website for the most up-to-date product information

31	

03BL2M		112BPC 112BPCS	
05BL3M			
05BL5M	47	113	
05CL3M		113B	
05CL5M		113BPC	
05DL3M	47	113BPC1M	
05DL5M		113BPCS	
05GM3M		113D	
05GM5M	46	113DPC	
05YL3M	47	113E	
05YL5M		113EPC	
06AL5F		113EPCS	
06EL5F	48	113F	
09BL4M		113FPC	
09CL4M	46	113FPCS	
09DL4M	47	113PC	
09GM4M		113PCS	
09YL4M	47	114B	
101	274	114BPC	
101S		114BPC1M	
102	274	114BPCS	
102S		120	
103	274	1200	
103S		12001	
11		12002	
11001	231	12003	
11001L		12003D	
11002		12004	
11002L	231	12005	
11003		12006	
11003D		12006D	
11003DL	231	12010	
11003L	221	12011	
11004	231	12012	
11004L	231	12013	
11005		12014	
11005L	231	12015	
11006		12016	
11006D		12017	
11006DL	231	12033	
11006L	231	12033T	
11008		12034	
11008L	231	12035	
11009		12036	
11009L		12036D	
11012	231	12037	
11012L	231	12037T	
111			
		121	
111PC		1230	
111PCS	100	1238	
11201		125	
11201L	231	128	
11202	231	12A	
11202L		12B	
11203	231	12BL5M	
11203D		12BL6M	
11203DL		12CL5M	
11203L	231	12DL5M	
11204		12DL6M	
11204L	231	12GM5M	
11205	231	12GM6M	
11205L		12YL5M	
11206	231	13	
11206D		131	
11206DL		133	
11206L		1332A	
11208		1332B	
11208L	231	1334B	
11209		1394RAPC	
11209L		1394SMT	
11212	231	13A	
11212L		13AL5F	
112A		13AL6F	
112APC	98	13B	
112APCS	400	13E	

1400	
1400	.203
1400301	.203
1400315	
142A	
14B	94
151	.107
152	
152B	
153	.107
1532A	203
1532A301	
1532B	
1532B301	.203
1534B	203
154	
155	
15AL7F	48
15AL8F	48
15BL7M	
15BL8M	
15CL7M	46
15CL8M	46
15DL7M	
15EL8F	
15GM7M	46
15GM8M	46
15J9068	
15J9076	
15J9077	.230
15J9078	230
160	
•••	
1600	
1632A	.212
1632B	.212
1634B	212
16J1055	
170	.147
1700	.212
172	
173	
174S	.152
175	.152
176S	152
177S	
178	.152
1789	.212
179	450
181	.152
	.148
182	.148 .148
	.148 .148
182	.148 .148 .147
182 182QB 182QBD	.148 .148 .147 .147
182 182QB 182QBD 184	.148 .148 .147 .147 .147
182 182QB 182QBD 184 184L	.148 .148 .147 .147 .147 .147 .147
182 182QB 182QBD 184 184L 187	.148 .148 .147 .147 .147 .147 .147 .149
182 182QB 182QBD 184 184L	.148 .148 .147 .147 .147 .147 .147 .149
182 182QB 182QBD 184 184L 187	.148 .148 .147 .147 .147 .147 .147 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149
182	.148 .147 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149
182	.148 .147 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .147 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .147 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .262 .262 .262 .262
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .149
182	.148 .148 .147 .147 .147 .147 .149 .149 .149 .149 .149 .149 .149 .262 .262 .262 .262 .262 .262 .262 .26
182	148 148 147 147 147 147 149 149 149 149 149 149 149 2.62 2.62 2.62 2.62 2.62 2.62 2.62 2.6
182         182QB         182QBD         184         184         184         187         187B         187E         187E         180P18         18QP18         18QP18         18QP18         18QP18         18QP18         190         190         190A         190B	148 148 147 147 147 147 149 149 149 149 149 149 262 262 262 262 262 262 262 262 262 26
182         182QB         182QBD         184         184         184         187         187B         187BL         187BL         187D         187B         187L         188         180Q18         180Q18         180Q18         180Q18         180Q18         180Q18         180Q18         190A         190A         190A         190B         190BL	148 147 147 147 147 147 149 149 149 149 149 149 262 262 262 262 262 262 262 262 262 26
182         182QB         182QBD         184         184         184         187         187B         187E         187E         180P18         18QP18         18QP18         18QP18         18QP18         18QP18         190         190         190A         190B	148 147 147 147 147 147 149 149 149 149 149 149 262 262 262 262 262 262 262 262 262 26
182         182QB         182QBD         184         184         184         187         187B         187B         187B         187B         187B         187D         187E         187D         187E         187B         187D         187E         187E         187E         188         18QA18         18QP18         18QP18         18QH18         18QH18         19QA         190B         190B         201	.148           .148           .147           .147           .147           .147           .149           .149           .149           .149           .149           .149           .149           .149           .262           .151           .151           .151
182         182QB         182QBD         182QBD         184L         184L         184L         187B         187BD         187BL         187D         187L         187D         187L         187L         188         18QD18         18QP18         18QP18         18QP18         18QP18         18QP18         18QP18         19QP1         190A         190B         201         201	.148           .148           .147           .147           .147           .147           .149           .149           .149           .149           .149           .149           .149           .149           .149           .149           .149           .262
182	148 148 147 147 147 147 149 149 149 149 149 149 149 262 262 262 262 262 262 262 262 262 26
182	.148           .148           .147           .147           .147           .147           .149           .149           .149           .149           .149           .149           .262           .274
182	.148           .148           .147           .147           .147           .147           .149           .149           .149           .149           .149           .149           .262           .274

duct information	
203S274	
20GM8M	
20Q*20**	
220153	
225153	
226154	
227153	
228153	
229153	
22QB22	
22QD22263	
22QF22263	
22QK22263	
22QN22	
230153	
2300	
2331	
2332A86 2332B	
2332880	
235	
236154	
237153	
238153	
239153	
240145	
2400205	
2432A205	
2432B205	
2434B205	
245145	
24B109	
25	
250145 2501F65	
2501F65	
2501MP65	
2532A205	
2532B205	
2533205	
2533B205	
2534B205	
2542B	
2544B205 255145	
255	
2588	
260	
2600	
2600301205	
2600310205	
267145	
269145	
26U1003278	
26U1004278	
26U1005278	
26U1006	
26U1007	
26U1008	
26U1009278 26U1010278	
270145-146	
2732A205	
2732A301205	
2732B205	
2732B301205	
2733B205	
2734B205	
2734B301205	
2789	
280145-146 281145-146	
282143-146 282	
285145-146	
285L145	
288145-146	

# **EX Switchcraf**

# PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

290	
297	
298	-,
299	
2BL6M	
2C1072	
2P-1216	
2P1248	
2P1251	
2P1298 2P1384	
2P1384 2P1419	
2P1495	
2P1509	
2P1515	
2P1624	
2P2003	
305HJ084184	247
305KD084184	247
306HK042306	247
306HK084306	247
321	27
322	
323	27
324	
32HR***	
330F1	
330F2	
332A	
336A	
336B 33HR***	
340	
345A	
349A	
350	
3501F	
3501FP	123
3501FR	123
3501M	
3501MC	
3502	
35021K206	
35021K212 35022206	
35022212	
35027206	
35027212	
3502A	
3502AAU	161
3502ABAU	
3502RA	
3502RAAU	161
3502RABAU	
3503	
35041K206	
35041K212	
35042206 35042212	
35047206	
35047212	
3504M	
3505F	123
35061K206	303
35061K212	303
35062206	
35062212	
35067206	
35067212 3507	
3507	
35081K212	
35082206	
35082212	
35087206	303
35087212	303

35101K206
35101K212
35102206
35102212
35107206
35107212
35121K206
35121K212
35122206
35122212
35127206
35127212
3514PC123
3515PC123
3517PC123
352A159
35581
35582161
35585161
35HDBAU156
35HDBAUS156
35HDBN156
35HDBNS156
35HDNAU156
35HDNAUS156
35HDNN
35HDNNS156
35HDRAAU156
35HDRABAU156
35HDRANN
35HR***
35PM1119
35PM2A119
35RAPC2AH3114, 116
35RAPC2AHN2114, 116
35RAPC2AHN3114
35RAPC2AV114-115
35RAPC2AV4
35RAPC2AVN4114
35RAPC2BH3114, 116
35RAPC2BHN2114, 116
35RAPC2BHN3114
35RAPC2BV4114-115
35RAPC2BVN4114
35RAPC3BH3114, 116
35RAPC3BHN2114, 116
35RAPC3BHN3114
35RAPC3BV4114-115
35RAPC3BVN4114
35RAPC4BH3114, 116
35RAPC4BHN2114, 116
35RAPC4BHN2114, 116 35RAPC4BHN3114
35RAPC4BHN2114, 116 35RAPC4BHN3114 35RAPC4BV4114-115
35RAPC4BHN2114, 116 35RAPC4BHN3114 35RAPC4BV4114-115 35RAPC4BV4114-115
35RAPC4BHN2114, 116 35RAPC4BHN3114 35RAPC4BV4114-115
35RAPC4BHN2114, 116 35RAPC4BHN3114 35RAPC4BV4114-115 35RAPC4BV4114-115 35RAPC4BVN4114 114
35RAPC4BHN2         114, 116           35RAPC4BHN3         114           35RAPC4BV4         114           35RAPC4BV4         114           35RAPC4BVA         114           35RAPC4BVA         114           35RAPC4J         114           35RAPC7J         112
35RAPC4BHN2         114, 116           35RAPC4BHN3         114           35RAPC4BV4         114-115           35RAPC4BVN4         114-115           35RAPC4BVN4         114           35RAPC7J         112           35RAPC7JS         112           35RASMT         117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114-115         35RAPC4BVN4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117
35RAPC4BHN2         114, 116           35RAPC4BHN3         114           35RAPC4BV4         114-115           35RAPC4BVN4         114-115           35RAPC4BVN4         114           35RAPC7J         112           35RAPC7JS         112           35RASMT         117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114-115         35RAPC4BVN4       114         35RAPC3BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC7J       112         35RAPC7JS       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114-115         35RAPC4BVN4       114         35RAPC3BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC7J       112         35RAPC7JS       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC4BVA       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         35RASMT4BHNTR       117         35RASMT4BHNTR       117
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC7J       112         35RAPC7J       112         35RAPC7J       112         35RAPC7J       112         35RASMT       117         35RASMT       117         35RASMT       117         35RASMT2BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         363       159
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114-115         35RAPC4BVN4       114-115         35RAPC7J       112         35RAPC7J       112         35RASMT       117         35RASMT       117         35RASMT       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         362A       265         362A       265         364A       159
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114-115         35RAPC4BVN4       114-115         35RAPC7J       112         35RAPC7J       112         35RASMT       117         35RASMT       117         35RASMT       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         362A       265         362A       265         364A       159
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         363       159         364A       159         365       159
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BV4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         364A       159         36HR***       240
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BV4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         363       159         364A       159         365       159         36HR***       240         37021K1206       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BV4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         364A       159         36HR***       240
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         361A       159, 265         362A       265         363       159         364A       159         37021K1206       305         37021K1212       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BVA       114         35RAPC4BVN4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         361A       159, 265         362A       265         363.       159         364A       159         364A       159         364A       159         37021K1206       305         37021K1212       305         37021206       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BVN3       114         35RAPC4BVN4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         361A       159, 265         362A       265         363.       159         364A       159         365.       159         364R***       240         37021K1206       305         370221212       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BVA       114         35RAPC4BVN4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         361A       159, 265         362A       265         363.       159         364A       159         364A       159         364A       159         37021K1206       305         37021K1212       305         37021206       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC4BVA       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         363.       159         364A       159         364A       159         36HR***       240         37021K1206       305         370221206       305         370271206       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         35RASMT4BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         363       159         364A       159         364A       305         37021K1206       305         370221206       305         370221206       305         370271212       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVN4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         363       159         364A       159         365       159         36HR***       240         37021K1206       305         370221206       305         370271206       305         370241K1206       305         370241K1206       305         370241K1206       305         370241K1206       305         37041K1206       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVA       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         361A       159, 265         362A       265         363       159         364A       159         365       159         364R***       240         37021K1206       305         370221212       305         370221212       305         370271206       305         3702112       305         37041K1206       305         37041K1206       305
35RAPC4BHN2       114, 116         35RAPC4BHN3       114         35RAPC4BV4       114         35RAPC4BVN4       114         35RAPC4BVN4       114         35RAPC7J       112         35RAPC7JS       112         35RASMT       117         35RASMT2AHNTR       117         35RASMT2BHNTR       117         35RASMT2BHNTR       117         35RASMT3BHNTR       117         35RASMT4BHNTR       117         361A       159, 265         362A       265         363       159         364A       159         365       159         36HR***       240         37021K1206       305         370221206       305         370271206       305         370241K1206       305         370241K1206       305         370241K1206       305         370241K1206       305         37041K1206       305

370471206       .305         370471212       .305         37061K1206       .305         370621206       .305         370621206       .305         370671206       .305         370671206       .305         370671206       .305         370671206       .305         37081K1206       .305         37081K1206       .305         370821206       .305         370821206       .305         370821206       .305         370821206       .305	391Q43       2         391Q53       2         391Q63       2         40       1         40001       3         40002       3         40003       3         40004       3         40005       3
37061K1206	391Q63       40         40       14         40001       31         40002       31         40003       31         40004       31
37061K1212	40
370621206	40001
370621212         305           370671206         305           370671212         305           37081K1206         305           37081206         305           370821206         305           370821206         305           370821206         305	40002
370671206	40003
370671212	40004
37081K1206	
37081K1212	40005
370821206305 370821212305	
370821206305 370821212305	40008
	40012
	40101
370871206	40103
370871212	40104
370A159	40105
37101K1206	40108
37101K1212	40112
3710111212	40112
371021212	40110
371071206	40203
371071212	40204
37121K1206	40205
37121K1212305	40208
371221206	40212
371221212	40401
371271206	40403
371271212	40404
374159	40405
376159	40408
377159	40412
380148	40502
38021K1206	40505
38021K1212	406
380221206	40701
380221212	40703
380271206	40704
380271212	40705
38041K1206	40708
38041K1212	40901
380421206	40902
380421212	40903
380471206	40904
380471212	40905
38061K1206	40908
38061K1212	40912
380621206	41
380621212	41114
380671206	412
380671212	41203
38081K1206	41203
38081K1212	41208
380821206	41208
380821206	41212
380871206	413082
380871206	41308
38101K1206	41324
38101K1212	414
381021206	415
381021212	420
381071206	425
381071212	42A1 <sup>2</sup>
38121K1206	43A1
38121K1212	44
381221206	46201ME
381221212	46201MR
381271206305	46202LE28
381271212305	46202LR28
383A27	46202ME28
384A27	46202MR28
386A28	46203LE28
387A28	46203LR28
	46203LSE
	46203LSR28
391Q13	46203ME28

### \* Please visit the product pages on our website for the most up-to-date product information

46204LE	284	516-120-000-101	178	65042212	309	761K	
46204LR		516-120-000-102		65047206			
46204ME		516-290-500		65047212			
46204MR		516-290-590		65061K206			
46206LE		520		65061K212			
46206LFE		53B		65062206			
46206LFR		54A		65062212			
46206LR		54B		65067206			142
46206LSE		55		65067212			
46206LSE		5501F					
46206ME		5501F 5501M		65081K206			
46206MP				65081K212 65082206			
46206MR		5501MF					
46256LFR		5501MP 55HA2F		65082212			
				65087206			
46311LDR		56206L1		65087212			
46311MDR		56206L2		65101K206			
46311TDR		56313L1		65101K212			
46313LDR		56313L2		65102206			
46313MDR		570		65102212			
46313TDR		57GB3F		65107206			
47202LE		57GB5F		65107212			121, 158
47202LR		57HB3F		65121K206			158
47203LE		57HB5F		65121K212			158
47203LR		57KD3M		65122206			158
47204LCE		57NC5F		65122212			158
47204LCR		57PC3F	51	65127206		856	158
47204LE	286	57PC3FS	52	65127212		857	
47204LR		57PC5F	51	67021K506		858	
47206LCE		57PC5FS	52	67021K512		860	
47206LCR		580	146	67022506		865	
47206LE		581	146	67022512		88	
47206LR		585		67027506		880	
47215LCR		588		67027512			158
47215LR		58NC3F		67041K506			
47217LCR		590		67041K512			
47217LCR		597		67042506			
47221/LR		598		67042512			
47221LCR				67047506			
		59GB3F					
47227LFE		60		67047512			
47227LFR		60GB4F		67061K506			
482		60HA4F		67061K512			
482N		60NC4F		67062506			
482NC		60PC4F		67062512			312
483N		60PC4FS		67067506	310	90042B12	
483NC	140	610		67067512	310		
49101		612		67081K506			
49102	232	615	106	67081K512		90047B06	
49105	232	61GB5F	49	67082506		90047B12	
49201	232	61GB6F	49	67082512		90062B06	
49202	232	61HA5F		67087506		90062B12	
49205	232	61NC5F		67087512		90064B06	
49301	232	61PC5F	51	67101K506		90064B12	
49302		61PC5FS		67101K512		90067B06	
49305		61PC6F		67102506			
49309L		61PC6FS		67102512			
49309LS		620		67107506			
49312L		62206L		67107512			
49312LS		62GB7F		67121K506			
49329L		62GB8F		67121K512			
49329LS		62HB7F		67122506			
49331L		62HB8F		67122512			
49331LS		62NC7F		67127506			
50207L		62NC8F		67127512			
50207L		62PC7F					
				70			
50208L		62PC7FS		712A			
50209L		62PC8F		712RA			
50209LS		62PC8FS		722A			
50209M		65021K206		722RA			
50209MS		65021K212		732A			312
50212L		65022206		732RA			312
50212LS		65022212		740			312
510		65027206		745			312
512	106	65027212		750	157	903	273
515	106	65041K206		755	157	903D	
516-090-000-301	178	65041K212		760		9115	
516-090-000-302		65042206		760K			
	-						

5

# PHONE: 773 792-2700

### \* Please visit the product pages on our website for the most up-to-date product information

913273	A5N
913D273	A5N
9144	A5N
921245, 276	A65
921K	A65
923273	A65
923D273	A65
924430	A65
933273	A65
933D273	A6F
951273	A6F
952273	A6F
953273	A6N
961273	A6N
962273	A7F
963	A7F
97GV***	A7F
982A01R	A7N
982A03R	A7N
982A06R	AA:
99GD0726	AA:
99GV***	AA:
A1600	AA:
A1632B	AA:
A1634B	AA:
A1034B	AA: AA:
A3F015	AA: AA:
A3F025	AA: AA:
A3F02	AA. AA:
A3F03	
	AA4 AA4
A3F055	
A3F065	
A3F075	
A3F085	
A3F09	AA
A3FB4	AA
A3FBAU4	AA
A3FD	AA
A3FL4	AA
A3FS4	AA
A3M4-5	AA
A3M015	AA
A3M025	AA
A3M035	AA
A3M045	AA
A3M055	AA
A3M065	AA
A3M075	AA
A3M085	AA
A3M095	AA
A3MB4	AA
A3MBAU4	AA
A3ML4	AA
A3MS4	AA
A4F4	AA
A4FB4	AA
A4FBAU4	AD
A4FD4	AD
A4FL4	AD
A4M4	AQ
A4MB4	AQ
A4MBAU4	B16
A4ML4	B16
A591	B16
A592	B16
A593	B17
A594317	B17
A595	B17
A596	B3F
A598	B3F
A5F4	B3N
A5FB4	B3N
A5FBAU4	B4F
A5FD	B4N
A5FL4	B5F
A5M4	B5N
	_ 5.

A5MB4
A5MBAU4
A5ML4
A6501
A6502
A6503
A6504
A6505
A6508312
A6F4
A6FB4
A6FBAU4
A6M4
A6MBAU4
A7F4
A7FB4
A7FBAU4
A7M4
A7MBAU4
AA3F4
AA3FB4
AA3FBAU4
AA3FD
AA3FL
AA3FLD
AASFLD
AA3M
AA3MBAU4 AA3ML
AA4F4
AA4FB4
AA4FD4
AA4FL4
AA4M4
AA4ML4
AA5F4
AA5FB4
AA5FD4
AA5FL4
AA5M4
AA5MB4
AA5ML4
AA6F4
AA6FB4
AA6FD4
AA6FL
AA6M4
AA6ML
AA7F
AA7FB
AA7FD
AA7FD4 AA7FL
AA7ML4
AAA*F
AAA*M
AD1600
AD1632B
AD1634212
AQGP3224
AQGP3234
B1600212
B1632B212
B1634B212
B1650212
B1700212
B1795212
B1796212
B3F10
B3F10 B3FB10
B3FB10
B3FB10 B3M10
B3FB
B3FB
B3FB         10           B3M         10           B3MB         10           B4F         10           B4M         10

B6F10	C1194
B6M10	C12A94
B7F10	C12B
B7M10	C1600212
BD1600212	C1634B212
BD1632B	
	C240145
BD1634B212	C245145
BD1650212	C270145
BD1700212	C3F10
BD1795212	C3M10
BD1796212	C46203LR
BPJF01123	C46204MR
BPJF01AU123	C46206LFR
BPJF02	C46206LR
BPJF02AU123	C4F
	C4P10
BPJF03	-
BPJF03AU123	C55B109
BPJF04123	C56206L1
BPJF04AU123	C56206L2
BPJF05123	C56313L1289
BPJF05AU123	C56313L2
BPJF06123	C5F10
BPJF06AU123	C5M10
BPJJ01123	C62206L
BPJJ01AU123	C63212L
BPJJ01A0123	C65212L
	C6M10
BPJJ02AU123	C7F 10
BPJJ03	
BPJJ03AU123	C7M10
BPJJ04123	CB3F65
BPJJ04AU123	CB3M65
BPJJ05123	CD1600212
BPJJ05AU123	CD1634B212
BPJJ06123	CMT33183
BPJJ06AU123	CMT33283
BPJR01123	CMT332A83
BPJR01AU123	CMT332B83
BPJR02123	CMT332C84
BPJR02AU123	CMT33383
BPJR03123	CMT333A83
BPJR03AU123	CMT333B84
BPJR04123	CMT334-B83
BPJR04AU123	CMT334A
BPJR05123	CMT334C
BPJR05AU123	CMT334E83
BPJR06	CMT334F
BPJR06AU123	CMT335
BXR011	CMT335A
BXR011272	CMT336
BXR011PC272	CMT336A83
BXR013272	CMT336B83
BXR013P272	CMT336C83
BXR016272	CMT336D83
BXR016P272	CMT336E83
BXR021272	CMT33783
BXR0210272	CMT33883
BXR021PC272	CMT33983
BXR023272	CMT34184
BXR023P272	CMT342B84
BXR026272	CMT344B84
BXR026PC272	CMT34683
BXR03272	CMT346C84
BXR0310272	CMT351C
BXR0310PC272	CMT354F83
BXR031PC272	CMT356C83
BXR033	CMT358
BXR033PC	CMT35983
BXR036	CN11359
BXR036PC272	CN12A
BXR051272	CN12B
BXR0510	CN13B
BXR051PC272	CPC102A
BXR053272	CPC102D
BXR053PC272	CPC102F263
BXR056272	CPC102K263
BXR056PC272	CPC102N263

### \* Please visit the product pages on our website for the most up-to-date product information

CPC102R	263	DW3	311	EP913	276	IBS20B12106AR
CPC102T		DW301		EP913D		J3FS
CPC102U		DW302		EPS1PC1		J4MS
D1600		DW302		EPS1PC2		JP012000
D1632A				EPS1PC3		JP012S32A
		DW304				
D1632B		DW305		EPS1SL1		JP012S32B1
D1634B		DW308		EPS2PC1		JP012S34B1
D1700		DW312		EPS2PC2		JP022000
D1789	212	DW313	310	EPS2PC3	291	JP022S32A
D3F	9	DW316		EPS3PC1		JP022S32B
D3FB	9	DW4		EPS3PC2		JP022S34B
D3FBAU		DW41		EPS3PC3		JP032000
D3FD		DW43		EPS3SL1		JP032S32A
D3FDB		DW44		EPS4PC1		JP032S32B
D3M		DW45				
				EPS4PC2		JP032S34B
D3MB		DW47		EPS4PC3		JP042000
D3MBAU		DW48		F3FRAF		JP042S32A
D4F		DW7		F3FSTF		JP042S32B
D4FB	9	E*F	12	F3MRAF	23	JP042S34B
D4FBAU	9	E*M	12	F3SM3F	23	JP052000
D4M	9	E111L		FA11		JP052S32A
D4MB		E112BL		FAL11		JP052S32B
D4MBAU		E591		G3MS		JP052S34B
D5F		E592		G4MS		JP062000
D5FB		E594		G6083		JP062S32A
D5FBAU		E595		G6084		JP062S32B
D5M		E596		H101		JP062S34B
D5MB		E598		H101PC		JP072000
D5MBAU	9	E903		H102		JP072S32A
D6F	9	E903D		H102PC	275	JP072S32B
D6FB	9	E913		H103		JP072S34B
D6FBAU	9	E913D		H103D		JP082000
D6FDB		EAC225		H103PC		JP082S32A
D6M		EAC227		H201		JP082S32B
D6MB		EAC233		H201PC		JP082S34B
D6MBAU		EAC233S		H202		JP092000
D7F		EAC305		H202PC		JP092S32A
D7FB		EAC309		H203		JP092S32B
D7FBAU	9	EAC311	70	H203D		JP092S34B
D7M	9	EAC315	70	H203PC	275	JP102000
D7MB	9	EAC319	70	H3MS		JP102S32A
D7MBAU	9	EAC323	70	H4MS		JP102S32B
DA013		EAC325		HP75BNC1		JP102S34B
DA023		EAC327		HP75BNC10		JP112000
DA033		EAC333		HP75BNC12		JP112S32A
DA033		EAC333S		HP75BNC2		JP112S32A
DA053		EAC405		HP75BNC6		JP112S34B
DA083		EAC409		HP75BNC7		JP122000
DMD*FRA***	53	EAC411	70	HP75BNC9		JP122S32A
DS301		EAC413	70	HPCC4F	38	JP122S32B
DS302		EAC451	70	HPCC4FRA		JP122S34B
DS303		EAC453	70	HPCI4F		JP312000
DS306		EAC455		HPCP*4		JP322000
DS307		EAC457		HPCPK112F		JP9902
DS308		ED903		HPCPK112F1		JP9922
DS308		ED903		HPCPK112F1		JP9922
		ED903D		HPCPK324F		
DS312						JPD312000
DS313		ED913D		HPCPK324F1		JPD322000
DS316		EH13942		HPCPK3B		K131
DS317		EHBNC2		IBS10B02106AR		K255
DS318		EHBNCSC		IBS10B04106AR	314	K3FS
DS321	238	EHCAT62	16	IBS10B06106AR	314	K459
DS322		EHRCA2	16	IBS10B08106AR		K460
DS323		EHRCABNC		IBS10B10106AR		K4FS
DS350		EHUSB2		IBS10B12106AR		L11
DS351		EN3C**		IBS15B02106AR		L112A
DS352		EN3CR				L112APC
				IBS15B04106AR		
DS353		EN3CRAUTO		IBS15B06106AR		L112B
DUSB		EN3I**		IBS15B08106AR		L113B
DW05		EN3INS16	42	IBS15B10106AR	314	L114B
DW1		EN3INS20	42	IBS15B12106AR	314	L114BPC
DW101		EN3P**		IBS20B02106AR		L12A
DW102		EN3POS16		IBS20B04106AR		L12B
DW201		EN3POS20		IBS20B06106AR		L3MN
DW201		EP903		IBS20B08106AR		L4MN
DW202 DW205						
IN A POOF	311	EP903D	276	IBS20B10106AR		L5MN

**IX Switchcraf** 

.....314 .....26

..26

..207

207

.207

.207

..207

..207

..207

.207

.207

..207

..207

.207

..207

..207

..207

.207

.207

..207

..207

..207

..207

.207

..207

..207

.207

.207

.207

..207

..207

.207

.207

..207

..207

..207

.207

.207

.207

..207

..207

..207

.207

.207

..207

..207

207

.207

.210

..210

..207

.207

.207

.210

5

.26

.163

.94

..98

.98

.98

.98

.98

.98

.94

.94

.30

.30

..30

.....210

.....163

.....26

.....207

# **PHONE: 773 792-2700**

### \* Please visit the product pages on our website for the most up-to-date product information

.83

8	
	N N

		1 I
L712A	134	MT344B
L712RA		MT346
L722A	134	MT346A
L722RA	134	MT346B
LUS001	271	MT346C
LUS001PC	271	MT352A
LUS001ST	271	MT354B
M111	97	MT355
M112A	97	MT356C
M112APC	97	MT357
M112B	97	MT388
M112BPC	97	MT389
M113B	97	MT48FN
M113E	97	MT48HN
M113PPC1M	97	MT48K1FN
M114B	97	MT48K1HN
M114BPC	97	MT48K1NN
M114BPC1M	97	MT48K1NS
M3M	30	MT48K3FN
M4M	30	MT48K3HN
M5M	30	MT48K3NN
MBPK175T	201	MT48NN
MD10	249	MT48NS
MD15	249	MT52FN
MD3	249	MT52HN
MD6	249	MT52K1FN
MDPC2A	121	MT52K1HN
MDPC2AR	121	MT52K1NN
MDPC2ARA	121	MT52K1NS
MDSL2A		MT52K3FN
MDSL2ARA		MT52K3HN.
MDSMT2ARATR		MT52K3NN.
MDSMT2BRATR		MT52NN
MDSMT3BRATR		MT52NS
MDSMT4BRATR	120	MTP24K7
ML112B		MTP48K1NO
MN111		MTP48K1NS
MN112A		MTP48K3BP
MN112APC		MTP48K3NO
MN112B		MTP48K3NS
MN112BPC	97	MTP48K3PB
MN113B		MTP48K3SN
MN113BPC	97	MTP52K3BP
MN113E		MTPFA48K1I
MN114B	97	MTPFA48K1I
MN114BPC	97	MTPH48K1N
MN122A	97	MTPH48K1N
MNL112B	97	MTPH48K3N
MNL113B		MTPH48K3N
MT331		MTPH48K3S
MT332		MVJ*75T
MT332A		MVJ*NT
MT332B	83	MVP32K1*75
MT332C		MVP32K1*N
MT333		MVP32K3*75
MT333A	84	MVP32K3*N
MT333B	83	N111
MT333E	83	N111PC
MT334A		N111PCS
MT334B		N112A
MT334C		N112APC
MT334E		N112APCS
MT334F		N112B
MT335		N112BPC
MT335A	84	N112BPCS
MT336	83	N113
MT336A		N113B
MT336B		N113BPC
MT336C		N113BPCS
MT336D		N114B
MT336E		N114BPC
MT337		N114BPCS.
MT338		N3MS
MT339		NL111
MT342B		NL112A
MT343B		NL112B

MT344B	
MT346	
MT346A MT346B	
MT346C	
MT352A	04
MT354B	
MT355	
MT356C	
MT357	
MT388	
MT389	
MT48FN1	84
MT48HN1	84
MT48K1FN1	82
MT48K1HN1	82
MT48K1NN1	
MT48K1NS1	
MT48K3FN1	
MT48K3HN1	
MT48K3NN1	
MT48NN1	
MT48NS1	
MT52FN1	
MT52HN1	
MT52K1FN1	
MT52K1HN1 MT52K1NN1	
MT52K1NN1 MT52K1NS1	
MT52K3FN1	
MT52K3HN1	
MT52K3NN1	
MT52NN1	
MT52NS1	
MTP24K71	
MTP48K1NO1	
MTP48K1NS1	
	00
MTP48K3BPNS 1	74
MTP48K3BPNS1 MTP48K3NO 1	74 66
MTP48K3NO1	66
MTP48K3NO1 MTP48K3NS1	66 66
MTP48K3NO1 MTP48K3NS1 MTP48K3PBNO1	66 66 74
MTP48K3NO1 MTP48K3NS1 MTP48K3PBNO1 MTP48K3PBNO1 MTP48K3SNO1	66 66 74 66
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP48K3SNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPFA48K1NO         1	66 66 74 66 74 64
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP48K3SNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPFA48K1NO         1	66 66 74 66 74 64
MTP48K3NO	66 74 66 74 64 64
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP52K3BPNO         1           MTP52K3BPNO         1           MTPF448K1NO         1           MTPF448K1NS         1           MTPH48K1NO         1           MTPH48K1NS         1	66 74 66 74 64 64 71 71
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP48K3SNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPF5A48K1NO         1           MTPFA48K1NS         1           MTPH48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1	66 74 66 74 64 64 71 71 71
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNS         1           MTP52K3BPNO         1           MTPFA48K1NO         1           MTPFA48K1NS         1           MTPH48K3NO         1           MTPFA48K1NS         1           MTPH48K3NO         1           MTPH48K3NO         1           MTPH48K3NS         1	66 66 74 66 74 64 71 71 71 71
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPFA48K1NO         1           MTPFA48K1NS         1           MTPH48K3NO         1           MTPH48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MTPH48K3NS         1	66 66 74 66 74 64 64 71 71 71 71 71
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPFA48K1NO         1           MTPFA48K1NS         1           MTPH48K3NO         1           MTPH48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MTPH48K3NS         1           MTPH48K3NS         1           MTPH48K3NS         1           MTPH48K3NS         1	66 66 74 66 74 64 71 71 71 71 37
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTP548K1NO         1           MTPFA48K1NO         1           MTPH48K3NO         1           MTPH48K1NO         1           MTPH48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MVJ*75T         1	66 66 74 66 74 64 71 71 71 71 37 37
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTP52K3BPNO         1           MTP5448K1NO         1           MTPFA48K1NS         1           MTPH48K3NO         1           MTPH48K41NS         1           MTPH48K3NO         1           MTPH48K3NO         1           MTPH48K3NO         1           MVJ*75T         1           MVJ*75T         1           MVJ*75T         1           MVP32K1*75T         1	66 66 74 66 74 64 64 71 71 71 71 71 37 37 96
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNS         1           MTP52K3BPNO         1           MTP548K1NO         1           MTPFA48K1NO         1           MTPFA48K1NS         1           MTPH48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MVJ*75T         1           MVJ*75T         1           MVP32K1*75T         1           MVP32K1*7T         1	66 66 74 66 74 64 71 71 71 71 71 37 37 96 96
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNS         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPFA48K1NO         1           MTPFA48K1NS         1           MTPH48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MVJ*75T         1           MVJ*75T         1           MVP32K1*75T         1           MVP32K1*75T         1           MVP32K1*75T         1	66 66 74 66 74 64 71 71 71 71 71 71 37 96 96 96
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNS         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPF548K1NO         1           MTPFA48K1NS         1           MTPH48K3NO         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MVTPH48K3NS         1           MVTPH48K3NS         1           MVP375T         1           MVJ*75T         1           MVP32K1*75T         1           MVP32K1*75T         1           MVP32K1*75T         1           MVP32K3*75T         1           MVP32K3*75T         1	66 66 74 66 74 64 64 71 71 71 71 71 37 96 96 96 96
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3PBNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*75T       1         MVJ3X1*75T       1         MVP32K1*75T       1         MVP32K3*75T       1         MVP32K3*NT       1	66 66 74 66 74 64 71 71 71 71 71 71 37 96 96 98 98
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3PBNO       1         MTP52K3BPNO       1         MTPF5A48K1NO       1         MTPFFA48K1NS       1         MTPH48K1NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*NT       1         MVJ*XT       1         MVP32K1*75T       1         MVP32K3*TST       1         N111       N111	66 67 66 74 64 71 71 71 71 71 71 71 37 96 96 98 98 98
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3PBNO       1         MTP52K3BPNO       1         MTPF5A48K1NO       1         MTPFFA48K1NS       1         MTPH48K1NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*NT       1         MVJ*STST       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K3*75T       1         M111	66 67 66 74 64 71 71 71 71 71 71 37 37 96 96 98 98 00
MTP48K3NO         1           MTP48K3NS         1           MTP48K3PBNO         1           MTP48K3SNS         1           MTP48K3SNO         1           MTP52K3BPNO         1           MTPFA48K1NO         1           MTPFA48K1NS         1           MTPFA48K1NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MVJ*75T         1           MVJ*75T         1           MVP32K1*75T         1           MVP32K1*75T         1           MVP32K1*75T         1           MVP32K3*NT         1           N111         1           N111PC         1           N112A         1	66 67 66 74 64 64 71 71 71 71 71 71 71 71 71 71 71 71 96 96 98 98 00 98
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3PBNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVTPH48K3NO       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K3*NT       1         N111       1         N111PC       1         N112APC       1	66 67 66 74 64 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVTPH48K3NO       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*TST       1         MVP32K3*75T       1         NVP32K3*75T       1         N111PC       1         N112APC       1         N112APCS       1	66 674 664 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO         1           MTP48K3NS         1           MTP48K3SPBNO         1           MTP48K3SPBNO         1           MTP52K3BPNO         1           MTPF5A48K1NO         1           MTPFFA48K1NS         1           MTPH48K3NS         1           MTPH48K1NS         1           MTPH48K3NO         1           MTPH48K3NS         1           MTPH48K3NS         1           MVJ*NT         1           MVJ*STST         1           MVP32K1*75T         1           MVP32K1*TST         1           M111	66 674 664 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3SPBNO       1         MTP48K3SPNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K1NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*NT       1         MVJ*ST       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K1*T       1         MVP32K1*TST       1         N111	66 674 66 74 64 71 71 71 71 71 71 71 71 37 96 96 98 98 00 98 90 98 90 98 98 98 98
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K1NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MVTPH48K3NO       1         MVJ*NT       1         MVJ*ST       1         MVP32K1*75T       1         MVP32K1*T       1         MV112C       1         M112A       1         M112A       1         M112B       1         M112BPC       1         M112BPCS       1	66 674 66 74 64 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVTPH48K3NO       1         MVJ75T       1         MVJ75T       1         MVP32K1*75T       1         MVP32K1*TST       1         MVP32K3*NT       1         N111PC       1         N111PC       1         N112APC       1         N112B       1         N112BPC       1         N112BPCS       1         N112BPCS       1         N113       113	66 66 74 66 74 64 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP48K3SNO       1         MTP52k3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVTPH48K3NO       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*75T       1         MVP32K3*75T       1         N111PC       1         N112APC       1         N112APC       1         N112BPC       1         N112BPCS       1         N113B       1	66 66 74 66 74 64 71 71 71 71 71 77 71 77 71 77 71 77 71 77 96 96 98 98 00 98 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 98 90 98 98 90 98 90 98 90 98 90 98 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 90 98 98 90 90 90 90 90 90 90 90 90 90 90 90 90
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPF5A48K1NO       1         MTPFA48K1NS       1         MTPH48K1NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*NT       1         MVJ*XT       1         MVP32K1*75T       1         MVP32K3*TST       1         N111PC       1         N112APCS       1         N112BPC       1         N113B       113B	66 66 74 66 74 64 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3SPBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K1NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*NT       1         MVJ*ST       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K3*75T       1         N111PC       1         N112APCS       1         N112BPC       1         N112BPC       1         N113B       1         N113BPC       1	66             674
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MVTPH48K3NO       1         MVJ75T       1         MVJ75T       1         MVP32K1*TST       1         MVP32K1*NT       1         N111PC       1         N111PC       1         N112A       1         N112A       1         N112BPC       1         N112BPC       1         N113BPCS       1         N113BPCS       1         N114B       1	66 66 74 66 74 64 71 71 71 71 71 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MVTPH48K3NO       1         MVJ75T       1         MVJ75T       1         MVP32K1*T5T       1         MVP32K1*T5T       1         MVP32K3*T5T       1         N111PC       1         N111PC       1         N112APC       1         N112BPC       1         N112BPC       1         N112BPC       1         N113BPCS       1         N113BPCS       1         N114B       114BPC	66 666 74 66 74 64 71 71 71 71 71 71 71 71
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K3*NT       1         N111PC       1         N112APC       1         N112BPC       1         N112BPC       1         N113B       1         N113BPCS       1         N114B       11         N114BPC       1         N114BPC       1	66 666 74 66 74 64 71 71 71 71 71 73 73 79 96 998 900 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 988 008 980 990 990 990 990 990 990 990 990 900 900 900
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*75T       1         MVP32K3*75T       1         N111PC       1         N112PC       1         N112APC       1         N112BPC       1         N112BPC       1         N113B       113BPC         N113BPC       1         N114BPC       1         N114BPCS       1         N14BPCS       1	66 666 74 64 71 717 717 737 996 998 900 988 008 990 988 008 990 988 008 990 988 008 990 900 990 90
MTP48K3NO       1         MTP48K3NS       1         MTP48K3PBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MTPH48K3NO       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*75T       1         MVP32K1*75T       1         MVP32K3*NT       1         N111PC       1         N112APC       1         N112BPC       1         N112BPC       1         N113B       1         N113BPCS       1         N114B       11         N114BPC       1         N114BPC       1	$\begin{array}{c} 66\\ 66\\ 74\\ 64\\ 71\\ 71\\ 71\\ 71\\ 77\\ 77\\ 77\\ 77\\ 77\\ 77$
MTP48K3NO       1         MTP48K3NS       1         MTP48K3SPBNO       1         MTP48K3SNO       1         MTP52K3BPNO       1         MTPFA48K1NO       1         MTPFA48K1NS       1         MTPH48K3NS       1         MTPH48K1NS       1         MTPH48K3NO       1         MTPH48K3NS       1         MTPH48K3NS       1         MTPH48K3NS       1         MVJ*75T       1         MVJ*75T       1         MVP32K1*75T       1         MVP32K3*75T       1         MVP32K3*75T       1         N111PC       1         N112A       1         N112PC       1         N112APCS       1         N112BPC       1         N112BPC       1         N113B       113         N113BPC       1         N114BPCS       1         N114BPCS       1         N114BPCS       1         N114BPCS       1         N114BPCS       1         N114BPCS       1	66 674 64 71 71 71 77 73 799 96 98 80 98 9

NL113B	
	PJRAS1X3S01126
NL114B	PJRAS1X3S02
NL114BPC	PJRAS1X3U01126
NL114BPCS100	PJRAS2X1S01126
P2290	PJRAS2X1S02
P2315230	PJRAS2X2S01126
P2316230	PJRAS3X1S01126
P23491	PJRAS3X1S02126
P234913271	PJRAS3X2S01126
P23492271	PJRAS3X2S02126
P23493271	PJRAS4X2U01126
P23494271	PL102
P23495271	PL103205277
P23497271	PL103705277
P23498271	PL106205277
P2456230	PL106705277
P28630191	PL111278
P28630291	PL112205277
P28630491	PL112705277
P28630591	PL123705277
P28630791	PL126205277
P28630891	PL126705277
P28640191	PL202278
P28640291	PL203205277
P28640491	PL203705277
P28640591	PL206205277
P28640791	PL206705277
P28640891	PL211278
P2912297	PL212205277
P2936270, 314	PL212705277
P2937270, 314	PL226205277
P2938270, 314	PL226705277
P2939270, 314	PL303278
P2940270, 314	PL305278
P2941270, 314	PL308278
P2942270, 314	PL403205277
P2943270, 314	PL403705277
P2951270, 314	PL406205277
P2952270, 314	PL406705277
P2953270, 314	PL412205277
P2954270, 314	PL412705277
P2955270, 314	PL501278
P2956270, 314	PL503278
P2957270, 314	PL503205277
P2958270, 314	PL504278
P2979314	PL505278
P2992	PL506205277
P3F8	PL506705277
P3M8	PL508278
P4F8	PL512278
P4M8	PL512205277
P5F8	PL512705277
P5M8	PL513278
PC12A94	PL703705277
PC142A110	PL706205277
PC712A134	PL706705277
PC722A134	PL712205277
PC732A134	PL712705277
PCL712A134	PL803205277
PCL722A134	PL803705277
PD3F***20	PL806205277
PD3M***20	PL806705277
PJRAN1X1U01126	PL812205277
PJRAN1X1U02126	PL812705277
PJRAN1X1U03126	PL9105278
PJRAN1X1U04126	PL9205278
PJRAN2X1U01126	PPT163
PJRAN2X1U02126	PQG3F***18
PJRAN3X1U01126	PQG3M***18
PJRAN3X1U02126	PT1LA163
PJRAS1X1S01126	PT2B163
PJRAS1X1S02126	QG3F25
PJRAS1X1S03126	QG3FD25
PJRAS1X1S04126	QG3FDPC25
	QG3FDPC25 QG3M25 QG4F25

### \* Please visit the product pages on our website for the most up-to-date product information

00455	05	D 4 700	0.14	07001/	100	0004	-
QG4FD		RA760		S760K			5
QG4M		RA765		S761K			5
QG5F		RA850		S765			5
QG5FD		RAPC322		S765K			5
QG5M		RAPC712		S766K			5
QG6F		RAPC722		S830			5
QG6FD		RAPC732		SL01			5
QG6M		RAPC732OF		SL02			5
QG7F		RAPC742		SL03			5
QG7FD		RAPC742OF		SL04			
QG7M		RAPC752		SL05	61-62		
QGP322	4	RAPC752S	130	SL102F		ST131	
QGP323	4	RASH712	130	SL102M	63	ST200	
QGP326	10	RASH722	130	SL103F	63	ST230	
QGP327	10	RASH732		SL103M	63	ST303	
QGP362		RASM712		SL104F	63	ST304	
QGP363	9	RASM722		SL104M		ST305	
QGPK116FB		RASM732		SL105F			
QGPK116MB		RASM742TR		SL105M			
QGPK18M8FB		RASM752STR		SL172F			
QGPK1B		RASM752TR		SL173F			
QGPK332MFB		RN111PC		SL173M			
QGPK3B		RN112APC		SL174F			
R3FZ		RN112BPC		SL174M			
R3MZ		RN113BPC		SL175F			
R4FZ		RN113FPC		SL175M			
R4MZ		RN114BPC		SL18			
R5FZ		RS422H48N081		SL182F	64	ST329	
R5MZ	8	RS422H4N081	192	SL182M	64	ST35	
R6FZ	8	RS422H4N161	191	SL183F	64	ST40	
R6MZ	8	RS422H4N162	191-192	SL183M	64	ST60	
R7FZ		RS422H4N242		SL184F			
R7MZ		RS422PH4N081		SL184M			.250
RA200		RS422PH4N161		SL185F			
RA202		RS422PH4N162		SL185M			
RA205		RS422PH4N242		SL402F	•		
RA207		RS422PV4N081		SL402M			
RA208		RS422PV4N161		SL403F			
RA217		RS422PV4N162		SL403M			
RA35		RS422PV4N242		SL404F			
RA353		RS422PV4N322		SL404M			
RA354		RS422V4N081	191-192	SL405F			241
RA355		RS422V4N161	191	SL405M	62	ST850	
RA356	246-247	RS422V4N162	191-192	SL412F	62	ST90	
RA357		RS422V4N242	191-192	SL413F	62	ST900	
RA358		RS422V4N322	191-192	SL413M	62	ST900F	
RA359		RTT34B01	91	SL414F	62	ST91	
RA373		RTT34B02		SL414M		SUSB	
RA374		RTT34B04		SL415F			
RA375		RTT34B05		SL415M			
RA376		RTT34B07		SMD*FRA***			
RA377		RTT34B08		SN37A11			
RA378		RTT8701		SN37A12A	103	T3FL	
RA379		RTT8702		SN37A12A SN37A12B	103		
RA40		RTT8704		SN37A14B			9
RA41		RTT8705		SN49A11			9
RA49B11		RTT8707		SN49A12A			9
RA49B12A		RTT8708		SN49A12B			9
RA49B12B		S11		SN49A14B			9
RA49B14B		S112BPC	98	SN49B11		TA01	31
RA49C11	103	S112BPCS	100	SN49B12A	103	TA02	
RA49C12A	103	S12A	94	SN49B12B	103	TA03	
RA49C12B	103	S12B	94	SN49B14B	103	TA04	
RA49C14B	103	S13B	94	SN49C11	103	TA05	
RA700		S230		SN49C12A			
RA70B11		S250		SN49C12B			
RA70B12A		S260		SN49C14B			
RA70B12B		S267		SN70B11			
RA70B12B		S280		SN70B12A			
RA70C11		S3F5M		SN70B12B			
RA70C12A		S3FM		SN70B14B			
RA70C12B		S4FM		SN70C11			
RA70C14B		S580		SN70C12A			
RA710		S5F3M		SN70C12B			
			00		400		00
RA712A RA722A		S5FM S760		SN70C14B SR00			

5

# **PHONE: 773 792-2700**

### \* Please visit the product pages on our website for the most up-to-date product information

(e)	
_	
10	

TA4M32	TT133265
TA4MB	TT134265
TA4ML	TT135
TA5F32	Π141265
TA5FL32	TT142265
TA5FLB32	TT143265
TA5M	TT144265
TA5ML	TT145265
TA5MLB	TT146
TA6FL32	TT147265
TA6ML32	TT148265
TA7FL32	TT149
TA7ML	TT150265
TA8FL	TT151
TA8ML	Π152265
TAD2142	TT153265
TAD3142	TT154265
TB3M33	TT155265
TB3MB	TT161265
TB4M	Π162
TB4MB33	TT163265
TB5M33	TT164265
TB5MB	TT165265
TB6M	TT166
TB7M	Π167
TB8M	Π168
TBA03	TT169265
TBA04	TT170265
TBA05	TT171265
TBA06	TT172
TLP4	Π173
TLP633	TT174265
TQG3F37	TT175265
TQG3M	TT201234
TQG4F	TT202234
TQG4M	TT203
TQG5F37	TT204234
TQG5M37	TT205234
TQG6F37	TT206234
TQG6M	TT207234
TR1PC	TT208
	TT209
TR2A121	
TRA**M34	TT210234
TRA3M34	TT251143
TRA6M34	TT252143
TRA6MF	TT25390, 143
TRG4M	TT253N
TRGS4F33	TT253NC143
TT**267	TT254143
TT101265	TT254N143
TT102265	TT254NC143
TT103265	TT261144
TT104 265	TT263
11104	
Π105265	TT281
TT106265	TT282265
TT107265	TT283265
TT108265	TT284265
TT109265	TT289265
TT110	TT2W48MCF1223
TT111	TT2W48MCN1
TT112265	TT2W48VCF1223
TT113265	TT2W48VCN1223
TT114265	TT3087
TT115265	TT30FM87
TT121	TT31
TT122	TT31DC
TT123265	TT31FM87
TT124265	TT31FMDC87
TT125265	TT32A87
TT126	TT32ADC
TT127	
	TT32AFM87
Π128265	TT32AFMDC87
TT128265 TT129	TT32B87
TT129265 TT130265	TT32B
ТТ129	TT32B
TT129265 TT130265	TT32B

T32CC         87         TT506         212           T32CPM         87         TT507         212           T33E         87         TT509         212           T33B         87         TT51         215         218           T33BDC         87         TT51         220, 234           T33BFMDC         87         TT510         230, 234           T33SPMDC         87         TT5102S32A         217           T33FMDC         87         TT5102S32B         217           T33FMDC         87         TT5102S32B         217           T34A         87         TT5102S32B         217           T34AFMDC         87         TT5102S32B         217           T34AFMDC         87         TT5102W32B         217           T34AFMDC         87         TT5102W32B         217           T34EFMDC         87         TT5122         233           T34CC         87         TT5122         233           T34CFMC         87         TT512         233           T34CFMC         87         TT512         233           T34CFMC         87         TT513         233           T34CFMC         <	···· ··· ··· ··· ··· ··· ··· ··· ··· ·	
T32CFMDC         87         T1507         212           T132         T1508         212           T133         87         T1509         212           T133BC         87         T1510         200, 234           T133BFMD         87         T15102S312         217           T133BFMDC         87         T15102S312         217           T133PMDC         87         T15102S32A         217           T133PMDC         87         T15102S32B         217           T134A         87         T15102S34B         217           T134AFMDC         87         T15102W32B         217           T134AFMDC         87         T15102W32B         217           T134BFMDC         87         T15102W32B         217           T134BFMDC         87         T15102W32B         217           T134BFMDC         87         T1512         233           T134CPM         87         T1512         233           T134CPM         87         T1512         233           T134EFMDC         87         T1512         233           T134CPM         87         T1512         233           T134E         87         <	TT32C	TT505
TT32CFMDC         87         TT508         212           TT33B         87         TT51         215,218           TT33BCC         87         TT510         200,234           TT33BFMDC         87         TT5102000         217           TT33BFMDC         87         TT5102S32A         217           TT33FM         87         TT5102S32B         217           TT33FM         87         TT5102S32B         217           TT34FMC         87         TT5102S32B         217           TT34FM         87         TT5102S32B         217           TT34FM         87         TT5102S32B         217           TT34FM         87         TT5102S32B         217           TT34FM         87         TT5102W32B         217           TT34FM         87         TT5102W32B         217           TT34FM         87         TT5102W32B         217           TT34FM         87         TT5102W32B         217           TT34FM         87         TT512Z         233           TT34CFMDC         87         TT512Z         233           TT34CFMDC         87         TT512Z         233           TT34CFMDC <td></td> <td></td>		
TT33         87         TT50         212           TT33BC         87         TT51         215, 218, 218, 218, 218, 218, 218, 218, 218		
TT38B       87       TT51       215, 216, 216, 216, 216, 216, 216, 216, 216		
TT33BC       87       TT510       230, 230, 230, 240, 240, 240, 241, 241, 241, 241, 241, 241, 241, 241		
TT33BFMDC         217           TT33BFMDC         87           TT33PDC         87           TT33PDC         87           TT33PDC         87           TT33PDC         87           TT34ADC         87           TT34ADC         87           TT34APC         87           TT34APMDC         87           TT34APMDC         87           TT34APMDC         87           TT34APMDC         87           TT34BPMDC         87           TT34BPMDC         87           TT34BPMDC         87           TT34BPMDC         87           TT34BPMDC         87           TT34BPMDC         87           TT34CPMDC         87           TT34CPMDC         87           TT34CPMDC         87           TT312         233           TT34CPMDC         87           TT312         233           TT34CPMDC         87           TT512         233           TT34CPMDC         87           TT312         233           TT34CPMDC         87           TT313         233           TT344		
TT33BFMDC       87       TT5102S31       217         TT33PM       87       TT5102S32A       217         TT33FMDC       87       TT5102S32B       217         TT34A       87       TT5102S34B       217         TT34AFMDC       87       TT5102S34B       217         TT34AFM       87       TT5102V32A       217         TT34AFMDC       87       TT5102V32A       217         TT34BFMDC       87       TT511       212         TT34BFMDC       87       TT511       213         TT34EFMOC       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CFM       87       TT512       233         TT34CFM       87       TT512       233         TT34CFM       87       TT513       233         TT35C       87       TT513       233         TT36A       87       TT513       233         TT36A       87       TT514       233         TT35       87       TT514       233         TT36A       87       TT514       233		, -
TT33FM       87       TT5102S32B       217         TT34A       87       TT5102S38B       217         TT34A       87       TT5102V31       217         TT34AFM       87       TT5102V32A       217         TT34AFMOC       87       TT5102V32A       217         TT34BEM       87       TT5102V32A       217         TT34BEMOC       87       TT5102V32B       217         TT34BEMOC       87       TT511       212         TT34EFMOC       87       TT512       233         TT34C       87       TT512       233         TT34CC       87       TT512       233         TT34CPM       87       TT512       233         TT34CPM       87       TT512       233         TT34CPM       87       TT512       233         TT34CPM       87       TT513       233         TT35       87       TT513       233         TT36       87       TT514       233         TT36       87       TT514       233         TT36AFMDC       87       TT514       233         TT36AC       87       TT514       233		
TT34ADC.       87       TT5102S38B       217         TT34ADC       87       TT5102X34B       217         TT34AFM       87       TT5102W32A       217         TT34AFMOC       87       TT5102W32B       217         TT34AFMOC       87       TT5102W32B       217         TT34BEMOC       87       TT5112       238         TT34EFMOC       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CFMDC       87       TT512       233         TT34CFMDC       87       TT513       233         TT34FPDC       87       TT513       233         TT35D       87       TT513       233         TT35C       87       TT513       233         TT35C       87       TT513       233         TT35C       87       TT513       233         TT35C       87       TT514       233         TT36ADC       87       TT514       233         TT36ADC       87       TT514       233 <tr< td=""><td>TT33DC87</td><td>TT5102S32A217</td></tr<>	TT33DC87	TT5102S32A217
TT34AD.       87       TT5102S34B       217         TT34AFM       87       TT5102W32A       217         TT34AFMOC       87       TT5102W32B       217         TT34BDC       87       TT5102W32B       217         TT34BDC       87       TT5102W32B       217         TT34BFM       87       TT511       213         TT34EFMOC       87       TT512       233         TT34C       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CFMDC       87       TT513       233         TT35       87       TT513       233         TT35       87       TT513       233         TT35       87       TT513       233         TT35       87       TT514       233         TT36       87       TT514       233         TT36A       87       TT514       233         TT36A       87       TT514       233         TT36A       87       TT514       233         TT36AC <td>TT33FM87</td> <td>TT5102S32B217</td>	TT33FM87	TT5102S32B217
TT34APC       87       TT5102W31       217         TT34AFMDC       87       TT5102W32B       217         TT34BE       87       TT5102W32B       217         TT34BC       87       TT5102W33B       217         TT34BC       87       TT5112       233         TT34DC       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CC       87       TT512       233         TT34CPM       87       TT512       233         TT34FDC       87       TT513       233         TT35       87       TT513       233         TT35       87       TT513       233         TT36C       87       TT513       233         TT36A       87       TT513       233         TT36A       87       TT514       233         TT36A <td< td=""><td></td><td>TT5102S33B217</td></td<>		TT5102S33B217
TT34AFM       87       TT5102W32A       217         TT34BC       87       TT5102W32B       217         TT34BDC       87       TT5102W32B       217         TT34BFM       87       TT5112       233         TT34C       87       TT512       233         TT34C       87       TT512       233         TT34CC       87       TT512       233         TT34CDC       87       TT512       233         TT34CPMDC       87       TT512       233         TT34CPMDC       87       TT512       233         TT35       87       TT513       233         TT35DC       87       TT513       233         TT35FMDC       87       TT513       233         TT36A       87       TT514       233         TT36A       <		
TT34AFNDC       87       TT5102W33B       217         TT34BDC       87       TT5102W33B       217         TT34BFM       87       TT5112       223         TT34C       87       TT5121       223         TT34C       87       TT512       233         TT34CC       87       TT512       233         TT34CDC       87       TT512       233         TT34CPMDC       87       TT512       233         TT34CFMDC       87       TT512       233         TT34FMDC       87       TT512       233         TT34FDC       87       TT513       233         TT35D       67       TT513       233         TT35D       87       TT513       233         TT36A       87       TT513       233         TT36A       87       TT514       233         TT36C       87       TT514       233         TT36A <t< td=""><td></td><td></td></t<>		
TT34B.       87       TT5102W34B       217         TT34BFM       87       TT5102W34B       217         TT34BFMDC       87       TT5112       223         TT34C       87       TT512       233         T34CDC       87       TT512       233         T34CFMDC       87       TT512       233         T34FMDC       87       TT512       233         T34FMDC       87       TT512       233         T35       87       TT513       233         T35DC       87       TT513       233         T36       87       TT513       233         T36ADC       87       TT513       233         T36ADC       87       TT5143       233         T36ADC       87       TT5143       233         T36ADC       87       TT5143       233         T36ADC       87       TT5143       233         T36BDC       87       TT5143       233         T36C       87       TT5143       233         T36AFMDC       87       TT5145       234         T36C       87       TT5145       234         T36C <t< td=""><td></td><td></td></t<>		
TT34BPC       87       TT5102W34B       217         TT34BFMDC       87       TT511       212         TT34C       87       TT5121       233         TT34C       87       TT512       233         TT34C       87       TT512       233         TT34CFM       87       TT512       233         TT34CFMDC       87       TT512       233         TT34FFMC       87       TT512       233         TT35DC       87       TT5131       233         TT35FM       87       TT513       233         TT36A       87       TT513       233         TT36A       87       TT513       233         TT36A       87       TT5143       233         TT36A       87       TT5144       233         TT36A       87       TT514       234         TT36C       87<		
TT34BFMDC       87       TT511.       212         TT34CDC       87       TT512.       233         TT34CDC       87       TT512.       233         TT34CPMDC       87       TT512.       233         TT34CFMDC       87       TT512.       233         TT34F       87       TT512.       233         TT35D       87       TT513.       233         TT35D       87       TT513.       233         TT35D       87       TT513.       233         TT35FMDC       87       TT513.       233         TT36A       87       TT513.       233         TT36A       87       TT514.       233         TT36A       87       TT514.       233         TT36A       87       TT514.       233         TT36AFMDC       87       TT514.       234         TT36DC       87       TT514.       234		
TT34BFMDC		
TT34C       87       TT5122       233         TT34CPM       87       TT5123       233         TT34CFMDC       87       TT5124       233         TT34CFMDC       87       TT5128       233         TT34CFMDC       87       TT5131       233         TT35       87       TT5132       233         TT35C       87       TT5132       233         TT35C       87       TT5133       233         TT36DC       87       TT5134       233         TT36AA       87       TT5138       233         TT36AA       87       TT5142       233         TT36AA       87       TT5143       233         TT36ADC       87       TT5143       233         TT36ADC       87       TT5142       233         TT36ADC       87       TT5142       233         TT36ADC       87       TT5142       233         TT36C       87       TT5142       233         TT36DC       87       TT5142       233         TT36DC       87       TT5142       234         T36DC       87       TT518       234         T36DC <td></td> <td></td>		
TT34CDC       .87       TT5123       .233         TT34CFMDC       .87       TT5124       .233         TT34F       .87       TT5125       .233         TT34F       .87       TT5125       .233         TT35       .87       TT5131       .233         TT35DC       .87       TT5132       .233         TT35PM       .87       TT5134       .233         TT36       .87       TT5134       .233         TT36A       .87       TT5134       .233         TT36A       .87       TT5142       .233         TT36A       .87       TT5142       .233         TT36APMDC       .87       TT5142       .233         TT36AFMDC       .87       TT5142       .233         TT36AFMDC       .87       TT5143       .233         TT36BDC       .87       TT5144       .233         TT36CFMDC       .87       TT5151       .234         TT36CFMDC       .87       TT5151       .234         TT36CFMDC       .87       TT516       .237         TT36FM       .87       TT518       .237         TT36FM       .71519       .236       .		
TT34CFM       87       TT5124       233         TT34F       87       TT5128       233         TT34FDC       87       TT5128       233         TT35DC       87       TT5132       233         TT35DC       87       TT5132       233         TT35FMDC       87       TT5132       233         TT35FMDC       87       TT5133       233         TT36A       87       TT5135       233         TT36A       87       TT5143       233         TT36A       87       TT5142       233         TT36BDC       87       TT5144       233         TT36C       87       TT5145       234         TT36C       87       TT5152       234         TT36C       87       TT514       233         TT36C       87       TT514       236         TT36C       87		
TT34CFMDC       .87       TT5125       .233         TT34F       .87       TT5128       .233         TT35       .87       TT5131       .233         TT35DC       .87       TT5132       .233         TT35FMDC       .87       TT5133       .233         TT35FMDC       .87       TT5134       .233         TT36       .87       TT5134       .233         TT36A       .87       TT5134       .233         TT36A       .87       TT5143       .233         TT36AAC       .87       TT5143       .233         TT36AFMDC       .87       TT5142       .233         TT36AFMDC       .87       TT5144       .233         TT36BDC       .87       TT5145       .234         TT36CFMDC       .87       TT5151       .234         TT36CFMDC       .87       TT515       .244         TT36DFMDC       .87       TT516       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT512		
TT34F.		
TT34FDC       .87       TT5131       .233         TT35       .87       TT5132       .233         TT35FM       .87       TT5133       .233         TT35FMOC       .87       TT5133       .233         TT35FMOC       .87       TT5133       .233         TT36A       .87       TT5138       .233         TT36A       .87       TT5141       .233         TT36A       .87       TT5142       .233         TT36A       .87       TT5143       .233         TT36AFMDC       .87       TT5144       .233         TT36AFMDC       .87       TT5144       .233         TT36B       .87       TT5145       .234         TT36C       .87       TT5151       .234         TT36C       .87       TT516       .237         TT36FM       .87       TT518       .236		
TT35		
TT35DC		
TT35FM       .87       TT5134       .233         TT35FMDC       .87       TT5135       .233         TT36       .87       TT5138       .233         TT36A       .87       TT5141       .233         TT36A       .87       TT5142       .233         TT36AFMDC       .87       TT5144       .233         TT36AFMDC       .87       TT5144       .233         TT36BE       .87       TT5144       .233         TT36C       .87       TT5145       .233         TT36E       .87       TT5145       .234         TT36CC       .87       TT5145       .234         TT36CFMDC       .87       TT5155       .234         TT36CFMDC       .87       TT516       .237         TT36FM       .87       TT516       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT519       .236         TT400       .230       TT52       .218         Tt403       .230       TT52       .218         Tt404       .230       TT5202000       .217         Tt408       .230       TT5302095       .219		
TT35FMDC		
TT36A.		TT5135233
TT36ADC       .87       TT5142       .233         TT36AFM       .87       TT5143       .233         TT36AFMDC       .87       TT5144       .233         TT36BE       .87       TT5145       .233         TT36BDC       .87       TT5145       .233         TT36C       .87       TT5151       .234         TT36CDC       .87       TT5152       .234         TT36CFMDC       .87       TT516       .234         TT36CFMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .236         TT401       .230       TT520       .248         TT403       .230       TT520       .248         TT404       .230       TT5202W34B       .217         TT405       .230       TT5302000       .217         TT413       .230       TT5302W34B       .217         T448       .230       TT5302W35       .219         T45148       .230       TT5302W35       .219         T45148       .230       TT5302W	TT3687	TT5138233
TT36AFM       .87       TT5143       .233         TT36AFMDC       .87       TT5144       .233         TT36B       .87       TT5144       .233         TT36BDC       .87       TT5144       .233         TT36C       .87       TT5148       .233         TT36CDC       .87       TT5151       .234         TT36CPMDC       .87       TT5162       .234         TT36CFMDC       .87       TT516       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT519       .236         T401       .230       TT520       .236         T404       .230       TT520       .236         T404       .230       TT520       .236         T4506       .230       TT5302000       .217         TT408       .230       TT5302000       .217         T443       .230       TT5302000       .219         T4516       .230       TT5302000       .219         T4516       .230       TT5302000       .219         T4524       .230       TT5302095	TT36A87	TT5141233
TT36AFMDC       .87       TT5144       .233         TT36B       .87       TT5145       .233         TT36C       .87       TT5148       .233         TT36C       .87       TT5151       .234         TT36CDC       .87       TT5152       .234         TT36CFM       .87       TT5155       .234         TT36CFMDC       .87       TT516       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT518       .237         TT36FMDC       .87       TT519       .236         Tt401       .230       TT520       .236         Tt404       .230       TT5202000       .217         Tt405       .230       TT520231       .217         Tt408       .230       TT5302000       .219         Tt45144       .230       TT5302000       .219         Tt45144       .230       TT530200       .219         Tt45124       .230       TT540205       .219         Tt45248       .230       TT540200       .219         Tt45244       .230       TT	TT36ADC87	TT5142233
TT36B       87       TT5145       233         TT36BDC       87       TT5148       233         TT36C       87       TT5151       234         TT36CDC       87       TT5152       234         TT36CFM       87       TT5152       234         TT36CFMDC       87       TT516       237         TT36FM       87       TT516       237         TT36FMDC       87       TT518       237         TT36FMDC       87       TT518       236         TT401       230       TT52       218         TT403       230       TT520       236         TT404       230       TT520       236         TT404       230       TT5202000       217         TT408       230       TT520200       219         T4516       230       TT5302000       219         T4516       230       TT5302000       219         T45148       230       TT5302895       219         T45148       230       TT5302895       219         T45148       230       TT5402895       219         T4524       230       TT5402895       219	TT36AFM87	TT5143233
TT36BDC	TT36AFMDC87	
TT36C	TT36B87	TT5145233
TT36CDC.       .87       TT5152.       .234         TT36CFM.       .87       TT5155.       .234         TT36CFM.       .87       TT516.       .237         TT36FM.       .87       TT518.       .237         TT36FM.       .87       TT518.       .237         TT36FMDC.       .87       TT519.       .236         TT401       .230       TT52.       .218         T403.       .230       TT520.       .236         TT404.       .230       TT520.       .236         TT405.       .230       TT5202000.       .217         TT408.       .230       TT5202000.       .217         TT408.       .230       TT521.       .236         TT45106.       .230       TT5302000.       .219         T45106.       .230       TT5302000.       .219         T45148.       .230       TT5302S95.       .219         T4524.       .230       TT54       .220         T45306.       .230       TT5402W95.       .219         T45248.       .230       TT5402W96.       .219         T45324.       .230       TT5502W34B       .217         T45448.		
TT36CFM       .87       TT5155       .234         TT36CFMDC       .87       TT516       .237         TT36FM       .87       TT517       .237         TT36FMDC       .87       TT519       .236         TT401       .230       TT52       .218         T403       .230       TT520       .236         T404       .230       TT5202000       .217         T405       .230       TT5202031       .217         T404       .230       TT5202031       .217         T443       .230       TT5302000       .219         T4516       .230       TT5302000       .219         T4524       .230       TT5302095       .219         T4524       .230       TT5402000       .219         T4524       .230       TT5402095       .219         T45424       .230       TT5502		
TT36CFMDC       .87       TT516       .237         TT36DC       .87       TT517       .237         TT36FM       .87       TT518       .237         TT36FMDC       .87       TT519       .236         Tt401       .230       TT52       .218         Tt403       .230       TT520       .236         Tt404       .230       TT520.       .236         Tt405       .230       TT5202000       .217         Tt405       .230       TT5202W34B       .217         Tt413       .230       TT521       .236         Tt4506       .230       TT5302W34B       .217         Tt45124       .230       TT5302W00       .219         Tt45124       .230       TT5302W95       .219         Tt45224       .230       TT5402W95       .219         Tt45248       .230       TT5402W96       .219         Tt45384       .230       TT5402W96       .219         Tt454424       .230       TT5502S31       .217         Tt45448       .230       TT5502S31       .217         Tt45448       .230       TT5502S31       .217         Tt45448       .230		
TT36DC       .87       TT517       .237         TT36FM       .87       TT518       .237         TT36FMDC       .87       TT519       .236         Tt401       .230       TT52       .218         Tt403       .230       TT520       .236         Tt404       .230       TT520       .236         Tt405       .230       TT5202000       .217         Tt408       .230       TT520231       .217         Tt408       .230       TT521       .236         Tt4506       .230       TT53       .215, 220         Tt4516       .230       TT5302000       .219         Tt45148       .230       TT5302205       .219         Tt45148       .230       TT5302206       .219         Tt4524       .230       TT5302295       .219         Tt45248       .230       TT54       .215, 220         Tt4536       .230       TT5402000       .219         Tt45348       .230       TT5502831       .217         Tt45448       .230       TT5502331       .217         Tt45448       .230       TT5502331       .217         Tt4548       .230		
TT36FM		
TT36FMDC		
TT401       230       TT52       218         TT403       230       TT520       236         TT404       230       TT5202000       217         TT405       230       TT5202831       217         TT408       230       TT5202W34B       217         TT413       230       TT5202W34B       217         TT413       230       TT53       215, 220         TT45166       230       TT53       215, 220         TT45106       230       TT5302S95       219         TT45124       230       TT5302S95       219         TT45206       230       TT5302W95       219         TT45248       230       TT5402S95       219         TT45248       230       TT5402W95       219         TT45248       230       TT5402W96       219         TT45248       230       TT5502S31       217         TT45248       230       TT5502S31       217         TT45244       230       TT5502S31       217         TT45244       230       TT5502S31       217         TT45244       230       TT5502S31       217         TT45448       230 <td< td=""><td></td><td></td></td<>		
TT403       230       TT520       236         TT404       230       TT5202000       217         TT405       230       TT5202S31       217         TT408       230       TT5202W34B       217         TT413       230       TT5202W34B       217         TT413       230       TT5202W34B       217         TT413       230       TT521       236         TT4506       230       TT53       215,220         TT45106       230       TT5302S95       219         TT45124       230       TT5302S96       219         TT45206       230       TT5302W95       219         TT4524       230       TT5402W95       219         TT45248       230       TT5402W96       219         TT45324       230       TT5402W96       219         TT45248       230       TT5502S31       217         TT45448       230       TT5502W34B       217         TT45524       230       TT5502W34B       217         TT45548       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT45848       230		
TT404       230       TT5202000       217         TT405       230       TT5202S31       217         TT408       230       TT5202W34B       217         TT413       230       TT521       236         TT4506       230       TT53       215, 220         TT4516       230       TT5302000       219         TT45106       230       TT5302S95       219         TT45148       230       TT5302W95       219         TT4524       230       TT5302W95       219         TT4524       230       TT5302W96       219         TT45248       230       TT544       215, 220         TT45324       230       TT5402W96       219         TT45384       230       TT5502S31       219         TT45448       230       TT5502S31       217         TT45484       230		
TT405       230       TT5202S31       217         TT408       230       TT5202W34B       217         TT413       230       TT521       236         TT4506       230       TT53       215, 220         TT45166       230       TT5302000       219         TT45148       230       TT5302S95       219         TT45148       230       TT5302W95       219         TT4524       230       TT5302W95       219         TT45248       230       TT5402W95       219         TT45248       230       TT54       215, 220         TT45366       230       TT5402W96       219         TT45348       230       TT5402W96       219         TT45448       230       TT5502W34B       217         TT45448       230       TT5502W34B       217         TT45248       230       TT5502W34B       217         TT45248       230       TT5602W34B       217         TT45248       230       TT5502W34B       217         TT45448       230       TT5602W34B       217         TT45488       230       TT5602W34B       217         TT45848       2		
TT408       230       TT5202W34B       217         TT413       230       TT521       236         TT4506       230       TT53       215, 220         TT45106       230       TT5302000       219         TT45148       230       TT5302S95       219         TT45148       230       TT5302S96       219         TT45224       230       TT5302W95       219         TT45248       230       TT5402C00       219         TT45248       230       TT5402C00       219         TT45366       230       TT5402C00       219         TT45324       230       TT5402C00       219         TT45348       230       TT5402C00       219         TT45406       230       TT5502S31       217         TT45448       230       TT5502W34B       217         TT45248       230       TT5502W34B       217         TT45248       230       TT5602W34B       217         TT45488       230       TT5602W34B       217         TT45488       230       TT5602W34B       217         TT45488       230       TT5602W34B       217         TT45848 <td< td=""><td></td><td></td></td<>		
TT4506		
TT45106       230       TT5302000       219         TT45124       230       TT5302S95       219         TT45148       230       TT5302S96       219         TT45206       230       TT5302W95       219         TT45224       230       TT5302W96       219         TT45248       230       TT5402W96       219         TT45324       230       TT5402000       219         TT45324       230       TT5402S95       219         TT45324       230       TT5402S95       219         TT45324       230       TT5502S31       217         TT45448       230       TT5502S31       217         TT45524       230       TT5602W34B       217         TT45524       230       TT5602000       217         TT45848       230       TT5602W34B       217         TT45848	TT413230	TT521236
TT45124       230       TT5302S95       219         TT45148       230       TT5302S96       219         TT45206       230       TT5302W95       219         TT45224       230       TT5302W96       219         TT45248       230       TT54       215,220         TT45306       230       TT5402000       219         TT45348       230       TT5402S95       219         TT45348       230       TT5402S95       219         TT45348       230       TT5502S31       217         TT454448       230       TT5502W34B       217         TT45524       230       TT5602S31       217         TT45548       230       TT5602W34B       217         TT45824       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TM45848       230       TT5602W34B       217         TT4W24WCF1<	TT4506230	TT53215, 220
TT45148       230       TT5302S96       219         TT45206       230       TT5302W95       219         TT45224       230       TT5302W96       219         TT45248       230       TT54       210         TT45306       230       TT5402000       219         TT45348       230       TT5402000       219         TT45348       230       TT5402S95       219         TT45406       230       TT5502S31       217         TT45248       230       TT5502S31       217         TT45248       230       TT5502W34B       217         TT45248       230       TT550200       217         TT45548       230       TT5602S31       217         TT45824       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TM45848       230       TT5602W34B       217         TT45848	TT45106230	
TT45206       230       TT5302W95       219         TT45224       230       TT5302W96       219         TT45248       230       TT54       215, 220         TT45306       230       TT5402000       219         TT45324       230       TT5402000       219         TT45324       230       TT5402895       219         TT45324       230       TT5402W96       219         TT45348       230       TT5502S31       217         TT45424       230       TT5502W34B       217         TT45548       230       TT5602W34B       217         TT45548       230       TT5602000       217         TT45548       230       TT5602000       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602000       217         TT45848       230       TT5602W34B       217         TT45848	TT45124230	TT5302S95219
TT45224       230       TT5302W96       219         TT45248       230       TT54       215, 220         TT45306       230       TT5402000       219         TT45324       230       TT5402S95       219         TT45348       230       TT5402S95       219         TT45348       230       TT5402S95       219         TT450406       230       TT5502S31       217         TT45248       230       TT5502W34B       217         TT45524       230       TT5602W34B       217         TT45524       230       TT5602000       217         TT45524       230       TT5602000       217         TT45548       230       TT5602000       217         TT45824       230       TT5602W34B       217         TT45824       230       TT5602000       217         TT45824       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         T4W24VCF1       223       TT59       215, 220         TT4W24VCN1 <td></td> <td></td>		
TT45248       .230       TT54       .215, 220         TT45306       .230       TT5402000       .219         TT45324       .230       TT5402S95       .219         TT45348       .230       TT5402S95       .219         TT45348       .230       TT5402W96       .219         TT45406       .230       TT55       .215, 218         TT45424       .230       TT5502S31       .217         TT45524       .230       TT5502W34B       .217         TT45548       .230       TT5602000       .217         TT45824       .230       TT5602000       .217         TT45548       .230       TT5602000       .217         TT45824       .230       TT5602000       .217         TT45848       .230       TT5602W34B       .217         TT45848       .230       TT5602W34B       .217         TT45848       .230       TT5602W34B       .217         TT4W24MCF1       .223       TT57       .220         TT4W24WCF1       .223       TT59       .215, 220         TT4W24WCN1       .223       TT5902000       .219         TT501       .236       TT5902W89       .219     <		
TT45306       230       TT5402000       219         TT45324       230       TT5402S95       219         TT45348       230       TT5402W96       219         TT45406       230       TT55       215,218         TT45424       230       TT5502S31       217         TT45448       230       TT5502W34B       217         TT45484       230       TT5602W34B       217         TT45484       230       TT5602W34B       217         TT45484       230       TT5602W34B       217         TT45824       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT445848       230       TT5602W34B       217         TT44824       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         TT4W24WCF1       223       TT59       215, 220         TT4W24VCF1       223       TT59       215, 220         TT4W24VCN1       223       TT5902000       219         TT5		
TT45324       230       TT5402S95       219         TT45348       230       TT5402W96       219         TT45406       230       TT55       215, 218         TT45424       230       TT5502S31       217         TT45248       230       TT5502W34B       217         TT45488       230       TT5502W34B       217         TT45244       230       TT5502W34B       217         TT45548       230       TT5602000       217         TT45824       230       TT5602000       217         TT45848       230       TT5602W34B       217         TT4502W34MCF1       223       TT57       220         TT4W24MCF1       223       TT59       215, 220         TT4W24VCF1       223       TT5902000       219         TT501       236       TT5902W89       219         TT502<		
TT45348       230       TT5402W96       219         TT45406       230       TT55       215, 218         TT45424       230       TT5502S31       217         TT45448       230       TT5502W34B       217         TT45524       230       TT5502W34B       217         TT45548       230       TT5602000       217         TT45848       230       TT5602000       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602000       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         TT4W24MCF1       223       TT58       215, 220         TT4W24VCF1       223       TT5902000       219         TT501       236       TT5902889       219         TT502       236       TT5902W89       219         TT503       236       TT60       215, 220		
TT45406       .230       TT55       .215, 218         TT45424       .230       TT5502S31       .217         TT45448       .230       TT5502W34B       .217         TT45524       .230       TT5502W34B       .217         TT45548       .230       TT5502W00       .217         TT45548       .230       TT56       .215, 218         TT45848       .230       TT56       .215, 218         TT45848       .230       TT5602000       .217         TT45848       .230       TT5602W34B       .217         TT45848       .230       TT5602W34B       .217         TT45848       .230       TT5602W34B       .217         TT45844       .230       TT5602W34B       .217         TT44W24MCF1       .223       TT57       .220         TT4W24WCF1       .223       TT59       .215, 220         TT4W24VCF1       .223       TT5902000       .219         TT501       .236       TT5902W89       .219         TT502       .236       TT5902W89       .219         TT503       .236       TT60       .215, 220		
TT45424       230       TT5502S31       217         TT45448       230       TT5502W34B       217         TT45548       230       TT5502W34B       217         TT45548       230       TT56       215 218         T45806       230       TT5602000       217         T45848       230       TT5602031       217         T45824       230       TT5602S31       217         T45824       230       TT5602S31       217         T45848       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         TT4W24WCF1       223       TT59       215, 220         TT4W24VCF1       223       TT5902000       219         T501       236       TT5902W89       219         T502       236       TT5902W89       219         T503       236       TT60       215, 220		
TT45448       .230       TT5502W34B       .217         TT45524       .230       TT552000       .217         TT45548       .230       TT56       .215, 218         TT45806       .230       TT5602000       .217         TT45824       .230       TT5602000       .217         TT45824       .230       TT5602031       .217         TT45848       .230       TT5602W34B       .217         TT445848       .230       TT5602W34B       .217         TT445448       .230       TT5602W34B       .217         TT4W24MCF1       .223       TT57       .220         TT4W24VCF1       .223       TT59       .215, 220         TT4W24VCF1       .223       TT5902000       .219         TT501       .236       TT590289       .219         TT502       .236       TT5902W89       .219         TT503       .236       TT60       .215, 220		
TT45524       230       TT552000       217         TT45548       230       TT56       215, 218         TT45806       230       TT5602000       217         TT45824       230       TT5602000       217         TT45824       230       TT5602831       217         TT45848       230       TT5602W34B       217         TT4V24MCF1       223       TT57       220         TT4W24MCN1       223       TT58       215, 220         TT4W24VCF1       223       TT5902000       219         TT501       236       TT590289       219         TT502       236       TT5902W89       219         TT503       236       TT60       215, 220		
TT45548       230       TT56       215, 218         TT45806       230       TT5602000       217         TT45824       230       TT5602S31       217         TT45848       230       TT5602W34B       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         TT4W24WCF1       223       TT59       215, 220         TT4W24VCF1       223       TT59       215, 220         TT4W24VCN1       223       TT5902000       219         TT501       236       TT5902X89       219         TT502       236       TT5902W89       219         TT503       236       TT60       215, 220		
TT45806       230       TT5602000       217         TT45824       230       TT5602S31       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         TT4W24MCF1       223       TT58       215, 220         TT4W24VCF1       223       TT59       215, 220         TT4W24VCF1       223       TT59       215, 220         TT4W24VCN1       223       TT5902000       219         TT501       236       TT5902X89       219         TT502       236       TT5902W89       219         TT503       236       TT60       215, 220		
TT45824       230       TT5602S31       217         TT45848       230       TT5602W34B       217         TT4W24MCF1       223       TT57       220         TT4W24MCN1       223       TT58       215, 220         TT4W24VCN1       223       TT59       215, 220         TT4W24VCN1       223       TT5902000       219         TT501       236       TT5902S89       219         TT503       236       TT60       215, 220		
TT45848		
TT4W24MCF1       .223       TT57       .220         TT4W24MCN1       .223       TT58       .215, 220         TT4W24VCF1       .223       TT59       .215, 220         TT4W24VCN1       .223       TT5902000       .219         TT501       .236       TT5902889       .219         TT503       .236       TT60       .215, 220		
TT4W24MCN1       223       TT58       215, 220         TT4W24VCF1       223       TT59       215, 220         TT4W24VCN1       223       TT5902000       219         TT501       236       TT5902S89       219         TT502       236       TT5902W89       219         TT503       236       TT60       215, 220		
TT4W24VCF1       223       TT59       215, 220         TT4W24VCN1       223       TT5902000       219         TT501       236       TT5902S89       219         TT502       236       TT5902W89       219         TT503       236       TT60       215, 220		
TT501		
TT502236         TT5902W89219           TT503236         TT60215, 220		
TT503215, 220		
TT504236 TT6002000219		
	TT504236	TT6002000219

### \* Please visit the product pages on our website for the most up-to-date product information

TT6002S89	.219
TT6002W89	
TT61215,	220
TT6102000	.219
TT6102S89	210
TT6102W89	
TT62215,	220
TT6202000	.219
TT6202S89	
TT6202W89	
TT631	87
TT632A	87
TT632B	
TT632C	87
TT633	87
TT633B	
TT634A	
TT634B	87
TT634C	
TT635	
TT636	87
TT636A	87
TT636C	
TT6W48MCF1	
TT6W48MCN1	.223
TT6W48VCF1	
TT6W48VCN1	
TT722	.264
TT724	264
ΤΤ726	
ΤΤ727	.264
TT728	.264
ΤΤ729	
TT741	.264
TT741N0	.264
TT742	264
TT742N0	
TT744	.264
TT744N0	.264
Π746	
TT746N0	
	.264
TT747	
	.264
TT747N0	.264 .264
TT747N0 TT748	.264 .264 .264
TT747N0	.264 .264 .264
TT747N0 TT748 TT749	.264 .264 .264 .264
TT747N0 TT748 TT749 TT861	.264 .264 .264 .264 .264
TT747N0 TT748 TT749 TT861 TT862	.264 .264 .264 .264 .264 .264
TT747N0 TT748 TT749 TT861 TT862 TT864	.264 .264 .264 .264 .264 .264 .264
TT747N0 TT748 TT749 TT861 TT862	.264 .264 .264 .264 .264 .264 .264
TT747N0 TT748 TT749 TT861 TT862 TT864 TT866	.264 .264 .264 .264 .264 .264 .264 .264
ТТ747N0 ТТ748 ТТ749. ТТ861 ТТ862 ТТ864. ТТ866 ТТ866 ТТ867	.264 .264 .264 .264 .264 .264 .264 .264
ТТ747N0 ТТ748 ТТ749. ТТ861. ТТ864. ТТ864. ТТ866. ТТ867. ТТ868	.264 .264 .264 .264 .264 .264 .264 .264
ТТ747N0 ТТ748 ТТ749 ТТ861 ТТ862 ТТ864 ТТ866 ТТ866 ТТ867 ТТ868 ТТ869	.264 .264 .264 .264 .264 .264 .264 .264
ТТ747N0 ТТ748 ТТ749 ТТ861 ТТ862 ТТ864 ТТ866 ТТ866 ТТ867 ТТ868 ТТ869	.264 .264 .264 .264 .264 .264 .264 .264
TT747N0 TT748. TT749. TT861 TT862. TT864 TT866. TT866. TT867. TT868 TT868 TT869. TT89	.264 .264 .264 .264 .264 .264 .264 .264
TT747N0 TT748 TT749 TT861 TT862 TT864 TT866 TT867 TT868 TT868 TT869 TT89 TT89DC	.264 .264 .264 .264 .264 .264 .264 .264
TT747N0 TT748 TT749 TT861 TT862 TT862 TT866 TT866 TT866 TT867 TT868 TT869 TT869 TT89 TT89P TT89P.M	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749 TT861 TT862 TT864 TT866 TT867 TT868 TT868 TT869 TT89 TT89DC	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749. TT861 TT862 TT862 TT864 TT866 TT866 TT867 TT868 TT869 TT869 TT89 TT89 TT89FM TT89FMDC	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749. TT861 TT862 TT864 TT866 TT866 TT867 TT868 TT869 TT869 TT89 TT89DC TT89FMD TT89FMDC TT89FMDC TT91001	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749. TT861 TT862 TT864 TT866 TT867 TT868 TT869. TT89 TT89DC TT89FM TT89FM TT89FMDC. TT91001 TT91002	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749 TT861 TT862 TT864 TT866 TT867 TT868 TT869 TT899 TT89 TT89 TT89PMDC TT89FM TT89FMDC TT89FMDC TT91001 TT91002 TT91003	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749. TT861 TT862 TT864 TT866 TT867 TT868 TT869. TT89 TT89DC TT89FM TT89FM TT89FMDC. TT91001 TT91002	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749 TT861 TT862 TT864 TT866 TT867 TT867 TT869 TT89 TT89 TT89DC TT89FM TT89FMDC TT89FMDC TT91001 TT91002 TT91004	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749 TT861 TT862 TT862 TT866 TT866 TT867 TT868 TT869 TT89 TT89 TT89 TT89FM TT89FM TT89FM TT89FMDC TT91001 TT91003 TT91004 TT91005	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749. TT861 TT862 TT862 TT866 TT866 TT867 TT868 TT869 TT89 TT89 TT89FM TT89FMDC TT91001. TT91002. TT91004. TT91005. TT91008	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749 TT861 TT862 TT862 TT866 TT866 TT867 TT868 TT869 TT89 TT89 TT89 TT89FM TT89FM TT89FM TT89FMDC TT91001 TT91003 TT91004 TT91005	264 264 264 264 264 264 264 264 264 264
TT747N0 TT748 TT749. TT861 TT862 TT864. TT866 TT867 TT868. TT869. TT89 TT89 TT89FM. TT89FMDC TT91001. TT91002. TT91003 TT91005. TT91005. TT91008 TT91011.	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264
TT747N0	264 264 264 264 264 264 264 264 264 264

- I
TT91411216
TT92001216
TT92002
TT92003216
TT92004216
TT92005216
TT92008216
TT92011216
TT92201216
TT92202
TT92203
TT92204216
TT92205216
TT92208216
TT92211216
TT92401216
TT92402216
TT92403216
TT92404216
TT92405216
TT92408216
TT92411216
TT93001216
TT93002216
TT93003216
TT93004216
TT93005216
TT93008216
TT93011216
TT93301216
TT93302216
TT93303216
TT93304216
TT93305216
ТТ93308216
TT93311216
TT93601216
TT93602216
TT93603216
TT93604216
TT93605216
TT93608216
TT93611
TT9590
TT95DC90
TT95FM90
TT95FMDC90
TT96EDACNO178
TT96EDACNS
TT96FM90
TT96FMDC90
TTD**
TTD5102000
TTD5102S31217
TTD5102W34B217
TTD5202000217
TTD520231217
TTD5202W34B217
TTD5302000219
TTD5302S95219
TTD5302W96219
TTD5402000219
TTD5402S95
TTD5402W96219
TTD5902000219
TTD5902S89219
TTD5902W89219
TTD6002000219
TTD6002S89219
TTD6002W89219
TTEZN***
TTP96ASFN
TTP96ASHN
TTP96ASNN
TTP96K1FN
TTP96K1HN180

TTP96K1NN180	V
TTP96K3BPNS	Ň
	Ŵ
TTP96K3FN	v
TTP96K3HN180	-
TTP96K3NN	V
TTP96K3NS168	V
TTP96K5BPNS174	V
TTPFA96K1NO164	V
TTPFA96K1NS164	V
TTPH96K1NO171	V
TTPH96K1NS171	Ŵ
TTPH96K3NO171	Ň
TTPH96K3NS171	Ň
TY3F	Ň
TY3FPC	Ŵ
TY4F	v
TY4FPC	v
	v
TY5F	
TY5FPC	V
TYEF01	V
TYEF02	V
TYEF03	V
TYEF0437	V
TYEF0537	V
TYEF0837	V
TYEF11	V
UJ193	V
UJ2A93	V
UJ2B93	V
UJ4B93	Ŵ
US001	Ň
US001PC	Ň
US001ST	Ň
VAPK1HD*75T	Ň
VAPK1HD*NT	v
	v
VAPK1SD*75T	
VAPK1SD*NT199	V
VAPK3HD*75T199-200	V
VAPK3HD*NT199	V
VAPK3SD*75T199	V
VAPK3SD*NT199	V
VJHD*75T136	V
VJHD*75TX195	V
VJHD*NT136	V
VJHD*NTX195	V
VJSD*75T136	V
VJSD*75TX195	V
VJSD*NT136	V
VJSD*NTX195	V
VMAFN	V
VMP**	Ň
VMVHD*75T199	Ň
VMVHD*NT199	Ň
VMVSD*75T199	Ň
VMVSD*NT199	Ň
VP**	Ň
VPP24K1HD*75T193	Ň
	v
VPP24K1HD*NT	v
VPP24K1SD*75T193	v
VPP24K1SD*NT	-
VPP24K3HD*75T193	V
VPP24K3HD*NT193	V
VPP24K3SD*75T193	V
VPP24K3SD*NT193	V
VPP26K1HD*75T193	V
VPP26K1HD*NT193	V
VPP26K1SD*75T193	V
VPP26K1SD*NT193	V
VPP26K3HD*75T193	V
VPP26K3HD*NT193	V
VPP26K3SD*75T193	V
VPP26K3SD*NT193	V
W11003231	V
W11003L231	Ŵ
W11006231	Ň
W11006L231	Ň
	•

luct	information	
N110 <sup>-</sup>	12	231
	03	
	03L	
	06	
N1120	06L	231
	12	
	12L 2A	
	4B	
N1532	2A301	203
N1532	2B301	203
N1534	4B	203
	4B301	
	2B	
N1634	4B	212
NJ252	9 2A	212
N2532	2A 3B	205 205
N2732	2A301	205
N2732	2B	205
N2732	2B301	205
	4B301	
	9	
/V4M.	34B	25
	634В	
	50	
	95	
	96	
NBD1	634B	212
NBD1	650	212
	795	
	34B	
	I634B T331	212
	T332A	
	T332B	
	Г333	
NCMI	Т334В	83
	Т335	
	T335A	
	Г336 Г336А	
	T336B	
	T336C	
	T336D	
NCMI	T336E	84
	32B	
	34B	
	89	
	331 332A	
	332B	
	332C	
	333	
	333B	
	333E	
	334A	
	334B	
	334C 334E	
	334F	
	335	
	335A	
	336	
NMT3	336A	83
	336B	
	336C	
	336D	
	336E 342B	
	342B 344B	
	388	
	389	

# **Ex Switchcraft**

# **PHONE: 773 792-2700**

### \* Please visit the product pages on our website for the most up-to-date product information

	*	
e		
	1	
	U	
	B	
	14.1	
(	9	
Y	P	

WTT3187
WTT31DC87
WTT31FM87
WTT31FMDC87
WTT32A87
WTT32ADC87
WTT32AFM87
WTT32AFMDC87
WTT32B87
WTT32BDC87
WTT32BFM87
WTT32BFMDC87
WTT32C87
WTT32CDC87
WTT32CFM87
WTT32CFMDC87
WTT3387
WTT33B87
WTT33BDC87
WTT33BFM87
WTT33BFMDC87
WTT33DC87
WTT33FM87
WTT33FMDC87
WTT34A87
WTT34ADC87
WTT34AFM87
WTT34AFMDC87
WTT34B87
WTT34BDC87
WTT34BFM87
WTT34BFMDC87
WTT3587
WTT35DC87
WTT35FM87
WTT35FMDC87
WTT3687
WTT36A87
WTT36ADC87
WTT36AFM87
WTT36AFMDC87
WTT36C87
WTT36CDC
WTT36CFM
WTT36CFMDC
WTT36DC
WTT36FM87
WTT36FMDC87
WTT631
WTT632A87
WTT632B
WTT632C
WTT633
WTT633B
WTT634A
WTT634B
WTT634C
WTT635
WTT636
WTT636A
WTT636C
WTT89
WTT89DC
WTT89FM
WTT89FMDC
WTT95DC90
WTT95FM90
WTT95FMDC90
WTT96FM90
WTT96FMDC90
X1332A203
X1332A203 X1332B203
X1332B203 X1334B203
X1532A
X1532B301203
200

87	X1534B203
87	X1542B315203
87	X21248
87	X2432A205
87	X2432B205
87	X2434B205
87	X2532A205
87	X2532B205
87	X2534B205
87	X2732A205
87	X2732A301205
87	X2732B205
87	X2732B301205
87	X2734B205
87	X2734B301205
87	X2832A205
87	X2932A205
87	X51248317
87	XMT332A84
87	XMT332B84
87	XMT334B84
87	Y21248317
87	Y28248317
87	Y3F22
87	Y3FD22
87	Y3FPC22
87	Y3MPC22
87	Y51248317
87	YEF0122
87	YEF0222
87	YEF0322
87	YEF0422
87	YEF0522
87	YEF0822
87	YMT332A84
87	YMT332B84
87	YMT334B84
87	Z15J108
87	Z21248
87	Z28248
87	Z51248317
97	

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft: UJ2B UJ1 UJ2A UJ-4B