

SC702CT Stereo A/V Direct Box Switchcraft® **Audio Specifications**


Parameter	Performance	Conditions
Frequency Response	20Hz - 20kHz	+/-0.3dB, ref 1kHz
Total Harmonic Distortion + Noise	< 0.007% < 0.4%	at 1kHz, +4dBu Input, 22kHz Bandwidth at 20Hz, +4dBu Input, 22kHz Bandwidth
Maximum Input Level	+18dBu	at 20Hz with 1% THD+Noise
Input Impedance	> 120kΩ	at 1kHz
Output Impedance	< 50Ω	at 1kHz
Common Mode Rejection Ratio (CMRR)	> 105dB	at 60Hz
Deviation from Linear Phase	< 6° < 1° < 11°	at 20Hz at 1kHz at 20kHz
Voltage Gain	-23dB -43dB	+/-1dB +/-1dB with 20dB pad engaged
Pad Attenuation	20dB	+/-1dB

Notes: All measurements were taken with a 25Ω unbalanced source and measured from the XLR with a $1k\Omega$ balanced load. Specifications subject to change without notice.

CUSTOMER DRAWING

	SCALE 1:1		(FI)®
	DATE DRAWN		
	11-15-11	SHEET 2 OF 3	
	DRAWN BY	PART No.	REV
	ВНМ	SC702CT	D
_			

SolidWorks CAD File C

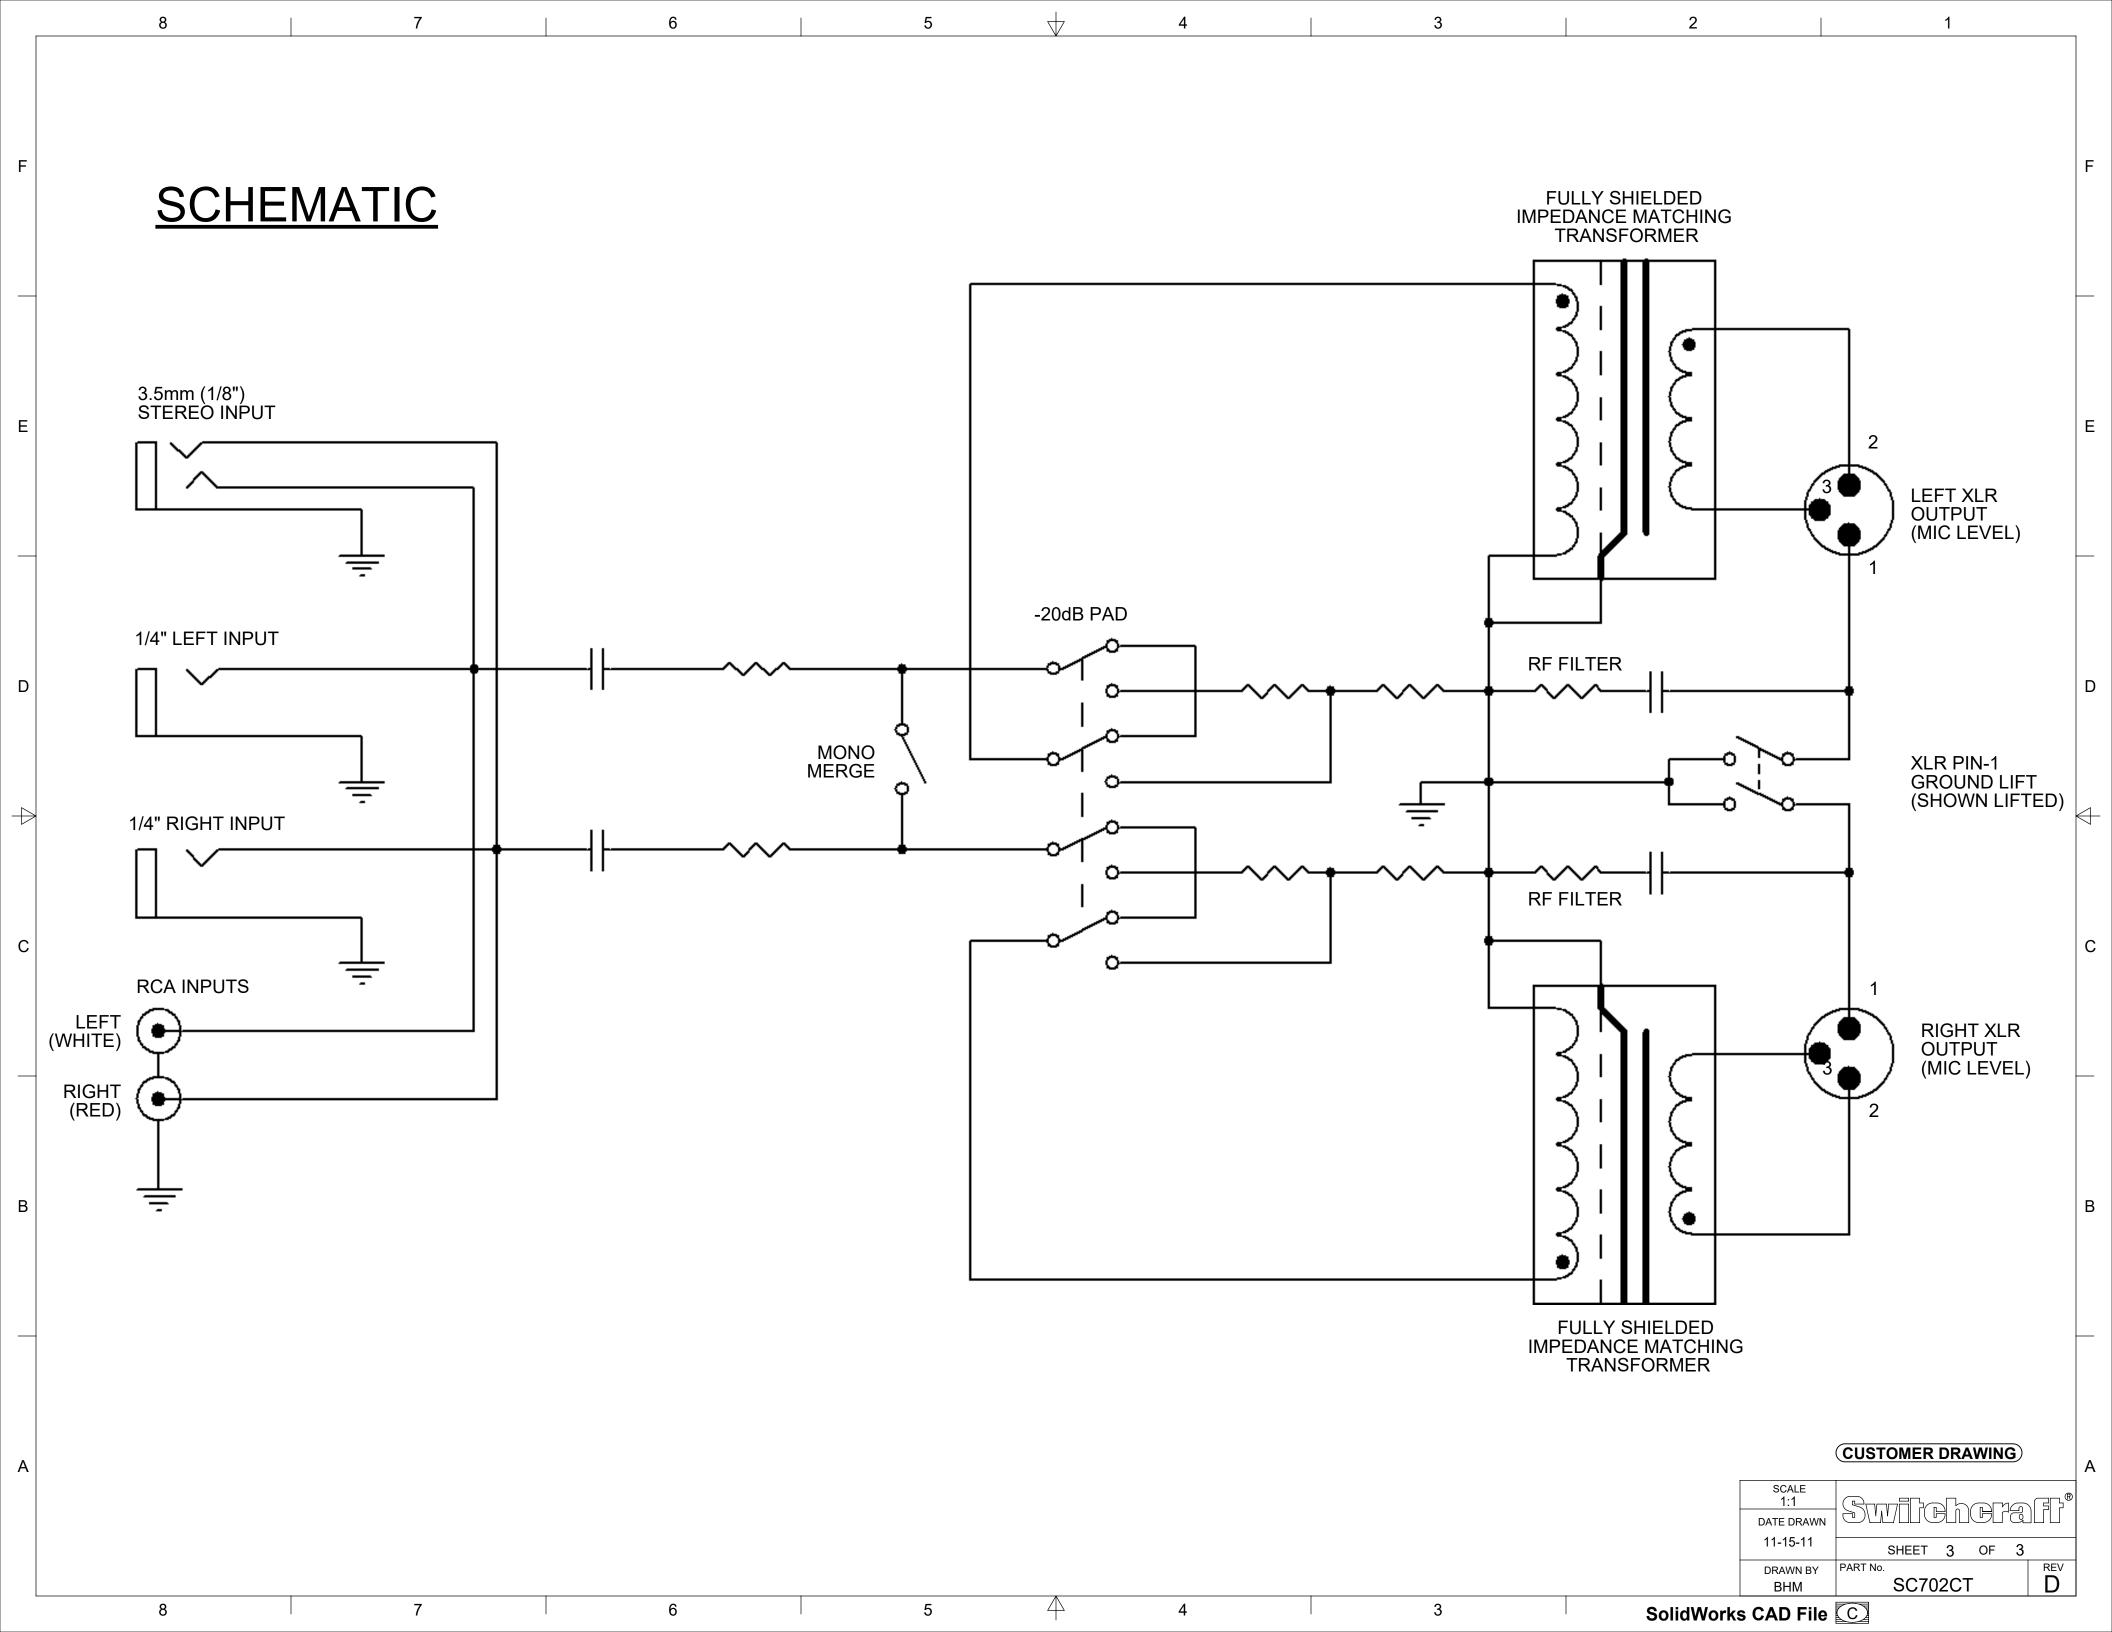

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft:

SC702CT