



DIMENSIONS SHOWN FOR REFERENCE ONLY

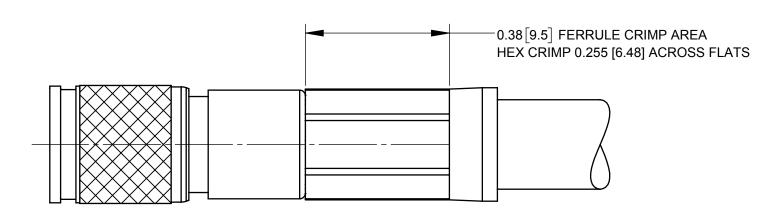

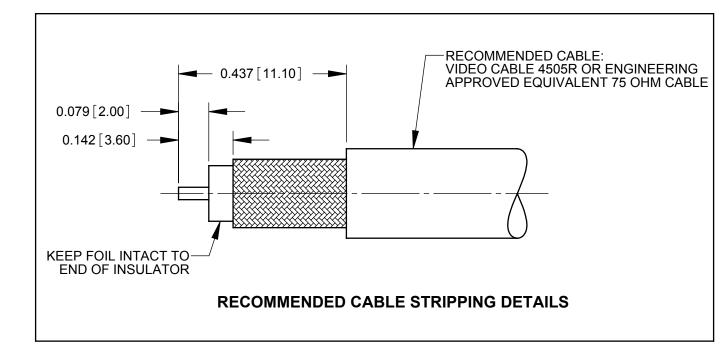

NOTES:


1. MEETS SMPTE 2082-1 CHARACTERISTIC IMPEDANCE: 75 OHMS CONTACT RESISTANCE: 50 MILLIOHMS MAX.

2. MATERIAL:

BODY: COPPER ALLOY, NICKEL PLATED.
CONTACT PIN: COPPER ALLOY, GOLD PLATED.
SPRING: BERYLLIUM COPPER, NICKEL PLATED.
TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.
INSULATOR: TEFLON
FERRULE: COPPER ALLOY, NICKEL PLATED.

3. THIS PRODUCT IS RoHS COMPLIANT.

(CUSTOMER DRAWING)

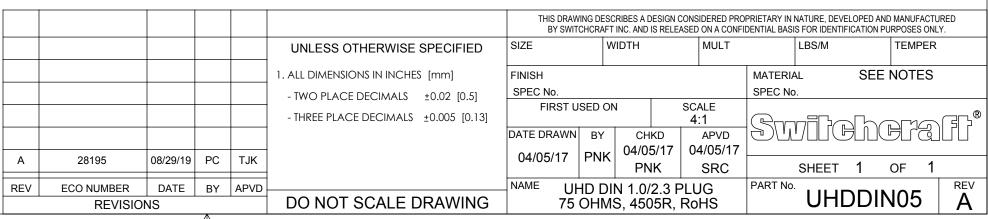

4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft: UHDDIN05