
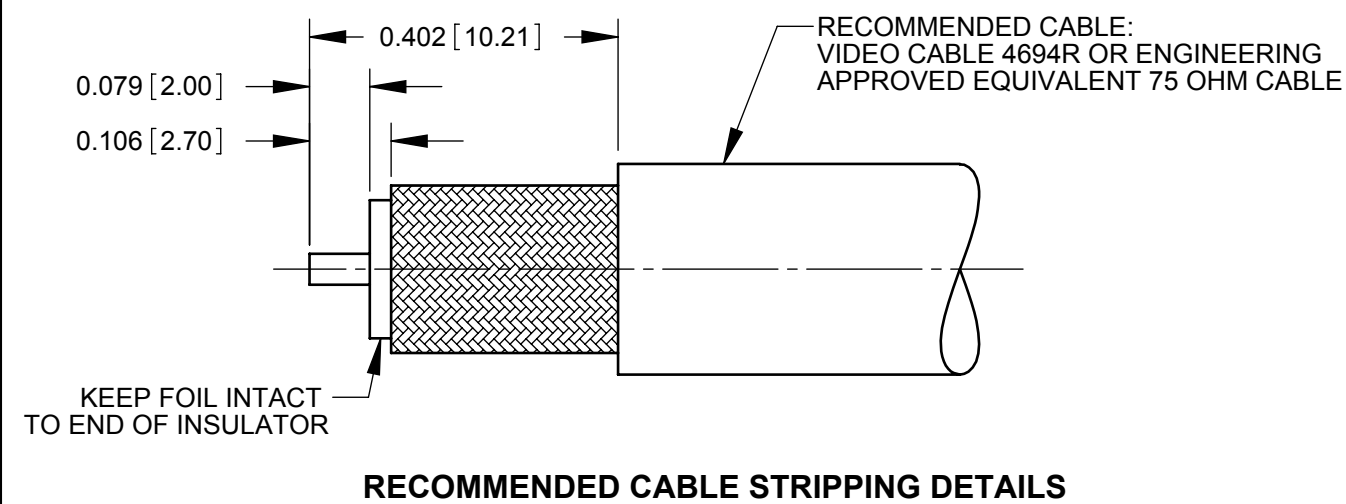


DIMENSIONS SHOWN FOR REFERENCE ONLY

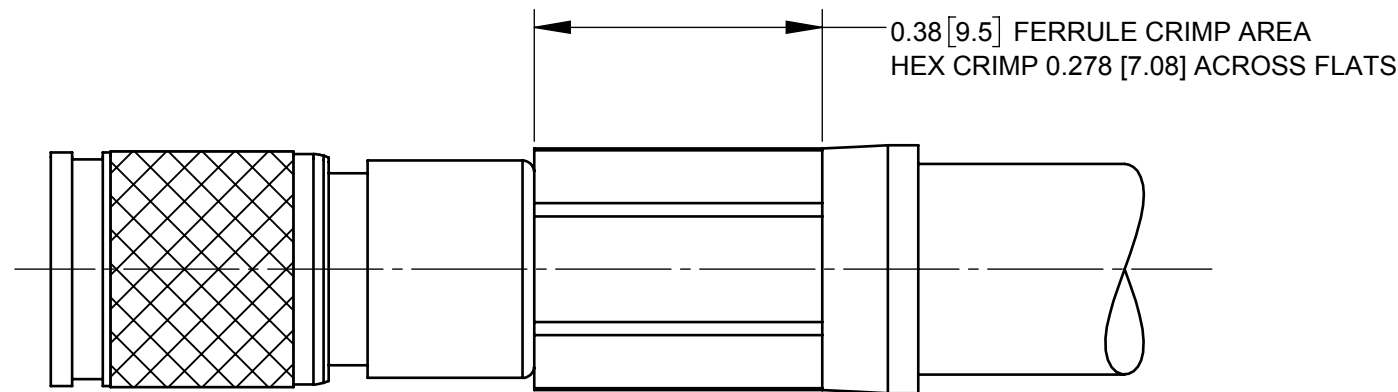

- NOTES:
1. MEETS SMPTE 2082-1  
CHARACTERISTIC IMPEDANCE: 75 OHMS  
CONTACT RESISTANCE: 50 MILLIOHMS MAX.
  2. MATERIAL:  
BODY: COPPER ALLOY, NICKEL PLATED.  
CONTACT PIN: COPPER ALLOY, GOLD PLATED.  
SPRING: BERYLLIUM COPPER, NICKEL PLATED.  
TINE CONTACT: BERYLLIUM COPPER, GOLD PLATED.  
INSULATOR: TEFLON  
FERRULE: COPPER ALLOY, NICKEL PLATED.
  3. THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

					<div>UNLESS OTHERWISE SPECIFIED</div> <div>1. ALL DIMENSIONS IN INCHES [mm]</div> <div>- TWO PLACE DECIMALS    ±0.02 [0.5]</div> <div>- THREE PLACE DECIMALS   ±0.005 [0.13]</div>	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.															
						SIZE	WIDTH		MULT		LBS/M		TEMPER								
						FINISH						MATERIAL									
						SPEC No.						SEE NOTES									
						FIRST USED ON				SCALE		<div>Switchcraft®</div>									
										4:1											
						DATE DRAWN	BY	CHKD		APVD		<div>SHEET   1   OF   1</div>									
						04/05/17	PNK	04/05/17		04/05/17											
							PNK		SRC												
A	28195	08/29/19	PC	TJK																	
REV	ECO NUMBER	DATE	BY	APVD																	
REVISIONS					DO NOT SCALE DRAWING					NAME    UHD DIN 1.0/2.3 PLUG 75 OHMS, 4694R, RoHS					PART No.    UHDDIN94					REV    A	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Switchcraft:](#)

[UHDDIN94](#)