

400W, 6.8V - 200V Surface Mount Transient Voltage Suppressor

FEATURES

- AEC-Q101 qualified
- Ideal for automated placement
- Glass passivated chip junction
- Excellent clamping capability
- Fast response time: Typically less than 1.0ps
- Typical I_R less than $1\mu A$ above 10V
- Meets ISO 7637-2 (Pulse 1/2a/2b/3a/3b)
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

| KEY PARAMETERS | | |
|--|----------------|------|
| PARAMETER | VALUE | UNIT |
| V_{WM} | 5.5 - 171 | V |
| V_{BR} | 6.12 - 210 | V |
| P_{PPM} $t_p = 10/1000\mu s$ waveform | 400 | W |
| $T_{J MAX}$ | 150 | °C |
| Package | DO-214AC (SMA) | |
| Configuration | Single die | |



APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: DO-214AC (SMA)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.060g (approximately)



DO-214AC (SMA)

| ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ unless otherwise noted) | | | |
|--|-----------|-------------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Peak power dissipation at $T_A = 25^\circ C$, $t_p = 1ms$ (Note 1) | P_{PK} | 400 | W |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load | I_{FSM} | 40 | A |
| Maximum instantaneous forward voltage at 25A for unidirectional only | V_F | 3.5 | V |
| Operating junction temperature range | T_J | -55 to +150 | °C |
| Storage temperature range | T_{STG} | -55 to +150 | °C |

Notes:

1. Non-repetitive current pulse per Fig.5 and derated above $T_A = 25^\circ C$ per Fig.2

Devices for Bipolar Applications

1. For bidirectional use CH or CAH suffix for types P4SMA6.8H - types P4SMA200AH
2. Electrical characteristics apply in both directions

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)

| Part number | Marking code | Breakdown voltage V _{BR} @I _T ⁽¹⁾ (V) | | Test current I _T (mA) | Working stand-off voltage V _{WM} (V) | Maximum reverse leakage current I _R @V _{WM} ⁽¹⁾ (μA) | Maximum peak impulse current I _{PPM} (A) t _p = 10/1000 μs | Maximum clamping voltage V _C @I _{PPM} (V) t _p = 10/1000 μs | Maximum Temperature Coefficient of V _{BR} (%/°C) |
|-------------|--------------|--|-------|--|---|---|---|---|---|
| | | Min | Max | | | | | | |
| P4SMA6.8H | ADJ | 6.12 | 7.48 | 10 | 5.50 | 1000 | 38.0 | 10.8 | 0.057 |
| P4SMA6.8AH | AEJ | 6.46 | 7.14 | 10 | 5.80 | 1000 | 40.0 | 10.5 | 0.057 |
| P4SMA7.5H | AFJ | 6.75 | 8.25 | 10 | 6.05 | 500 | 35.0 | 11.7 | 0.061 |
| P4SMA7.5AH | AGJ | 7.13 | 7.88 | 10 | 6.40 | 500 | 37.0 | 11.3 | 0.061 |
| P4SMA8.2H | AHJ | 7.38 | 9.02 | 10 | 6.63 | 200 | 33.0 | 12.5 | 0.065 |
| P4SMA8.2AH | AKJ | 7.79 | 8.61 | 10 | 7.02 | 200 | 34.0 | 12.1 | 0.065 |
| P4SMA9.1H | ALJ | 8.19 | 10.00 | 1.0 | 7.37 | 50 | 30.0 | 13.8 | 0.068 |
| P4SMA9.1AH | AMJ | 8.65 | 9.55 | 1.0 | 7.78 | 50 | 31.0 | 13.4 | 0.068 |
| P4SMA10H | ANJ | 9.00 | 11.00 | 1.0 | 8.10 | 10 | 28.0 | 15.0 | 0.073 |
| P4SMA10AH | APJ | 9.50 | 10.50 | 1.0 | 8.55 | 10 | 29.0 | 14.5 | 0.073 |
| P4SMA11H | AQJ | 9.90 | 12.10 | 1.0 | 8.92 | 1 | 26.0 | 16.2 | 0.075 |
| P4SMA11AH | ARJ | 10.50 | 11.60 | 1.0 | 9.40 | 1 | 27.0 | 15.6 | 0.075 |
| P4SMA12H | ASJ | 10.80 | 13.20 | 1.0 | 9.72 | 1 | 24.0 | 17.3 | 0.078 |
| P4SMA12AH | ATJ | 11.40 | 12.60 | 1.0 | 10.2 | 1 | 25.0 | 16.7 | 0.078 |
| P4SMA13H | AUJ | 11.70 | 14.30 | 1.0 | 10.5 | 1 | 22.0 | 19.0 | 0.081 |
| P4SMA13AH | AVJ | 12.40 | 13.70 | 1.0 | 11.1 | 1 | 23.0 | 18.2 | 0.081 |
| P4SMA15H | AWJ | 13.50 | 16.50 | 1.0 | 12.1 | 1 | 19.0 | 22.0 | 0.084 |
| P4SMA15AH | AXJ | 14.30 | 15.80 | 1.0 | 12.8 | 1 | 20.0 | 21.2 | 0.084 |
| P4SMA16H | AYJ | 14.40 | 17.60 | 1.0 | 12.9 | 1 | 17.8 | 23.5 | 0.086 |
| P4SMA16AH | AZJ | 15.20 | 16.80 | 1.0 | 13.6 | 1 | 18.6 | 22.5 | 0.086 |
| P4SMA18H | BDJ | 16.20 | 19.80 | 1.0 | 14.5 | 1 | 16.0 | 26.5 | 0.088 |
| P4SMA18AH | BEJ | 17.10 | 18.90 | 1.0 | 15.3 | 1 | 16.5 | 25.5 | 0.088 |
| P4SMA20H | BFJ | 18.00 | 22.00 | 1.0 | 16.2 | 1 | 14.0 | 29.1 | 0.090 |
| P4SMA20AH | BGJ | 19.00 | 21.00 | 1.0 | 17.1 | 1 | 15.0 | 27.7 | 0.090 |
| P4SMA22H | BHJ | 19.80 | 24.20 | 1.0 | 17.8 | 1 | 13.0 | 31.9 | 0.092 |
| P4SMA22AH | BKJ | 20.90 | 23.10 | 1.0 | 18.8 | 1 | 13.7 | 30.6 | 0.092 |
| P4SMA24H | BLJ | 21.60 | 26.40 | 1.0 | 19.4 | 1 | 12.0 | 34.7 | 0.094 |
| P4SMA24AH | BMJ | 22.80 | 25.20 | 1.0 | 20.5 | 1 | 12.6 | 33.2 | 0.094 |
| P4SMA27H | BNJ | 24.30 | 29.70 | 1.0 | 21.8 | 1 | 10.7 | 39.1 | 0.096 |
| P4SMA27AH | BPJ | 25.70 | 28.40 | 1.0 | 23.1 | 1 | 11.0 | 37.5 | 0.096 |
| P4SMA30H | BQJ | 27.00 | 33.00 | 1.0 | 24.3 | 1 | 9.6 | 43.5 | 0.097 |
| P4SMA30AH | BRJ | 28.50 | 31.50 | 1.0 | 25.6 | 1 | 10.0 | 41.4 | 0.097 |
| P4SMA33H | BSJ | 29.70 | 36.30 | 1.0 | 26.8 | 1 | 8.8 | 47.7 | 0.098 |
| P4SMA33AH | BTJ | 31.40 | 34.70 | 1.0 | 28.2 | 1 | 9.0 | 45.7 | 0.098 |
| P4SMA36H | BUJ | 32.40 | 39.60 | 1.0 | 29.1 | 1 | 8.0 | 52.0 | 0.099 |
| P4SMA36AH | BVJ | 34.20 | 37.80 | 1.0 | 30.8 | 1 | 8.4 | 49.9 | 0.099 |
| P4SMA39H | BWJ | 35.10 | 42.90 | 1.0 | 31.6 | 1 | 7.4 | 56.4 | 0.100 |
| P4SMA39AH | BXJ | 37.10 | 41.00 | 1.0 | 33.3 | 1 | 7.7 | 53.9 | 0.100 |
| P4SMA43H | BYJ | 38.70 | 47.30 | 1.0 | 34.8 | 1 | 6.7 | 61.9 | 0.101 |
| P4SMA43AH | BZJ | 40.90 | 45.20 | 1.0 | 36.8 | 1 | 7.0 | 59.3 | 0.101 |
| P4SMA47H | CDJ | 42.30 | 51.70 | 1.0 | 38.1 | 1 | 6.2 | 67.8 | 0.101 |
| P4SMA47AH | CEJ | 44.70 | 49.40 | 1.0 | 40.2 | 1 | 6.4 | 64.8 | 0.101 |
| P4SMA51H | CFJ | 45.90 | 56.10 | 1.0 | 41.3 | 1 | 5.7 | 73.5 | 0.102 |
| P4SMA51AH | CGJ | 48.50 | 53.60 | 1.0 | 43.6 | 1 | 6.0 | 70.1 | 0.102 |
| P4SMA56H | CHJ | 50.40 | 61.60 | 1.0 | 45.4 | 1 | 5.2 | 80.5 | 0.103 |
| P4SMA56AH | CKJ | 53.20 | 58.80 | 1.0 | 47.8 | 1 | 5.4 | 77.0 | 0.103 |
| P4SMA62H | CLJ | 55.8 | 68.2 | 1.0 | 50.2 | 1 | 4.7 | 89.0 | 0.104 |
| P4SMA62AH | CMJ | 58.9 | 65.1 | 1.0 | 53.0 | 1 | 5.0 | 85.0 | 0.104 |

ELECTRICAL SPECIFICATIONS (T_A = 25°C unless otherwise noted)

| Part number | Marking code | Breakdown voltage V _{BR} @I _T ⁽¹⁾ (V) | | Test current I _T (mA) | Working stand-off voltage V _{WM} (V) | Maximum reverse leakage current I _R @V _{WM} ⁽¹⁾ (μA) | Maximum peak impulse current I _{PPM} (A) t _p = 10/1000 μs | Maximum clamping voltage V _C @I _{PPM} (V) t _p = 10/1000 μs | Maximum Temperature Coefficient of V _{BR} (%/°C) |
|-------------|--------------|--|------|--|---|---|---|---|---|
| | | Min | Max | | | | | | |
| P4SMA68H | CNJ | 61.2 | 74.8 | 1.0 | 55.1 | 1 | 4.2 | 98.0 | 0.104 |
| P4SMA68AH | CPJ | 64.6 | 71.4 | 1.0 | 58.1 | 1 | 4.5 | 92.0 | 0.104 |
| P4SMA75H | CQJ | 67.5 | 82.5 | 1.0 | 60.7 | 1 | 3.8 | 108 | 0.105 |
| P4SMA75AH | CRJ | 71.3 | 78.8 | 1.0 | 64.1 | 1 | 4.0 | 103 | 0.105 |
| P4SMA82H | CSJ | 73.8 | 90.2 | 1.0 | 66.4 | 1 | 3.5 | 118 | 0.105 |
| P4SMA82AH | CTJ | 77.9 | 86.1 | 1.0 | 70.1 | 1 | 3.7 | 113 | 0.105 |
| P4SMA91H | CUJ | 81.9 | 100 | 1.0 | 73.7 | 1 | 3.2 | 131 | 0.106 |
| P4SMA91AH | CVJ | 86.5 | 95.5 | 1.0 | 77.8 | 1 | 3.3 | 125 | 0.106 |
| P4SMA100H | CWJ | 90 | 110 | 1.0 | 81.0 | 1 | 2.9 | 144 | 0.106 |
| P4SMA100AH | CXJ | 95 | 105 | 1.0 | 85.5 | 1 | 3.0 | 137 | 0.106 |
| P4SMA110H | CYJ | 99 | 121 | 1.0 | 89.2 | 1 | 2.6 | 158 | 0.107 |
| P4SMA110AH | CZJ | 105 | 116 | 1.0 | 94.0 | 1 | 2.7 | 152 | 0.107 |
| P4SMA120H | RDJ | 108 | 132 | 1.0 | 97.2 | 1 | 2.4 | 173 | 0.107 |
| P4SMA120AH | REJ | 114 | 126 | 1.0 | 102 | 1 | 2.5 | 165 | 0.107 |
| P4SMA130H | RFJ | 117 | 143 | 1.0 | 105 | 1 | 2.2 | 187 | 0.107 |
| P4SMA130AH | RGJ | 124 | 137 | 1.0 | 111 | 1 | 2.3 | 179 | 0.107 |
| P4SMA150H | RHJ | 135 | 165 | 1.0 | 121 | 1 | 1.9 | 215 | 0.108 |
| P4SMA150AH | RKJ | 143 | 158 | 1.0 | 128 | 1 | 2.0 | 207 | 0.108 |
| P4SMA160H | RLJ | 144 | 176 | 1.0 | 130 | 1 | 1.8 | 230 | 0.108 |
| P4SMA160AH | RMJ | 152 | 168 | 1.0 | 136 | 1 | 1.9 | 219 | 0.108 |
| P4SMA170H | RNJ | 153 | 187 | 1.0 | 138 | 1 | 1.7 | 244 | 0.108 |
| P4SMA170AH | RPJ | 162 | 179 | 1.0 | 145 | 1 | 1.8 | 234 | 0.108 |
| P4SMA180H | RQJ | 162 | 198 | 1.0 | 146 | 1 | 1.6 | 258 | 0.108 |
| P4SMA180AH | RRJ | 171 | 189 | 1.0 | 154 | 1 | 1.7 | 246 | 0.108 |
| P4SMA200H | RSJ | 180 | 220 | 1.0 | 162 | 1 | 1.4 | 287 | 0.108 |
| P4SMA200AH | RTJ | 190 | 210 | 1.0 | 171 | 1 | 1.51 | 274 | 0.108 |

Notes:

1. V_{BR} measure after I_T applied for 300μs, I_T = square wave pulse or equivalent.
2. Surge current waveform per Figure.5 and derate per Figure.2.
3. For bipolar types having V_{WM} of 10 volts and under, the I_D limit is doubled.
4. For bidirectional use CH or CAH suffix for types PS4MA6.8H through P4SMA200AH.
5. All terms and symbols are consistent with ANSI/IEEE C62.35.

ORDERING INFORMATION

| ORDERING CODE ⁽¹⁾ | PACKAGE | PACKING |
|------------------------------|----------------|---------------------|
| P4SMAxH | DO-214AC (SMA) | 7,500 / Tape & Reel |

Notes:

1. "x" defines voltage from 6.8V(P4SMA6.8H) to 200V(P4SMA200AH)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Peak Pulse Power Rating Curve

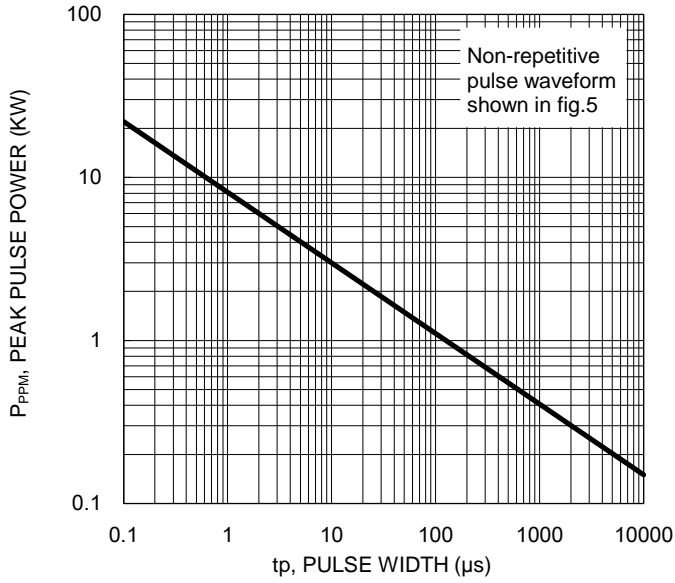


Fig.2 Pulse Derating Curve

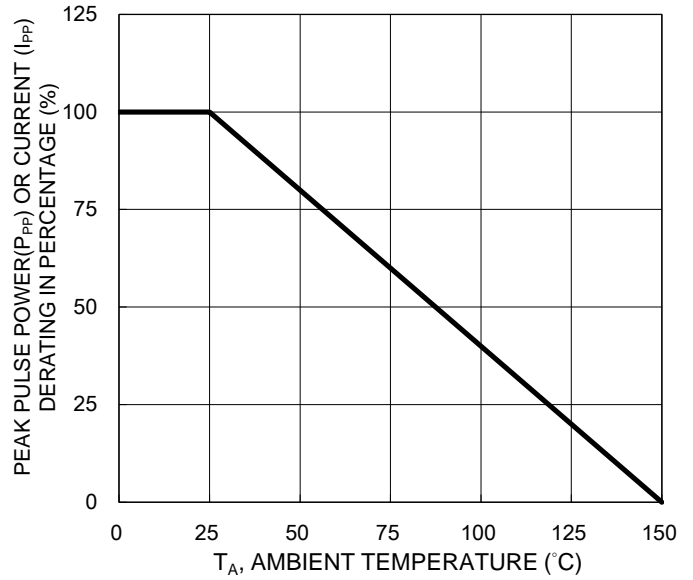


Fig.3 Typical Junction Capacitance


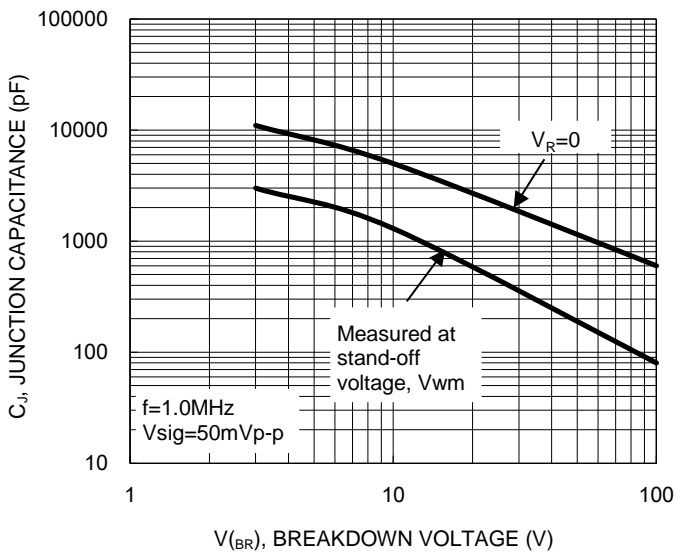



Fig.4 Maximum Non-repetitive Forward Surge Current

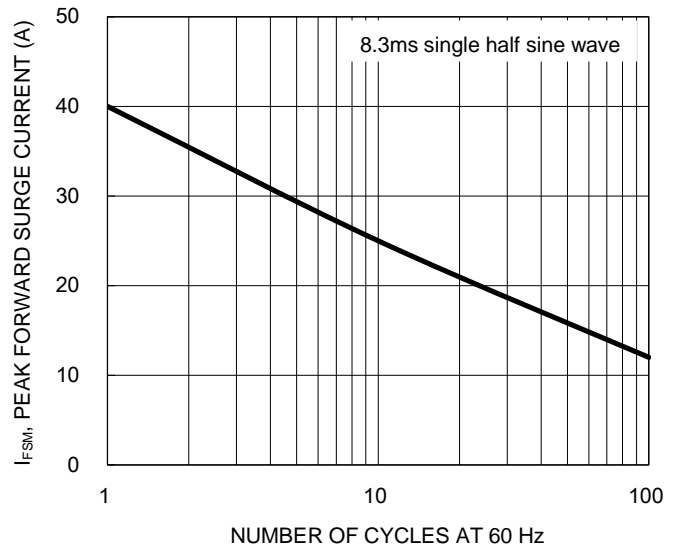

CHARACTERISTICS CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Clamping Power Pulse Waveform

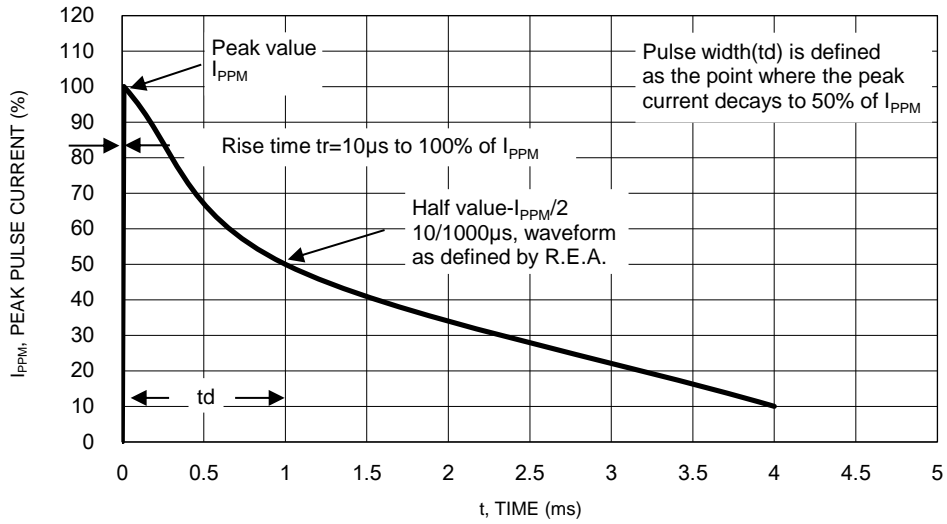


PACKAGE OUTLINE DIMENSIONS

DO-214AC (SMA)

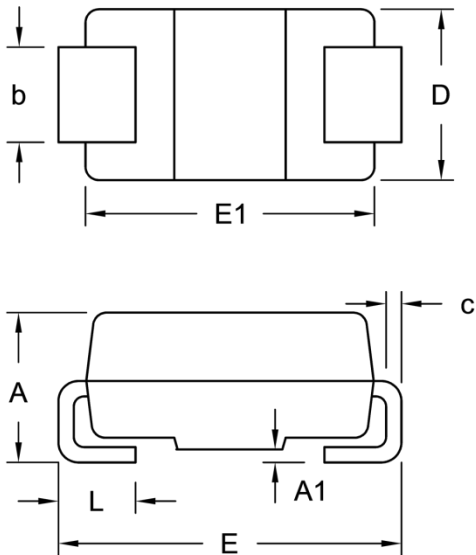

| DIM. | Unit (mm) | | Unit (inch) | |
|------|-----------|------|-------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.99 | 2.50 | 0.078 | 0.098 |
| A1 | 0.10 | 0.20 | 0.004 | 0.008 |
| b | 1.27 | 1.58 | 0.050 | 0.062 |
| c | 0.15 | 0.31 | 0.006 | 0.012 |
| D | 2.29 | 2.83 | 0.090 | 0.111 |
| E | 4.95 | 5.33 | 0.195 | 0.210 |
| E1 | 4.06 | 4.60 | 0.160 | 0.181 |
| L | 0.90 | 1.41 | 0.035 | 0.056 |

SUGGESTED PAD LAYOUT

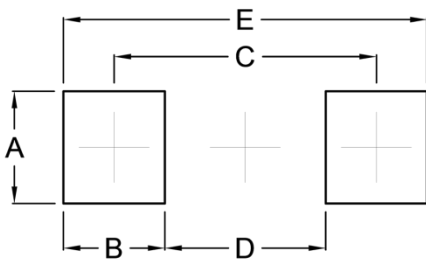

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 1.68 | 0.066 |
| B | 1.52 | 0.060 |
| C | 3.93 | 0.155 |
| D | 2.41 | 0.095 |
| E | 5.45 | 0.215 |

MARKING DIAGRAM



Cathode band for uni-directional products only

- P/N = Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[P4SMA100CHM2G](#) [P4SMA100HM2G](#) [P4SMA91HM2G](#) [P4SMA82CHM2G](#) [P4SMA82HM2G](#) [P4SMA91CHM2G](#)
[P4SMA68HM2G](#) [P4SMA75CHM2G](#) [P4SMA75HM2G](#) [P4SMA62CHM2G](#) [P4SMA62HM2G](#) [P4SMA68CHM2G](#)
[P4SMA51HM2G](#) [P4SMA56CHM2G](#) [P4SMA56HM2G](#) [P4SMA47CHM2G](#) [P4SMA47HM2G](#) [P4SMA51CHM2G](#)
[P4SMA39HM2G](#) [P4SMA43CHM2G](#) [P4SMA43HM2G](#) [P4SMA36CHM2G](#) [P4SMA36HM2G](#) [P4SMA39CHM2G](#)
[P4SMA30HM2G](#) [P4SMA33CHM2G](#) [P4SMA33HM2G](#) [P4SMA27CHM2G](#) [P4SMA27HM2G](#) [P4SMA30CHM2G](#)
[P4SMA22HM2G](#) [P4SMA24CHM2G](#) [P4SMA24HM2G](#) [P4SMA20CHM2G](#) [P4SMA20HM2G](#) [P4SMA22CHM2G](#)
[P4SMA18HM2G](#) [P4SMA200CHM2G](#) [P4SMA200HM2G](#) [P4SMA180CHM2G](#) [P4SMA180HM2G](#) [P4SMA18CHM2G](#)
[P4SMA16HM2G](#) [P4SMA170CHM2G](#) [P4SMA170HM2G](#) [P4SMA160CHM2G](#) [P4SMA160HM2G](#) [P4SMA16CHM2G](#)
[P4SMA150CHM2G](#) [P4SMA150HM2G](#) [P4SMA15CHM2G](#) [P4SMA15HM2G](#) [P4SMA13CHM2G](#) [P4SMA13HM2G](#)
[P4SMA12HM2G](#) [P4SMA130CHM2G](#) [P4SMA130HM2G](#) [P4SMA120CHM2G](#) [P4SMA120HM2G](#) [P4SMA12CHM2G](#)
[P4SMA110CHM2G](#) [P4SMA110HM2G](#) [P4SMA11CHM2G](#) [P4SMA11HM2G](#) [P4SMA10CHM2G](#) [P4SMA10HM2G](#)