

10A, 200 - 600V Isolated Glass Passivated Super Fast Rectifier

FEATURES

- High efficiency
- High current capability
- High reliability
- High surge current capability
- Low power loss
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

KEY PARAMETERS


PARAMETER	VALUE	UNIT
$I_{F(AV)}$	2 x 5	A
V_{RRM}	200 - 600	V
$T_{J\ MAX}$	150	°C
Package	ITO-220AB	
Configuration	Dual Die	

APPLICATIONS


- High frequency rectification
- Freewheeling application
- Switching mode converters and inverters in computer, automotive and telecommunication.

MECHANICAL DATA

- Case: ITO-220AB
- Molding compound meets UL 94V-0 flammability rating
- Packing code with suffix "G" means green compound (halogen-free)
- Part no. with suffix "H" means AEC-Q101 qualified
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Mounting torque: 0.56 N-m maximum
- Weight: 1.77 g (approximately)



ITO-220AB



ABSOLUTE MAXIMUM RATINGS (T _A = 25°C unless otherwise noted)							
PARAMETER		SYMBOL	SFF10L 04G	SFF10L 05G	SFF10L 06G	SFF10L 08G	UNIT
Marking code on the device			SFF10L04G	SFF10L05G	SFF10L06G	SFF10L08G	
Repetitive peak reverse voltage		V _{RRM}	200	300	400	600	V
Reverse voltage, total rms value		V _{R(RMS)}	140	280	280	420	V
Forward current	Per device	I _{F(AV)}	10				A
	Per diode		5				
Surge peak forward current, 8.3 ms single half sine-wave superimposed on rated load per diode		I _{FSM}	125		80		A
Junction temperature		T _J	- 55 to +150				°C
Storage temperature		T _{STG}	- 55 to +150				°C

THERMAL PERFORMANCE

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-lead thermal resistance	$R_{\theta JL}$	2	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	9	°C/W
Junction-to-case thermal resistance	$R_{\theta JC}$	3	°C/W

Thermal Performance Note: Units mounted on recommended PCB (2"x3"x0.25" Al -plate)

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode ⁽¹⁾	SFF10L04G	I _F = 5A, T _J = 25°C	V _F	0.94	0.98	V
		I _F = 5A, T _J = 125°C		0.82	0.90	V
	SFF10L05G	I _F = 5A, T _J = 25°C		1.04	1.30	V
		I _F = 5A, T _J = 125°C		0.89	0.96	V
	SFF10L06G	I _F = 5A, T _J = 25°C		1.05	1.30	V
		I _F = 5A, T _J = 125°C		0.92	1.00	V
	SFF10L08G	I _F = 5A, T _J = 25°C		1.21	1.70	V
		I _F = 5A, T _J = 125°C		1.04	1.20	V
Reverse current @ rated V _R per diode ⁽²⁾		T _J = 25°C	I _R	-	10	μA
		T _J = 125°C		-	400	μA
Junction capacitance	SFF10L04G	1 MHz, V _R =4.0V	C _J	60	-	pF
	SFF10L05G			50	-	pF
	SFF10L06G					pF
	SFF10L08G					pF
Reverse recovery time	SFF10L04G	I _F =0.5A , I _R =1.0A I _{RR} =0.25A	t _{rr}	-	35	ns
	SFF10L05G					
	SFF10L06G					
	SFF10L08G					

Notes:

1. Pulse test with $PW=0.3\text{ ms}$
2. Pulse test with $PW=30\text{ ms}$

ORDERING INFORMATION

PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
SFF10L0XG (Note 1, 2)	H	C0	G	ITO-220AB	50 / Tube

Notes:

1. "x" defines voltage from 200V (SFF10L04G) to 600V (SFF10L08G)
2. Whole series with green compound (halogen-free)

EXAMPLE P/N

EXAMPLE P/N	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
SFF10L04GHC0G	SFF10L04G	H	C0	G	AEC-Q101 qualified Green compound

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

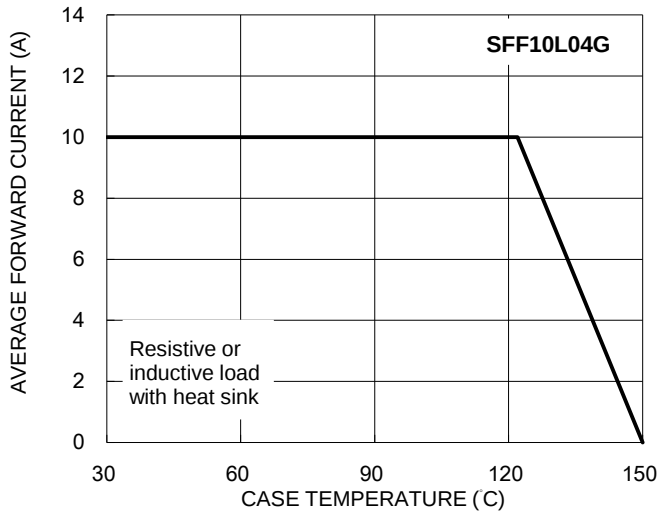


Fig2. Typical Junction Capacitance

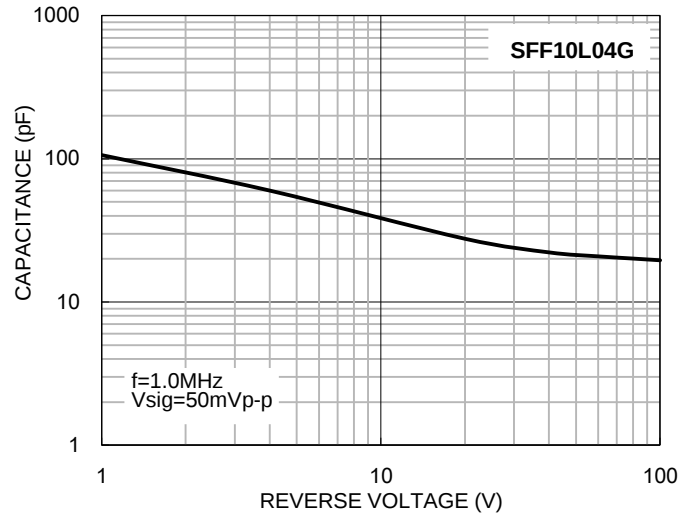


Fig3. Typical Reverse Characteristics


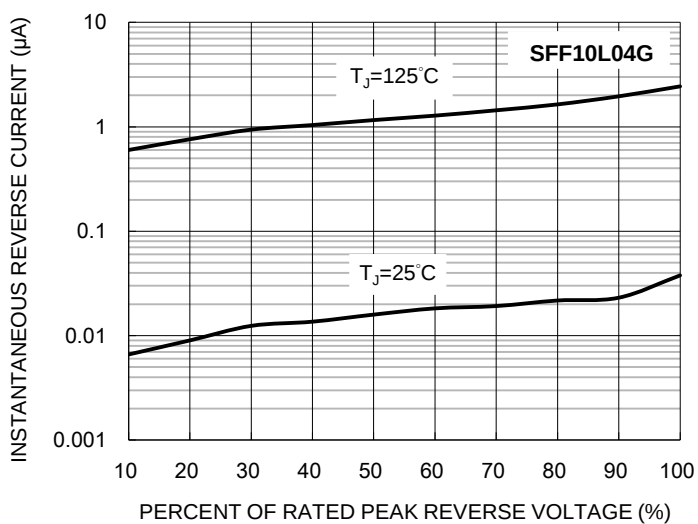


Fig4. Typical Forward Characteristics

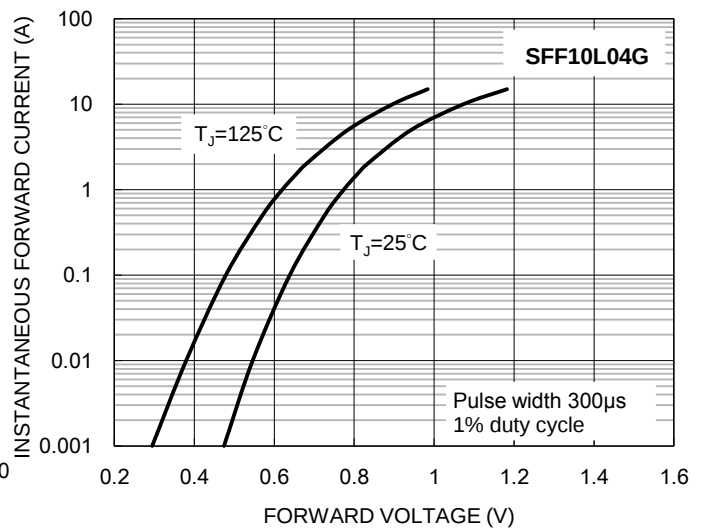

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

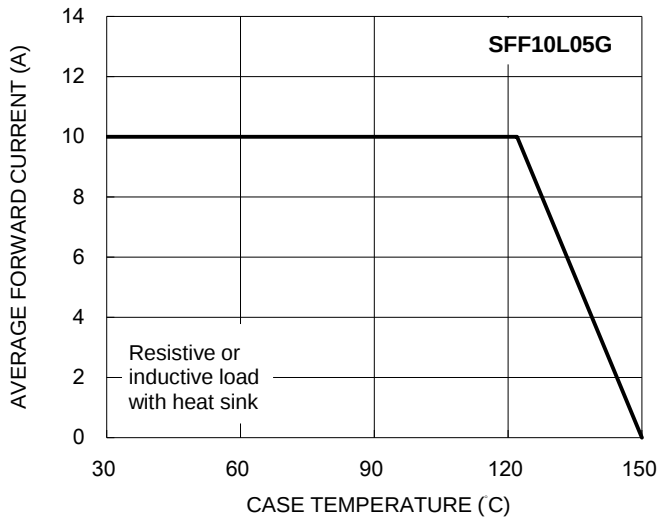


Fig2. Typical Junction Capacitance

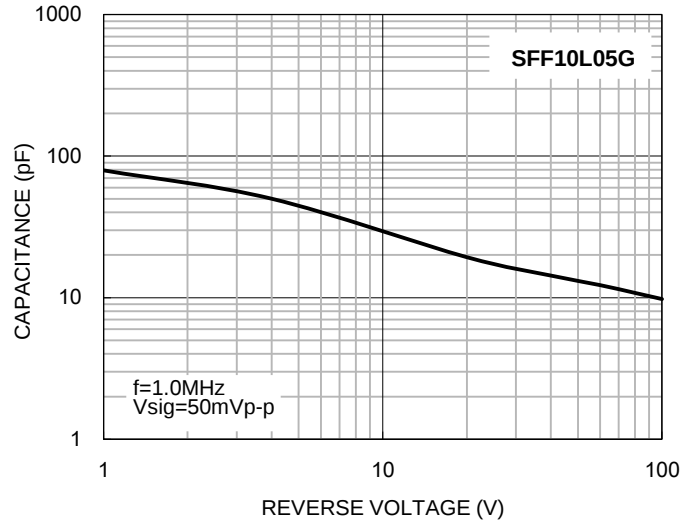


Fig3. Typical Reverse Characteristics


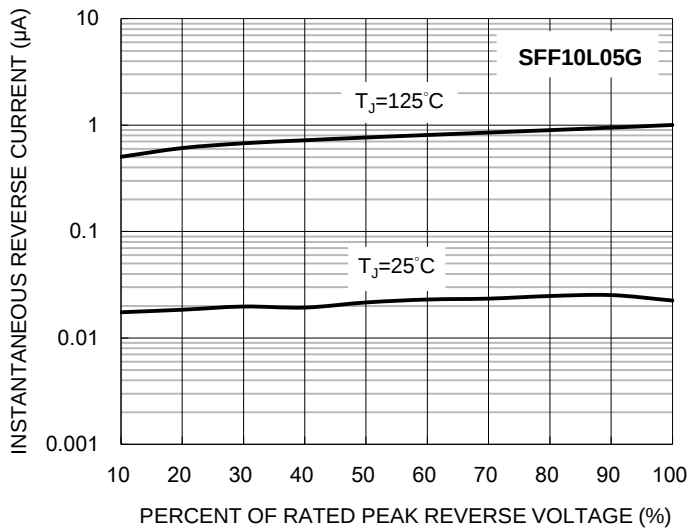


Fig4. Typical Forward Characteristics

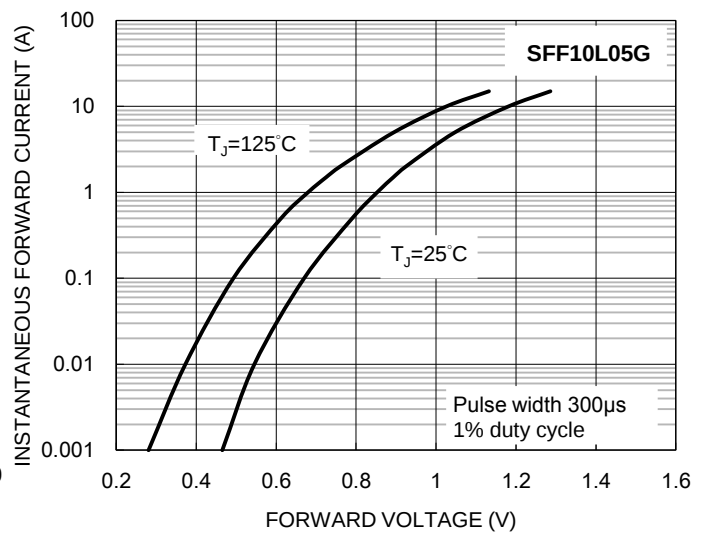

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

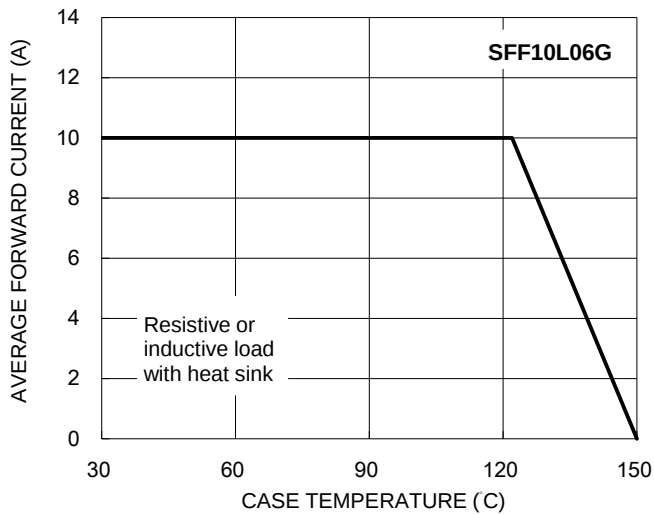


Fig2. Typical Junction Capacitance

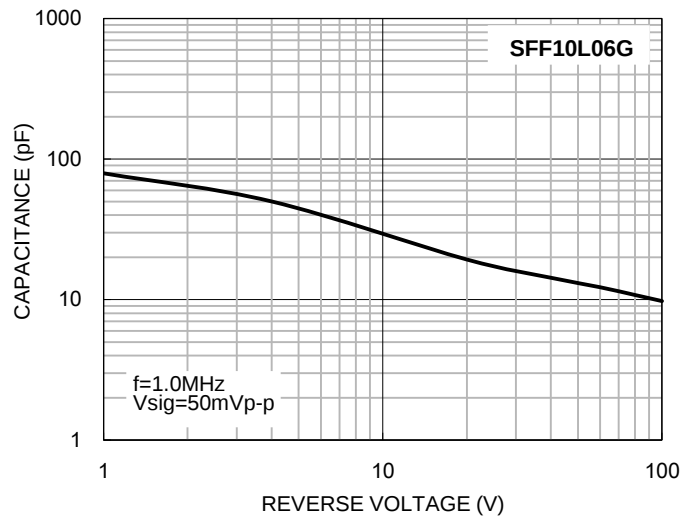


Fig3. Typical Reverse Characteristics


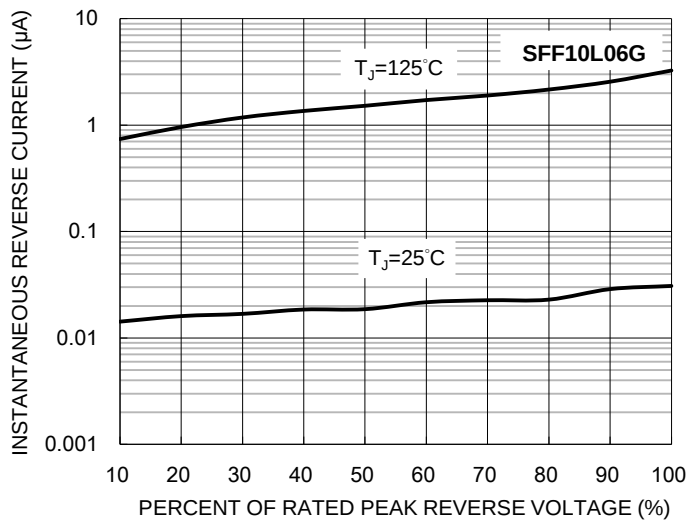


Fig4. Typical Forward Characteristics

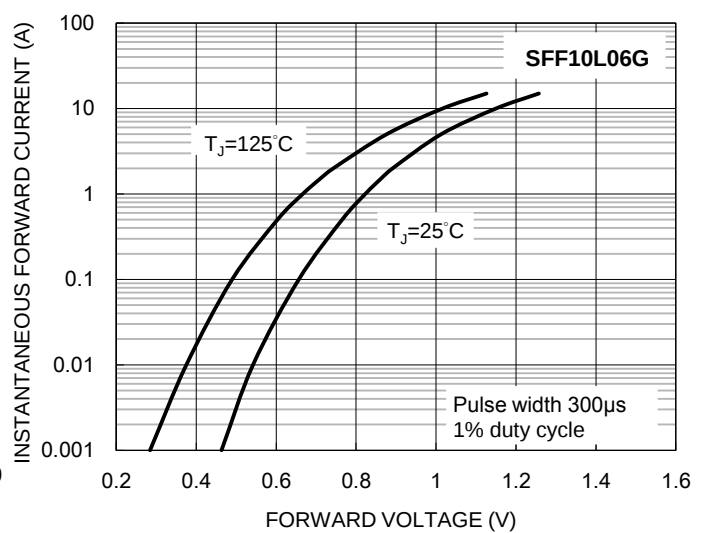

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig1. Forward Current Derating Curve

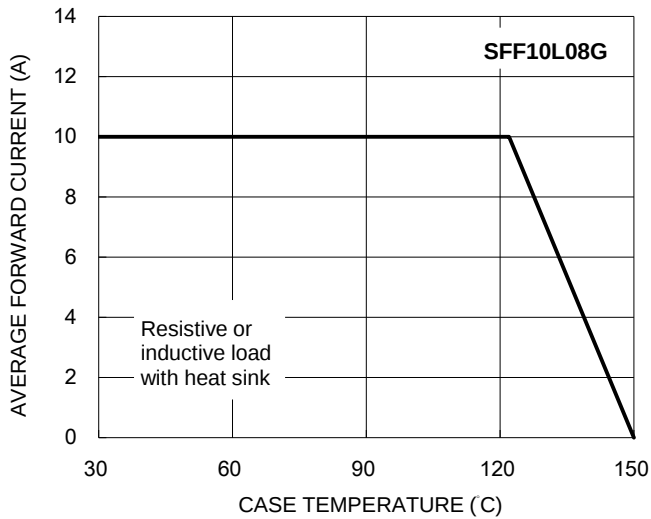


Fig2. Typical Junction Capacitance

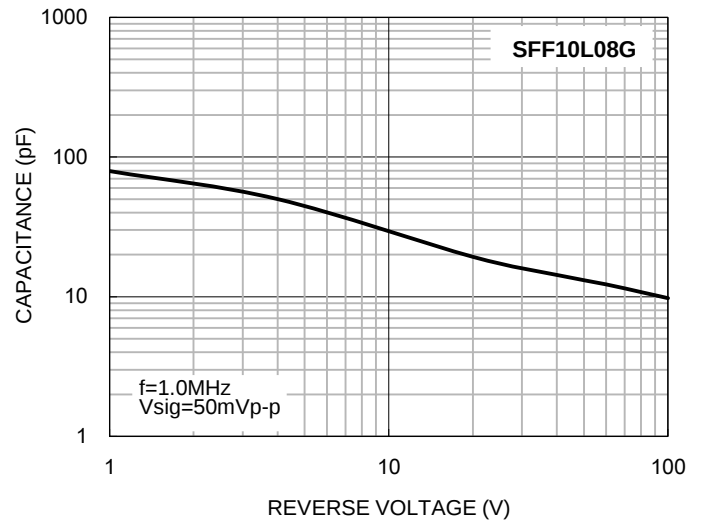


Fig3. Typical Reverse Characteristics



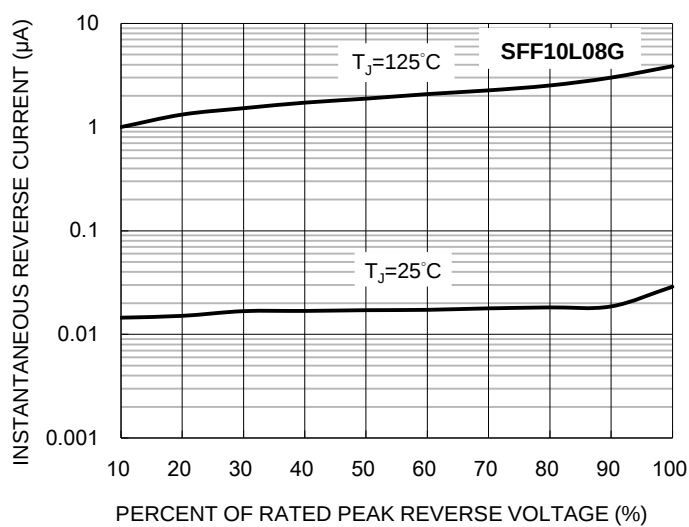


Fig4. Typical Forward Characteristics

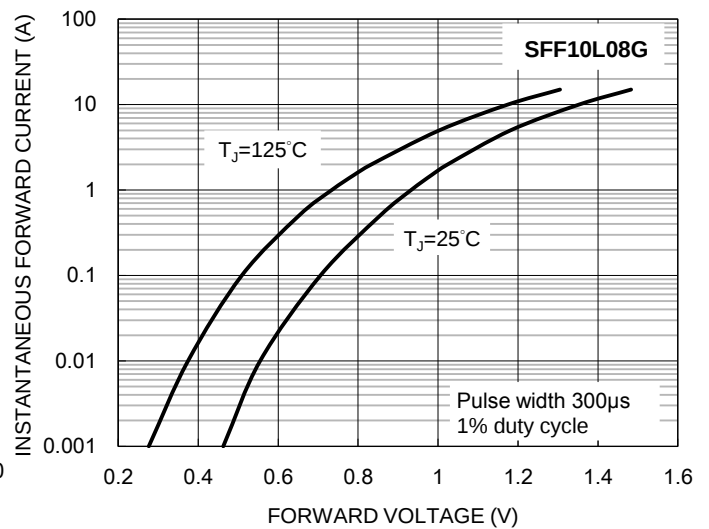

PACKAGE OUTLINE DIMENSIONS

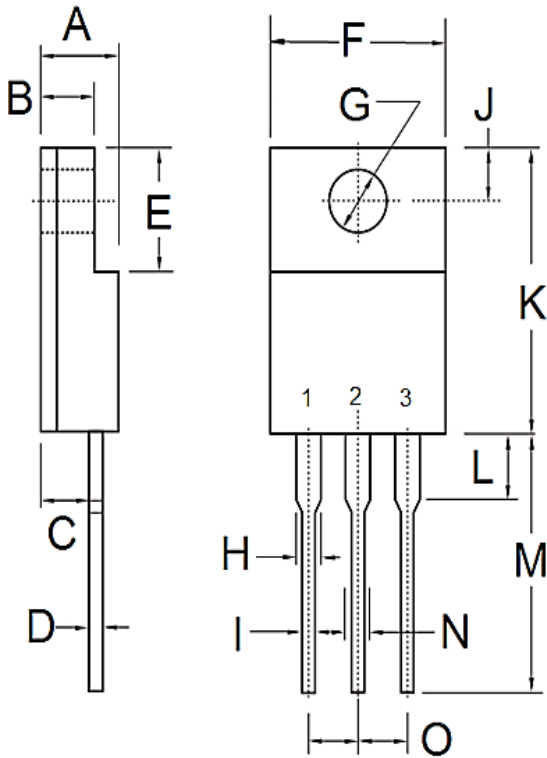

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.16	0.098	0.124
C	2.30	2.96	0.091	0.117
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	0.95	1.45	0.037	0.057
I	0.50	0.90	0.020	0.035
J	2.40	3.20	0.094	0.126
K	14.80	15.50	0.583	0.610
L	-	4.10	-	0.161
M	12.60	13.80	0.496	0.543
N	-	1.80	-	0.071
O	2.41	2.67	0.095	0.105

MARKING DIAGRAM



P/N = Marking Code
 G = Green Compound
 YWW = Date Code
 F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[SFF10L05GHC0G](#) [SFF10L06G C0G](#) [SFF10L06GHC0G](#) [SFF10L08G C0G](#) [SFF10L08GHC0G](#) [SFF10L04G C0G](#)
[SFF10L04GHC0G](#) [SFF10L05G C0G](#) [SFF10L04G](#) [SFF10L05G](#) [SFF10L06G](#) [SFF10L08G](#) [SFF10L04GH](#)
[SFF10L05GH](#) [SFF10L06GH](#) [SFF10L08GH](#)