

## 1000W, 9V - 40V Surface Mount Transient Voltage Suppressor

### FEATURES

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Excellent clamping capability
- Fast response time: Typically less than 1.0ps
- Meets ISO 7637-2 (Pulse 1/2a/2b/3a/3b)
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### KEY PARAMETERS

PARAMETER	VALUE	UNIT
$V_{WM}$	9 - 40	V
$V_{BR}$	10.0 - 49.1	V
$P_{PK}$	1,000	W
$T_{J\ MAX}$	175	°C
Package	DO-214AA (SMB)	
Configuration	Single die	

### APPLICATIONS

- Protect sensitive circuit from damage by high voltage transients
- Lighting, ESD transient voltage protection of IC, system
- Inductive switching load protection of IC, system
- Electrical Fast Transient Immunity protection of IC, system



DO-214AA (SMB)

### MECHANICAL DATA

- Case: DO-214AA (SMB)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.110g (approximately)

### ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Peak power dissipation at $T_A = 25^\circ\text{C}$ , $t_p = 1\text{ms}^{(1)}$	$P_{PK}$	1,000	W
Steady state power dissipation	$P_D$	5	W
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	100	A
Forward Voltage @ $I_F = 50\text{A}$ for Uni-directional only	$V_F$	3.5	V
Junction temperature	$T_J$	-55 to +175	°C
Storage temperature	$T_{STG}$	-55 to +175	°C

#### Note:

1. Non-repetitive current pulse per Fig.3 and derated above  $T_A = 25^\circ\text{C}$  per Fig.2

Devices for Bipolar Applications

1. For bidirectional use CA suffix

<b>THERMAL PERFORMANCE</b>			
<b>PARAMETER</b>	<b>SYMBOL</b>	<b>TYP</b>	<b>UNIT</b>
Junction-to-lead thermal resistance	$R_{\theta JL}$	20	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	100	°C/W

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)										
Device		Device Marking Code		Breakdown Voltage @ $I_T$		Test Current $I_T$ (mA)	Stand-Off Voltage $V_{WM}$ (V)	Maximum Reverse Leakage @ $V_{WM}$ $I_D$ ( $\mu\text{A}$ )	Maximum Peak Pulse Current $I_{PPM}$ (A)	Maximum clamping voltage @ $I_{PPM}$ $V_C$ (V)
				$V_{BR}$ (V)	Min					
UNI	BI	UNI	BI	Min	Max					
SMB10J9.0A	SMB10J9.0CA	1KV	KVC	10.0	11.1	1	9	10	64.9	15.4
SMB10J10A	SMB10J10CA	1KX	KXC	11.1	12.3	1	10	8	58.8	17.0
SMB10J11A	SMB10J11CA	1KZ	KZC	12.2	13.5	1	11	5	54.9	18.2
SMB10J12A	SMB10J12CA	1LE	LEC	13.3	14.7	1	12	5	50.3	19.9
SMB10J13A	SMB10J13CA	1LG	LGC	14.4	15.9	1	13	5	46.5	21.5
SMB10J14A	SMB10J14CA	1LK	LKC	15.6	17.2	1	14	5	43.1	23.2
SMB10J15A	SMB10J15CA	1LM	LMC	16.7	18.5	1	15	1	41.0	24.4
SMB10J16A	SMB10J16CA	1LP	LPC	17.8	19.7	1	16	1	38.5	26.0
SMB10J17A	SMB10J17CA	1LR	LRC	18.9	20.9	1	17	1	36.2	27.6
SMB10J18A	SMB10J18CA	1LT	LTC	20.0	22.1	1	18	1	34.2	29.2
SMB10J20A	SMB10J20CA	1LV	LVC	22.2	24.5	1	20	1	30.9	32.4
SMB10J22A	SMB10J22CA	1LX	LXC	24.4	26.9	1	22	1	28.2	35.5
SMB10J24A	SMB10J24CA	1LZ	LZC	26.7	29.5	1	24	1	25.7	38.9
SMB10J26A	SMB10J26CA	1ME	MEC	28.9	31.9	1	26	1	23.8	42.1
SMB10J28A	SMB10J28CA	1MG	MGC	31.1	34.4	1	28	1	22.0	45.4
SMB10J30A	SMB10J30CA	1MK	MKC	33.3	36.8	1	30	1	20.7	48.4
SMB10J33A	SMB10J33CA	1MM	MMC	36.7	40.6	1	33	1	18.8	53.3
SMB10J36A	SMB10J36CA	1MP	MPC	40.0	44.2	1	36	1	17.2	58.1
SMB10J40A	SMB10J40CA	1MR	MRC	44.4	49.1	1	40	1	15.5	64.5

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE<sup>(1)</sup></b>	<b>PACKAGE</b>	<b>PACKING</b>
SMB10Jx	DO-214AA (SMB)	3,000 / Tape & Reel


**Notes:**

- "x" defines voltage from 9V(SMB10J9.0A) to 40V(SMB10J40CA)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Peak Pulse Power Rating Curve**

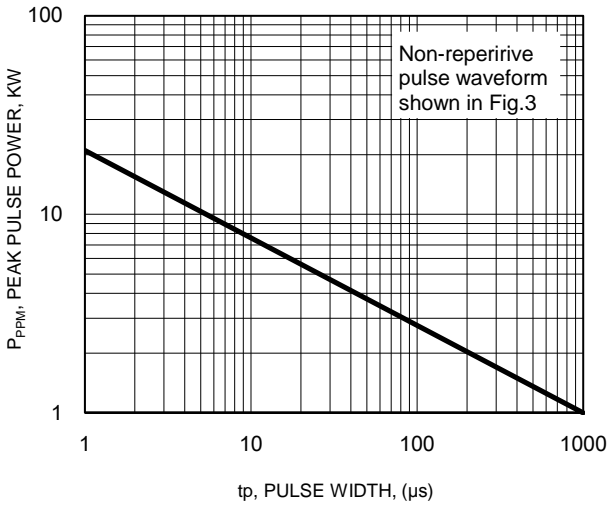


**Fig.2 Pulse Derating Curve**

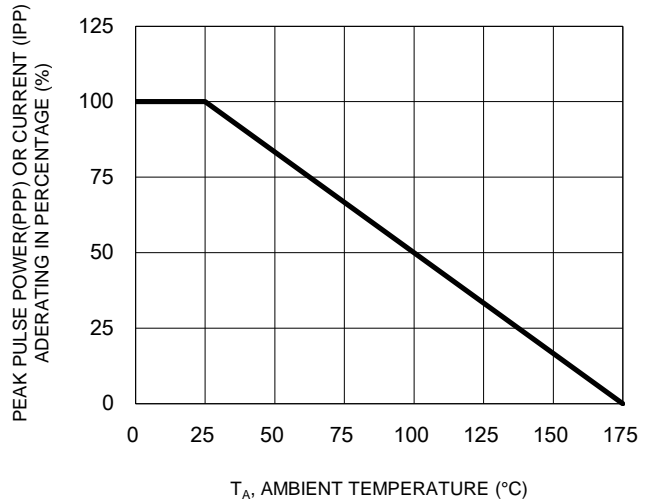

**Fig.3 Clamping Power Pulse Waveform**

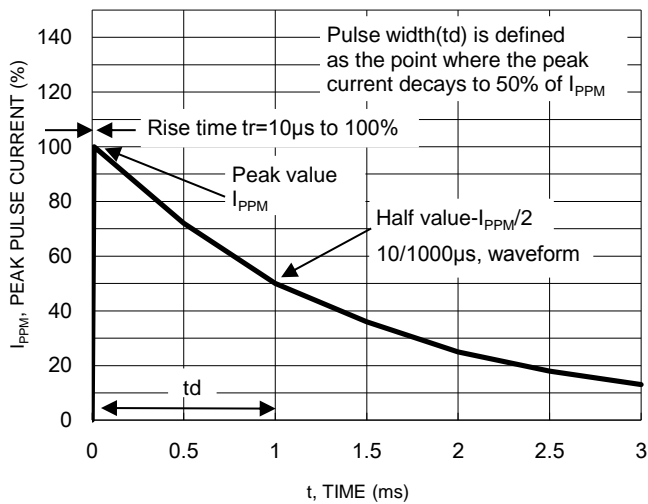


**Fig.4 Maximum Non-Repetitive Forward Surge Current Unidirectional Only**

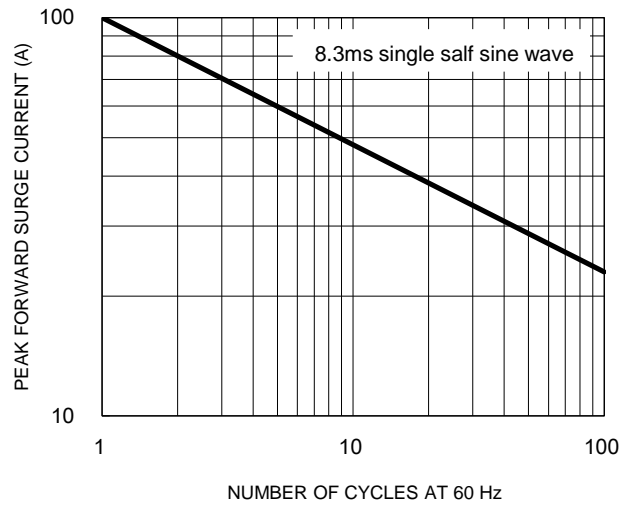


**PACKAGE OUTLINE DIMENSIONS**

DO-214AA (SMB)

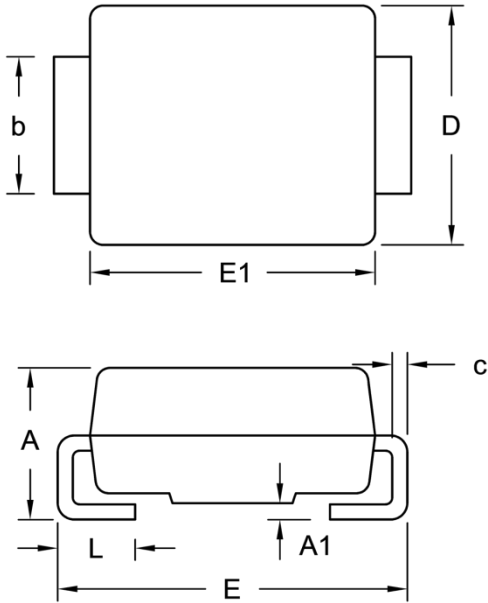

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	1.95	2.65	0.077	0.104
A1	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.31	0.006	0.012
D	3.30	3.95	0.130	0.156
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
L	0.75	1.60	0.030	0.063

**SUGGESTED PAD LAYOUT**

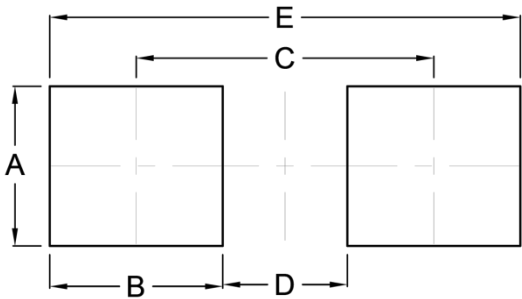

Symbol	Unit (mm)	Unit (inch)
A	2.30	0.091
B	2.50	0.098
C	4.30	0.169
D	1.80	0.071
E	6.80	0.268

**MARKING DIAGRAM**



- P/N = Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

Cathode band for uni-directional products only

## **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Taiwan Semiconductor:

[SMB10J10A R5G](#) [SMB10J15CA R5G](#) [SMB10J40CA R4G](#) [SMB10J40CA R5G](#) [SMB10J13A R5G](#) [SMB10J12CA R5G](#) [SMB10J14A R4G](#) [SMB10J14CA R4G](#) [SMB10J24A R5G](#) [SMB10J13A R4G](#) [SMB10J22A R5G](#) [SMB10J28A R5G](#) [SMB10J26CA R5G](#) [SMB10J17CAHR5HG](#) [SMB10J13CA R5G](#) [SMB10J26CA R4G](#) [SMB10J14A R5G](#) [SMB10J40A R4G](#) [SMB10J33A R5G](#) [SMB10J17CA R4G](#) [SMB10J28CA R5G](#) [SMB10J24A R4G](#) [SMB10J12A R4G](#) [SMB10J11CA R5G](#) [SMB10J17A R4G](#) [SMB10J40A R5G](#) [SMB10J12A R5G](#) [SMB10J33CA R4G](#) [SMB10J30CA R4G](#) [SMB10J26A R5G](#) [SMB10J28A R4G](#) [SMB10J18A R5G](#) [SMB10J11CA R4G](#) [SMB10J18A R4G](#) [SMB10J18CA R5G](#) [SMB10J30CA R5G](#) [SMB10J30A R4G](#) [SMB10J26A R4G](#) [SMB10J9.0A R4G](#) [SMB10J11A R4G](#) [SMB10J12CA R4G](#) [SMB10J14CA R5G](#) [SMB10J16A R5G](#) [SMB10J33CA R5G](#) [SMB10J30A R5G](#) [SMB10J20CA R5G](#) [SMB10J16CA R5G](#) [SMB10J17CA R5G](#) [SMB10J22CA R4G](#) [SMB10J36CA R4G](#) [SMB10J24CA R5G](#) [SMB10J11A R5G](#) [SMB10J18CA R4G](#) [SMB10J9.0CA R4G](#) [SMB10J9.0A R5G](#) [SMB10J15CA R4G](#) [SMB10J15A R5G](#) [SMB10J16CA R4G](#) [SMB10J17A R5G](#) [SMB10J33A R4G](#) [SMB10J15A R4G](#) [SMB10J36A R5G](#) [SMB10J10A R4G](#) [SMB10J22CA R5G](#) [SMB10J9.0CA R5G](#) [SMB10J20A R5G](#) [SMB10J20CA R4G](#) [SMB10J20A R4G](#) [SMB10J10CA R5G](#) [SMB10J13CA R4G](#) [SMB10J28CA R4G](#) [SMB10J16A R4G](#) [SMB10J36CA R5G](#) [SMB10J10CA R4G](#) [SMB10J36A R4G](#) [SMB10J24CA R4G](#) [SMB10J22A R4G](#) [SMB10J17CA M4G](#) [SMB10J18A M4G](#) [SMB10J18CA M4G](#) [SMB10J20A M4G](#) [SMB10J14A M4G](#) [SMB10J10A M4G](#) [SMB10J10CA M4G](#) [SMB10J11A M4G](#) [SMB10J11CA M4G](#) [SMB10J12A M4G](#) [SMB10J12CA M4G](#) [SMB10J13A M4G](#) [SMB10J13CA M4G](#) [SMB10J14CA M4G](#) [SMB10J15A M4G](#) [SMB10J15CA M4G](#) [SMB10J16A M4G](#) [SMB10J16CA M4G](#) [SMB10J17A M4G](#) [SMB10J20CA M4G](#) [SMB10J22A M4G](#) [SMB10J22CA M4G](#) [SMB10J24A M4G](#)