

## 3000W, 10V - 100V Surface Mount Transient Voltage Suppressor

### FEATURES

- Ideal for automated placement
- Glass passivated chip junction
- Excellent clamping capability
- Meets ISO 7637-2 (Pulse 1/2a/2b/3a/3b)
- Fast response time: Typically less than 1.0ps
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Immunization of sensitive devices in telecommunications, consumer electronics, and industrial equipment from electrostatic discharge (ESD) and transient voltages induced by load switching and lightning.

### MECHANICAL DATA

- Case: DO-214AB (SMC)
- Molding compound meets UL 94V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 2 whisker test
- Polarity: As marked
- Weight: 0.290g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$V_{WM}$	10 - 100	V
$V_{BR}$	11.1 - 123	V
$P_{PK}$	3000	W
$T_{J\ MAX}$	175	°C
Package	DO-214AB (SMC)	
Configuration	Single die	



DO-214AB (SMC)

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak power dissipation at $T_A = 25^\circ\text{C}$ , $t_p = 1\text{ms}^{(1)}$	$P_{PK}$	3000	W
Steady state power dissipation at $T_A = 25^\circ\text{C}$	$P_D$	6.5	W
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	300	A
Forward Voltage @ $I_F = 100\text{A}$ for Unidirectional only <sup>(2)</sup>	$V_F$	3.5 / 5.0	V
Junction temperature	$T_J$	-55 to +175	°C
Storage temperature	$T_{STG}$	-55 to +175	°C

#### Notes:

1. Non-repetitive current pulse per Fig.5 and derated above  $T_A = 25^\circ\text{C}$  per Fig.2
2.  $V_F = 3.5\text{V}$  on SMDJ10A - SMDJ90A devices and  $V_F = 5.0\text{V}$  on SMDJ100A

Devices for bipolar applications

1. For bidirectional use CA suffix for SMDJ10A – SMDJ64A
2. Electrical characteristics apply in both directions

**THERMAL PERFORMANCE**

PARAMETER	SYMBOL	TYP	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	75	°C/W
Junction-to-lead thermal resistance	$R_{\theta JL}$	15	°C/W

**ELECTRICAL SPECIFICATIONS** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Part number		Marking code		Breakdown voltage $V_{BR}@I_T$ (V)		Test current $I_T$ (mA)	Working stand-off voltage $V_{WM}$ (V)	Maximum Reverse Leakage $I_R@V_{WM}$ ( $\mu\text{A}$ )	Maximum peak impulse current $I_{PPM}$ (A)	Maximum clamping voltage $V_C@I_{PPM}$ (V)
				Min	Max					
SMDJ10A	SMDJ10CA	PDX	DDX	11.1	12.3	1	10	5	176.5	17.0
SMDJ11A	SMDJ11CA	PDZ	DDZ	12.2	13.5	1	11	1	164.8	18.2
SMDJ12A	SMDJ12CA	PEE	DEE	13.3	14.7	1	12	1	150.8	19.9
SMDJ13A	SMDJ13CA	PEG	DEG	14.4	15.9	1	13	1	139.5	21.5
SMDJ14A	SMDJ14CA	PEK	DEK	15.6	17.2	1	14	1	129.3	23.2
SMDJ15A	SMDJ15CA	PEM	DEM	16.7	18.5	1	15	1	123.0	24.4
SMDJ16A	SMDJ16CA	PEP	DEP	17.8	19.7	1	16	1	115.4	26.0
SMDJ17A	SMDJ17CA	PER	DER	18.9	20.9	1	17	1	108.7	27.6
SMDJ18A	SMDJ18CA	PET	DET	20.0	22.1	1	18	1	102.7	29.2
SMDJ20A	SMDJ20CA	PEV	DEV	22.2	24.5	1	20	1	92.6	32.4
SMDJ22A	SMDJ22CA	PEX	DEX	24.4	26.9	1	22	1	84.5	35.5
SMDJ24A	SMDJ24CA	PEZ	DEZ	26.7	29.5	1	24	1	77.1	38.9
SMDJ26A	SMDJ26CA	PFE	DFE	28.9	31.9	1	26	1	71.3	42.1
SMDJ28A	SMDJ28CA	PFG	DFG	31.1	34.4	1	28	1	66.1	45.4
SMDJ30A	SMDJ30CA	PFK	DFK	33.3	36.8	1	30	1	62.0	48.4
SMDJ33A	SMDJ33CA	PFM	DFM	36.7	40.6	1	33	1	56.3	53.3
SMDJ36A	SMDJ36CA	PFP	DFP	40.0	44.2	1	36	1	51.6	58.1
SMDJ40A	SMDJ40CA	PFR	DFR	44.4	49.1	1	40	1	46.5	64.5
SMDJ43A	SMDJ43CA	PFT	DFT	47.8	52.8	1	43	1	43.2	69.4
SMDJ45A	SMDJ45CA	PFV	DFV	50.0	55.3	1	45	1	41.3	72.7
SMDJ48A	SMDJ48CA	PFX	DFX	53.3	58.9	1	48	1	38.8	77.4
SMDJ51A	SMDJ51CA	PFZ	DFZ	56.7	62.7	1	51	1	36.4	82.4
SMDJ54A	SMDJ54CA	PGE	DGE	60.0	66.3	1	54	1	34.4	87.1
SMDJ58A	SMDJ58CA	PGG	DGG	64.4	71.2	1	58	1	32.1	93.6
SMDJ60A	SMDJ60CA	PGK	DGK	66.7	73.7	1	60	1	31.0	96.8
SMDJ64A	SMDJ64CA	PGM	DGM	71.1	78.6	1	64	1	29.1	103
SMDJ70A		PGP		77.8	86.0	1	70	1	26.5	113
SMDJ75A		PGR		83.3	92.1	1	75	1	24.8	121
SMDJ78A		PGT		86.7	95.8	1	78	1	23.8	126
SMDJ85A		PGV		94.4	104	1	85	1	21.9	137
SMDJ90A		PGX		100	111	1	90	1	20.5	146
SMDJ100A		PGZ		111	123	1	100	1	18.5	162

**ORDERING INFORMATION**

ORDERING CODE <sup>(1)</sup>	PACKAGE	PACKING
SMDJx	DO-214AB (SMC)	3,000 / Tape & Reel


**Notes:**

- “x” defines voltage from 10V(SMDJ10A) to 100V(SMDJ100A)  
“x” defines voltage from 10V(SMDJ10CA) to 64V(SMDJ64CA)


## CHARACTERISTICS CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Peak Pulse Power Rating Curve**

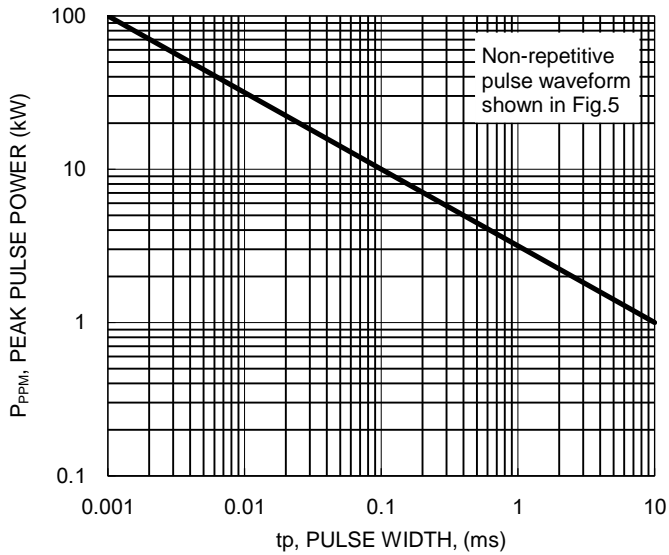


**Fig.2 Pulse Derating Curve**

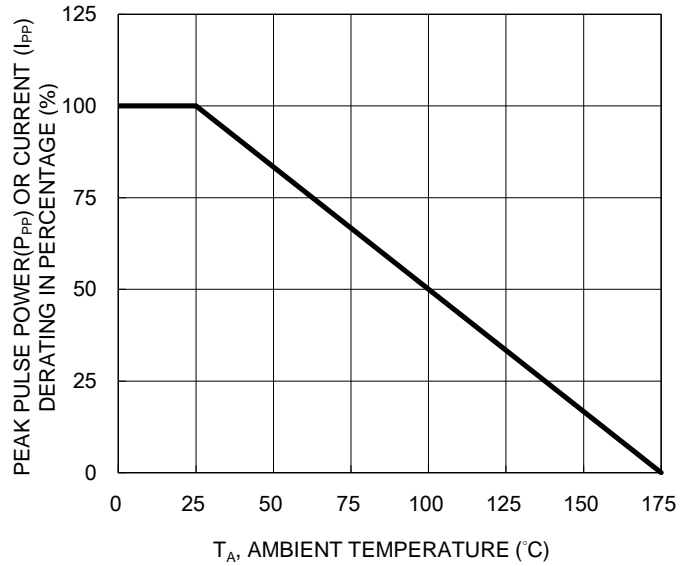

**Fig.3 Typical Junction Capacitance**

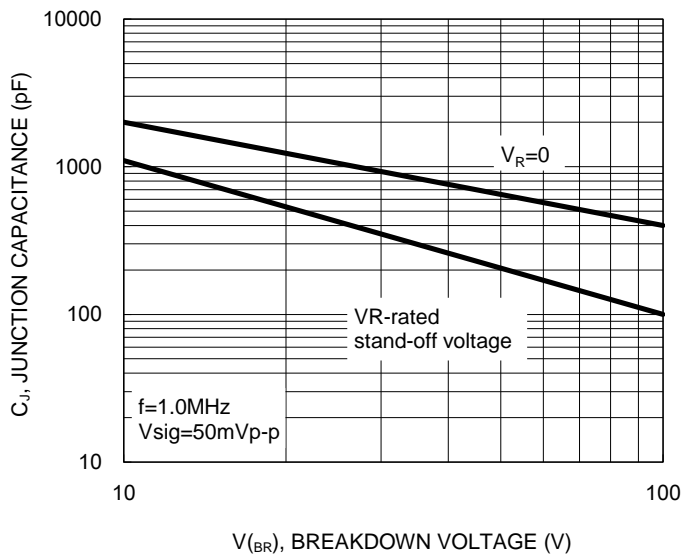


**Fig.4 Maximum Non-repetitive Forward Surge Current**

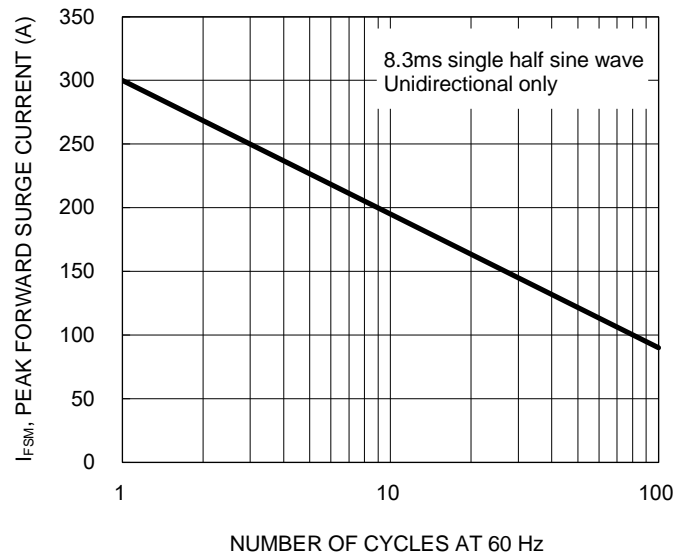

## CHARACTERISTICS CURVES


( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.5 Clamping Power Pulse Waveform**

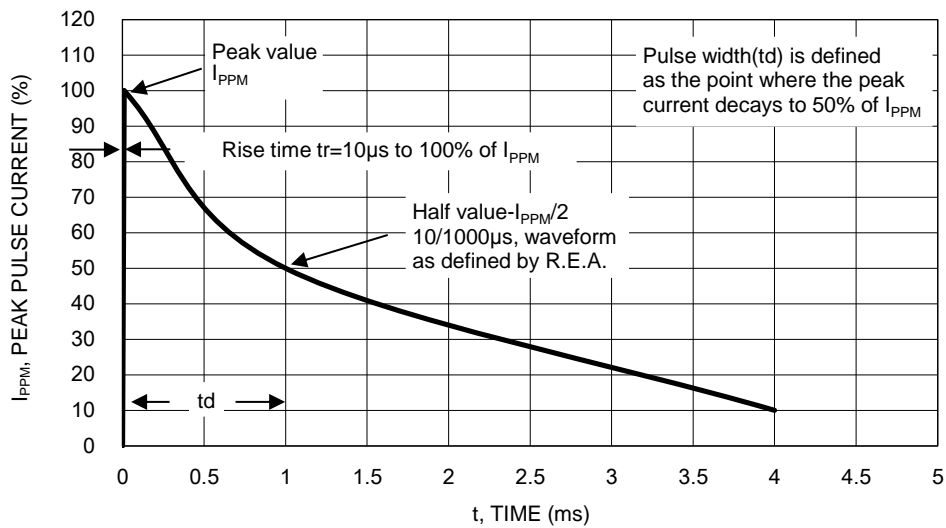


## PACKAGE OUTLINE DIMENSIONS

DO-214AB (SMC)

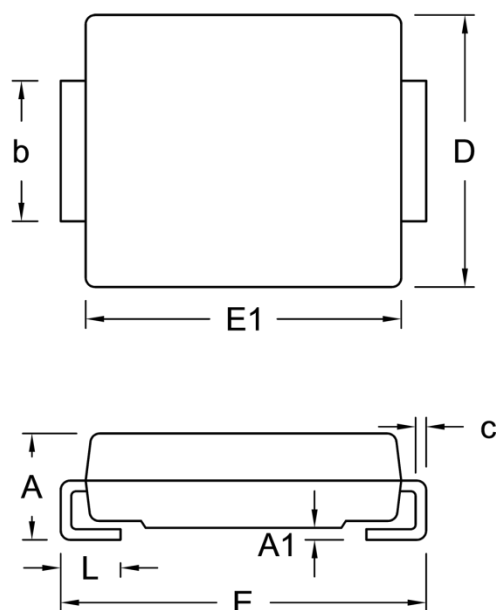

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	2.00	2.62	0.079	0.103
A1	0.10	0.20	0.004	0.008
b	2.90	3.20	0.114	0.126
c	0.15	0.31	0.006	0.012
D	5.59	6.22	0.220	0.245
E	7.75	8.13	0.305	0.320
E1	6.60	7.11	0.260	0.280
L	1.00	1.60	0.039	0.063

## SUGGESTED PAD LAYOUT

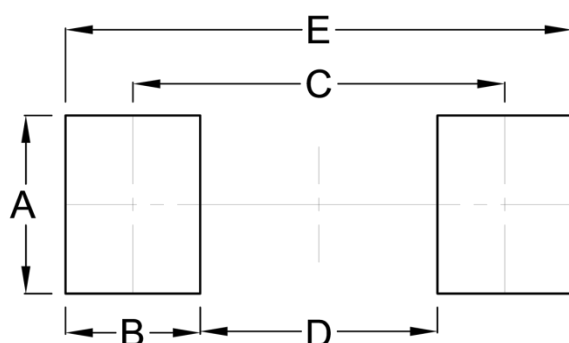

Symbol	Unit (mm)	Unit (inch)
A	3.30	0.130
B	2.50	0.098
C	6.90	0.272
D	4.40	0.173
E	9.40	0.370

## MARKING DIAGRAM



Cathode band for uni-directional products only

P/N = Marking Code  
 G = Green Compound  
 YW = Date Code  
 F = Factory Code

## **Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Taiwan Semiconductor:

[SMDJ10A R6G](#) [SMDJ12CA R6G](#) [SMDJ18A R6G](#) [SMDJ100A R6G](#) [SMDJ16A R6G](#) [SMDJ14A R6G](#) [SMDJ100A R7G](#) [SMDJ13A R7G](#) [SMDJ15CA R6G](#) [SMDJ15CA R7G](#) [SMDJ14A R7G](#) [SMDJ12A R7G](#) [SMDJ18CA R7G](#) [SMDJ16CA R7G](#) [SMDJ10CA R6G](#) [SMDJ13CA R7G](#) [SMDJ11CA R7G](#) [SMDJ11A R6G](#) [SMDJ14CA R6G](#) [SMDJ18A R7G](#) [SMDJ16A R7G](#) [SMDJ17A R7G](#) [SMDJ17A R6G](#) [SMDJ12CA R7G](#) [SMDJ15A R6G](#) [SMDJ10CA R7G](#) [SMDJ17CA R6G](#) [SMDJ16CA R6G](#) [SMDJ13CA R6G](#) [SMDJ17CA R7G](#) [SMDJ15A R7G](#) [SMDJ11CA R6G](#) [SMDJ14CA R7G](#) [SMDJ13A R6G](#) [SMDJ10A R7G](#) [SMDJ11A R7G](#) [SMDJ12A R6G](#) [SMDJ18CA R6G](#) [SMDJ12A V6G](#) [SMDJ12A V7G](#) [SMDJ13A V6G](#) [SMDJ13A V7G](#) [SMDJ14A V6G](#) [SMDJ14A V7G](#) [SMDJ15A V6G](#) [SMDJ15A V7G](#) [SMDJ16A V6G](#) [SMDJ17A V7G](#) [SMDJ18A V6G](#) [SMDJ18A V7G](#) [SMDJ10A V6G](#) [SMDJ10A V7G](#) [SMDJ11A V6G](#) [SMDJ11A V7G](#) [SMDJ16A V7G](#) [SMDJ17A V6G](#) [SMDJ100A](#) [SMDJ10A](#) [SMDJ10CA](#) [SMDJ11A](#) [SMDJ11CA](#) [SMDJ12A](#) [SMDJ12CA](#) [SMDJ13A](#) [SMDJ13CA](#) [SMDJ14A](#) [SMDJ14CA](#) [SMDJ15A](#) [SMDJ15CA](#) [SMDJ16A](#) [SMDJ16CA](#) [SMDJ17A](#) [SMDJ17CA](#) [SMDJ18A](#) [SMDJ18CA](#) [SMDJ100AH](#) [SMDJ10AH](#) [SMDJ10CAH](#) [SMDJ11AH](#) [SMDJ11CAH](#) [SMDJ12AH](#) [SMDJ12CAH](#) [SMDJ13AH](#) [SMDJ13CAH](#) [SMDJ14AH](#) [SMDJ14CAH](#) [SMDJ15AH](#) [SMDJ15CAH](#) [SMDJ16AH](#) [SMDJ16CAH](#) [SMDJ17AH](#) [SMDJ17CAH](#) [SMDJ18AH](#) [SMDJ18CAH](#)