

## 2A, 100V Surface Mount Schottky Barrier Rectifier

### FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- Guardring for overvoltage protection
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC



### MECHANICAL DATA

**Case:** DO-214AA (SMB)

**DO-214AA (SMB)**

Molding compound, UL flammability classification rating 94V-0

Moisture sensitivity level: level 1, per J-STD-020

Part no. with suffix "H" means AEC-Q101 qualified

**Terminal:** Matte tin plated leads, solderable per JESD22-B102

Meet JESD 201 class 2 whisker test

**Polarity:** Indicated by cathode band

**Weight :** 90 mg (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ( $T_A=25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	SSH210	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	100	V
Maximum RMS voltage	$V_{RMS}$	70	V
Maximum DC blocking voltage	$V_{DC}$	100	V
Maximum average forward rectified current	$I_{F(AV)}$	2	A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	75	A
Peak repetitive reverse surge current at $tp=2\mu\text{s}$ , 1kHz	$I_{RRM}$	1	A
Maximum instantaneous forward voltage (Note 1) $I_F = 2\text{ A} @ 25^\circ\text{C}$ $I_F = 2\text{ A} @ 125^\circ\text{C}$	$V_F$	0.79 0.65	V
Voltage rate of change (Rated $V_F$ )	$dV/dt$	10000	$\text{V}/\mu\text{s}$
Maximum reverse current @ rated $V_F$ $T_J=25^\circ\text{C}$ $T_J=125^\circ\text{C}$	$I_R$	1	$\mu\text{A}$
		1	mA
Typical thermal resistance	$R_{\theta JL}$	24	$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	- 55 to +175	$^\circ\text{C}$
Storage temperature range	$T_{STG}$	- 55 to +175	$^\circ\text{C}$

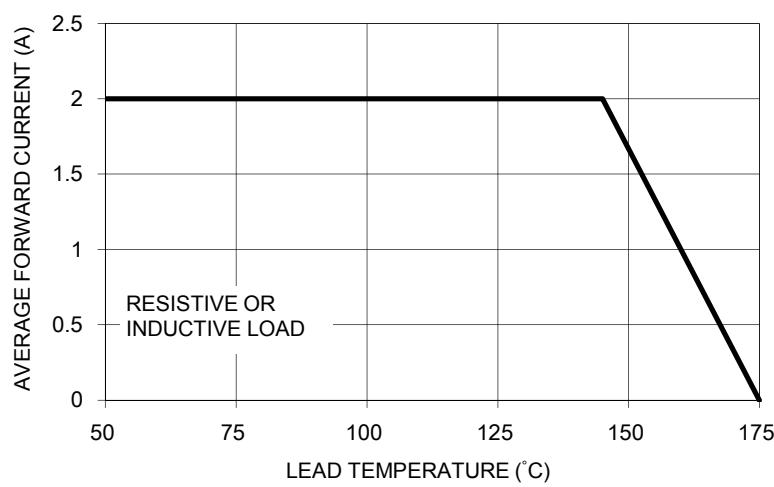
Note 1: Pulse test with  $PW=300\mu\text{s}$ , 1% duty cycle

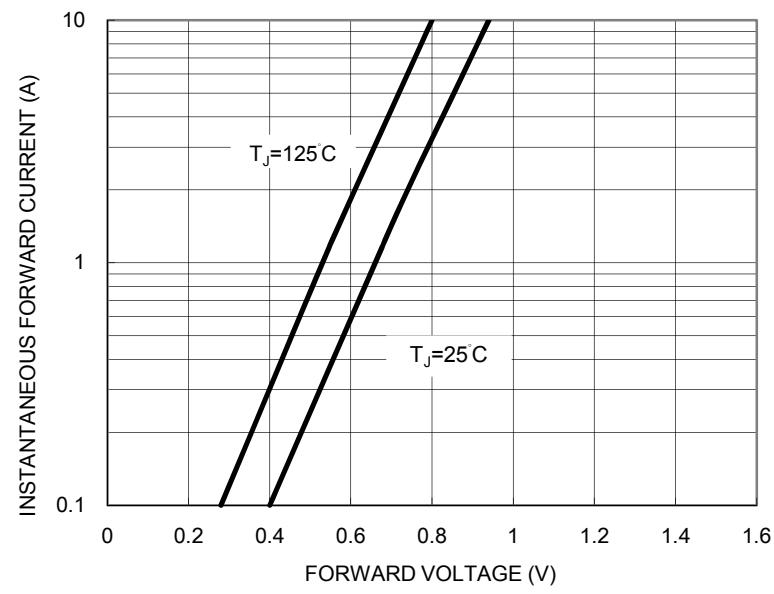
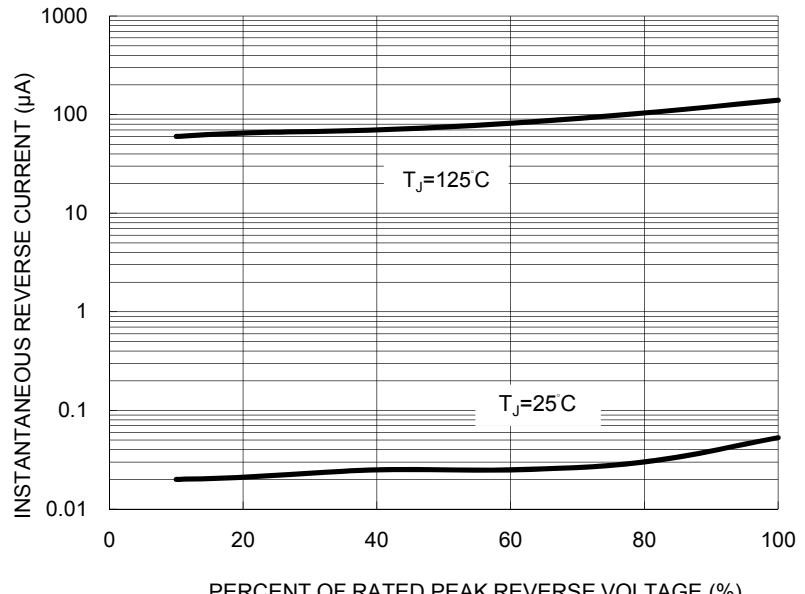
**ORDERING INFORMATION**

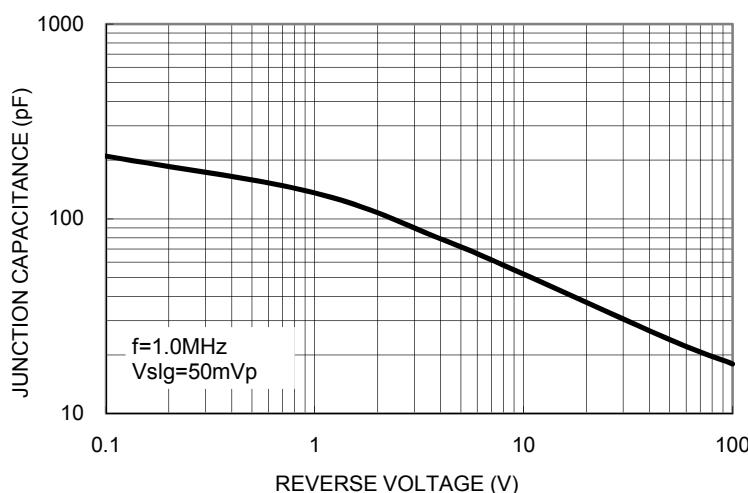
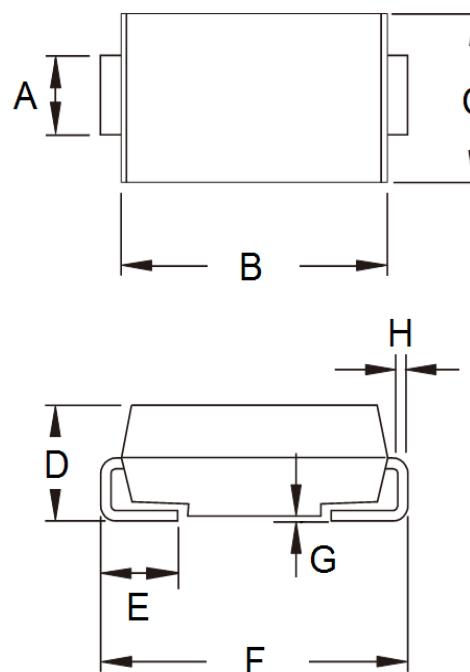
PART NO.	PART NO. SUFFIX	PACKING CODE	PACKAGE	PACKING
SSH210	H	R5	SMB	850 / 7" Plastic reel
		R4	SMB	3,000 / 13" Paper reel
		M4	SMB	3,000 / 13" Plastic reel

**EXAMPLE**

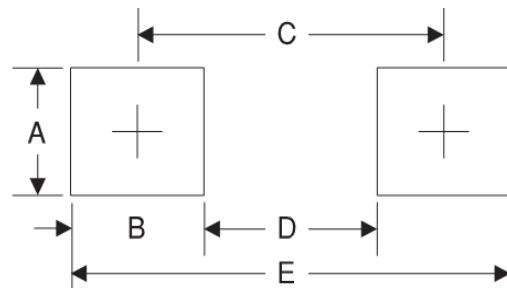
PREFERRED PART NO.	PART NO.	PART NO. SUFFIX	PACKING CODE	DESCRIPTION
SSH210HR5	SSH210	H	R5	AEC-Q101 qualified

**RATINGS AND CHARACTERISTICS CURVES**
 $(T_A=25^\circ\text{C} \text{ unless otherwise noted})$ 
**FIG.1 FORWARD CURRENT DERATING CURVE**

**FIG. 2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

**FIG. 3 TYPICAL FORWARD CHARACTERISTICS**

**FIG. 4 TYPICAL REVERSE CHARACTERISTICS**


**FIG. 5 TYPICAL JUNCTION CAPACITANCE**

**PACKAGE OUTLINE DIMENSIONS**
**DO-214AA (SMB)**


DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.95	2.10	0.077	0.083
B	4.25	4.75	0.167	0.187
C	3.48	3.73	0.137	0.147
D	1.99	2.61	0.078	0.103
E	0.90	1.41	0.035	0.056
F	5.10	5.30	0.201	0.209
G	0.10	0.20	0.004	0.008
H	0.15	0.31	0.006	0.012

**SUGGESTED PAD LAYOUT**


Symbol	Unit (mm)	Unit (inch)
A	2.3	0.091
B	2.5	0.098
C	4.3	0.169
D	1.8	0.071
E	6.8	0.268

**MARKING DIAGRAM**


P/N = Specific Device Code  
 YW = Date Code  
 F = Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[SSH210HR5](#)