REV. Status REVISION -12-17-01 YS

REVISION A CHANGED PIN MARKING 07/10/02 YS

REVISION B CHANGED PIN LENGTH 11/06/02 YS

REVISION C ADDED RoHS 12/08/05 MP

REVISION D ADDED GOLD **PLATED** 6-22-09 MP

REVISION E ADDED TEMP **RATING** 5/6/15 MP

AUDIO COUPLING MINIATURE ENCAPSULATED TRANSFORMER DESIGNED TO OPERATE 10mW MAX IN PRIMARY AND REFLECT A PRIMARY SOURCE IMPEDANCE OF APPROXIMATELY  $10K\Omega$  WITH  $125\Omega$  LOAD ON SECONDARY.

A. Electrical Specifications (@ 20°C)


- 1. Pri Source Impedance;  $10K\Omega$
- 2. Sec Load Impedance;  $125\Omega$
- 3. Pri DC Current; 0mA MAX
- 4. Operating Level; 10mW MAX @ 300Hz
- 5. Frequency Response (relative to 1KHz); ±3.0dB, @ 300Hz to 20KHz
- 6. Distortion; 5% MAX @ 300Hz, 10dBm
- 7. DC Resistance;

(1-2) 1100Ω ±30% (3-4) 28Ω ±30%

- 8. Turns Ratio; (1-2): (3-4) = 8.62 : 1 ±3%
- 9. Dielectric Strength;

500Vrms 0.5 minute @ Pri - Sec

B. Marking; MET-50, TAMURA, Primary and Secondary Impedance, pin numbers, 196-date code and country of origin

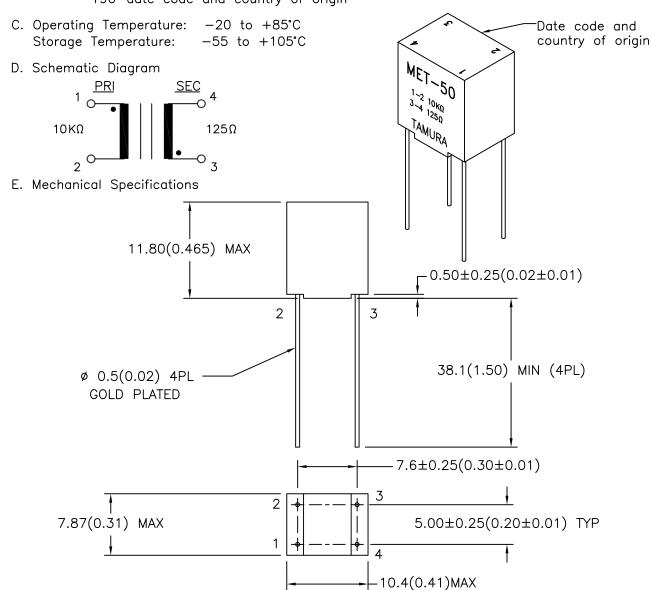

TOLERANCES (mm)  $4 \pm 0.2$  $4 \le 20 \pm 0.3$  $20 \le 50 \pm 0.4$ 

PREPARED BY:

C. POPPE

**ENGINEER:** DRAWING CONTROL NO. REV MATHI P. P-A1-12968 Ε SAFETY ENGINEER

MODEL DESCRIPTION AUDIO COUPLING MINIATURE ENCAPSULATED XFMR CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE TAMURA CORPORATION OF AMERICA 1040 SOUTH ANDREASEN DRIVE, #100 ESCONDIDO, CA. 92029 (951) 699-1270 FAX 7607400536 MODEL SPECIFICATION MET-50

DIM: mm[ln] SCL: 2/1

APPROVED: M. PITCHAI

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tamura: