

REV. Status

REVISION -
07/20/92 TSREVISION A
CHG'D FORMAT
03/09/00 TSREVISION B
FLIPPED RADII
& CLARIFIED
MARKING
06/24/05 YSREVISION C
RoHS COMPLIANT
11/03/05 MP


A. Electrical specification (@ 25°C)

1. Power rating; 500mW
2. Dielectric strength;
500VAC 1 minute
3. Insulation resistance;
10,000MΩ MIN @ 500VDC
4. Turns ratio;
(1-2):(3-4)= 1:1.30 ±5%
5. Primary open circuit inductance;
500μH MIN @ 1KHz, 40mV (1-2)
6. Primary ET-constant
8.5V-μs MIN
7. Rise time;
5.6ns MAX
8. Interwinding capacitance between Primary and Secondary;
32.0pF MAX @ 100KHz
9. Primary leakage inductance with shorted Secondary;
0.7μH MAX @ 100KHz
10. DC Resistance;
Primary (1-2) 1.35Ω MAX
Secondary (3-4) 1.35Ω MAX

B. Marking;

G516, TAM, date code and country of origin

C. Schematic diagram

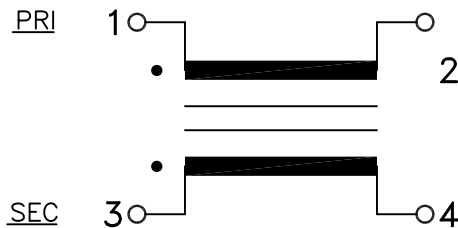


PIN 1 Designation

"TAM" and country of origin (molded)



MODEL NUMBER

G516

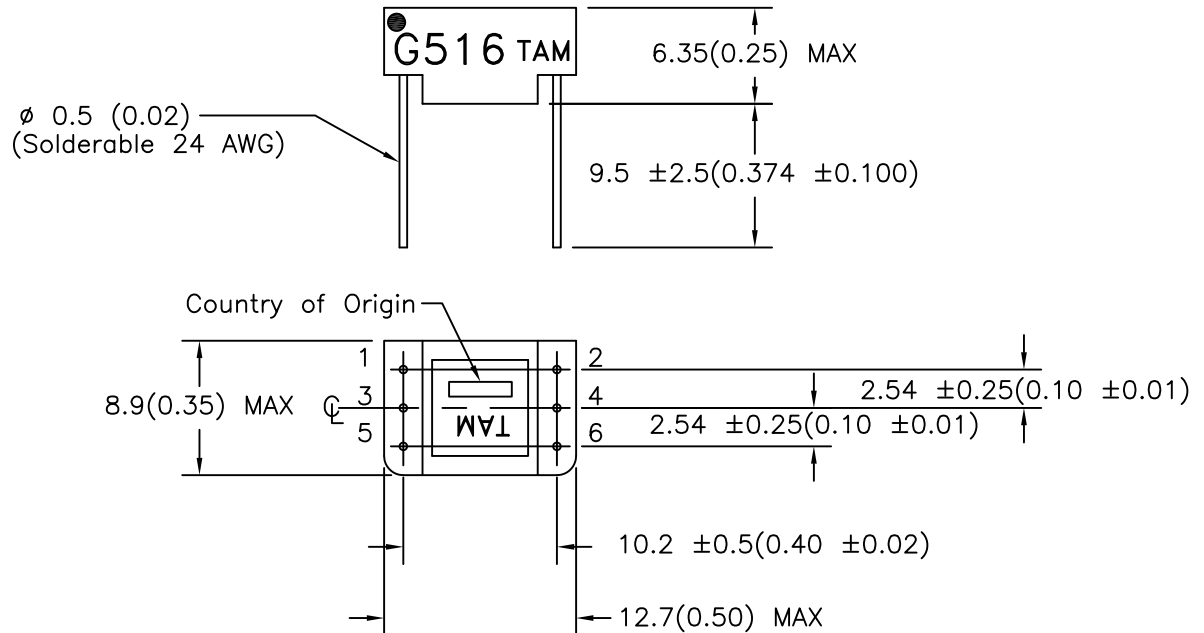

PREPARED BY:

K. BRENNAN

ENGINEER:

M. PITCHAI

SAFETY ENGINEER

T. CLEM

APPROVED:

Y. SEKIGUCHI

DRAWING CONTROL NO.

P-A1-10724

REV

C

MODEL DESCRIPTION

PULSE

TRANSFORMER

MODEL SPECIFICATION

G516

TAMURA CORPORATION OF AMERICA1040 SOUTH ANDREASEN DRIVE, #100 ESCONDIDO, CA. 92029
(951) 699-1270 FAX 7607400536

DIM: mm[In]

SCL: 2/1

SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tamura:](#)

[G516](#)