

# **Specification**

Part No.	:	CGGP.25.2.A.02
Description	:	GPS/GLONASS Dual-Band Ceramic Patch Antenna 25x25x2mm
Features	:	<ul> <li>4.24dBi Peak Gain for GPS Band</li> <li>4.38dBi Peak Gain for GLONASS Band</li> <li>Low profile – 2mm Height</li> <li>Pin Type Ceramic Patch Antenna</li> <li>Automotive TS16949 Production and Quality</li> <li>Approved</li> <li>RoHS compliant</li> </ul>





# **1.Introduction**

The CGGP.25.2.A.02 is a ceramic GPS/Glonass passive patch antenna, with a low profile thickness of only 2mm. It is designed for applications in vehicle navigation devices as well as other M2M/IoT devices where space is at a premium. Typical applicable industries are transportation, defense, marine, agriculture, and navigation.

The antenna has been tuned on a 70 x 70 mm ground plane, working at 1575.42MHz and 1602MHz, with 4.24dBi gain and 4.38dBi gain, respectively. The low profile design makes this antenna perfect for applications where space is limited. It can be easily through-hole mounted on PCB via pin. Double sided adhesive on the bottom of the patch helps to keep it in place while undergoing mounting. The CGGP.25.2.A.02 is manufactured and tested in a TS16949 first tier automotive approved facility.

For large volume GPS/GLONASS projects where performance is paramount, tuning for customer specific device environment and ground-plane size is needed, so custom tuned patch antennas should always be used. Taoglas can also provide different pin lengths for these antennas, all subject to potential NRE and MOQ. For more details please contact your regional Taoglas sales office.



# 2. Specification


ELECTRICAL							
Application Bands	GPS	GLONASS					
Operation Frequency (MHz)	1575.42 ±1.023	1602±5					
Return Loss (dB)	-10 max.						
Peak Gain (dBi)	4.24	4.38					
Efficiency (%)	67.78	68.28					
Impedance	50 ohms						
MECHANICAL							
Ceramic Dimension (mm)	25 x 25 x 2						
Pin Diameter (mm)	0.9						
Pin Length (mm)	2.4						
Weight (g)	4						
ENVIRONMENTAL							
Storage Temperature -40°C to 85°C							
Operation Temperature	:o 85°C						
Humidity	Non-condensing 65°C 95% RH						

\* Antenna properties were measured with the antenna mounted on 70\*70mm Ground Plane Taoglas Evaluation Board # CGGPD.25.B




# **3. Antenna Characteristcs**


### 3.1 Return Loss

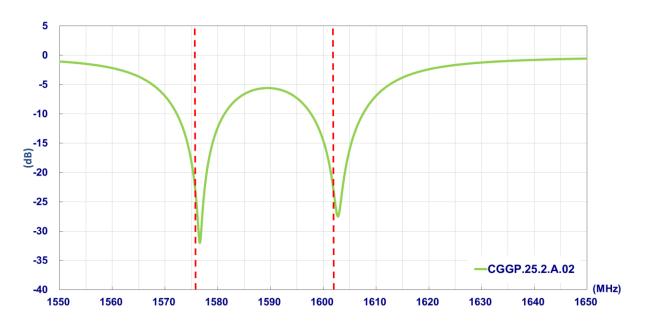

### **3.2 Efficiency**

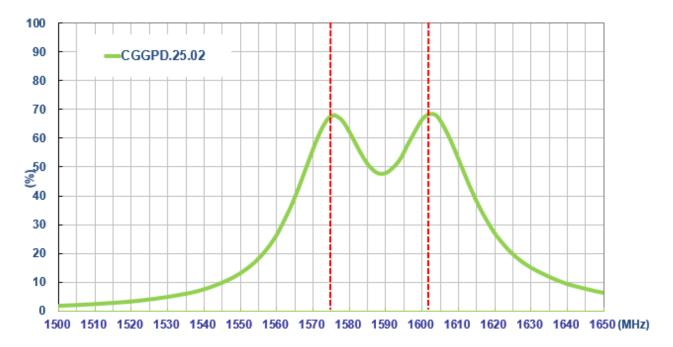




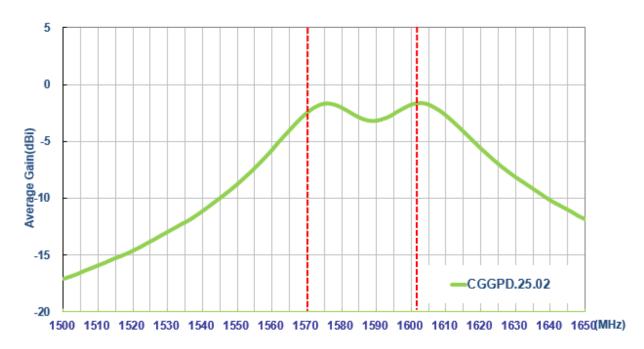

### 3.3 Average Gain

### 3.4 Peak Gain

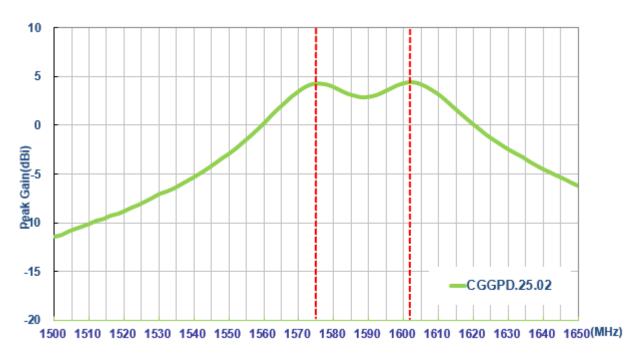




# **4. Antenna Radiation Pattern**

### 4.1. Measurement Setup


The CGGP.25.2.A.02 antenna is tested with 70mm\*70mm ground plane in a CTIA certified ETS-Lindgren Anechoic Chamber. The test setup is shown below.

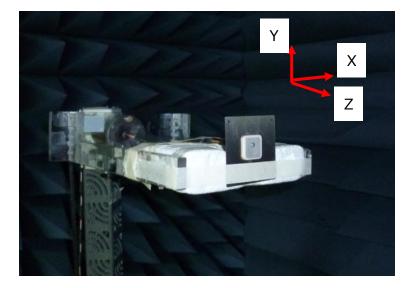




### 4.2. 2D Radiation Pattern


XY Plane

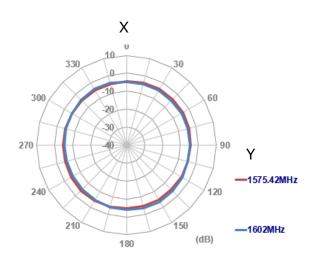

XZ Plane

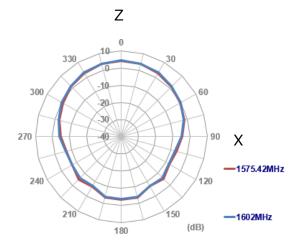


#### YZ Plane

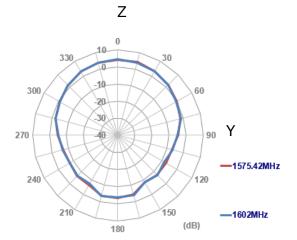




### 4.3. 3D Radiation Pattern

#### 1575.42MHz

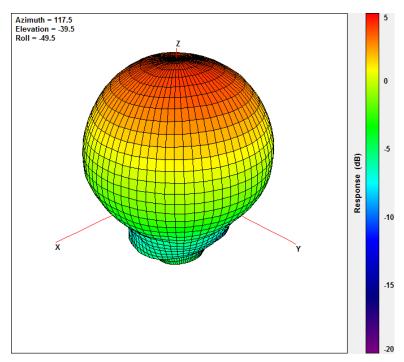


#### 1602MHz

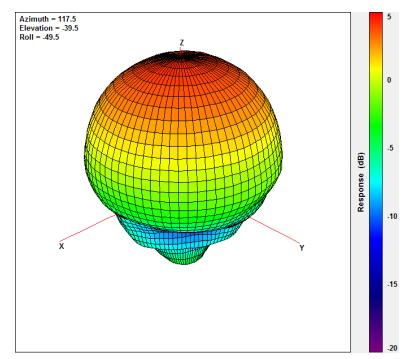



# **5. Mechanical Drawing**

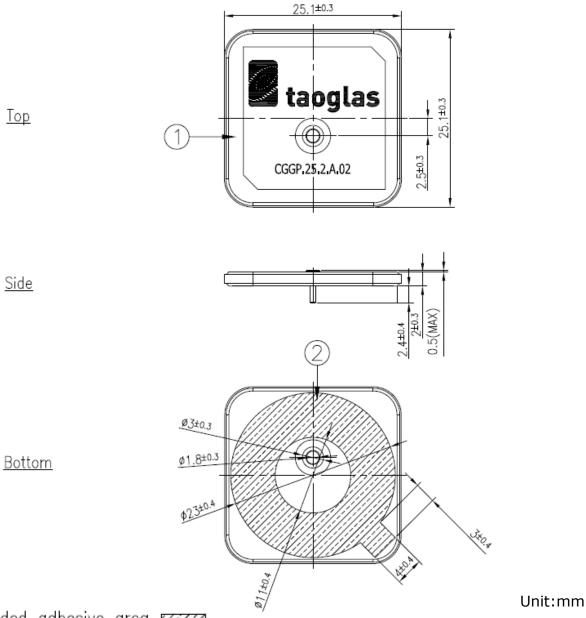


Note:

1.Double sided adhesive area.

	Name	Material	Finish	QTY
1	Patch(25*25*2mm)	Ceramic	Clear	1
2	Double sided Adhesive	NITTO 5015	White Liner	1



### **5.1 Adhesive Thickness**

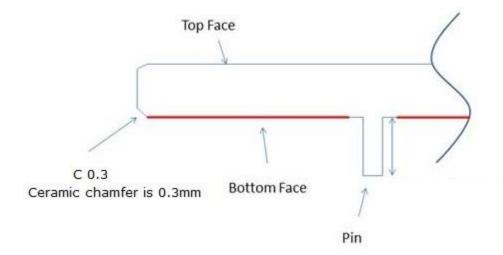

Red Line shows the adhesive without Liner - thickness 0.08~0.1mm



# 6. Evaluation Board (CGGPD.25.B)

Name


Ground-Plane

SMA(F)ST

1

2


3

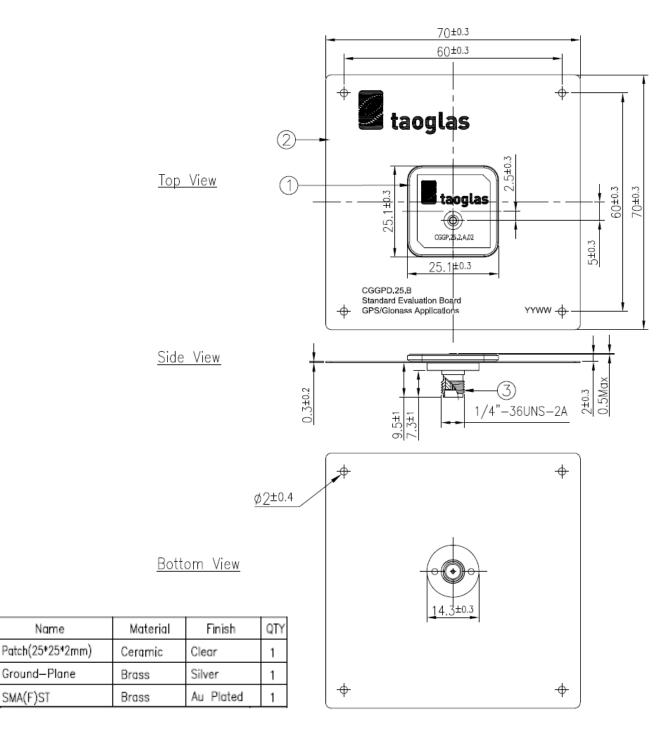

Unit:mm




# **7.PCB Footprint Recommendation**

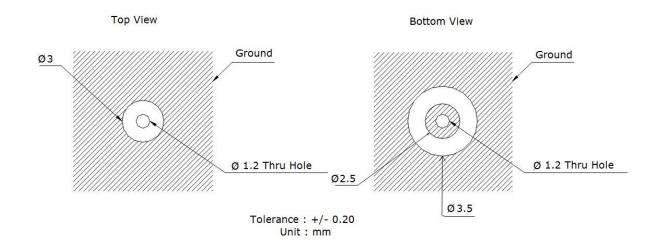



# 8. Packaging

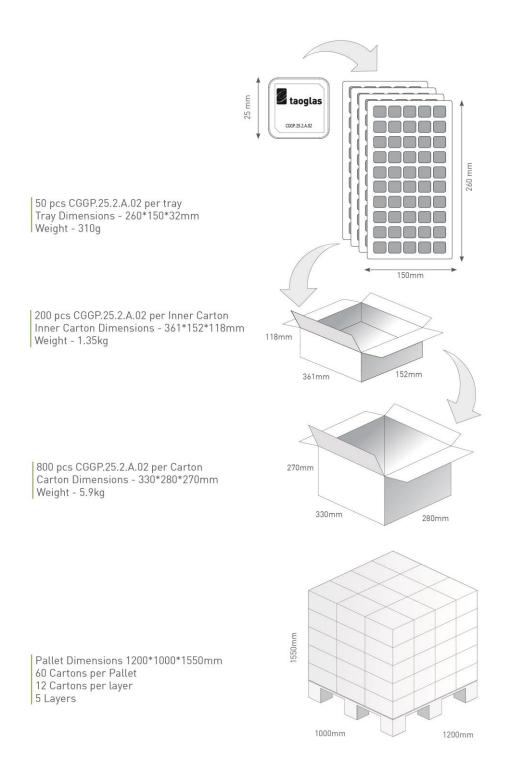



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas: CGGP.25.2.A.02