

## Specification

Part No.	:	<b>GSA.8842.A.105111</b>
Product Name	:	Wideband 5G/4G, ISM and Wi-Fi Adhesive Mount I-Bar Antenna with 1M CFD-200 SMA(M)
Features	:	5G/4G/3G / GPS / Wi-Fi 176.5mm * 59.2mm *13.6mm 617MHz to 6000MHz Cable: 1M CFD-200 Connector: SMA(M) IP65 waterproof housing <b>RoHS &amp; REACH Compliant</b>



## 1. Introduction

The GSA.8842 Wideband Dipole Antenna has been designed to cover all 5G/4G, ISM and Wi-Fi working frequencies in the 617-6000 MHz spectrum. It has the highest wide-band efficiency in its range of any terminal antenna on the market today and exhibits stable, omni-directional radiation patterns across all bands. It is an ideal solution for any device requiring high, reliable performance. When appropriately integrated, it can maximize the likelihood of meeting type approval or carrier certification requirements from an efficiency standpoint.

The GSA.8842 has been primarily designed for use with 5G/4G modules and devices that require the highest possible efficiency and peak gain to deliver best-in-class throughput on all major cellular (2G/3G/4G/5G) bands worldwide, vital for applications such as high speed video and real-time streaming, or high capacity MIMO networks on public transportation. It also provides good efficiency on both 2.4 and 5.8GHz Wi-Fi bands and is backwards-compatible with 2G and 3G cellular applications such as GSM, LTE, UMTS, Wi-Fi. This antenna also makes an excellent reference antenna for test purposes.

GSA.8842 has a low-profile, compact form factor and is easily mounted via high quality, first tier automotive approved 3M adhesive foam. The standard cable assembly includes 1 meter coaxial cable and SMA (M) connector. The robust ABS enclosure is IP65 rated. Cable and connector are customizable. Contact your regional Taoglas sales office for support.


## 2. Specification

Electrical									
Frequency (MHz)		617~698	698~960	1565~1612	1710~1990	1920~2170	2400~2500	2500~2700	4900~5850
Efficiency (%)									
In free space	0.3M	68.69	70.38	29.13	74.62	73.03	70.51	72.54	61.16
	1M	64.49	66.77	26.57	68.07	67.08	64.37	66.17	52.55
	2M	60.19	61.85	24.09	60.23	58.78	56.06	57.08	42.55
	3M	56.17	57.31	21.60	53.42	51.98	48.83	49.43	34.48
	5M	48.92	49.16	17.19	42.02	40.53	37.04	37.08	22.61
On the 2mm ABS Base	0.3M	69.05	72.92	56.73	73.06	70.03	73.19	72.43	62.01
	1M	64.82	69.20	51.73	66.62	64.31	66.75	66.04	53.29
	2M	60.49	64.09	46.98	58.96	56.35	58.13	56.97	43.15
	3M	56.46	59.38	42.05	52.30	49.83	50.63	49.34	34.98
	5M	49.17	50.93	33.48	41.14	38.85	38.41	37.01	22.94
On the Glass Base	0.3M	65.08	72.21	72.81	70.19	71.02	79.11	65.80	51.55
	1M	61.11	68.55	66.40	64.00	65.26	72.16	59.98	44.27
	2M	57.03	63.47	60.34	56.64	57.17	62.85	51.81	35.85
	3M	53.22	58.79	53.97	50.26	50.56	54.74	44.87	29.05
	5M	46.35	50.42	43.01	39.52	39.40	41.52	33.65	19.05
Average Gain(dB)									
In free space	0.3M	-1.63	-1.53	-5.36	-1.27	-1.37	-1.52	-1.39	-2.14
	1M	-1.90	-1.75	-5.76	-1.67	-1.73	-1.91	-1.79	-2.79
	2M	-2.20	-2.09	-6.18	-2.20	-2.31	-2.51	-2.44	-3.71
	3M	-2.50	-2.42	-6.66	-2.72	-2.84	-3.11	-3.06	-4.62
	5M	-3.10	-3.08	-7.65	-3.77	-3.92	-4.31	-4.31	-6.46
On the 2mm ABS Base	0.3M	-1.61	-1.37	-2.46	-1.36	-1.55	-1.36	-1.40	-2.08
	1M	-1.88	-1.60	-2.86	-1.76	-1.92	-1.76	-1.80	-2.73
	2M	-2.18	-1.93	-3.28	-2.29	-2.49	-2.36	-2.44	-3.65
	3M	-2.48	-2.26	-3.76	-2.82	-3.02	-2.96	-3.07	-4.56
	5M	-3.08	-2.93	-4.75	-3.86	-4.11	-4.16	-4.32	-6.39
On the Glass Base	0.3M	-1.87	-1.41	-1.38	-1.54	-1.49	-1.02	-1.82	-2.88
	1M	-2.14	-1.64	-1.78	-1.94	-1.85	-1.42	-2.22	-3.54
	2M	-2.44	-1.97	-2.19	-2.47	-2.43	-2.02	-2.86	-4.46
	3M	-2.74	-2.31	-2.68	-2.99	-2.96	-2.62	-3.48	-5.37
	5M	-3.34	-2.97	-3.66	-4.03	-4.04	-3.82	-4.73	-7.20


Peak Gain(dBi)									
Frequency (MHz)		617~698	698~960	1565~1612	1710~1990	1920~2170	2400~2500	2500~2700	4900~5850
In free space	0.3M	2.63	2.75	-0.14	3.65	3.65	4.20	4.20	4.17
	1M	2.33	2.55	-0.54	3.25	3.25	3.80	3.80	3.47
	2M	2.03	2.15	-1.04	2.71	2.71	3.20	3.20	2.57
	3M	1.73	1.85	-1.44	2.15	2.15	2.60	2.60	1.57
	5M	1.43	1.55	-1.84	1.65	1.65	2.00	2.00	0.57
On the 2mm ABS Base	0.3M	2.34	2.71	1.42	3.65	3.58	3.73	4.36	4.50
	1M	2.04	2.51	1.02	3.25	3.18	3.33	3.96	3.80
	2M	1.74	2.11	0.52	2.75	2.68	2.73	3.26	2.90
	3M	1.44	1.81	0.12	2.15	2.08	2.13	2.66	1.93
	5M	1.14	1.51	-0.28	1.55	1.48	1.53	2.06	1.03
On the Glass Base	0.3M	2.02	2.89	3.63	4.77	4.60	5.28	5.28	4.32
	1M	1.72	2.69	3.23	4.37	4.20	4.88	4.88	3.62
	2M	1.42	2.29	2.73	3.87	3.70	4.28	4.28	2.62
	3M	1.12	1.99	2.33	3.37	3.10	3.68	3.68	1.72
	5M	0.82	1.69	1.93	2.87	2.50	3.08	3.08	0.82
Impedance		50Ω							
Polarization		Linear							
VSWR		< 3							
Radiation Pattern		Omni							
Input Power		5 W							
Mechanical									
Antenna Dimensions		176.5mm * 59.2mm *13.6mm							
Casing		ABS							
Coaxial Cable		CFD-200							
Cable Length		1 Meter Standard, Fully Customizable							
Connector		SMA Male Standard, Fully Customizable							
Water Proof Level		IP65							
Adhesive		3M9448+CR4305 Double Sided Adhesive							
Weight		127g							
Environmental									
Operation Temperature Range		-40°C to 85°C							
Storage Temperature Range		-40°C to 85°C							
Humidity		Non-condensing 65°C 95% RH							

## 3. Antenna Characteristics


### 3.1 Test Setup

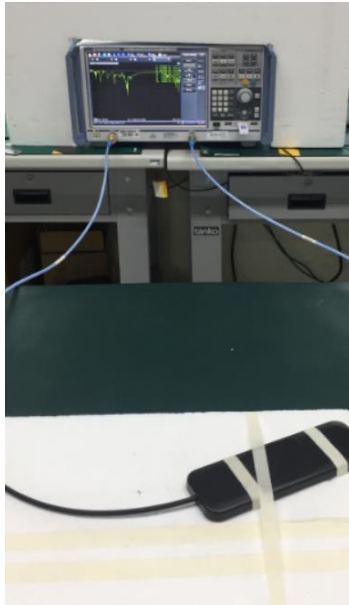

a) In free space

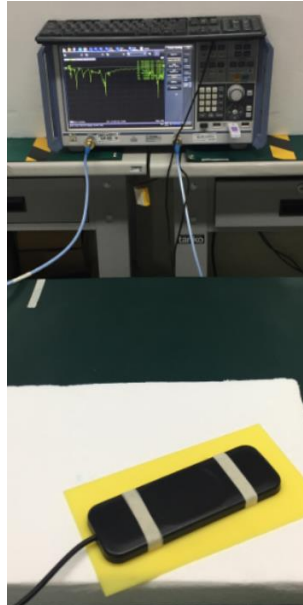


b) On 2mm ABS Base

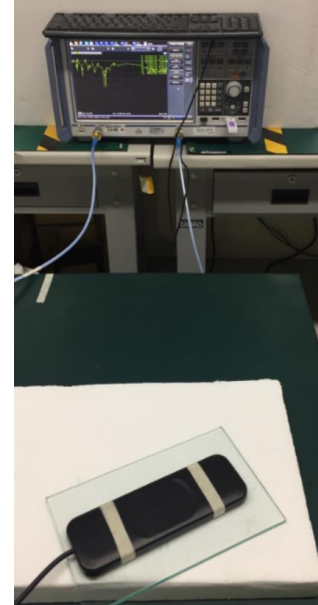


c) On the Glass Base

### 3.2 Return Loss

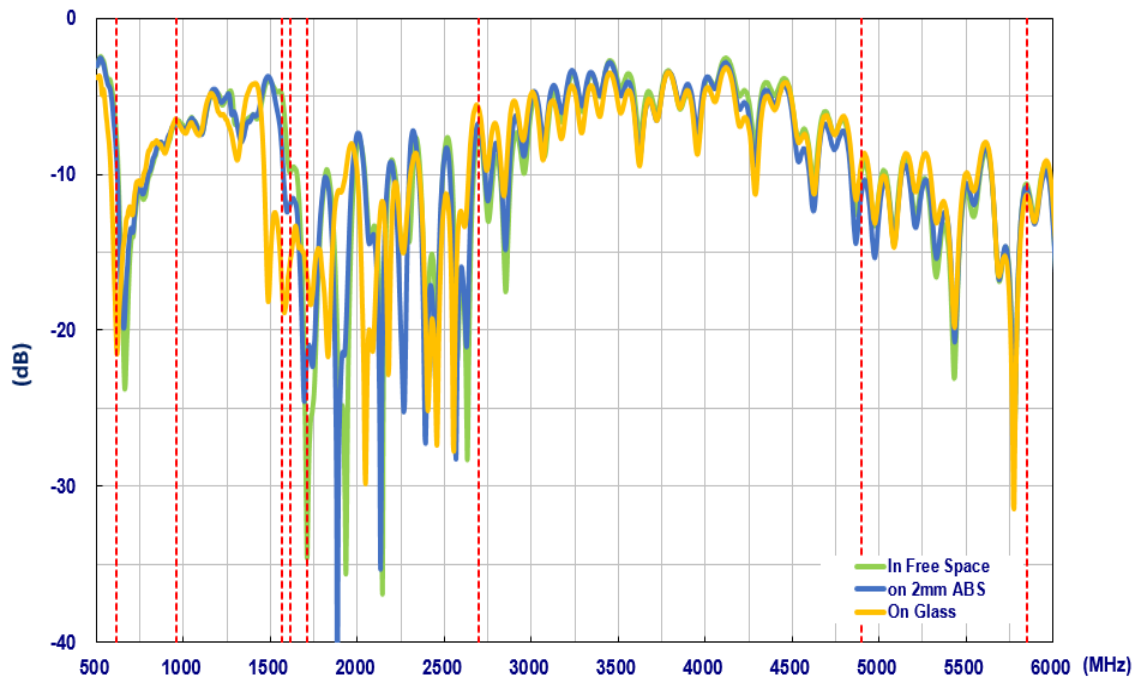


**Figure 1.** Return loss of GSA.8842 with 1 meter cable length

### 3.3 Efficiency

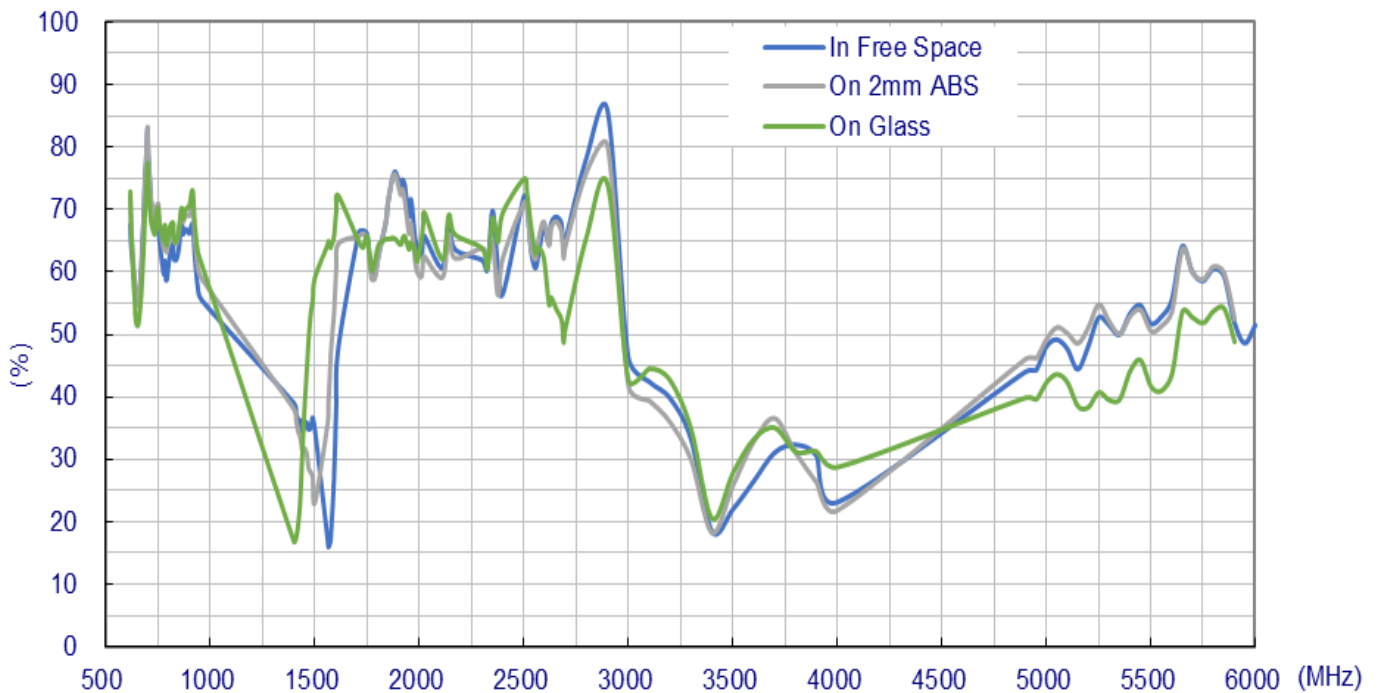


**Figure 2.** Efficiency of GSA.8842 with 1 meter cable length

### 3.4 Peak Gain

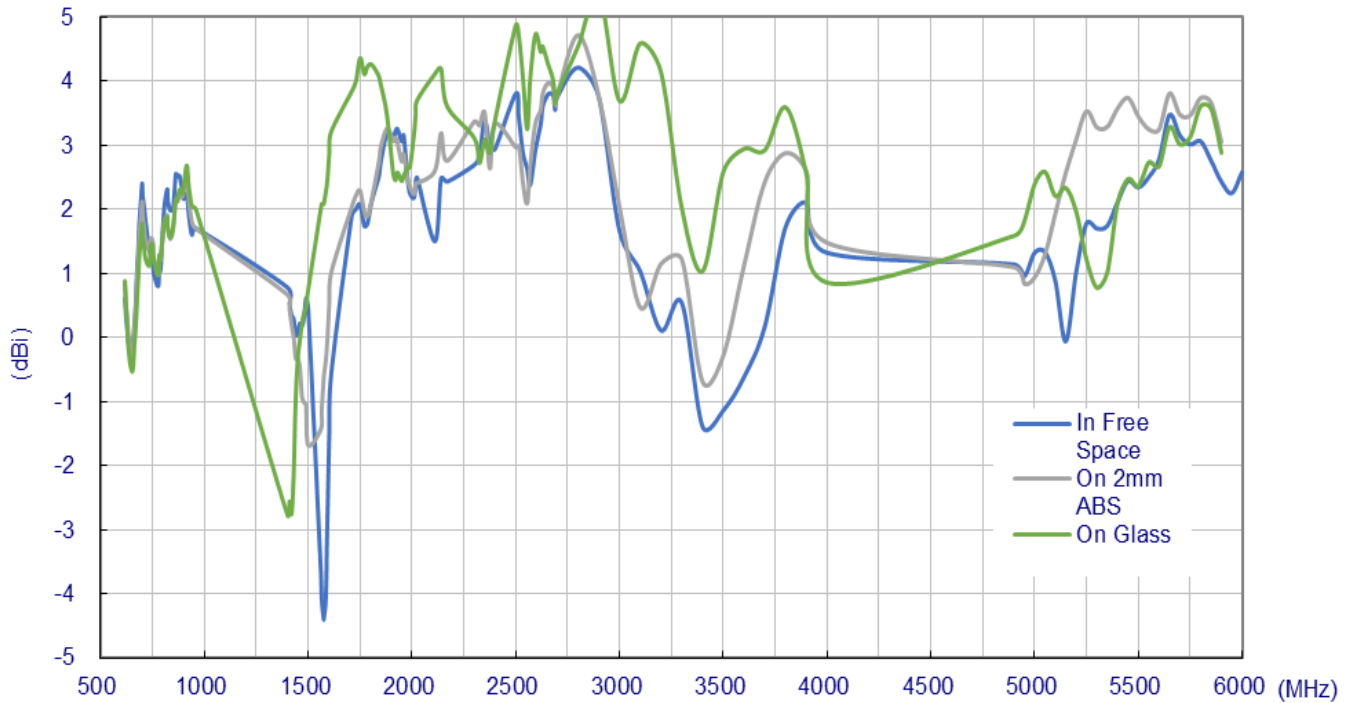

**Figure 3.** Peak gain of GSA.8842 with 1 meter cable length

### 3.5 Average Gain

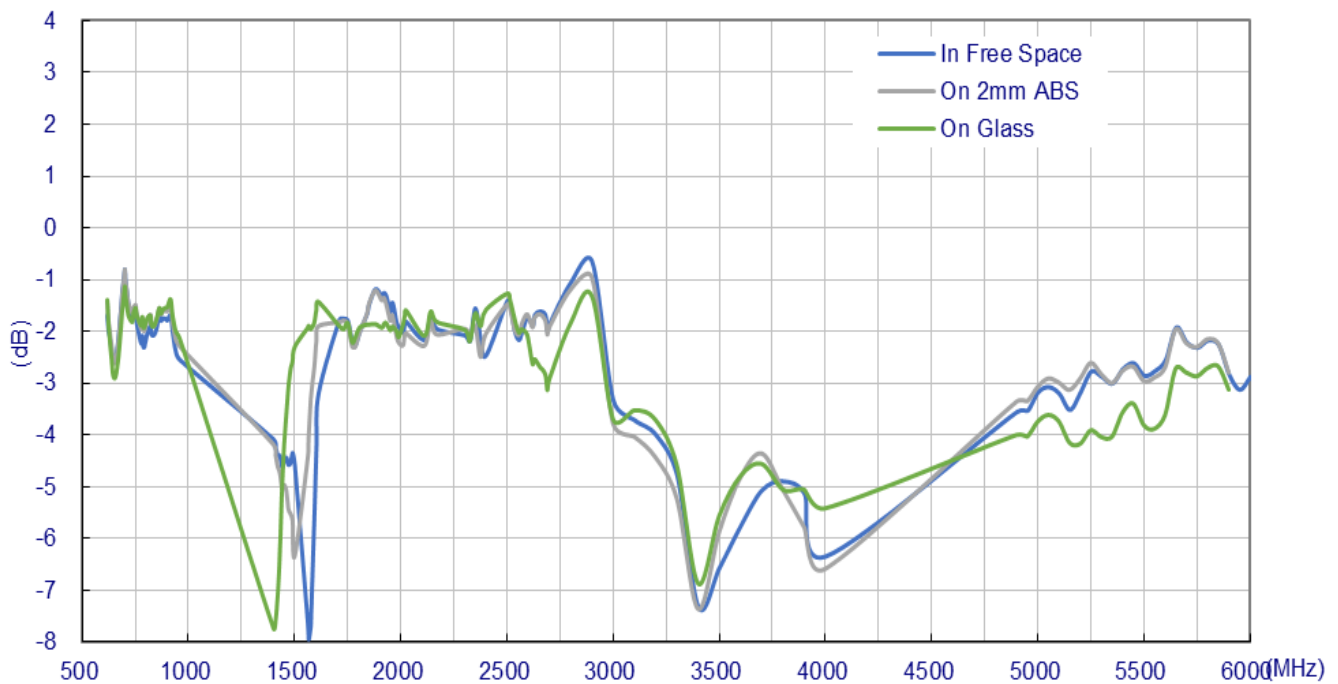

**Figure 4.** Average gain of GSA.8842 with 1 meter cable length

## 4. Antenna Radiation Patterns


The antenna radiation patterns were measured in an anechoic chamber. The measurement setup is shown below.



a) In free space



2) On 2mm ABS base



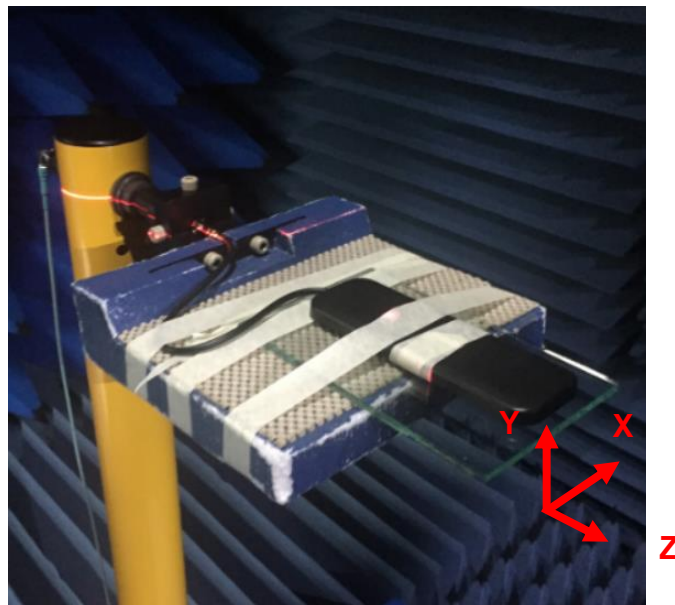




3) On the glass base




## 4.1 Antenna radiation patterns




**XY plane (Antenna with 1 meter cable length in free space)**

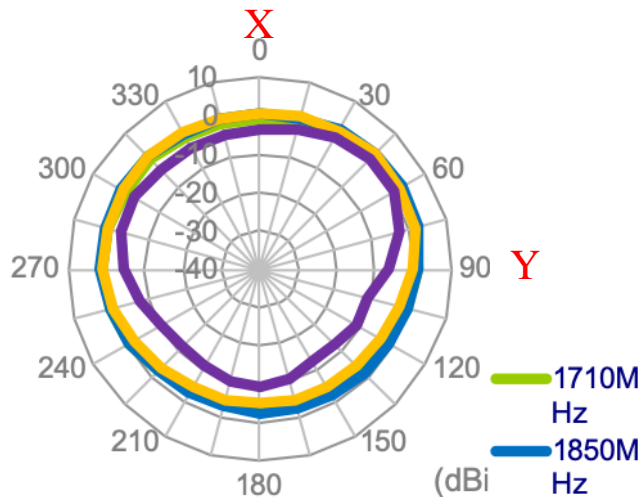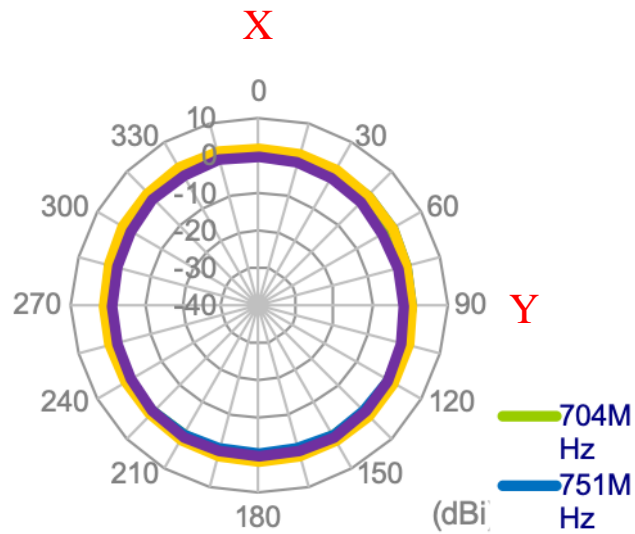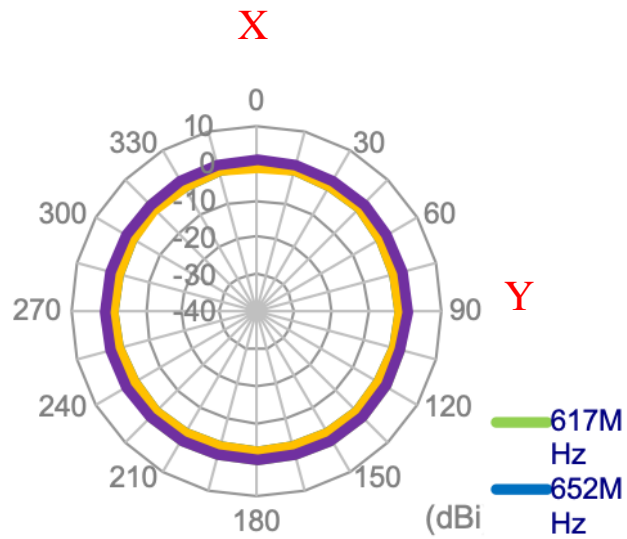


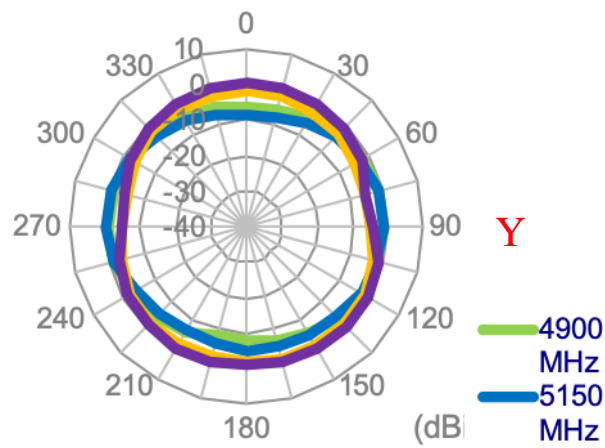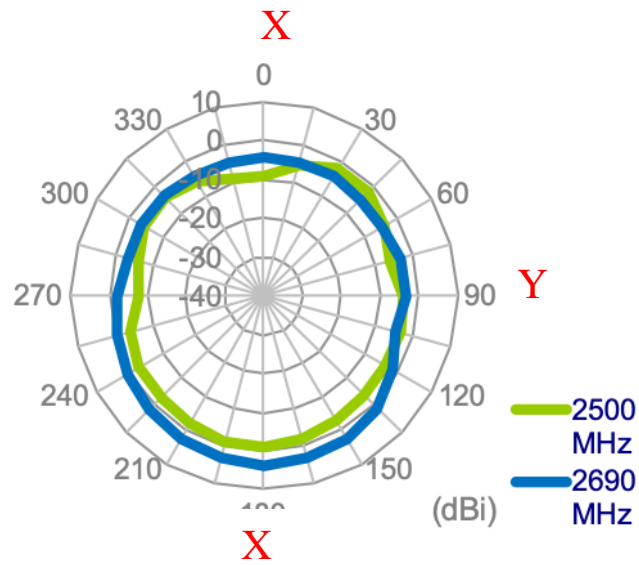



## 4.2 XZ plane (Antenna with 1 meter cable length in free space)



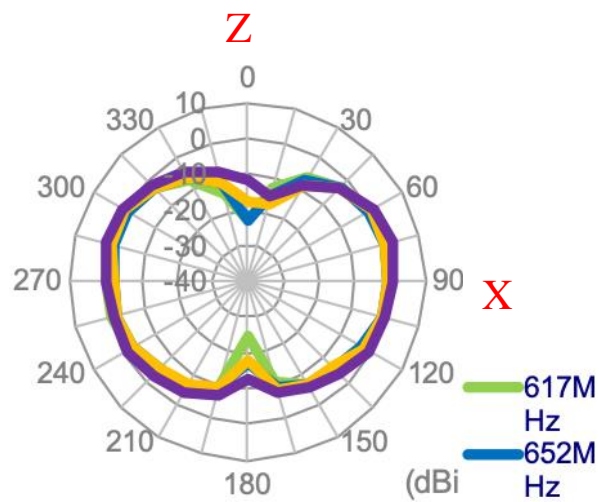


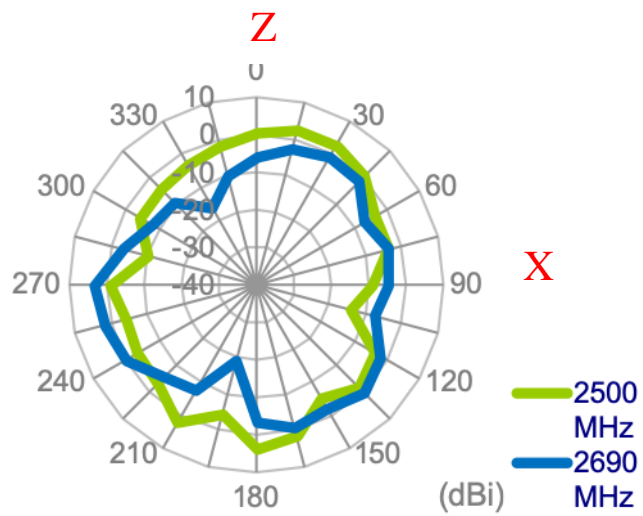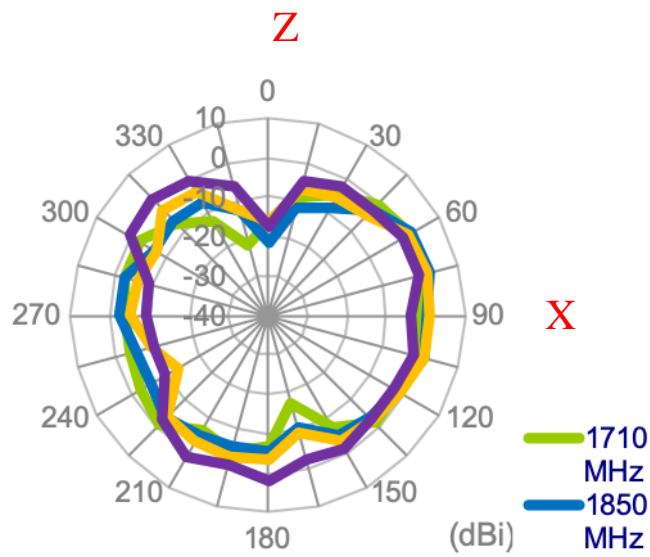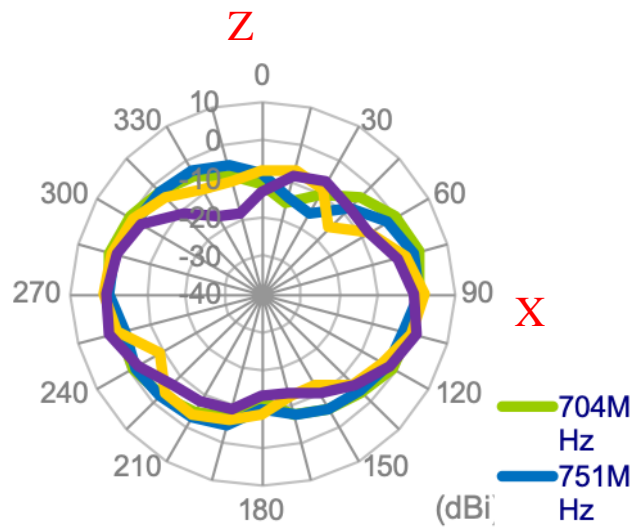



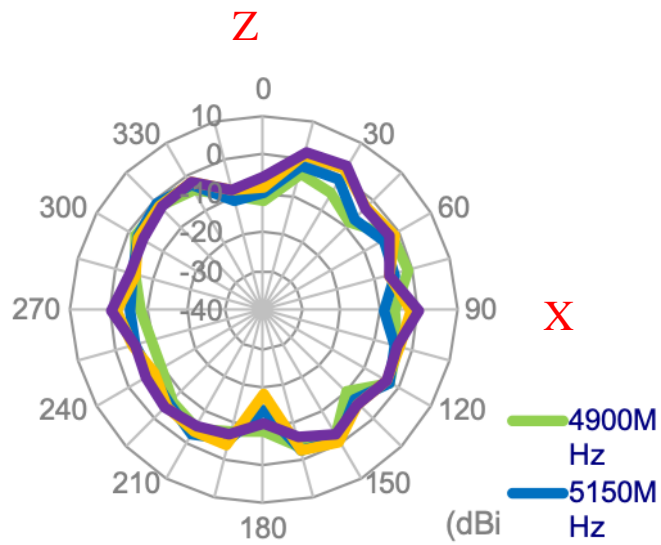




#### 4.3 YZ plane (Antenna with 1 meter cable length in free space)

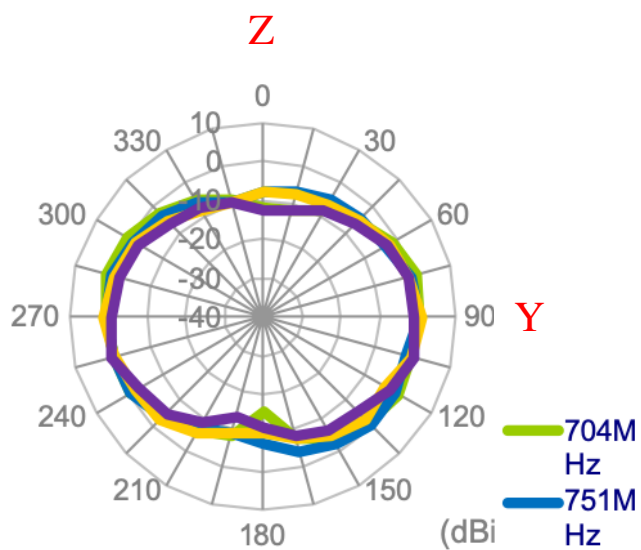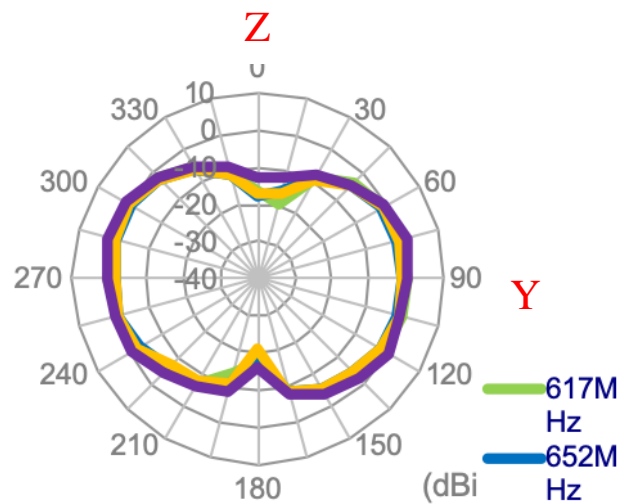

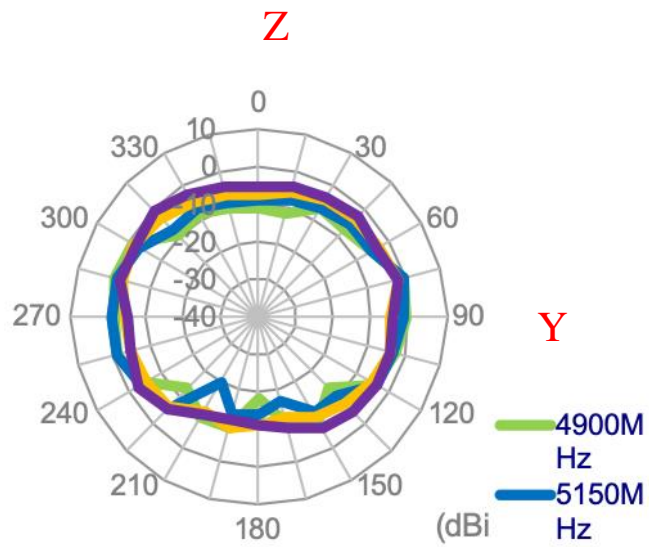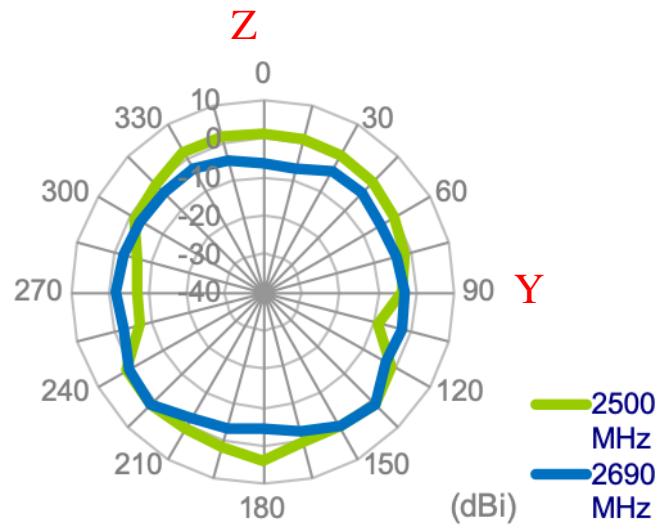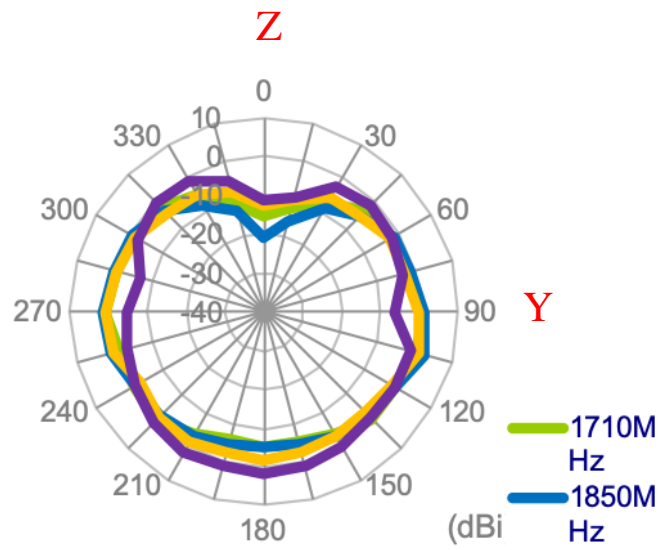





#### 4.4 XY plane (Antenna with 1 meter cable length on the 2mm ABS base)

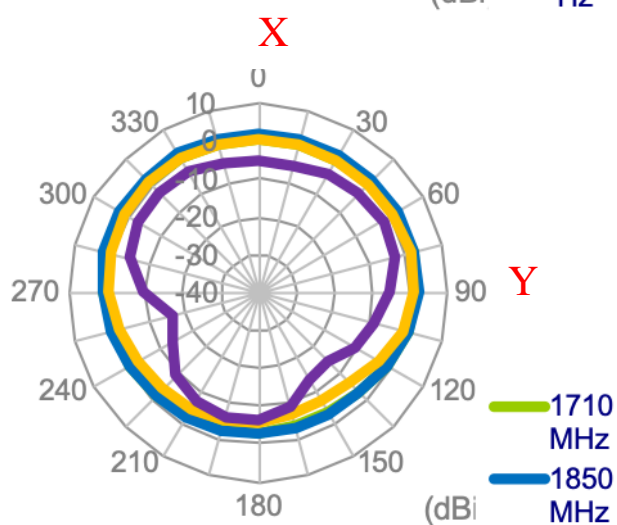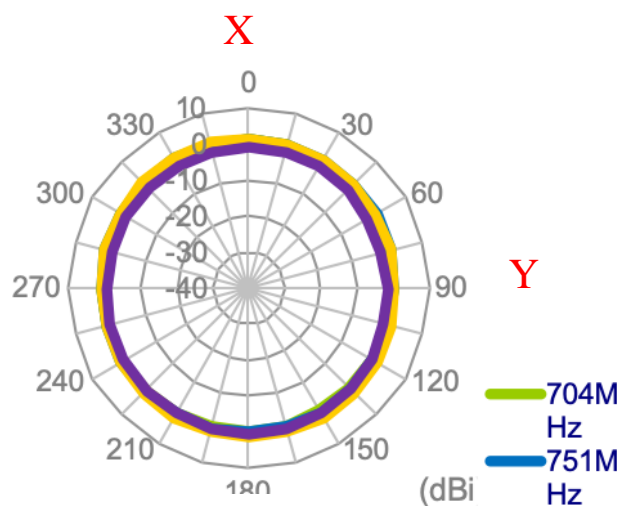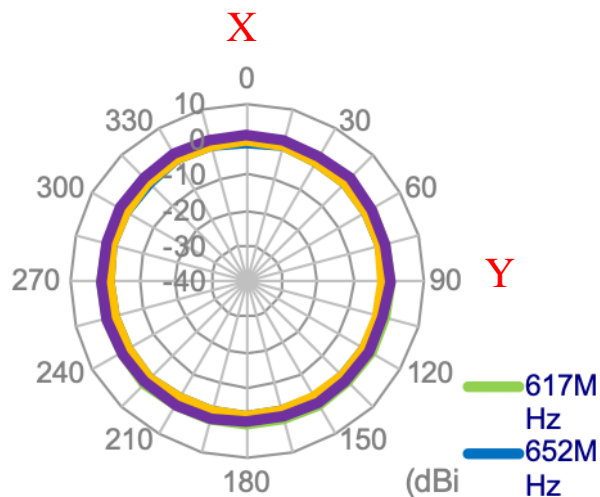

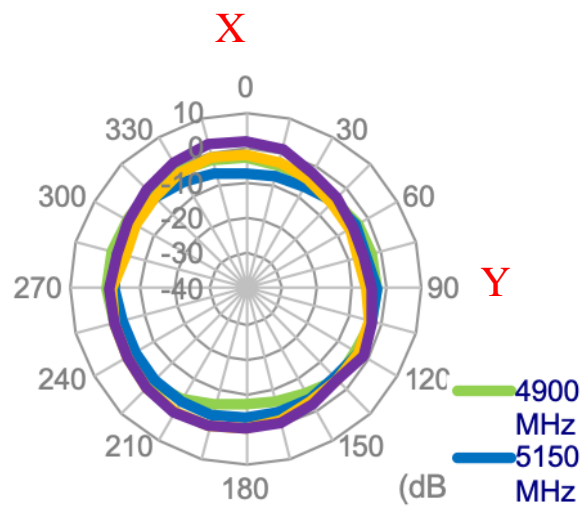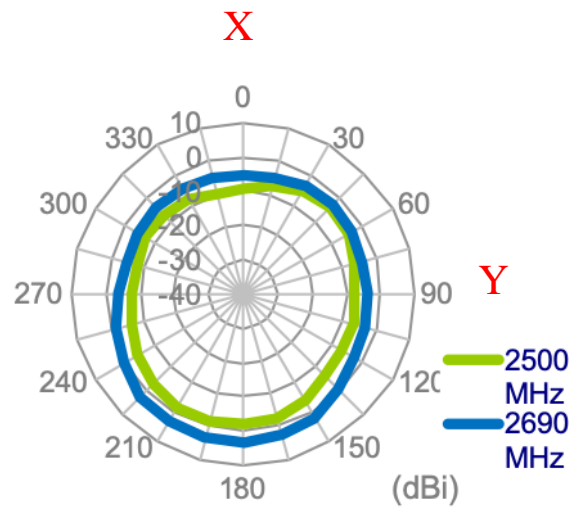


#### 4.5 XZ plane (Antenna with 1 meter cable length on the 2mm ABS base)


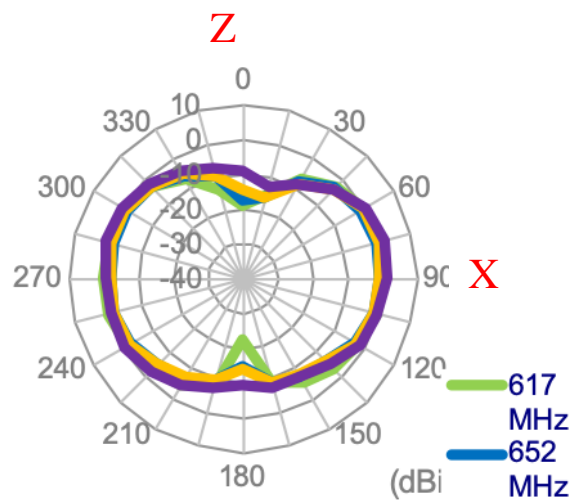


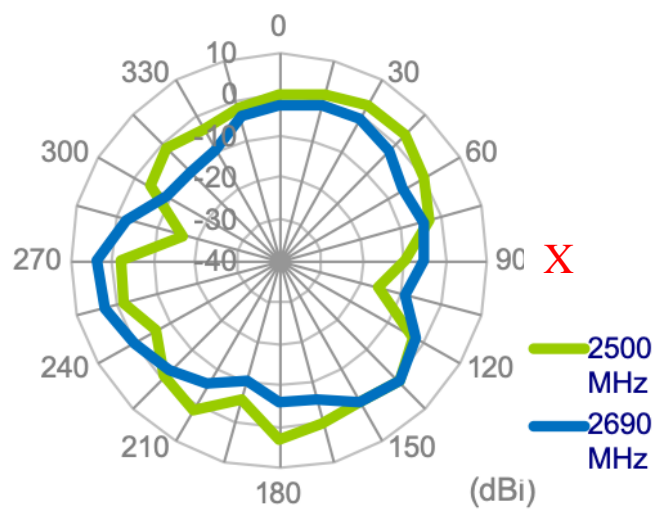
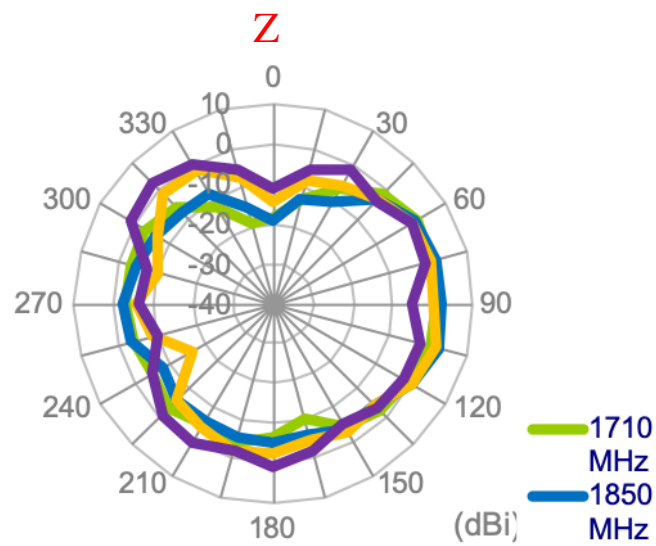
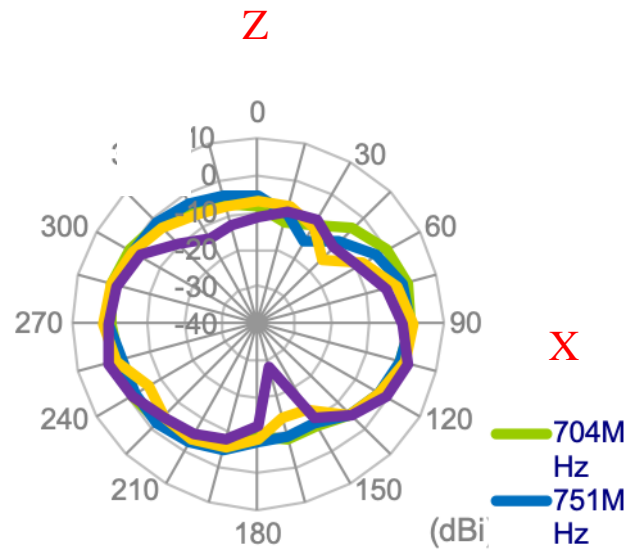




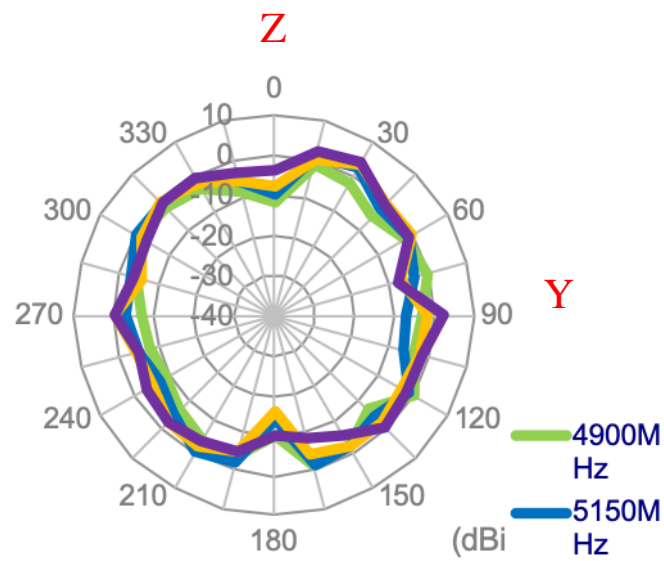




#### 4.6 YZ plane (Antenna with 1 meter cable length on the 2mm ABS base)

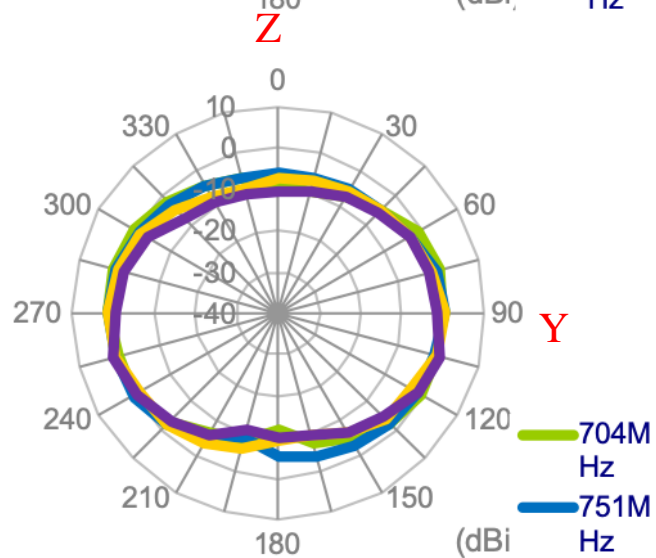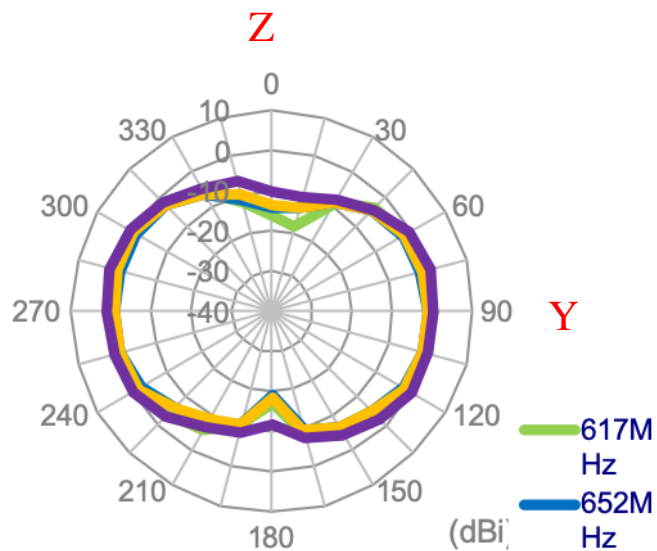

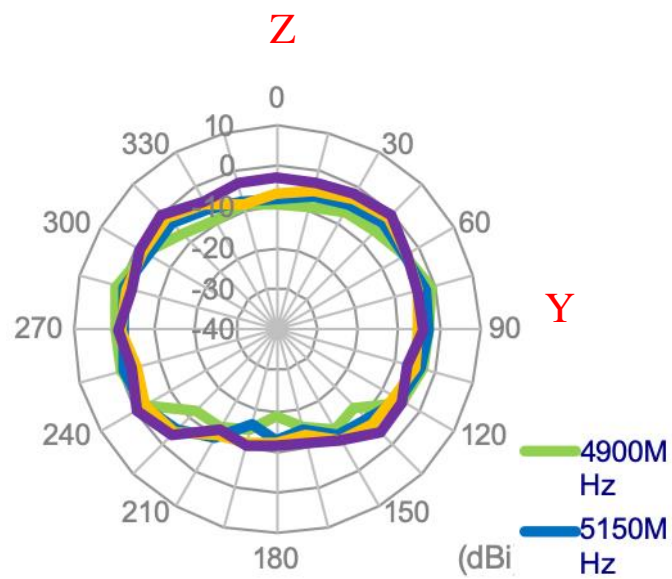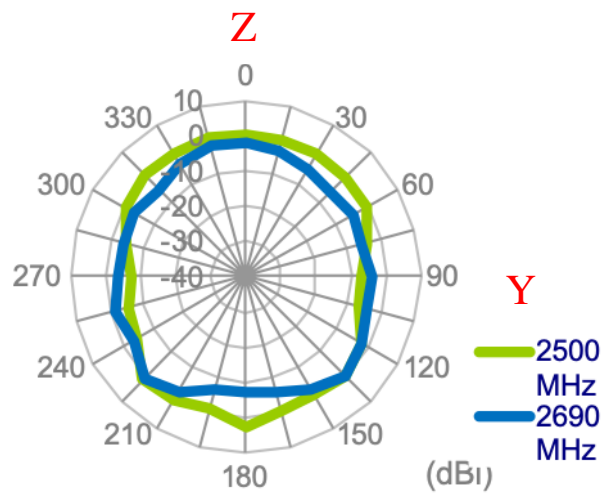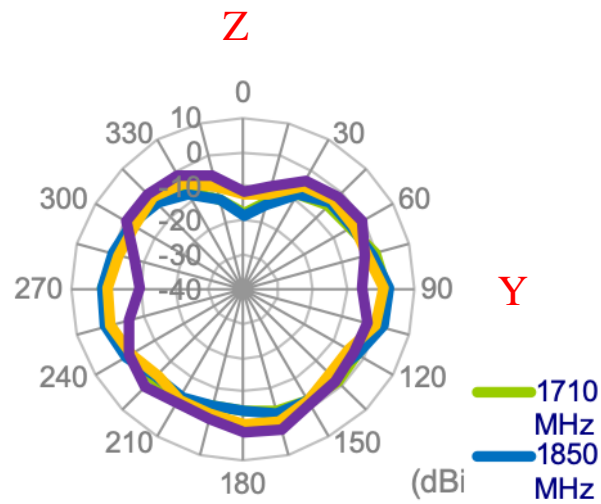





#### 4.7 XY plane (Antenna with 1 meter cable length on the glass base)

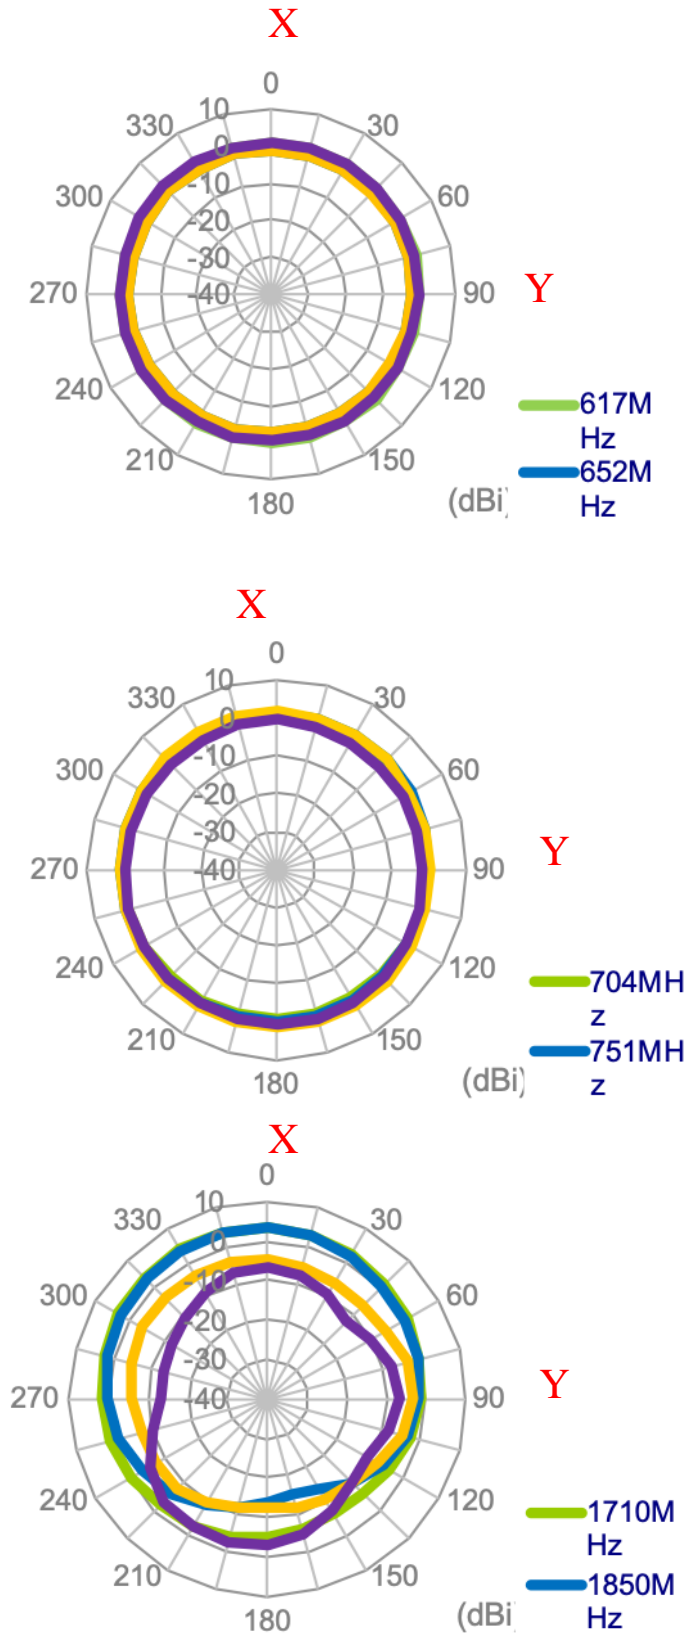


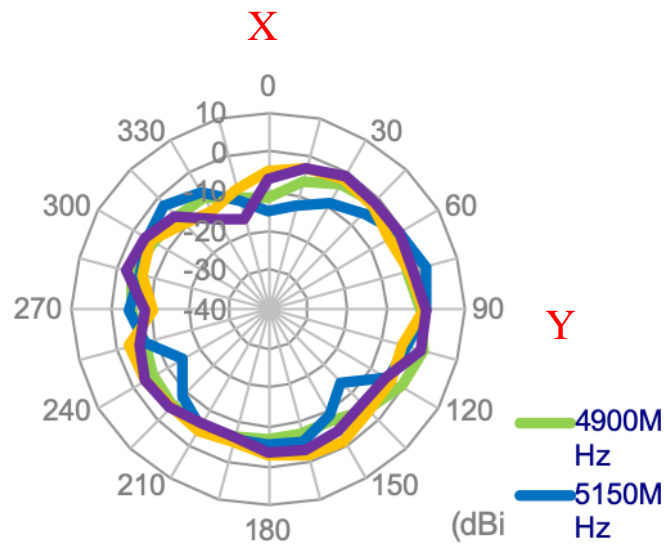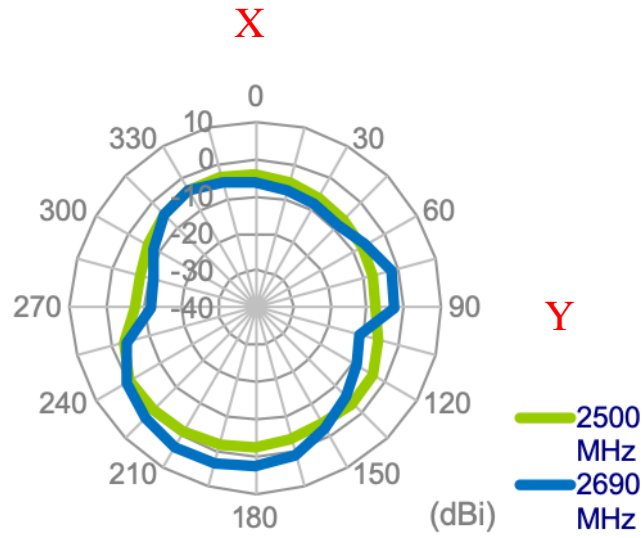



#### 4.7 XZ plane (Antenna with 1 meter cable length on the glass base)



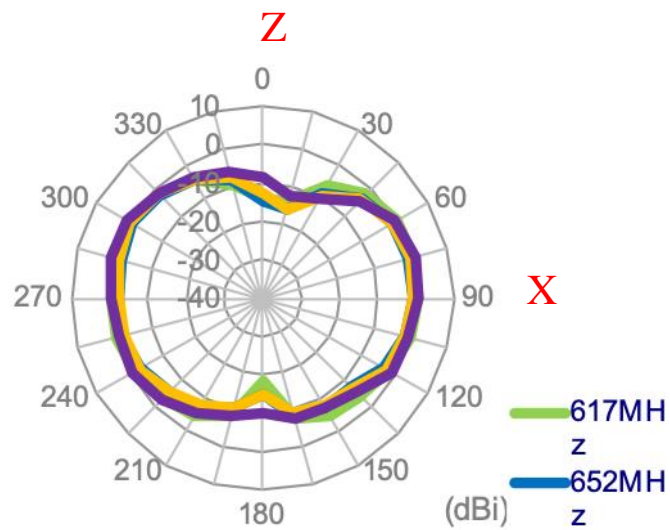


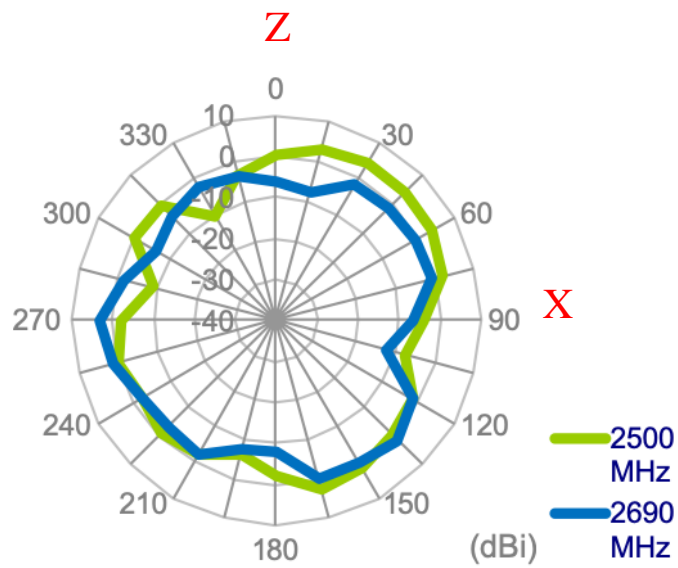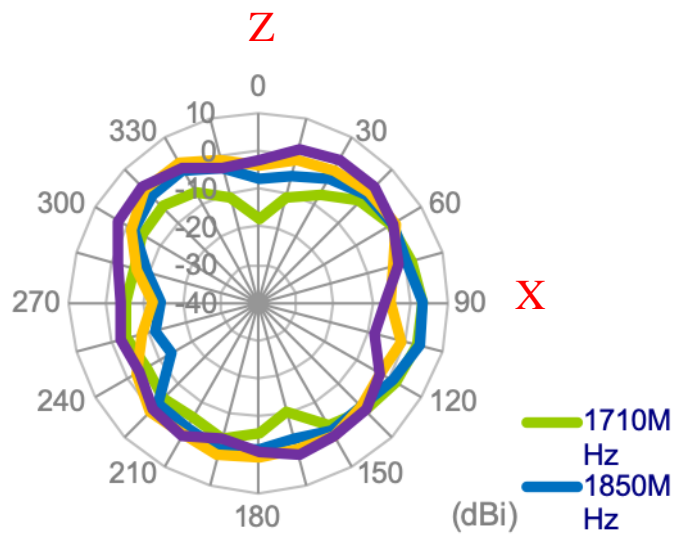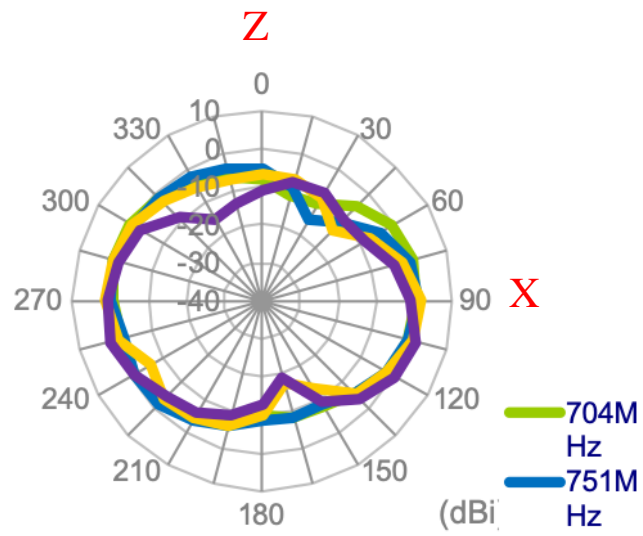

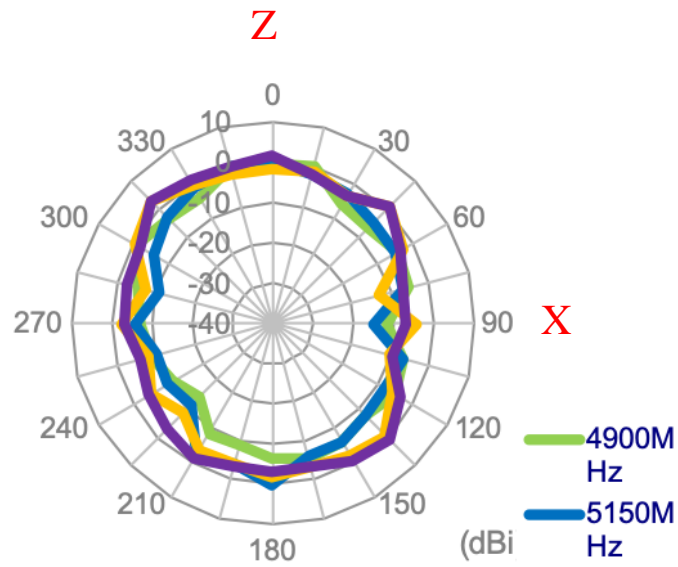


#### 4.8 YZ plane (Antenna with 1 meter cable length on the glass base)

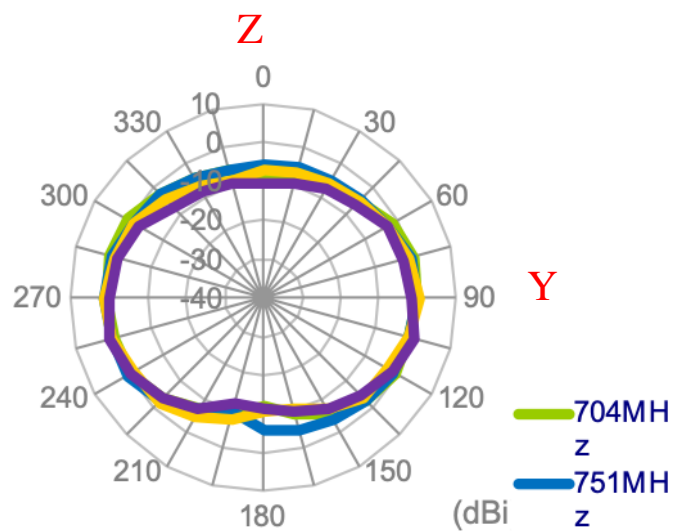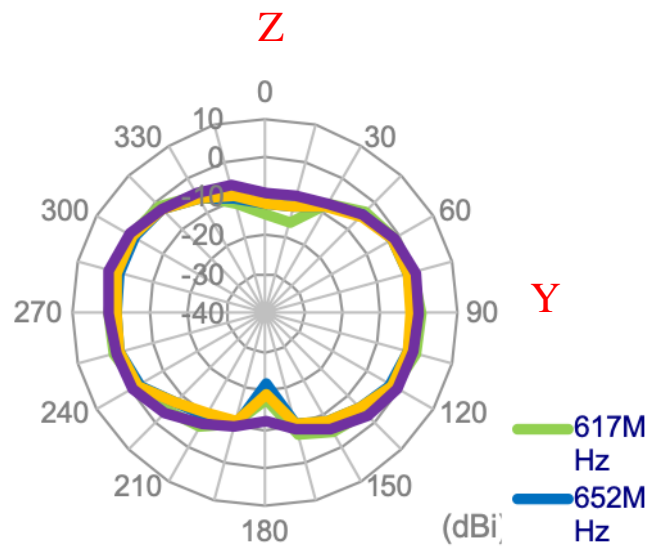

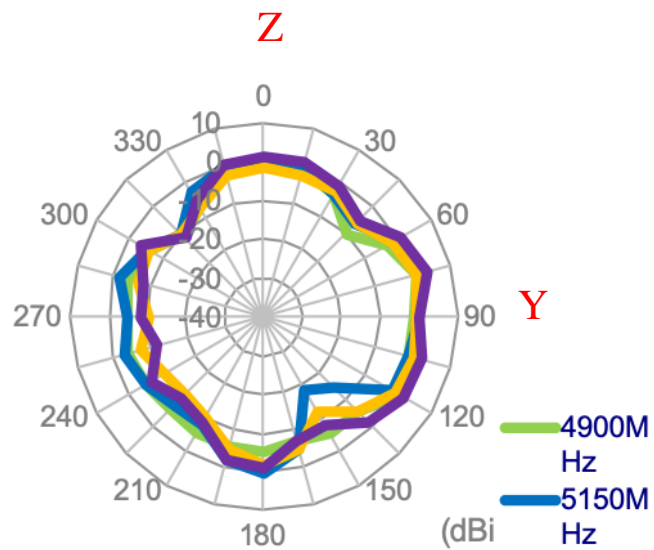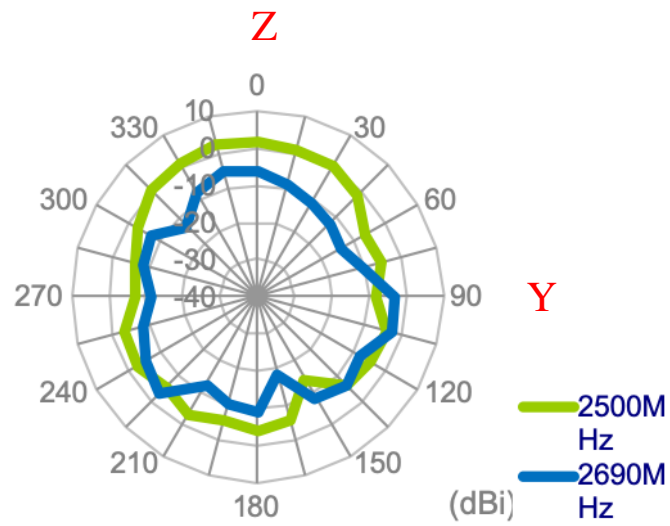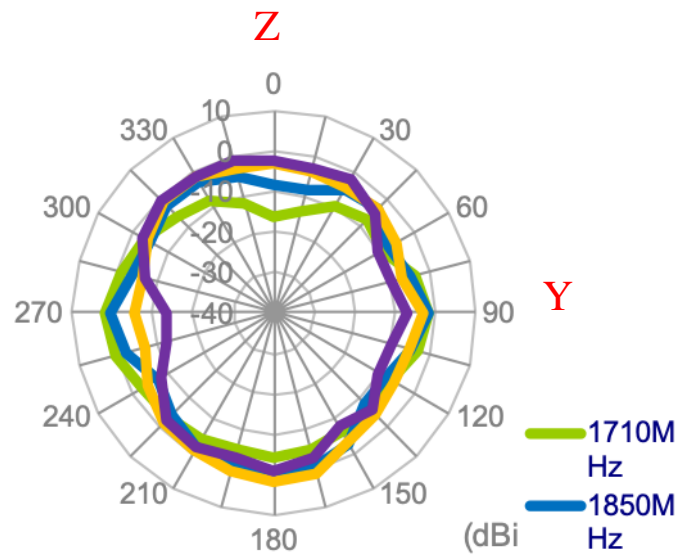





## 4.9 3D Radiation Pattern in free space

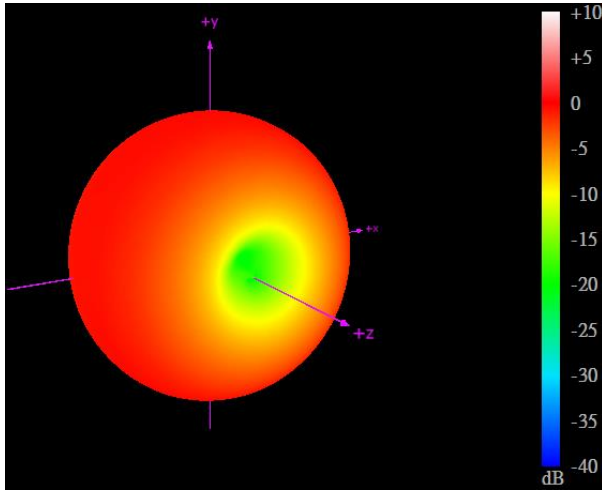


617 MHz

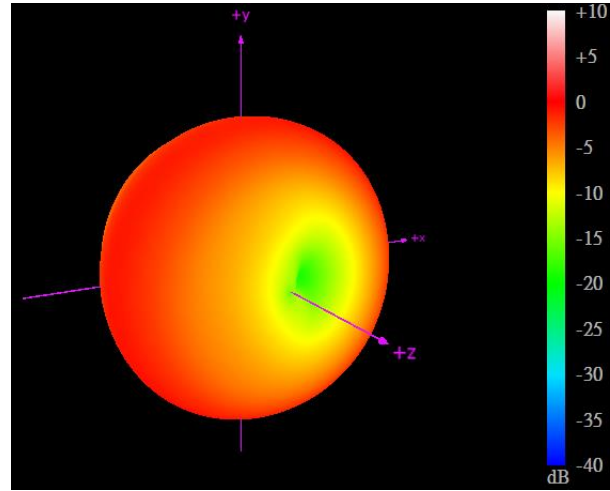


704 MHz

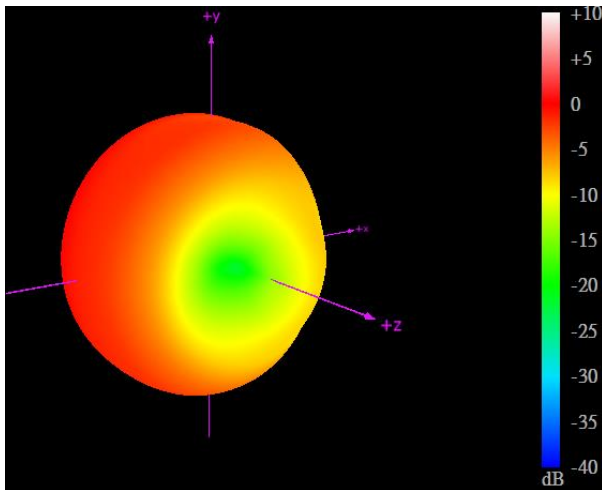


960 MHz

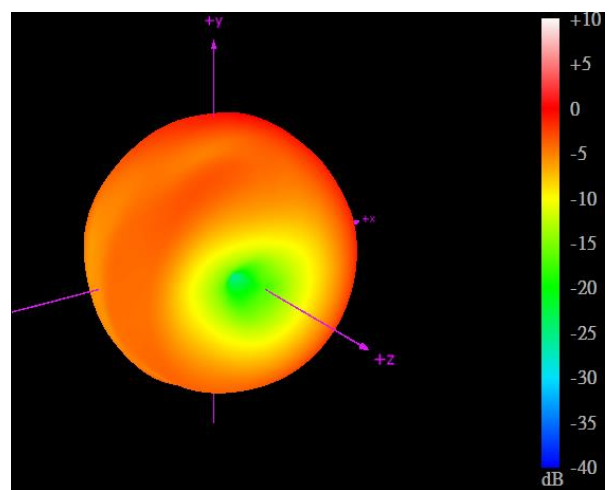

1710 MHz

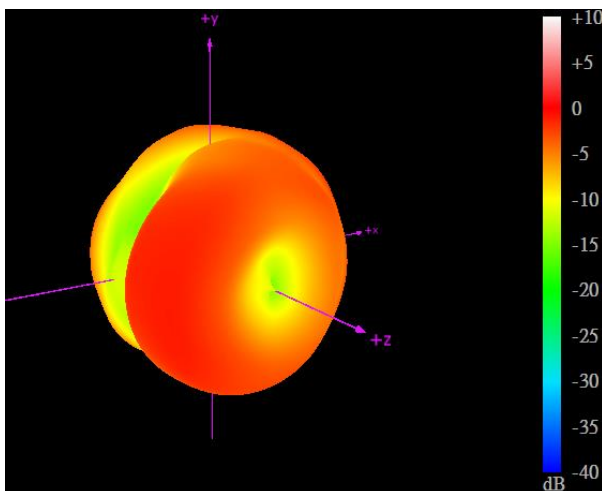


2170 MHz

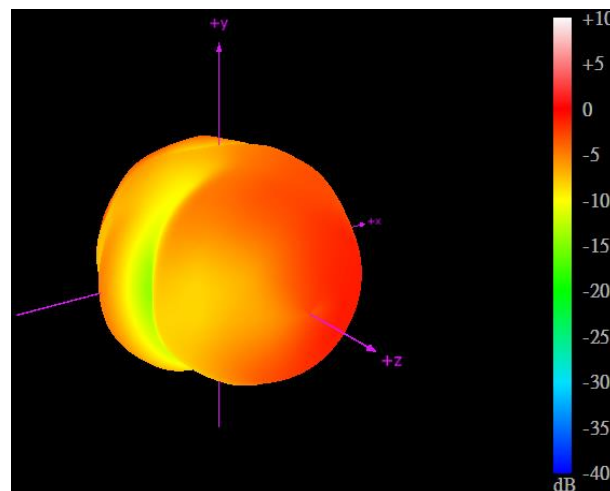


2500 MHz




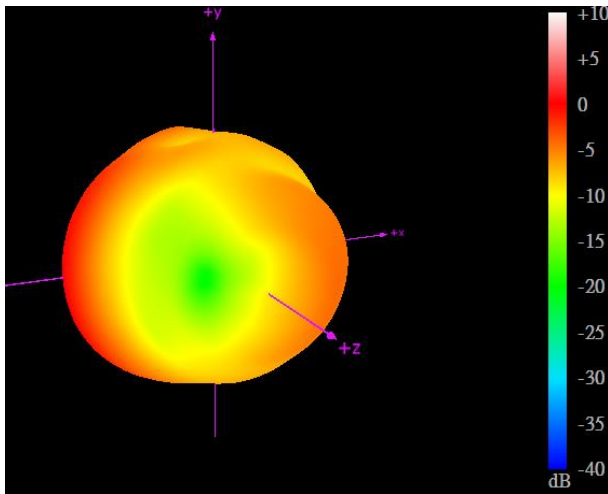

2690 MHz

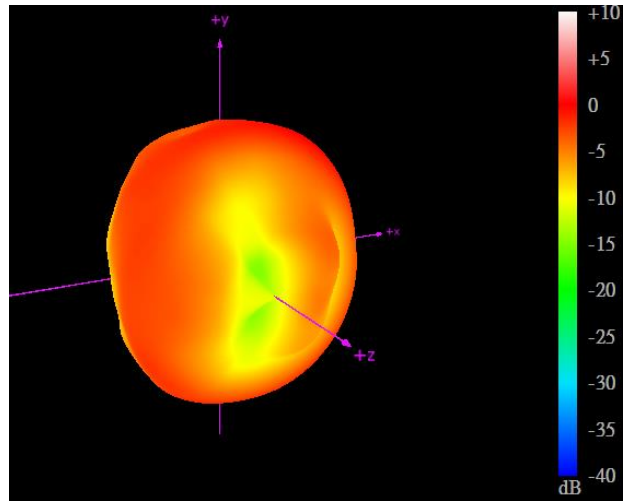


4900 MHz

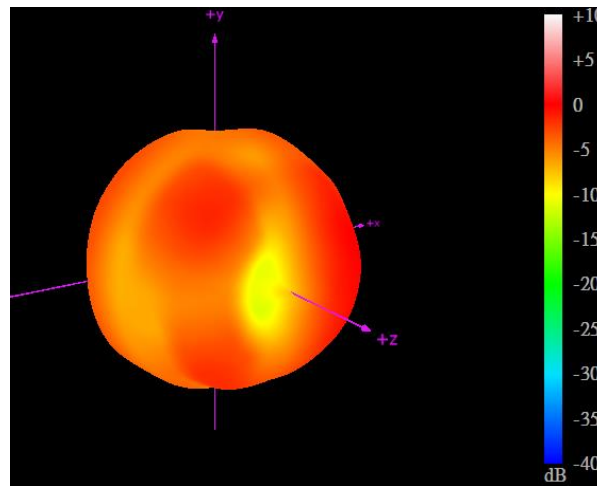


5850 MHz


#### 4.10 3D Radiation Pattern on the 2mm ABS base

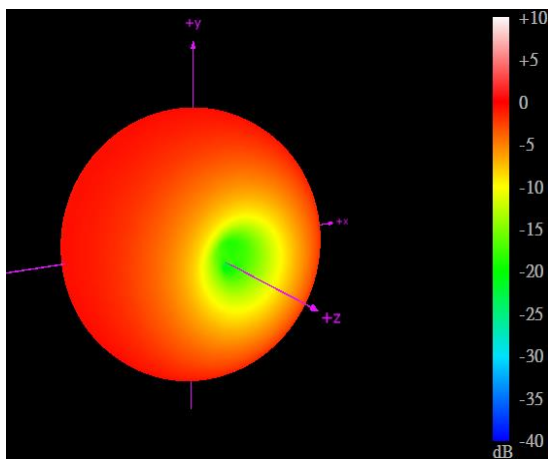


617 MHz

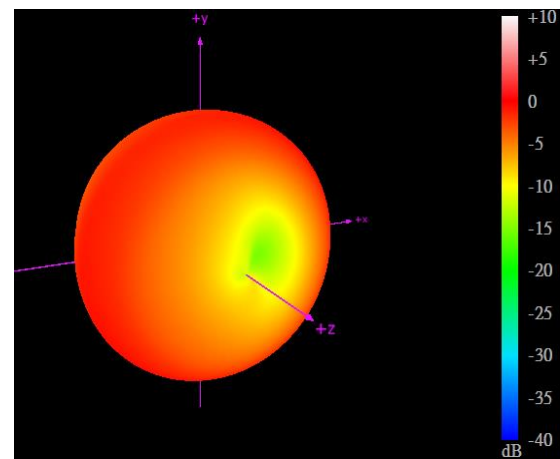


704 MHz

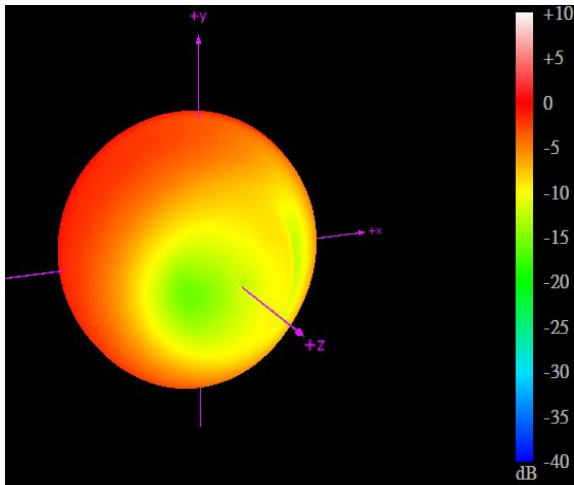


960 MHz

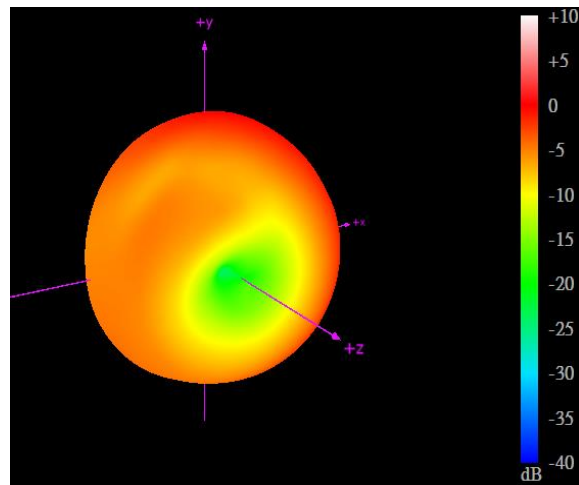


1710 MHz

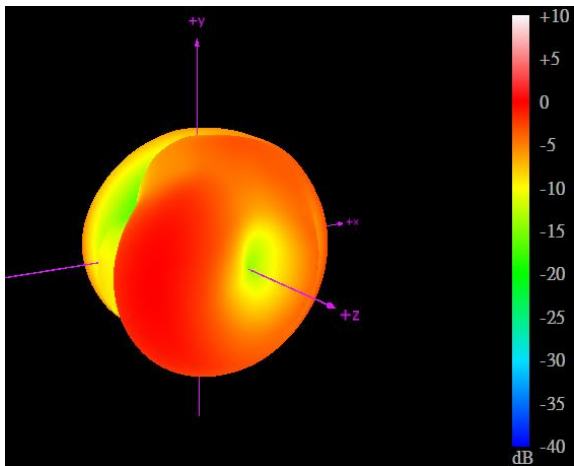


2170 MHz

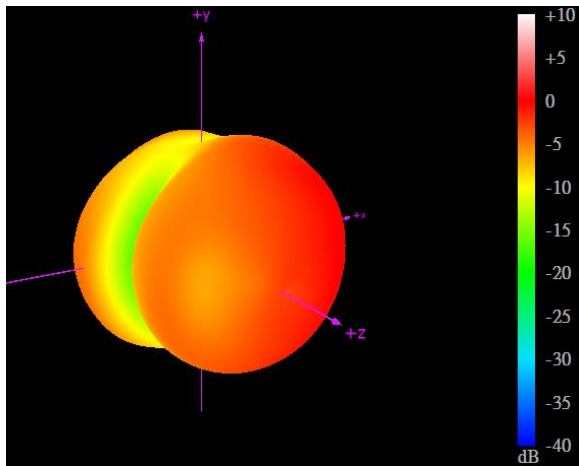


2500 MHz

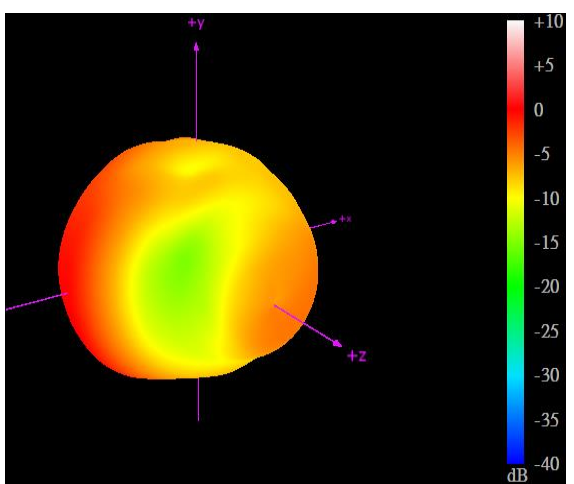

2690 MHz

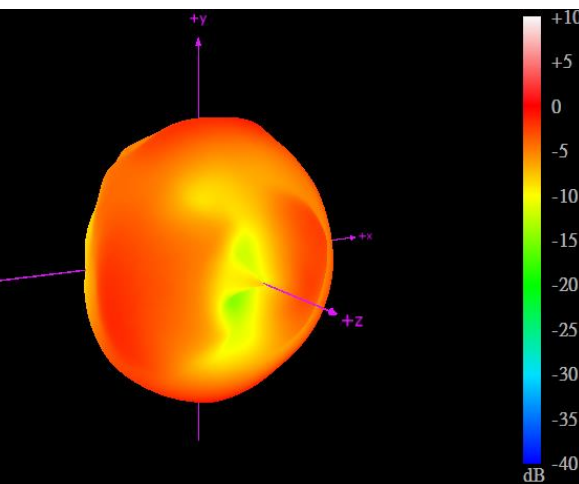


4900 MHz

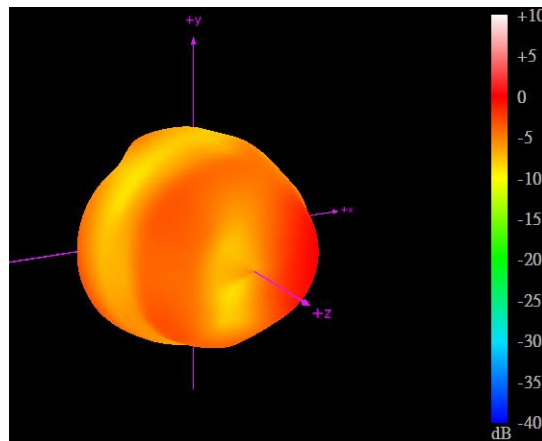


5850 MHz


#### 4.11 3D Radiation Pattern on the glass base

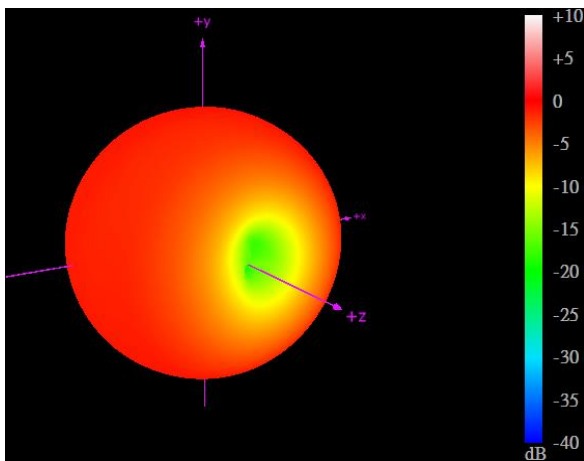


617 MHz

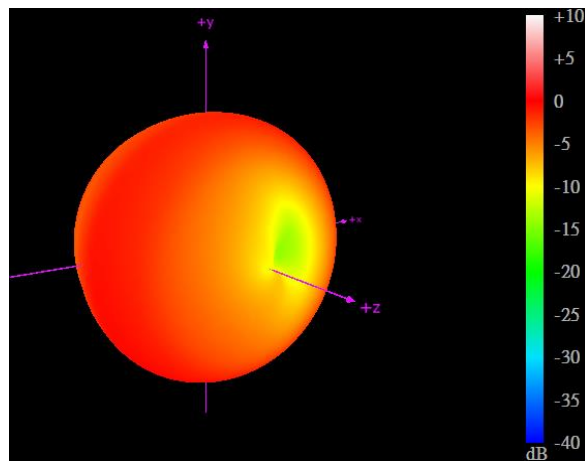


704 MHz

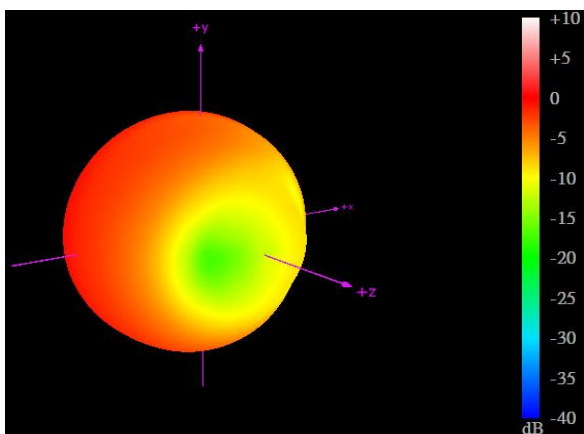


960 MHz

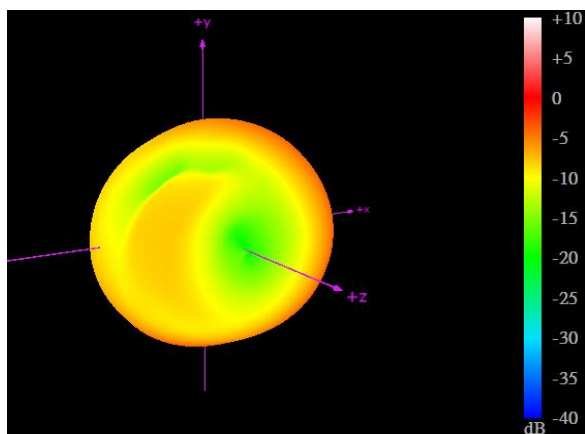


1710 MHz

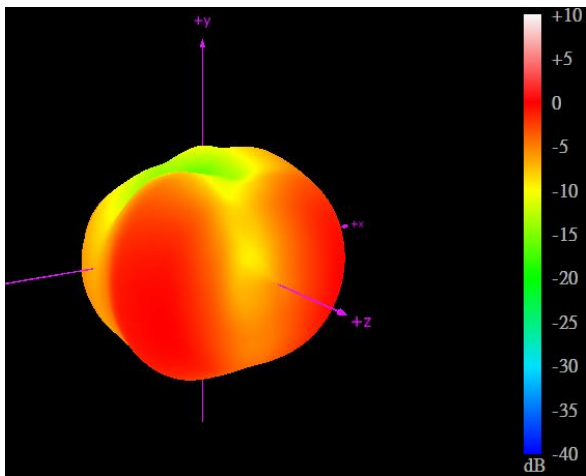


2170 MHz

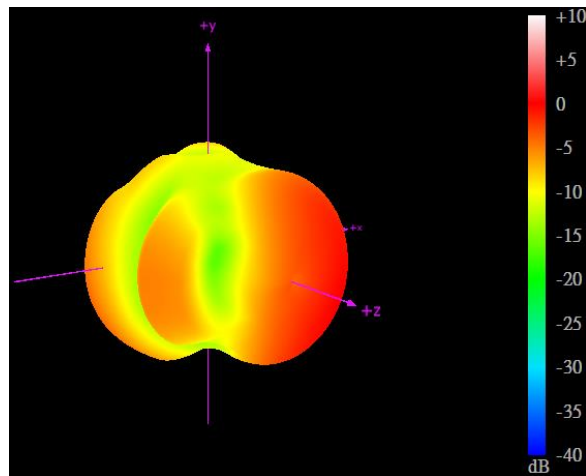


2500 MHz

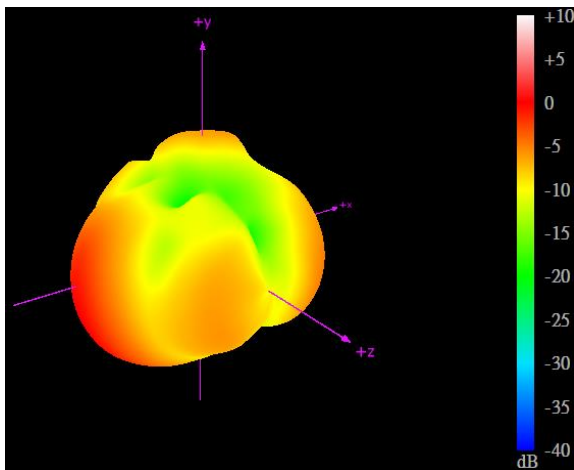

2690 MHz

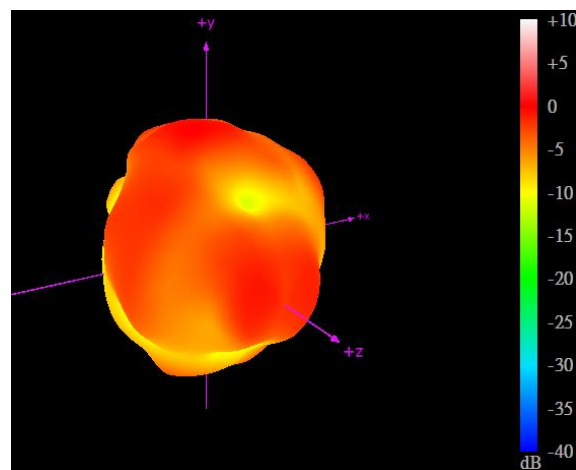


4900 MHz

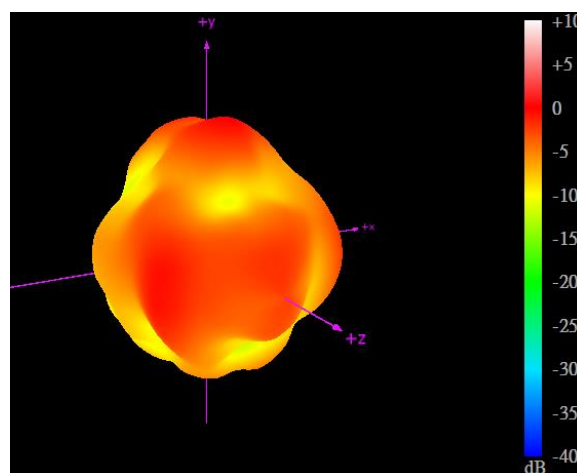

5850MHz

## 5. Mechanical Drawing (Unit: mm)

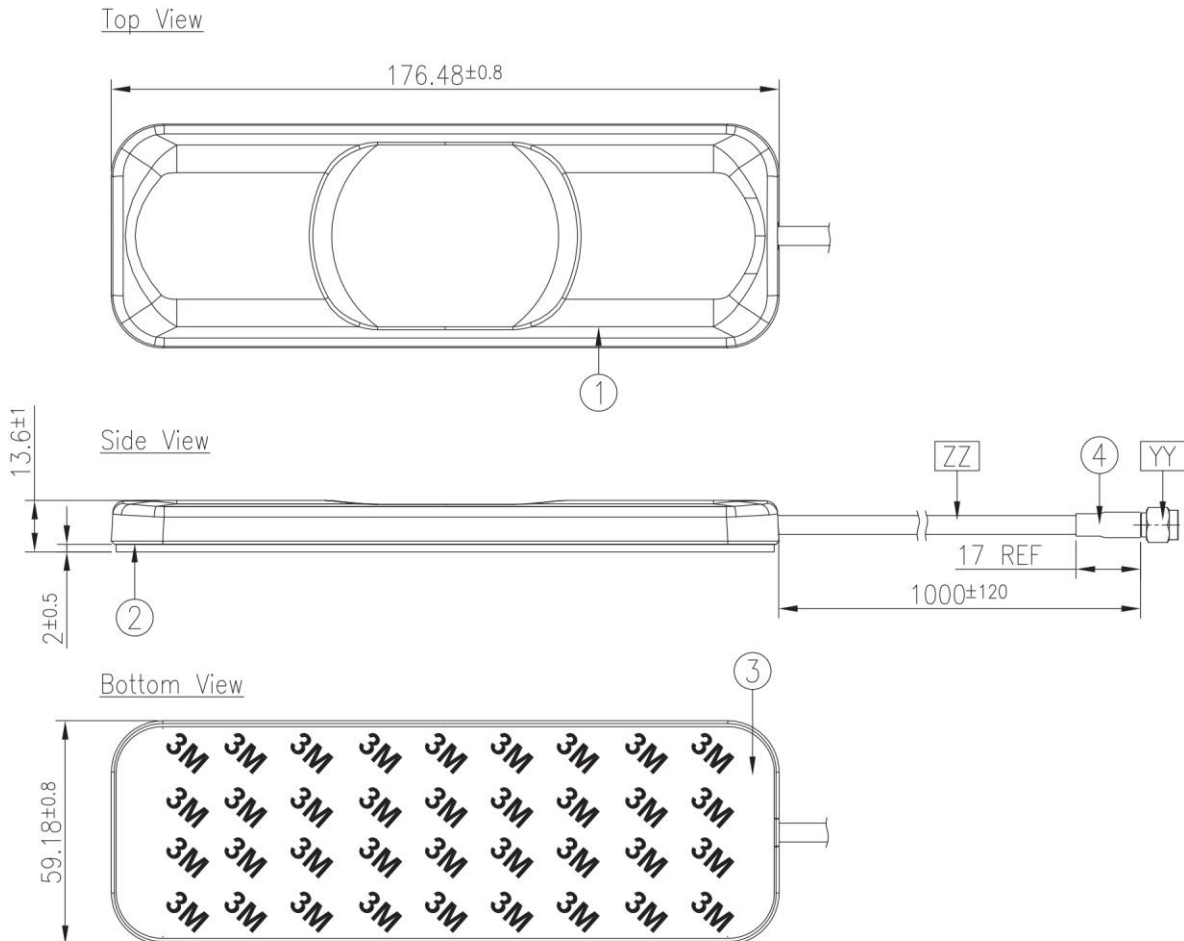


	Name	Material	Finish	QTY
1	Housing Top	ABS	Black	1
2	Housing Bottom	ABS	Black	1
3	Double Sided Adhesive (Black Foam)	3M9448HK+CR4305	White Liner	1
4	Heat Shrink Tube	PE	Black	1


	Name	Spec	Finish	QTY
YY	Connector Type	SMA(M)ST	Au Plated	1
ZZ	Cable Type	CFD200	Black	1

## 6. Packaging (Unit: mm)


1pc GSA.8842.A.105111 per PE bag  
 Bag Dimensions - 290\*160 mm  
 Weight - 124g

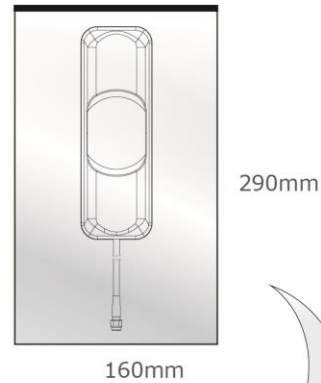

40pcs GSA.8842.A.105111 per carton  
 Carton Dimensions - 370\*370\*300 mm  
 Weight - 6.4Kg

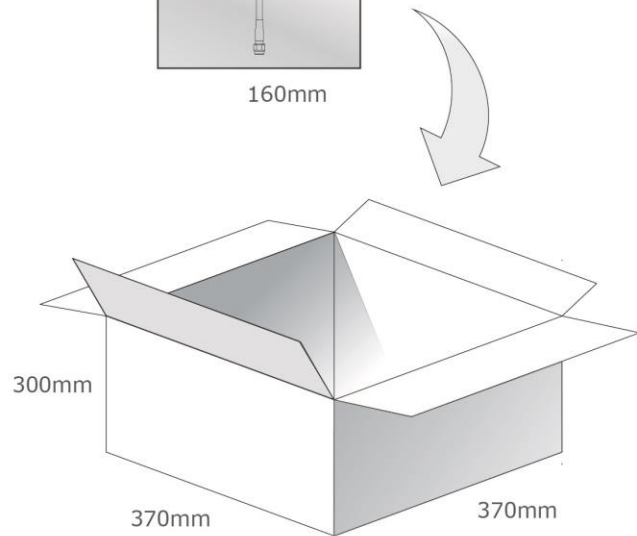


Pallet Dimensions 1200mm\*1000mm\*1400mm  
 24 Cartons per Pallet  
 6 Cartons per layer  
 4 Layers

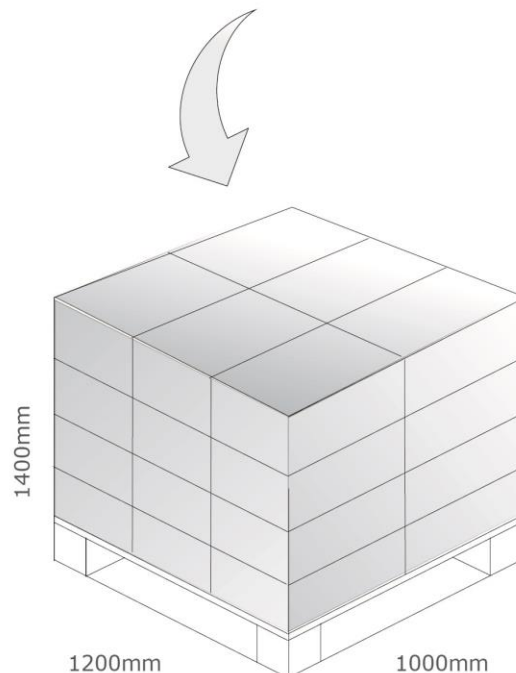

## 7. Application Note


The GSA.8842 antenna performance with different cable lengths and different mounting environments is shown below.

### 7.1 Return Loss (in free space)

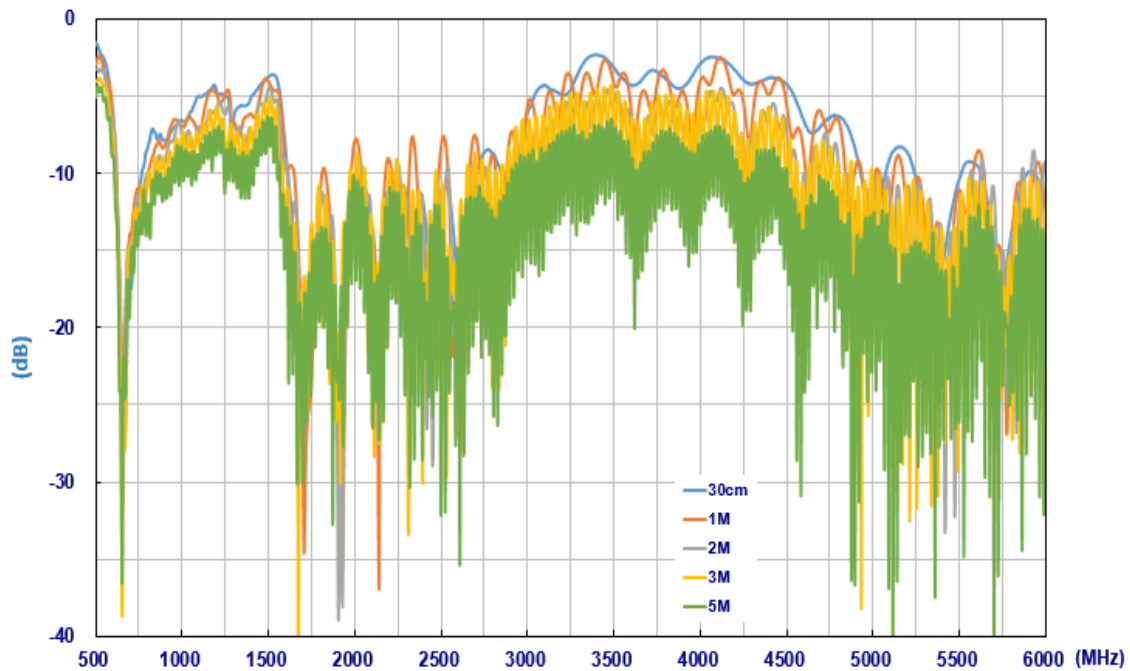

**Figure 5.** Return loss of GSA.8842 Antenna with different cable lengths


### 7.2 Efficiency (in free space)

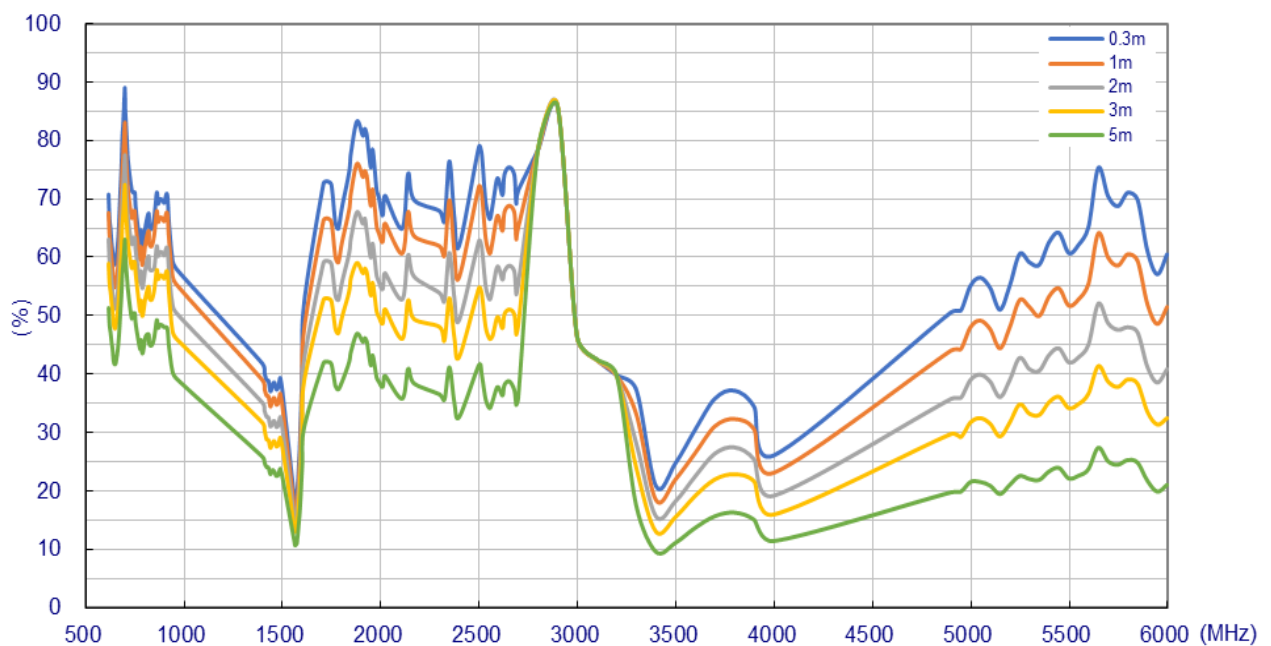

**Figure 6.** Efficiency of GSA.8842 Antenna with different cable lengths




### 7.3 Average Gain (in free space)

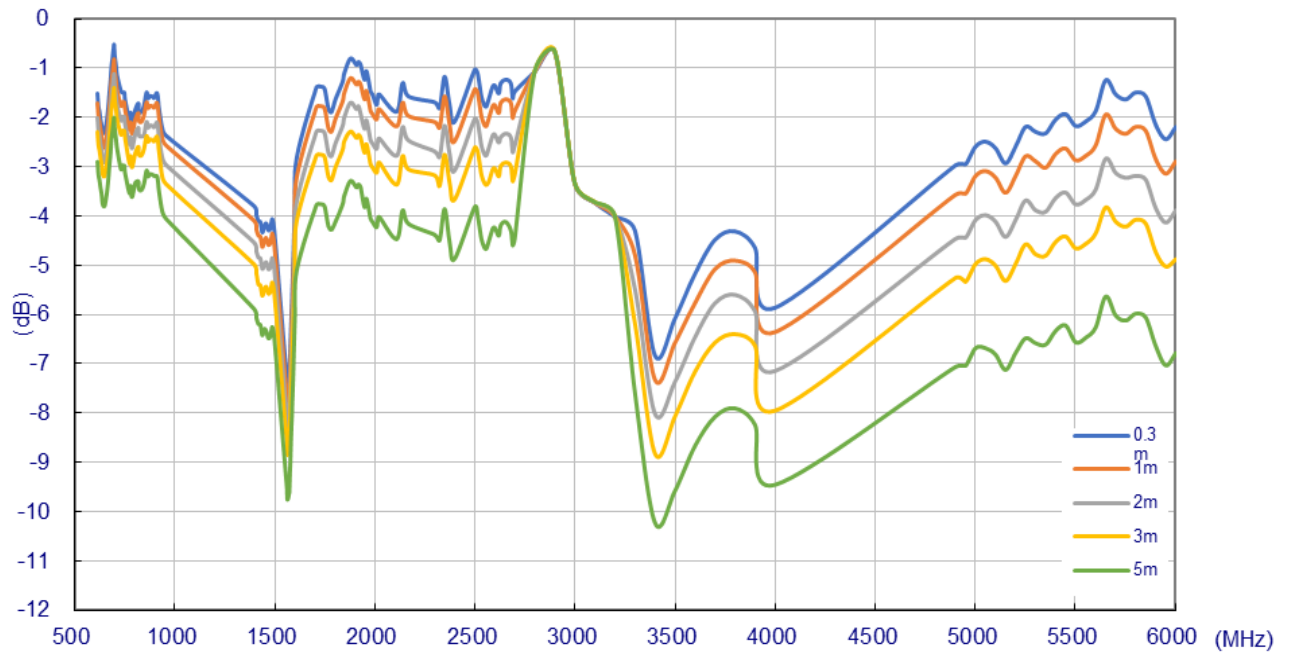

**Figure 7.** Average Gain of GSA.8842 Antenna with different cable lengths


### 7.4 Peak Gain (in free space)

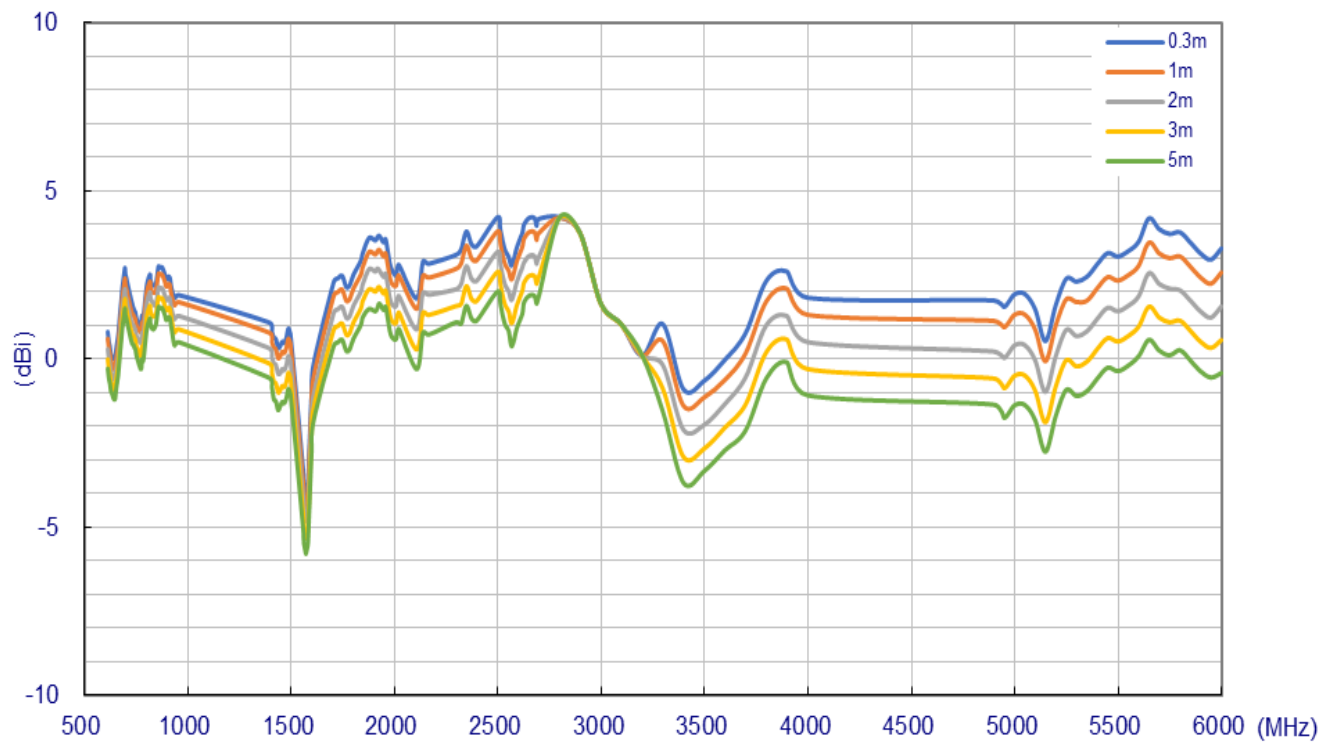

**Figure 8.** Peak Gain of GSA.8842 Antenna with different cable lengths




### 7.5 Return Loss (on the 2mm ABS base)

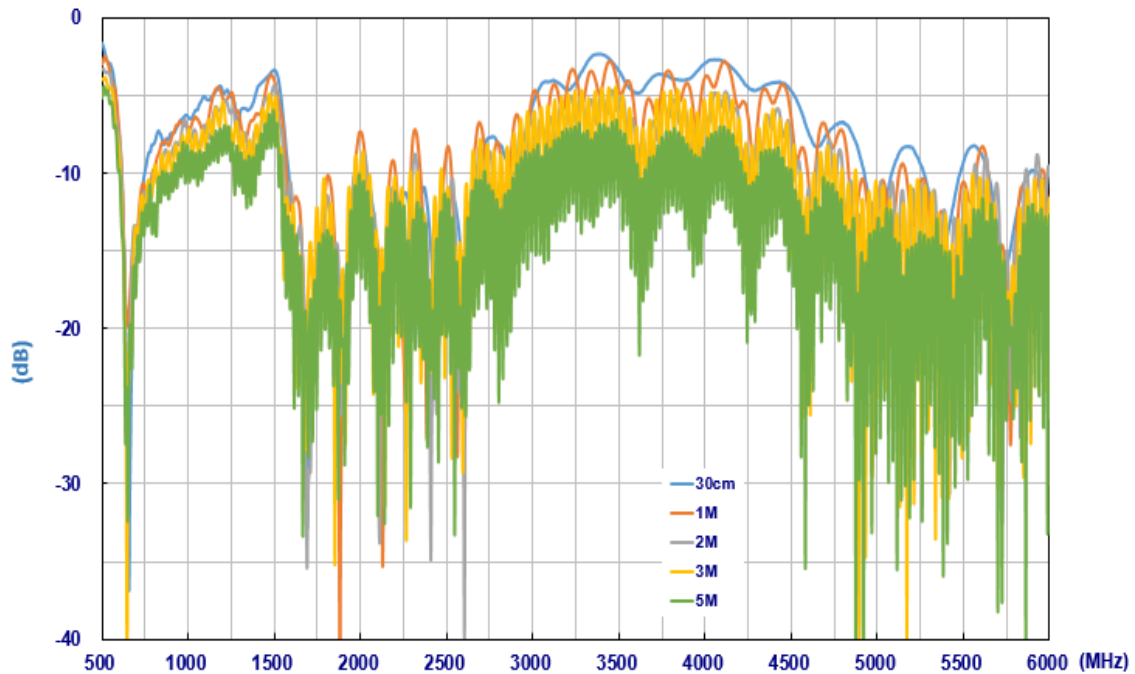


**Figure 9.** Return loss of GSA.8842 Antenna with different cable lengths

### 7.6 Efficiency (on the 2mm ABS base)

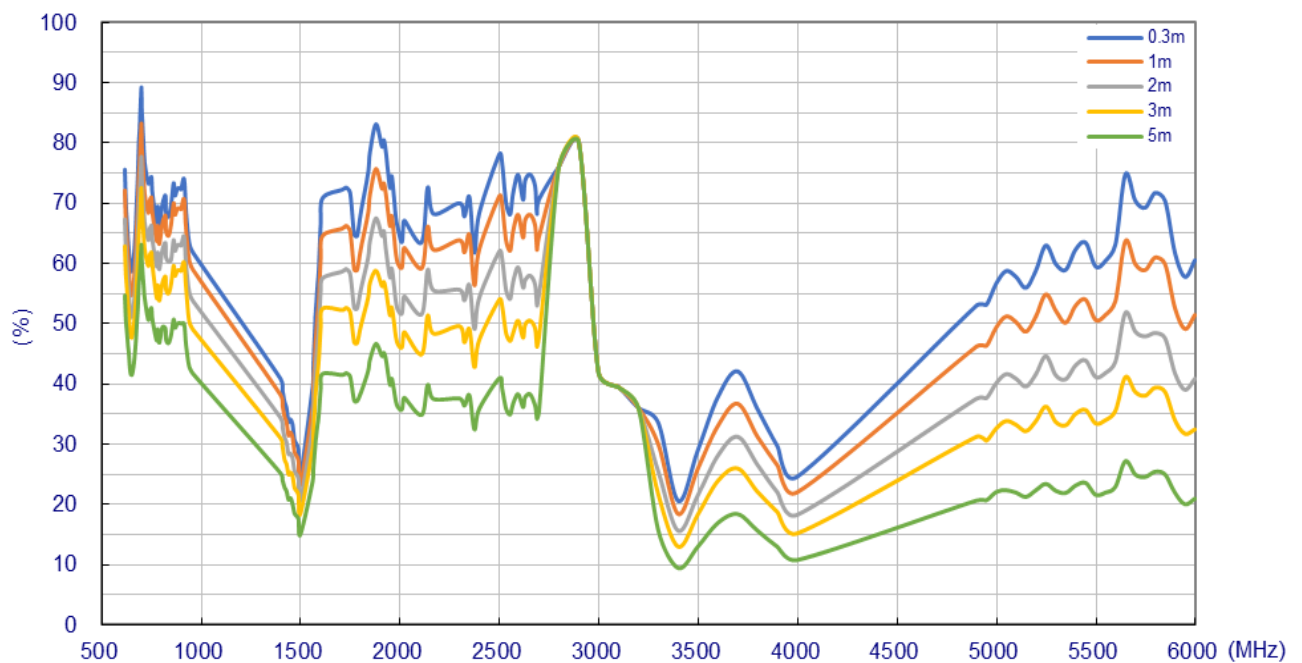


**Figure 10.** Efficiency of GSA.8842 Antenna with different cable lengths

### 7.7 Average Gain (on the 2mm ABS base)

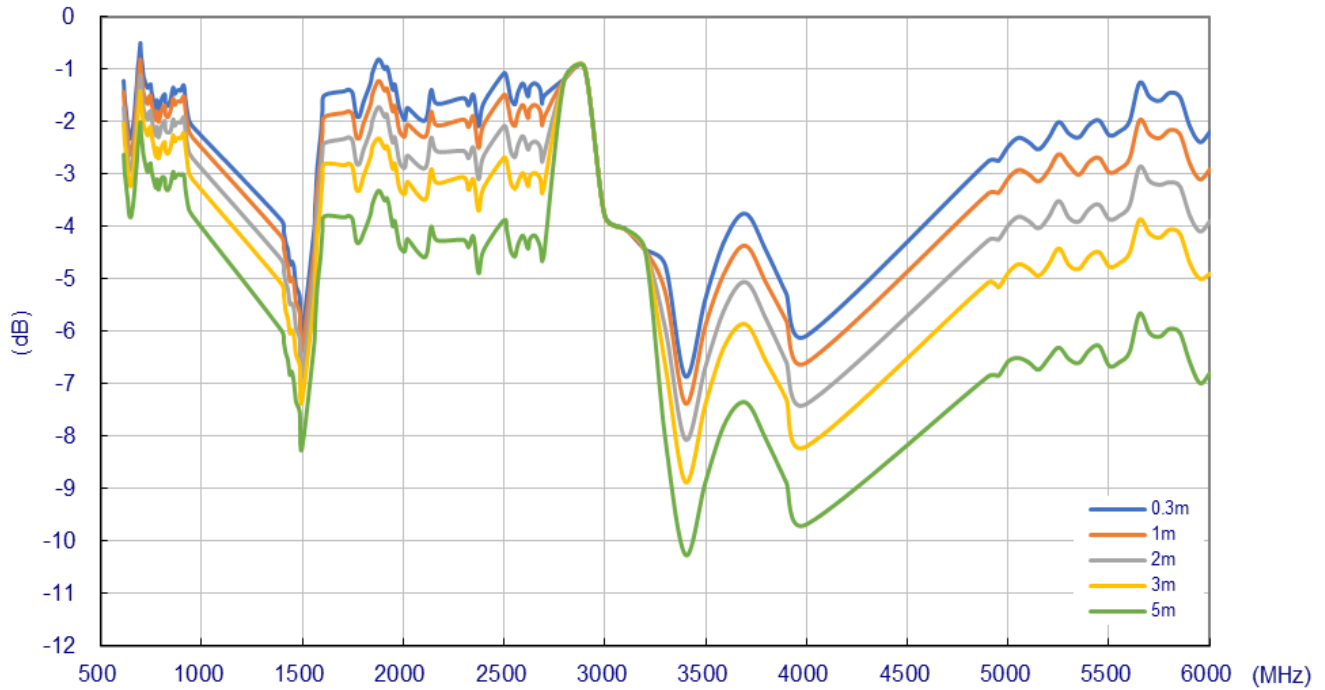


**Figure 11.** Average Gain of GSA.8842 Antenna with different cable lengths

### 7.8 Peak Gain (on the 2mm ABS base)

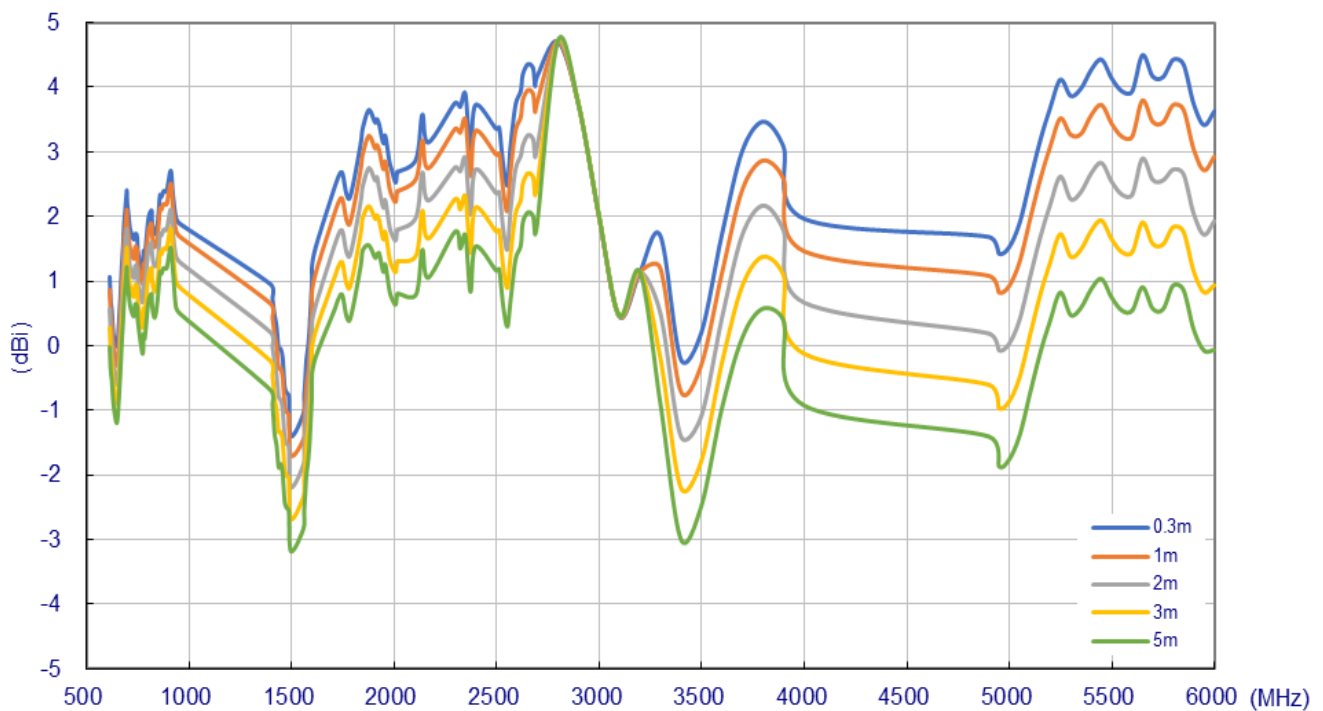


**Figure 12.** Peak Gain of GSA.8842 Antenna with different cable lengths

### 7.9 Return Loss (on the glass base)

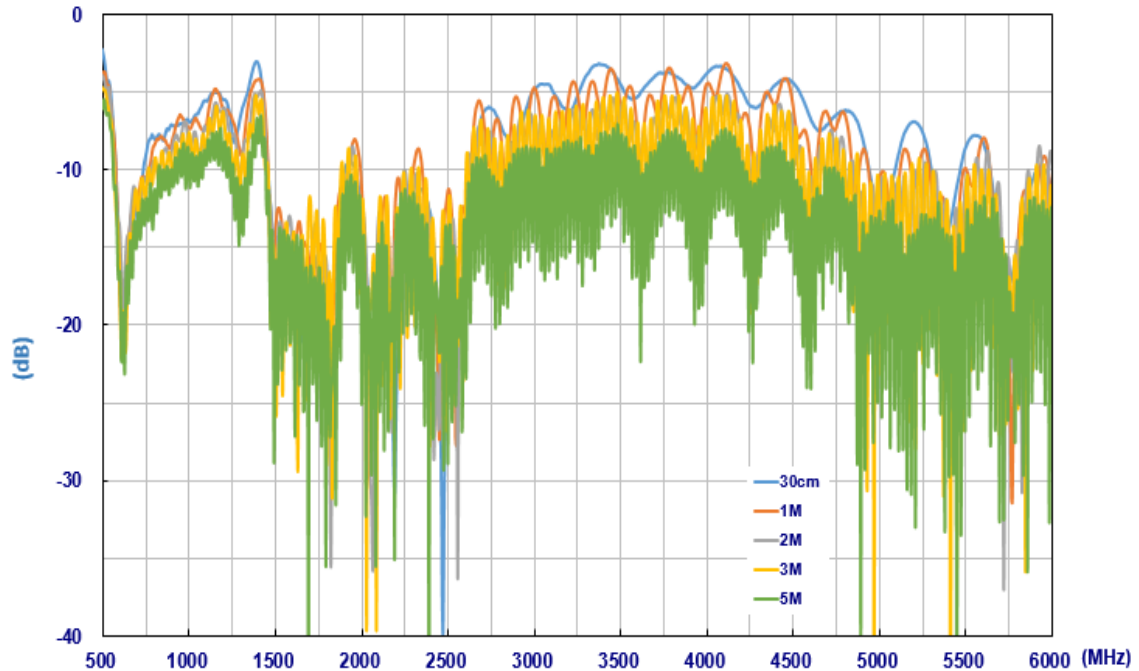


**Figure 13.** Return loss of GSA.8842 Antenna with different cable lengths

### 7.10 Efficiency (on the glass base)

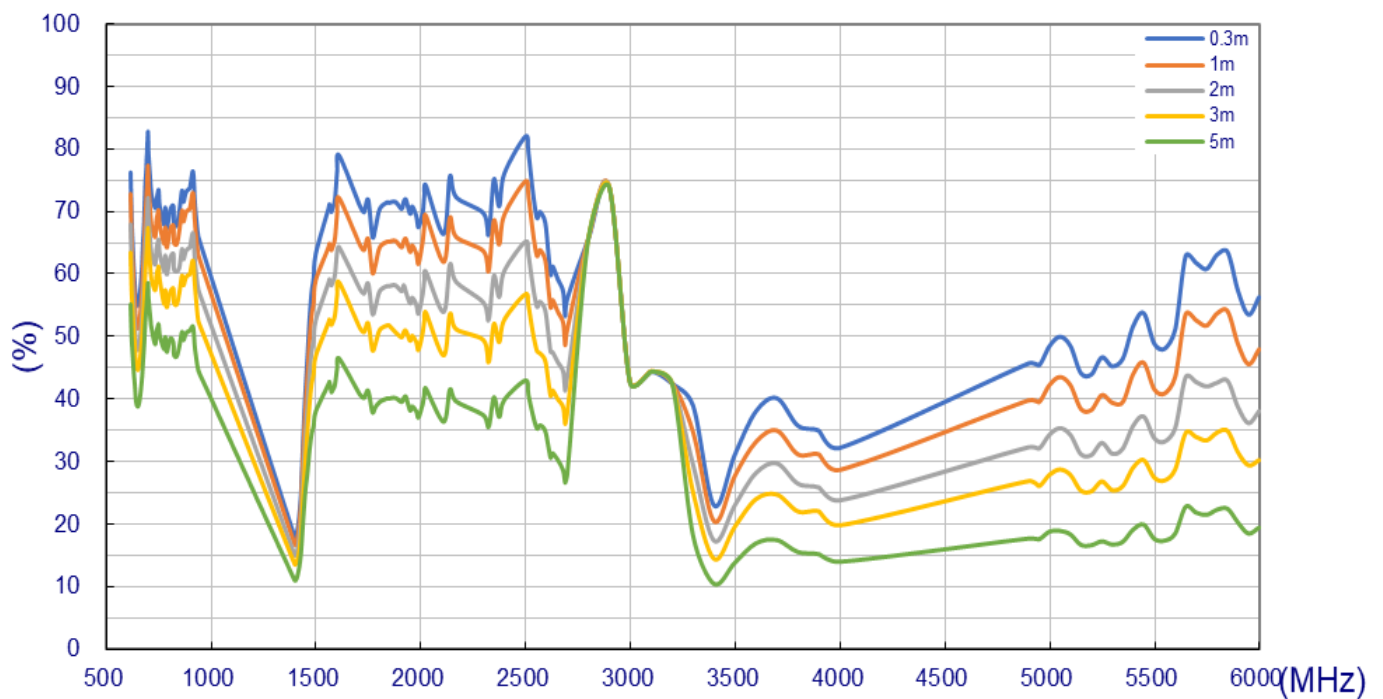


**Figure 14.** Efficiency of GSA.8842 Antenna with different cable lengths

### 7.11 Average Gain (on the glass base)

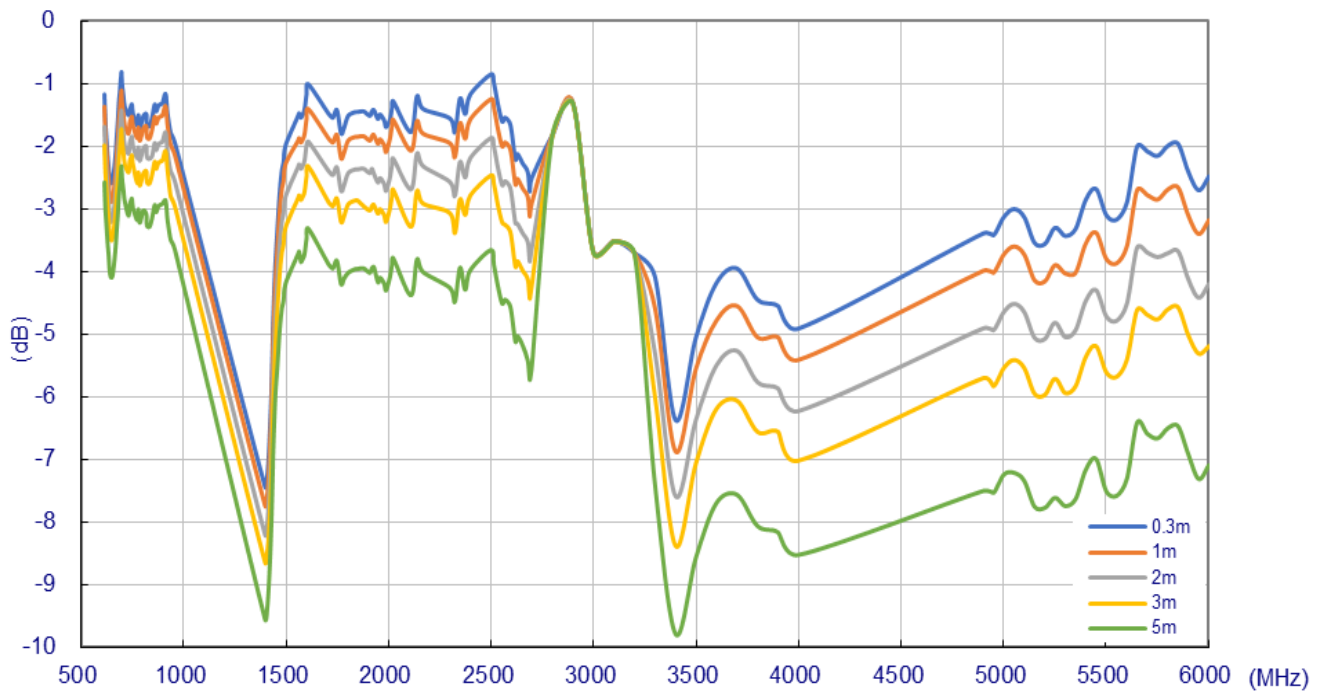

**Figure 15.** Average Gain of GSA.8842 Antenna with different cable lengths

### 7.12 Peak Gain (on the glass base)

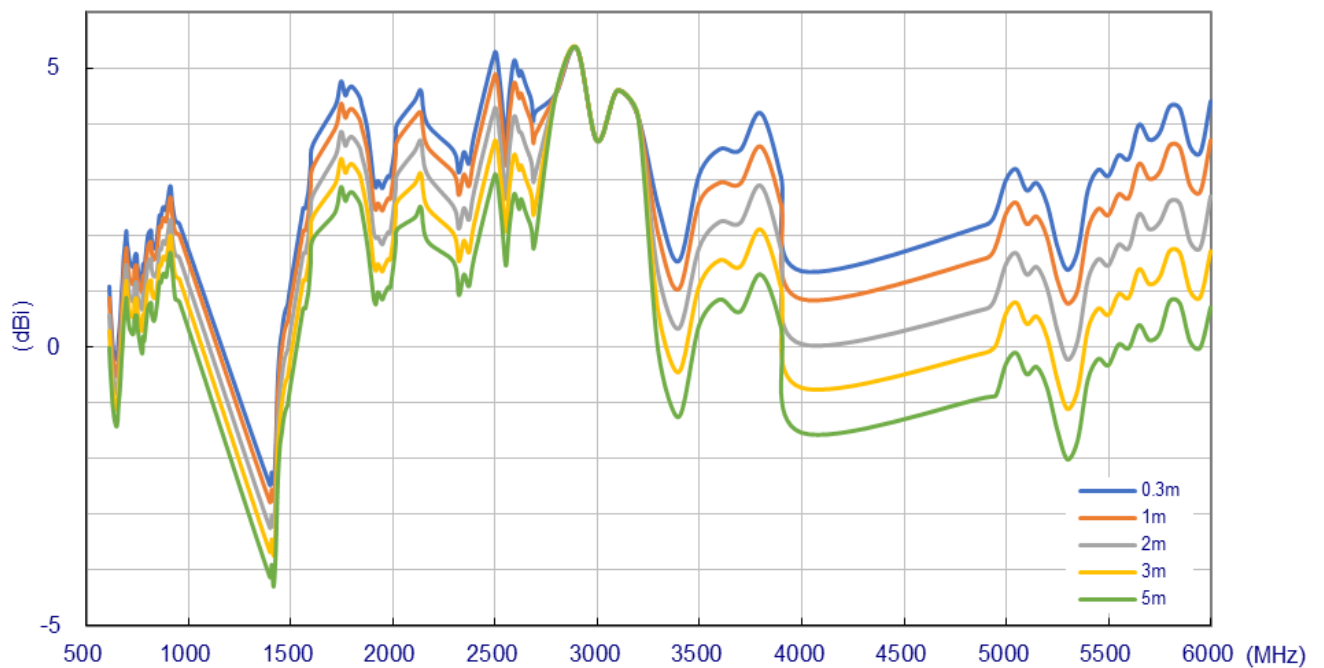

**Figure 16.** Peak Gain of GSA.8842 Antenna with different cable lengths

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

[GSA.8842.A.105111](#)