

### **SPECIFICATION**

Part No. : GW.26.0111.HT

2.4GHz Miniature Terminal Mount Monopole Antenna Product Name

HIGH TEMPERATURE

: SMA(M) Straight Connector, 50 Ohm Feature

**Dupont® Hytrel® High Temperature Resistant** 

TPEE Housing (up to 150°C)

**ROHS Compliant** 





#### 1 Introduction

The GW.26 HT series 2.4 GHz Monopole SMA (M) terminal mount antenna is ideal for 2.4GHz wireless applications such as Wifi, Zigbee and Bluetooth.

Antenna housing is made of highly resistant Dupont® Hytrel® TPEE material which is durable in high temperature application environments up to 150°C. This material is often applied in automotive or industrial applications, where the antenna is placed near the engine or heat generating components.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

Connection is made via a fixed SMA(M) connector with a hardened TPEE casing, this antenna is the ideal Wi-Fi-Bluetooth-ZigBee antenna for M2M devices where the antenna must be placed in harsh high temperature environments.



## **2 Specification**


Wi-Fi 2.4GHz				
Frequency	2400~2500MHz			
Bandwidth	100MHz			
Peak Gain	1.8dBi			
Radiation Efficiency	> 40%			
Radiation	Omni-directional			
Polarization	Vertical			
Power Handling 1W Max	Power Handling 1W Max			
Electrical Wave	Monopole			
Impedance	50Ω			
Operating Temperature	-40°C ~ +150°C			
Storage Temperature	-40°C ~ +85°C			



### **3 Mechanical Properties**


No	Parameter	Specification
1	Temperature	-40°c to +150°c
2	Radome Colour	Black
3	Radome Material	Dupont® Hytrel® TPEE

### 4 Antenna Characteristics 4.1 Antenna S11

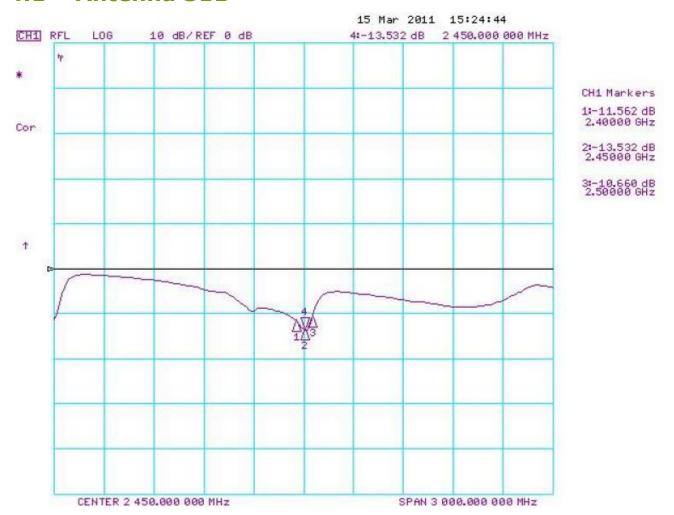




### 4.2 Antenna Peak Gain

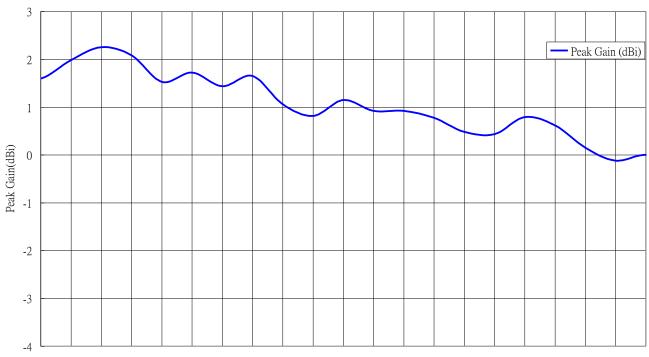

2350 2360 2370 2380 2390 2400 2410 2420 2430 2440 2450 2460 2470 2480 2490 2500 2510 2520 2530 2540 2550 Freq(MHz)




### 4.3 Antenna Efficiency

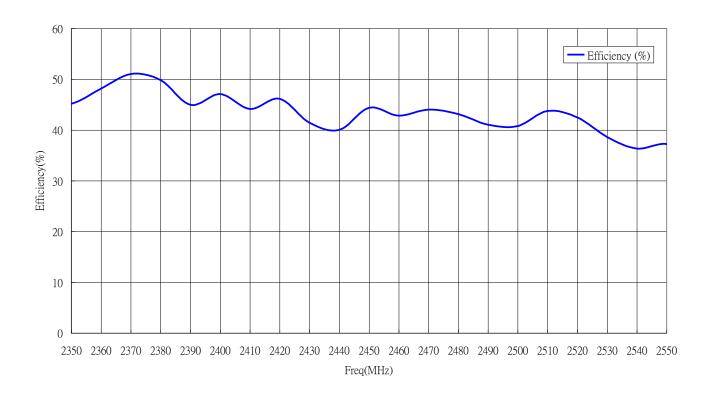




4.4 Antenna pattern (XY plane)

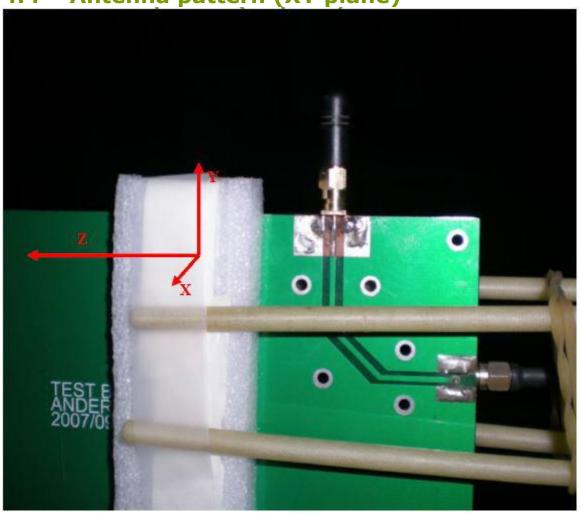




### 4.5 Antenna pattern (XY plane)

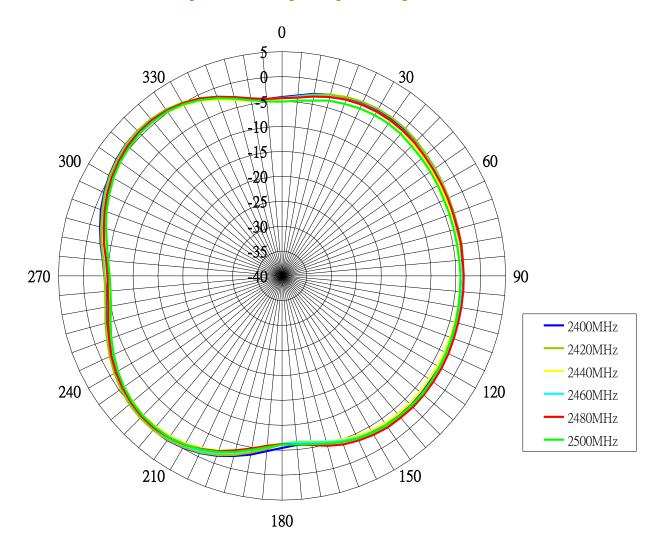




# **4.6** Antenna pattern (XZ plane)

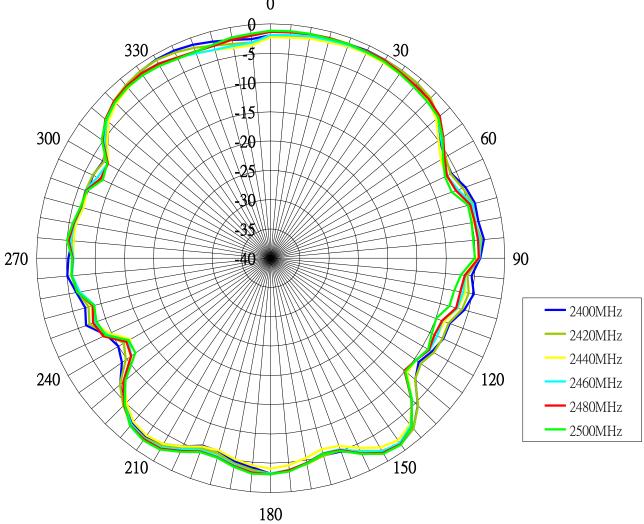




# **4.7** Antenna pattern (YZ plane)

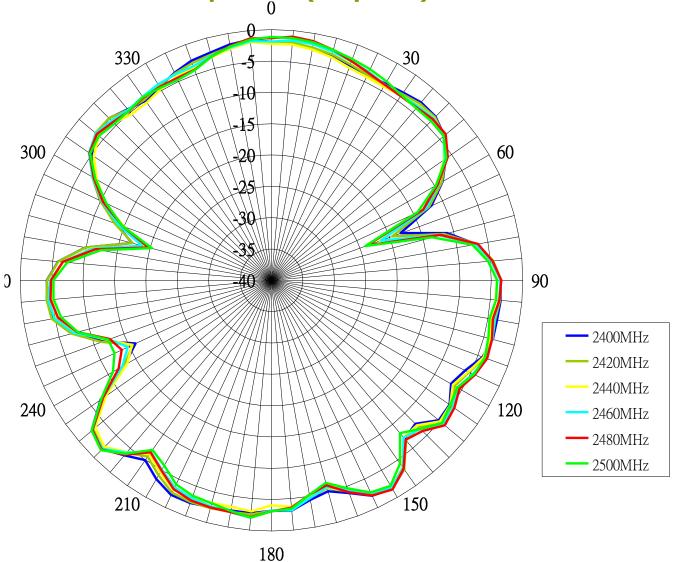



### **5. Outline Drawings and Structure**

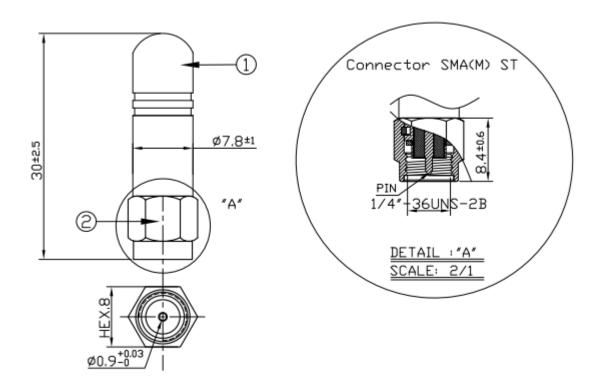

	Name	Material	Finish	QTY
1	GW.26 Housing High Temperature	TPEE	Black	1
2	SMA(M) ST	Brass	Ni Plated	1



### 6. Packaging

#### GW.26.0111.HT


### **Packaging Specifications**


1 pcs GW.26.0111.HT per PE Bag Bag Dimensions - 74 x 42 mm Weight - 4.5g


100 pcs GW.26.0111.HT per PE Large Bag Bag Dimensions - 280x 180mm Weight - 419kg


1500 pcs GW.26.0111.HT per carton Carton - 360x 310 x 160mm Weight - 7.25Kg

Pallet Dimensions 120x 100 x 148cm 72 Cartons per Pallet 12 Cartons per layer 6 Layers





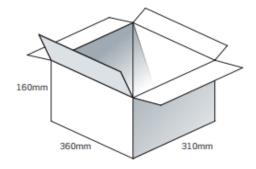



SPE-14-8-021/G/PK



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice.

Taoglas reserves the rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

© Taoglas

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

GW.26.0111.HT