

## **SPECIFICATION**

Part No. : **MA671.A.CGH.003** 

Product Name : Spartan Antenna 3in1 MA.671

Low Profile Screw-Mount (Permanent Mount)

**Public Safety** 

3 \* MIMO 4.5 ~ 4.9GHz antenna

2 x vertically polarized elements

1 x horizontally polarized element

Feature : IP67 Waterproof

High Efficiency / Peak Gain Outdoor Antenna

Standard 3M CFD-200 RP-SMA(M)

**RoHS Compliant** 





### 1. Introduction

The Spartan MA671 Public Safety 3\*MIMO antenna is a low profile, heavy-duty, fully IP67 waterproof external M2M antenna for use in remote monitoring and public safety applications.

The Spartan 3 x MIMO antenna is unique in the market because it combines three 4.5~4.9GHz antenna elements in a heavy-duty structure with high efficiency in a low profile compact format. The antenna screws down permanently onto a roof or metal panel and can be pole or wall-mounted. Two of the antenna elements are vertically polarized and one is horizontally polarized to maximize diversity gain and MIMO throughput.

For industries such as remote monitoring, smart meter systems, construction equipment, public safety at only 40mm high, the Spartan provides an unobtrusive, robust, rugged antenna that is durable even in extreme environments.



# 2. Specification Table

ELECTRICAL - V-pol. antenna 1						
Frequency (GHz)	4.5	4.7	4.9			
Radiation Efficiency* (%)	45.7	45.2	41.6			
Peak Gain* (dBi)	4.1	3.2	3.02			
VSWR	2 Max					
Polarization	Linear (Vertical)					
Impedance	50Ω					

ELECTRICAL - V-pol. antenna 2						
Frequency (GHz)	4.5	4.7	4.9			
Radiation Efficiency* (%)	45.5	43.4	37.9			
Peak Gain* (dBi)	3.4	3.8	2.43			
VSWR	2 Max					
Polarization	Linear (Vertical)					
Impedance	50Ω					


ELECTRICAL - H-pol. antenna					
Frequency (GHz)	4.5	4.7	4.9		
Radiation Efficiency* (%)	45.7	45.27	38.8		
Peak Gain* (dBi)	3.2	4.4	3.4		
VSWR	2 Max				
Polarization	Linear (Horizontal)				
Impedance	50Ω				

MECHANICAL					
Antenna Dimensions	Height 50mm x Diameter 150mm				
Casing	PC				
Base and thread	Nickel Plated Zinc				
Waterproof	IP67				
ENVIRONMENTAL					
Temperature Range	-40°C to 85°C				
Humidity	Non-condensing 65°C 95% RH				


<sup>\*</sup> all measurements were conducted with 3m CFD200 cable



### 3. Return Loss

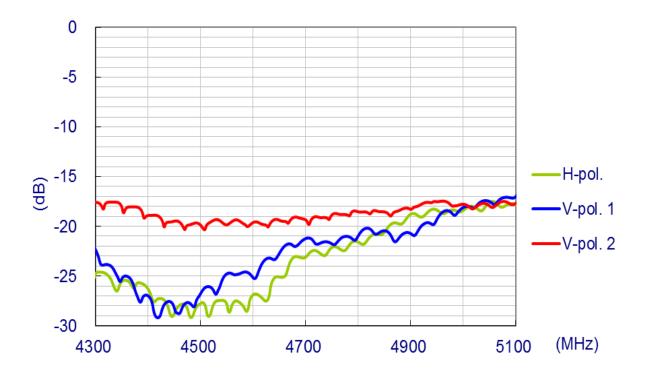


### 4. Maximum Gain

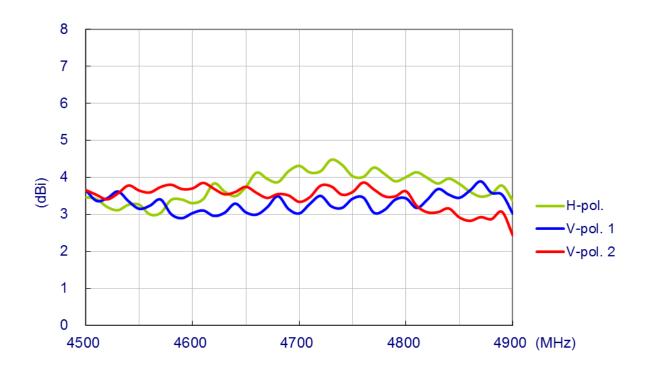




## 5. Average Gain

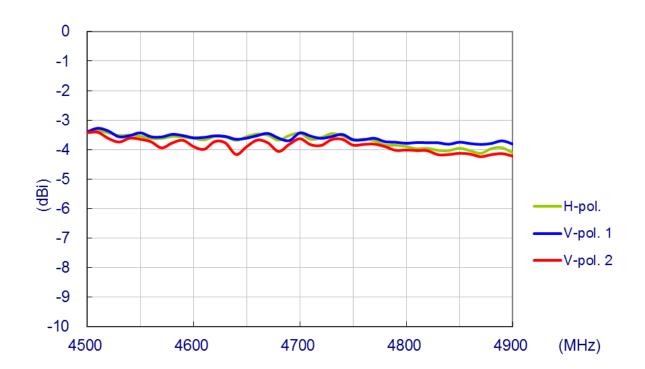


## 6. Efficiency

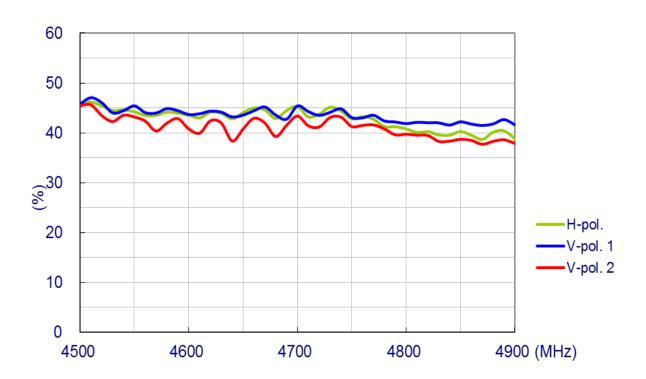




## 7. Antenna Radiation Patterns

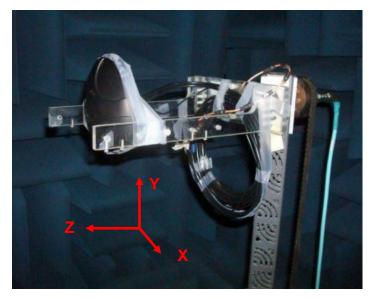

MA. 671 tested in CTIA approved 3D chamber




XYZ coordinates for reference




### 7.1 H-pol. antenna

#### **XY Plane**

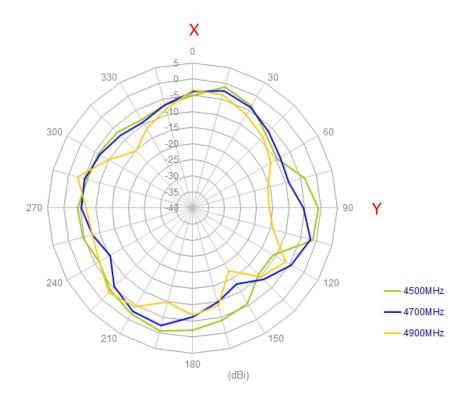


#### **XZ Plane**

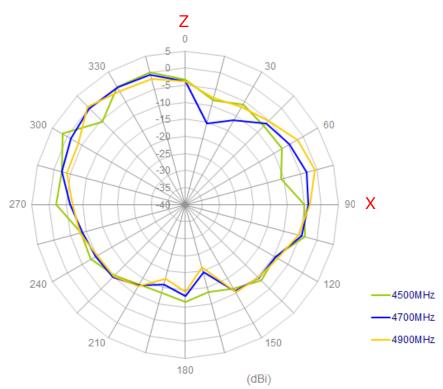




## 7.2 V-pol. 1 antenna

#### **XY Plane**

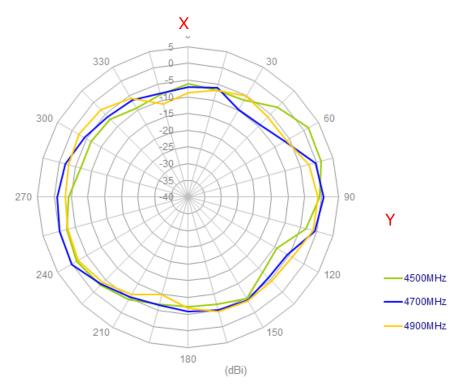


#### **XZ Plane**

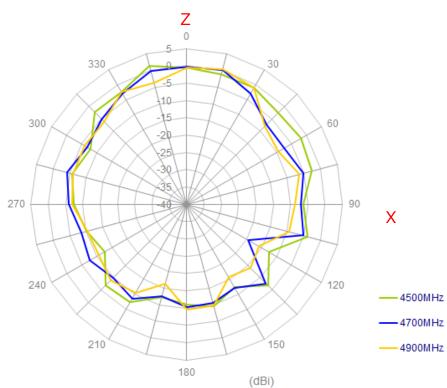




## 7.3 V-pol. 2 antenna



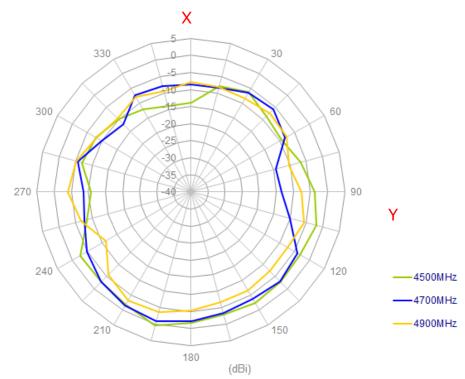

#### **XZ Plane**

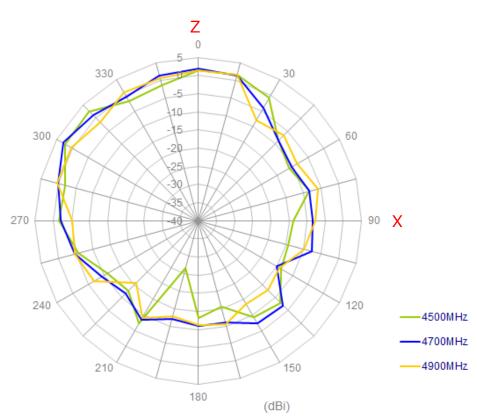





### 8. Cable attenuation

Cable attenuation (dB/ 100M)												
GHz	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6
CFD 200	26	39	49	58	66	73	-	86	-	98	-	109




## 9. Mechanical Drawing

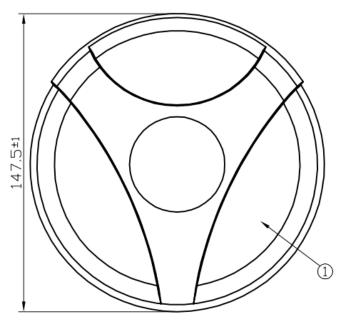

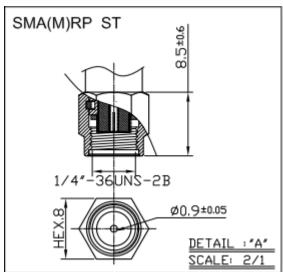


	Name	P/N			Material	Finish	QTY
1	Housing		000111F0000XXA	F	PC 540	Black	1
2	Closed Cell Foam	001011F0300XXA	(	CR 4305	Black	1	
3	3M Double Adhesi	001011F0300XXA	- 5	3M 9448 HK	White Liner	1	
4	M30 Nut	000411F0000XXA	į	Steel AJSI 1215	Ni Plated	1	
5	Washer	000411F0100XXA	ş	Steel AISI 1215	Ni Plated	1	
6	M30x 2 Thread 32	000311F0000XXA	7	Zinc Alloy	Ni Plated	1	
7	Waterproof Rubber		000711F0000XXA	Silicon		Black	1
8	4.5-4.9 GHz V-pol.Label		001012A000015A	1	Matte Silver PET	Silver	2
9	4.5-4.9 GHz H-pol.Label		001012A010015A	1	Matte Silver PET	Silver	1
10	Heat Shrink Tube		001311F0100XXA	F	PE	Black	3
11	Rubber Stopper		000711F0000XXA	0711F0000XXA Silico		Black	1
	Name	P/N		Spec	Finish	QTY	
W	Connector Type	SM/	LM.RP.ST.PLUG.G.W	Y	SMA(M)RP ST	Gold	3
ww	Cable Length				3000±30mm		
XX	Cable Type	301412A000015A			CFD 200	Black	3



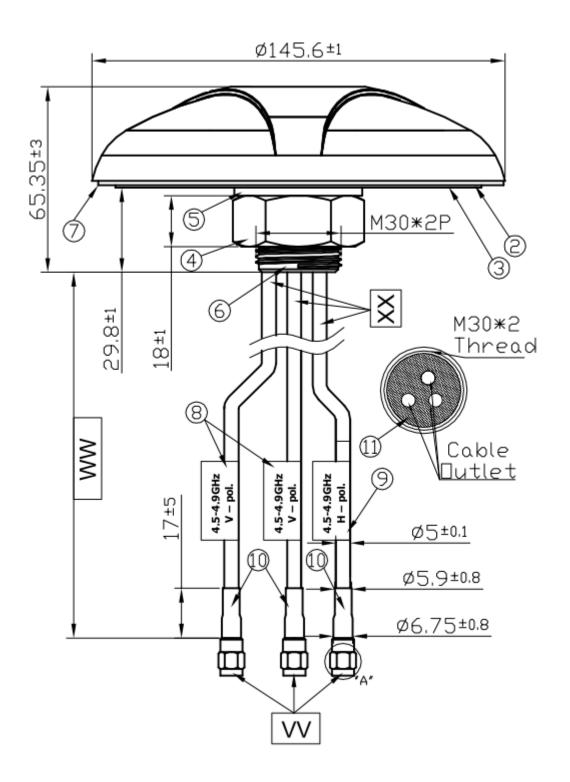




### 10. Installation

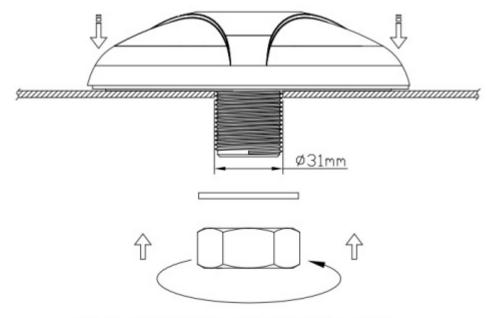


Recommended Torque for Mounting 49 N·m Maximum Torque for Mounting 58.8 N·m

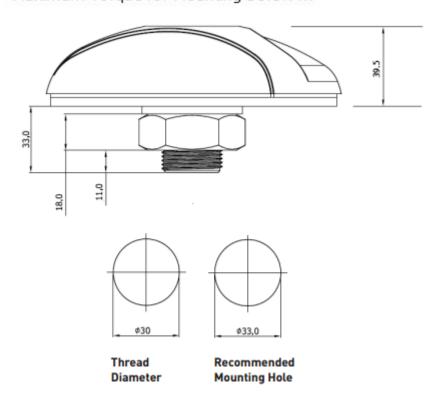





## 11. Packaging

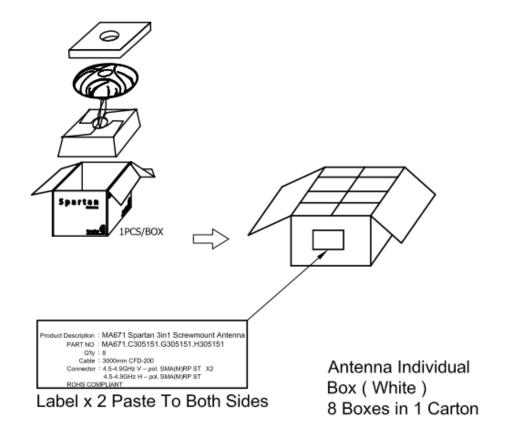



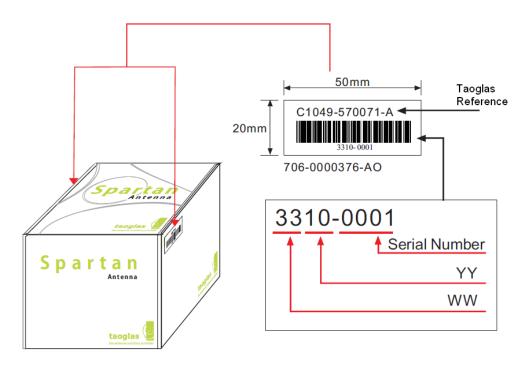

#### 8 boxes per carton

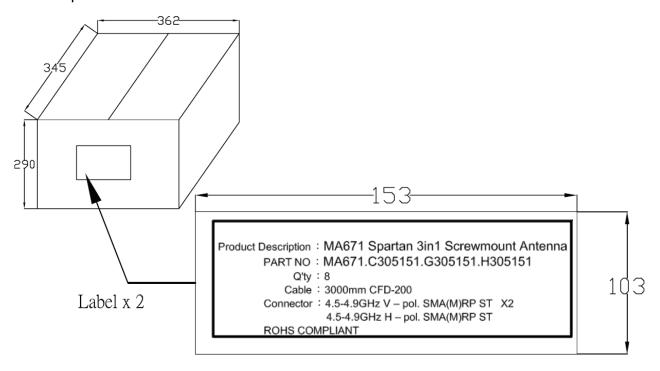



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

MA671.A.CGH.003