


High Temperature MLCCs

AT Series – 200°C & 250°C Rated



Present military specifications, as well as a majority of commercial applications, require a maximum operating temperature of 125°C. However, the emerging market for high temperature electronics demands capacitors operating reliably at temperatures beyond 125°C. AVX's high temperature chip capacitor product line, has been extended with the BME COG chip. All AT chips have verified capabilities of long term operation up to 250°C for applications in both military and commercial businesses. These capacitors demonstrate high volumetric efficiency, high insulation resistance and low ESR/ESL for the most demanding applications, such as "down-hole" oil exploration and aerospace programs.

HOW TO ORDER

AT10	3	T	104	K	A	T	2	A
AVX Style	Voltage Code	Temperature Coefficient	Capacitance Code (2 significant digits + no. of zeros)	Capacitance Tolerance	Test Level	Termination	Packaging	Special Code
AT03 = 0603 AT05 = 0805 AT06 = 1206 AT10 = 1210 AT12 = 1812 AT14 = 2225	16V = Y 25V = 3 50V = 5	PME COG 250°C = A COG 200°C = 2 VHT 250°C = T VHT 200°C = 4 BME COG 250°C = 5 COG 200°C = 3	101 = 100pF 102 = 1nF 103 = 10nF 104 = 100nF 105 = 1µF	J = ±5% K = ±10% M = ±20%	A = Standard	1 = Pd/Ag T = 100% Sn Plated (RoHS Compliant) 7 = Ni/Au Plated (For 250°C BME COG Only)	2 = 7" Reel 4 = 13" Reel 9 = Bulk	A = Standard

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

PME COG 0±30ppm/°C, -55°C to 250°C

BME COG 0±30ppm/°C, -55°C to 200°C

See TCC Plot for +250°C

VHT: T ±15%, -55°C to +150°C

See TCC Plot for +250°C

Capacitance Test (MIL-STD-202, Method 305)

25°C, 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

Dissipation factor 25°C

COG: 0.15% Max at 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

VHT: 2.5% Max at 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

Insulation Resistance 25°C (MIL-STD-202, Method 302)

100GΩ or 1000MΩ·µF (whichever is less)

Insulation Resistance 125°C (MIL-STD-202, Method 302)

10GΩ or 100MΩ·µF (whichever is less)

Insulation Resistance 200°C (MIL-STD-202, Method 302)

1GΩ or 10MΩ·µF (whichever is less)


Insulation Resistance 250°C (MIL-STD-202, Method 302)

100MΩ or 1MΩ·µF (whichever is less)

Direct Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50mA max charging current

DIMENSIONS:



millimeters (inches)

Size	AT03 = 0603	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225
(L) Length	1.60 ± 0.15 (0.063 ± 0.006)	2.01 ± 0.20 (0.079 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	4.50 ± 0.30 (0.177 ± 0.012)	5.72 ± 0.25 (0.225 ± 0.010)
(W) Width	0.81 ± 0.15 (0.032 ± 0.006)	1.25 ± 0.20 (0.049 ± 0.008)	1.60 ± 0.20 (0.063 ± 0.008)	2.50 ± 0.20 (0.098 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	6.35 ± 0.25 (0.250 ± 0.010)
(T) Thickness Max.	1.02 (0.040)	1.30 (0.051)	1.52 (0.060)	1.70 (0.067)	2.54 (0.100)	2.54 (0.100)
(t) terminal	min. 0.25 (0.010) max. 0.75 (0.030)	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 0.75 (0.030)	0.25 (0.010) 1.02 (0.040)	0.25 (0.010) 1.02 (0.040)


High Temperature MLCC

AT Series – 200°C & 250°C Rated




PERFORMANCE CHARACTERISTICS


Typical Temperature Coefficient of Capacitance (VHT Dielectric)

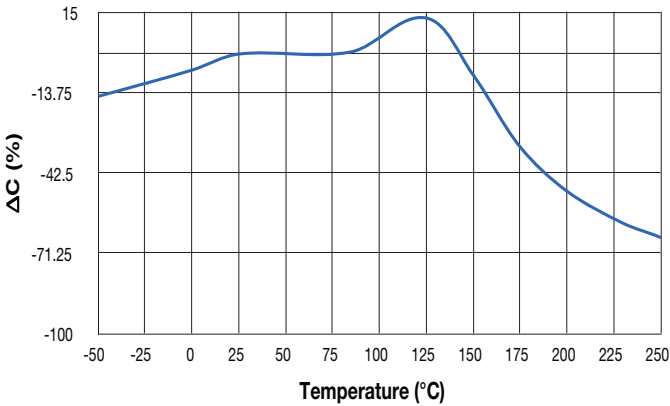


Typical Temperature Coefficient of Capacitance (COG Dielectric)

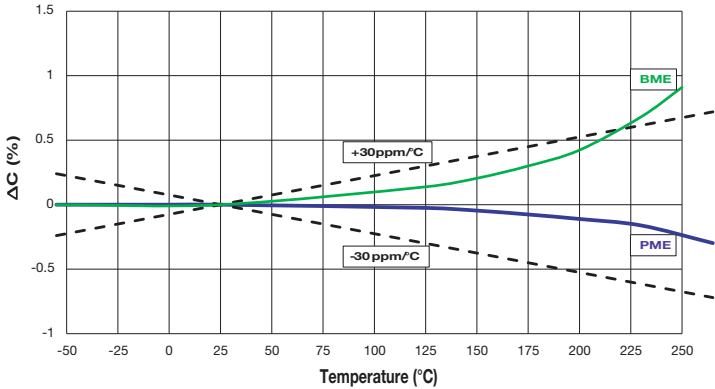


Typical Voltage Coefficient of Capacitance (VHT Dielectric)

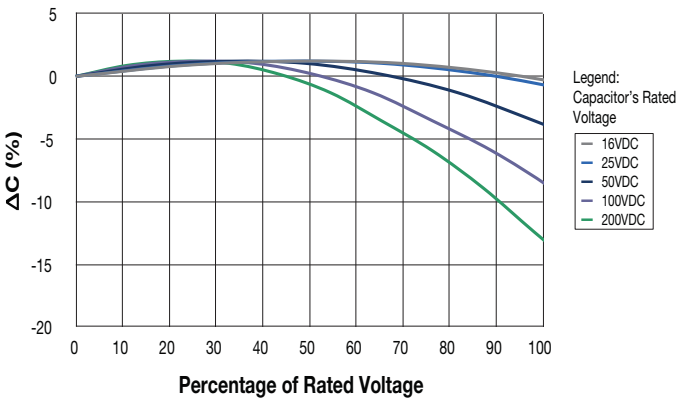


Typical Voltage Coefficient of Capacitance (COG Dielectric)

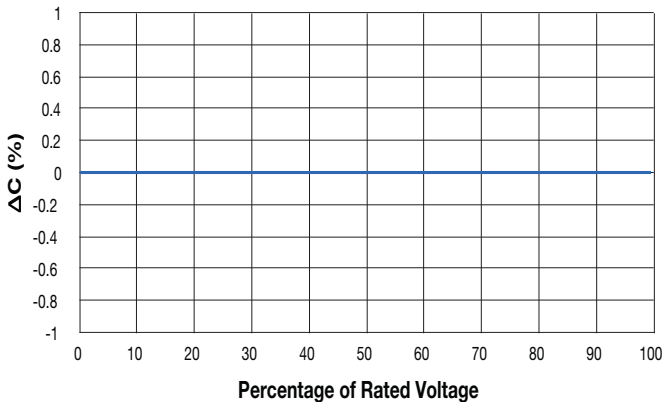

Typical RC vs Temperature (VHT Dielectric)

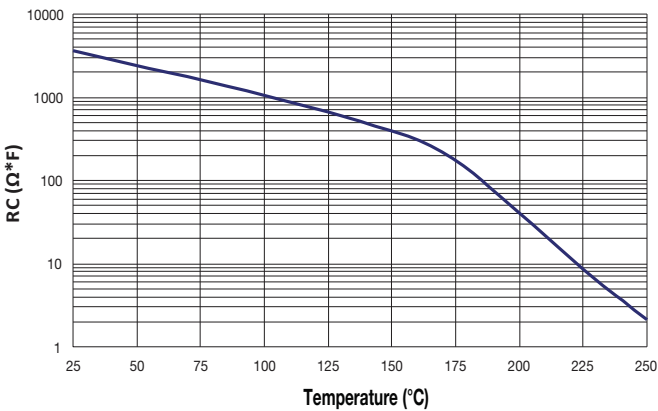

Typical RC vs Temperature (COG Dielectric)

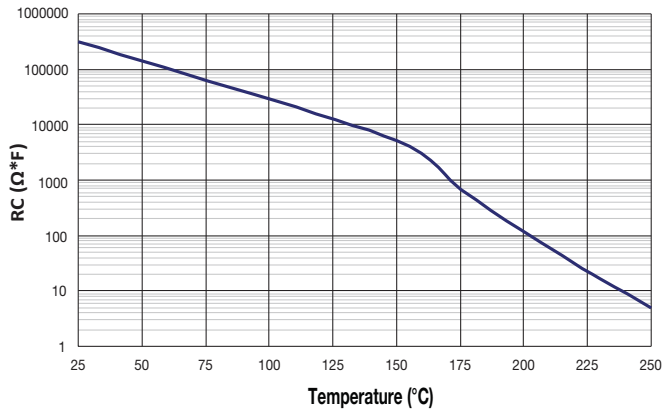


High Temperature MLCC

AT Series – 200°C & 250°C Rated



RELIABILITY


250°C Life Test @ 2x Rated Voltage (VHT Dielectric)

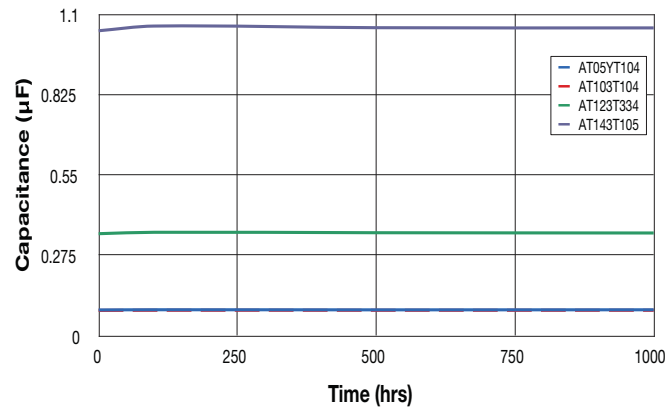

VHT - Failure Rate @ 90% Confidence Level (%/1000 hours)		
Temperature (°C)	50% Rated Voltage	100% Rated Voltage
200	0.002	0.017
250	0.026	0.210

*Typical 1210, 1812, 2225 Failure Rate Analysis based on 250°C testing and voltage ratings specified on the following page.

250°C Life Test @ 2x Rated Voltage (C0G Dielectric)

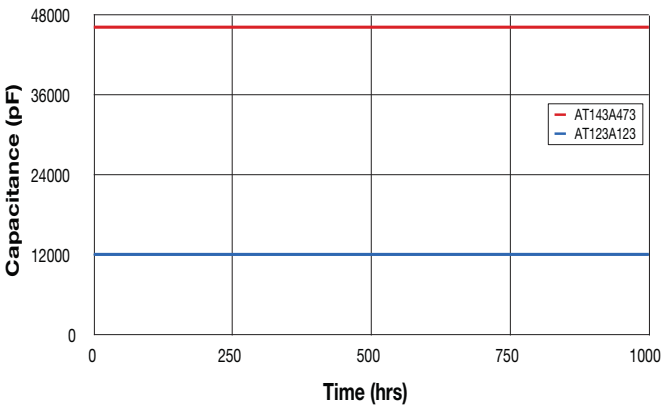


C0G - Failure Rate @ 90% Confidence Level (%/1000 hours)		
Temperature (°C)	50% Rated Voltage	100% Rated Voltage
200	0.006	0.047
250	0.074	0.590


*Typical 1812 and 2225 Failure Rate Analysis based on 250°C testing and voltage ratings specified on the following page.

FREQUENCY RESPONSE


Impedance Frequency Response (VHT Dielectric)

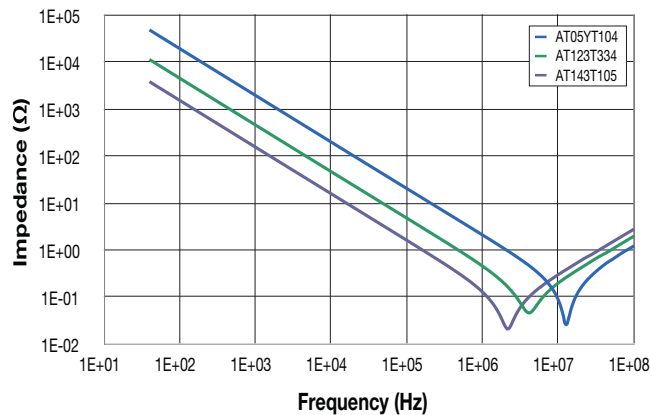


Impedance Frequency Response (C0G Dielectric)

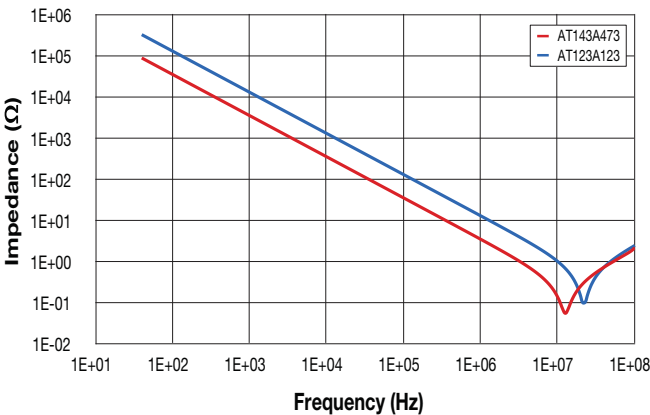

ESR Frequency Response (VHT Dielectric)

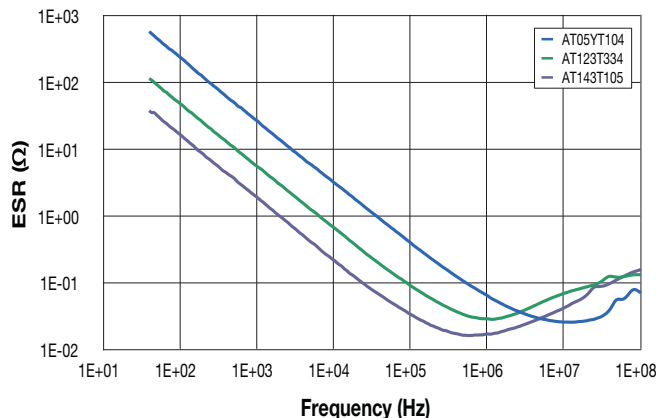

ESR Frequency Response (C0G Dielectric)

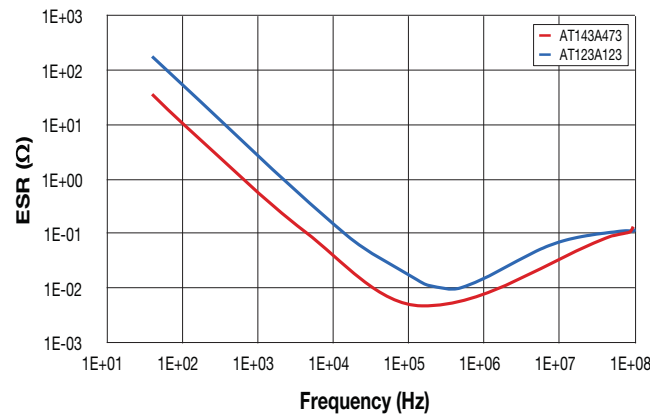

The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

High Temperature MLCC

AT Series – 200°C & 250°C Rated



CAPACITANCE RANGE

PREFERRED SIZES ARE SHADED

VHT Temp. Coefficient: 4 200°C Rated

Case Size	AT03 = 0603	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225
Soldering	Reflow/Wave	Reflow/Wave	Reflow/Wave	Reflow Only	Reflow Only	Reflow Only
(L) Length	mm 1.60±0.15 (in.) (0.063±0.006)	mm 2.01±0.20 (in.) (0.079±0.008)	mm 3.20±0.20 (in.) (0.126±0.008)	mm 3.20±0.20 (in.) (0.126±0.008)	mm 4.50±0.30 (in.) (0.177±0.012)	mm 5.72±0.25 (in.) (0.225±0.010)
(W) Width	mm 0.81±0.15 (in.) (0.032±0.006)	mm 1.25±0.20 (in.) (0.049±0.008)	mm 1.60±0.20 (in.) (0.063±0.008)	mm 2.50±0.20 (in.) (0.098±0.008)	mm 3.20±0.20 (in.) (0.126±0.008)	mm 6.35±0.25 (in.) (0.250±0.010)
(T) Thickness	mm 1.02 (in.) (0.040)	mm 1.30 (in.) (0.051)	mm 1.52 (in.) (0.060)	mm 1.70 (in.) (0.067)	mm 2.54 (in.) (0.100)	mm 2.54 (in.) (0.100)
(t) Terminal	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 1.02(0.040)	min 0.25(0.010) max 1.02(0.040)
Rated Temp. (°C)	200	200	200	200	200	200
Temp. Coefficient	4	4	4	4	4	4
Voltage (V)	25	25 50	25 50	25 50	50	50
Cap (pF)	1000 102					
	1200 122					
	1500 152					
	1800 182					
	2200 222					
	2700 272					
	3300 332					
	3900 392					
	4700 472					
	5600 562					
Cap (pF)	6800 682					
	8200 822					
	0.010 103					
	0.012 123					
	0.015 153					
	0.018 183					
	0.022 223					
	0.027 273					
	0.033 333					
	0.039 393					
Cap (pF)	0.047 473					
	0.056 563					
	0.068 683					
	0.082 823					
	0.100 104					
	0.120 124					
	0.150 154					
	0.180 184					
	0.220 224					
	0.270 274					
Cap (pF)	0.330 334					
	0.390 394					
	0.470 474					
	0.560 564					
	0.680 684					
	0.820 824					
	1.000 105					
Voltage (V)	25	25 50	25 50	25 50	50	50
Rated Temp. (°C)	200	200	200	200	200	200
Case Size	AT03 = 0603	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225

VHT Temp. Coefficient: T 250°C Rated

Case Size	AT03 = 0603	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225
Soldering	Reflow/Wave	Reflow/Wave	Reflow/Wave	Reflow Only	Reflow Only	Reflow Only
(L) Length	mm 1.60±0.15 (in.) (0.063±0.006)	mm 2.01±0.20 (in.) (0.079±0.008)	mm 3.20±0.20 (in.) (0.126±0.008)	mm 3.20±0.20 (in.) (0.126±0.008)	mm 4.50±0.30 (in.) (0.177±0.012)	mm 5.72±0.25 (in.) (0.225±0.010)
(W) Width	mm 0.81±0.15 (in.) (0.032±0.006)	mm 1.25±0.20 (in.) (0.049±0.008)	mm 1.60±0.20 (in.) (0.063±0.008)	mm 2.50±0.20 (in.) (0.098±0.008)	mm 3.20±0.20 (in.) (0.126±0.008)	mm 6.35±0.25 (in.) (0.250±0.010)
(T) Thickness	mm 1.02 (in.) (0.040)	mm 1.30 (in.) (0.051)	mm 1.52 (in.) (0.060)	mm 1.70 (in.) (0.067)	mm 2.54 (in.) (0.100)	mm 2.54 (in.) (0.100)
(t) Terminal	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 0.75(0.030)	min 0.25(0.010) max 1.02(0.040)	min 0.25(0.010) max 1.02(0.040)
Rated Temp. (°C)	250	250	250	250	250	250
Temp. Coefficient	T	T	T	T	T	T
Voltage (V)	16	16 25	16 25	16 25	25	25
Cap (pF)	1000 102					
	1200 122					
	1500 152					
	1800 182					
	2200 222					
	2700 272					
	3300 332					
	3900 392					
	4700 472					
	5600 562					
Cap (pF)	6800 682					
	8200 822					
	0.010 103					
	0.012 123					
	0.015 153					
	0.018 183					
	0.022 223					
	0.027 273					
	0.033 333					
	0.039 393					
Cap (pF)	0.047 473					
	0.056 563					
	0.068 683					
	0.082 823					
	0.100 104					
	0.120 124					
	0.150 154					
	0.180 184					
	0.220 224					
	0.270 274					
Cap (pF)	0.330 334					
	0.390 394					
	0.470 474					
	0.560 564					
	0.680 684					
	0.820 824					
	1.000 105					
Voltage (V)	16	16 25	16 25	16 25	25	25
Rated Temp. (°C)	250	250	250	250	250	250
Case Size	AT03 = 0603	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225

Voltage rating per table. Capacitance values specified at 25°C, derate capacitance value based on TCC and VCC Plots on page 107.

NOTE: Contact factory for non-specified capacitance values.

High Temperature MLCC

AT Series – 200°C & 250°C Rated

CAPACITANCE RANGE

PREFERRED SIZES ARE SHADED

BME COG Temp. Coefficient: 4 200°C Rated

Case Size		AT03=0603		AT05=0805		AT06=1206	
Soldering		Reflow/Wave		Reflow/Wave		Reflow/Wave	
(L) Length	mm	1.60±0.15		2.01±0.20		3.20±0.20	
	(in.)	(0.063±0.006)		(0.079±0.008)		(0.126±0.008)	
(W) Width	mm	0.81±0.15		1.25±0.20		1.60±0.20	
	(in.)	(0.032±0.006)		(0.049±0.008)		(0.063±0.008)	
(T) Thickness	mm	1.02		1.30		1.52	
	(in.)	(0.040)		(0.051)		(0.060)	
(t) Terminal	min	0.25(0.010)		0.25(0.010)		0.25(0.010)	
	max	0.75(0.030)		0.75(0.030)		0.75(0.030)	
Rated Temp. (°C)		200		200		200	
Temp. Coefficient		3		3		3	
Voltage (V)		25	50	25	50	25	50
Cap (pF)	39	390					
	47	470					
	56	560					
	68	680					
	82	820					
	100	101					
	120	121					
	150	151					
	180	181					
	220	221					
	270	271					
	330	331					
	390	391					
	470	471					
	560	561					
	680	681					
	820	821					
	1000	102					
	1200	122					
	1500	152					
	1800	182					
	2200	222					
	2700	272					
	3300	332					
	3900	392					
	4700	472					
	5600	562					
	6800	682					
	8200	822					
Cap (µF)	0.010	103					
	0.012	123					
	0.015	153					
	0.018	183					
	0.022	223					
	0.027	273					
	0.033	333					
	0.039	393					
	0.047	473					
	0.056	563					
	0.068	683					
	0.082	823					
	0.100	104					
Voltage (V)		25	50	25	50	25	50
Rated Temp. (°C)		200	200	200	200	200	200
Case Size		AT03=0603		AT05=0805		AT06=1206	

BME COG (Ni/Au) Temp. Coefficient: 5 250°C Rated

Case Size		AT03=0603		AT05=0805		AT06 = 1206	
Soldering		Reflow/Wave		Reflow/Wave		Reflow/Wave	
(L) Length	mm	1.60±0.15		2.01±0.20		3.20±0.20	
	(in.)	(0.063±0.006)		(0.079±0.008)		(0.126±0.008)	
(W) Width	mm	0.81±0.15		1.25±0.20		1.60±0.20	
	(in.)	(0.032±0.006)		(0.049±0.008)		(0.063±0.008)	
(T) Thickness	mm	1.02		1.30		1.52	
	(in.)	(0.040)		(0.051)		(0.060)	
(t) Terminal	min	0.25(0.010)		0.25(0.010)		0.25(0.010)	
	max	0.75(0.030)		0.75(0.030)		0.75(0.030)	
Rated Temp. (°C)		250		250		250	
Temp. Coefficient		5		5		5	
Voltage (V)		25		25		25	
Cap (pF)	39	390					
	47	470					
	56	560					
	68	680					
	82	820					
	100	101					
	120	121					
	150	151					
	180	181					
	220	221					
	270	271					
	330	331					
	390	391					
	470	471					
	560	561					
	680	681					
	820	821					
	1000	102					
	1200	122					
	1500	152					
	1800	182					
	2200	222					
	2700	272					
	3300	332					
	3900	392					
	4700	472					
	5600	562					
	6800	682					
	8200	822					
Cap (µF)	0.010	103					
	0.012	123					
	0.015	153					
	0.018	183					
	0.022	223					
	0.027	273					
	0.033	333					
	0.039	393					
	0.047	473					
	0.056	563					
	0.068	683					
	0.082	823					
	0.100	104					
Voltage (V)		25		25		25	
Rated Temp. (°C)		250		250		250	
Case Size		AT03=0603		AT05=0805		AT06=1206	

Voltage rating per table. Capacitance values specified at 25°C, derate capacitance value based on TCC and VCC Plots on page 107.

NOTE: Contact factory for non-specified capacitance values.

High Temperature MLCC

AT Series – 200°C & 250°C Rated



CAPACITANCE RANGE

PREFERRED SIZES ARE SHADED

PME C0G Temp. Coefficient: 2 200°C Rated

Case Size	AT05 = 0805		AT06 = 1206		AT10 = 1210		AT12 = 1812		AT14 = 2225	
Soldering	Reflow/Wave		Reflow/Wave		Reflow Only		Reflow Only		Reflow Only	
(L) Length	mm	2.01 ± 0.20	3.20 ± 0.20		3.20 ± 0.20		4.50 ± 0.30		2.75 ± 0.25	
	(in.)	(0.079 ± 0.008)	(0.126 ± 0.008)		(0.126 ± 0.008)		(0.177 ± 0.012)		(0.225 ± 0.010)	
(W) Width	mm	1.25 ± 0.20	1.60 ± 0.20		2.50 ± 0.20		3.20 ± 0.20		6.35 ± 0.25	
	(in.)	(0.049 ± 0.008)	(0.063 ± 0.008)		(0.098 ± 0.008)		(0.126 ± 0.008)		(0.250 ± 0.010)	
(T) Thickness	mm	1.30	1.52		1.70		2.54		2.54	
	(in.)	(0.051)	(0.060)		(0.067)		(0.100)		(0.100)	
(t) Terminal	min	0.25 (0.010)	0.25 (0.010)		0.25 (0.010)		0.25 (0.010)		0.25 (0.010)	
	max	0.75 (0.030)	0.75 (0.030)		0.75 (0.030)		1.02 (0.040)		1.02 (0.040)	
Rated Temp. (°C)	200		200		200		200		200	
Temp. Coefficient	2		2		2		2		2	
Voltage (V)	50		50		50		50		50	
Cap (pF)	100 101									
	120 121									
	150 151									
	180 181									
	220 221									
	270 271									
	330 331									
	390 391									
	470 471									
	560 561									
	680 681									
	820 821									
	1000 102									
	1200 122									
	1500 152									
Cap (µF)	1800 182									
	2200 222									
	2700 272									
	3300 332									
	3900 392									
	4700 472									
	5600 562									
	6800 682									
	8200 822									
	0.010 103									
	0.012 123									
	0.015 153									
	0.018 183									
	0.022 223									
	0.027 273									
0.033 333										
0.039 393										
0.047 473										
0.056 563										
0.068 683										
0.082 823										
0.100 104										
Voltage (V)	50		50		50		50		50	
Rated Temp. (°C)	200		200		200		200		200	
Case Size	AT05 = 0805		AT06 = 1206		AT10 = 1210		AT12 = 1812		AT14 = 2225	

PME C0G Temp. Coefficient: A 250°C Rated

Case Size	AT05 = 0805		AT06 = 1206		AT10 = 1210		AT12 = 1812		AT14 = 2225	
Soldering	Reflow/Wave		Reflow/Wave		Reflow Only		Reflow Only		Reflow Only	
(L) Length	mm	2.01 ± 0.20	3.20 ± 0.20		3.20 ± 0.20		4.50 ± 0.30		2.75 ± 0.25	
	(in.)	(0.079 ± 0.008)	(0.126 ± 0.008)		(0.126 ± 0.008)		(0.177 ± 0.012)		(0.225 ± 0.010)	
(W) Width	mm	1.25 ± 0.20	1.60 ± 0.20		2.50 ± 0.20		3.20 ± 0.20		6.35 ± 0.25	
	(in.)	(0.049 ± 0.008)	(0.063 ± 0.008)		(0.098 ± 0.008)		(0.126 ± 0.008)		(0.250 ± 0.010)	
(T) Thickness	mm	1.30	1.52		1.70		2.54		2.54	
	(in.)	(0.051)	(0.060)		(0.067)		(0.100)		(0.100)	
(t) Terminal	min	0.25 (0.010)	0.25 (0.010)		0.25 (0.010)		0.25 (0.010)		0.25 (0.010)	
	max	0.75 (0.030)	0.75 (0.030)		0.75 (0.030)		1.02 (0.040)		1.02 (0.040)	
Rated Temp. (°C)	250		250		250		250		250	
Temp. Coefficient	A		A		A		A		A	
Voltage (V)	25		25		25		25		25	
Cap (pF)	100	101								
	120	121								
	150	151								
	180	181								
	220	221								
	270	271								
	330	331								
	390	391								
	470	471								
	560	561								
	680	681								
	820	821								
	1000	102								
	1200	122								
	1500	152								
Cap (µF)	1800	182								
	2200	222								
	2700	272								
	3300	332								
	3900	392								
	4700	472								
	5600	562								
	6800	682								
	8200	822								
	0.010	103								
	0.012	123								
	0.015	153								
	0.018	183								
	0.022	223								
	0.027	273								
0.033	333									
0.039	393									
0.047	473									
0.056	563									
0.068	683									
0.082	823									
0.100	104									
Voltage (V)	25		25		25		25		25	
Rated Temp. (°C)	250		250		250		250		250	
Case Size	AT05 = 0805		AT06 = 1206		AT10 = 1210		AT12 = 1812		AT14 = 2225	

Voltage rating per table. Capacitance values specified at 25°C, derate capacitance value based on TCC and VCC Plots on page 107.

NOTE: Contact factory for non-specified capacitance values.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera AVX:

[AT143T105KA12A](#) [AT123T334KA12A](#) [AT053T223KA12A](#) [AT053T103KA12A](#) [AT103T104KA12A](#)
[AT03YT473MA12A](#) [AT05YT104MA12A](#) [AT0534104MAT2A](#) [AT0334473MAT2A](#) [AT123T334MA12A](#)
[AT103A472KA12A](#) [AT053T223MA12A](#) [AT143T105MA12A](#) [AT103T104MA12A](#) [AT053T103MA12A](#)