


# UBR Series

## Ultra-Broadband Resistors



### GENERAL DESCRIPTION

AVX Passive Micro Component group is pleased to introduce the UBR Series of next generation of surface mount Ultra-Broadband Resistors. This product was designed utilizing our proprietary Glass Sandwich Flexitem<sup>®</sup> Technology, (GSFT). The Flexitem<sup>®</sup> is a surface mountable automotive qualified termination that adds an extra margin against damage due to flexure during installation. The UBR Series has been designed with high quality selected materials that yield excellent performance. This product is ideal for use in Optical Transceiver Modules or any application requiring excellent ultra-broadband performance. The use of glass sandwich technology and precision laser trimming reduces parasitic noise up to 40 GHz.

### FEATURES

- Frequency Range: DC to 40 GHz
- EIA 0402 Case Size
- Power Rating: 125 mW
- Operating Temperature: -40°C to +125°C
- 100% Laser Trimming for Tight Tolerances
- RoHS Compliant


### APPLICATIONS

- Optical Transceiver Modules
- Broadband Receiver
- TOSA / ROSA
- Wideband Test Equipment
- Low Noise Amplifier
- MMIC Amplifiers
- Mixers
- Directional Couplers
- Ultra-Broadband Splitters and Combiners

### MARKETS

- Opto-electronics
- Automotive
- Telecom
- Broadband Jamming for EW
- Satellite Communication

### HOW TO ORDER

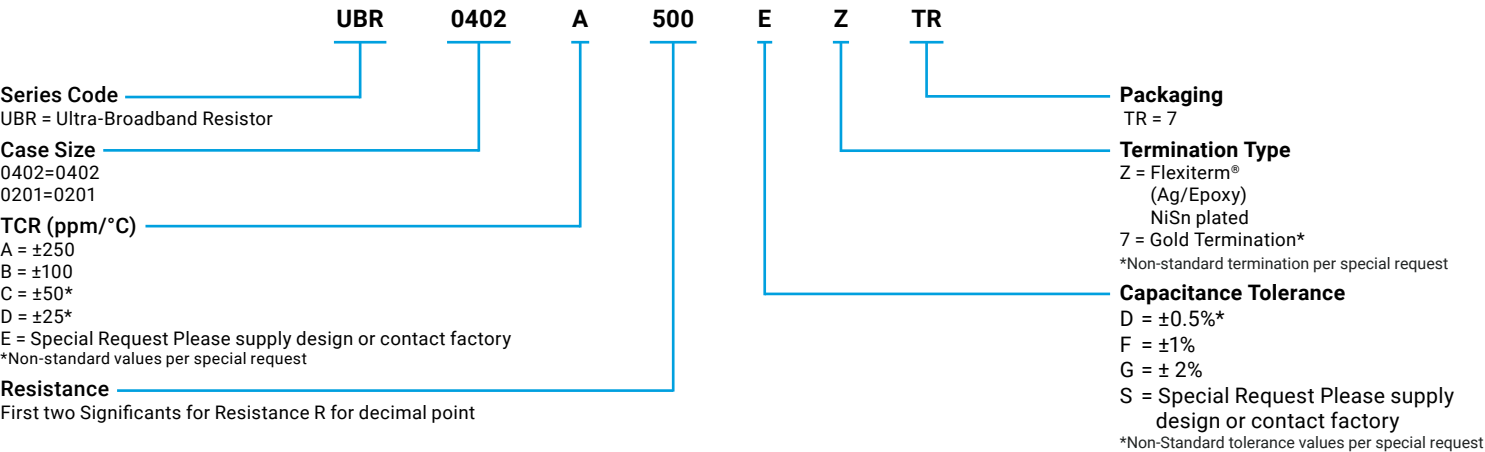


For RoHS compliant products, please select correct termination style

# UBR Series

## Ultra-Broadband Resistors

### MECHANICAL DIMENSIONS

mm (inches)

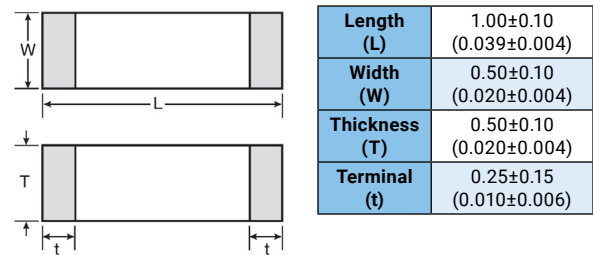


### 0402 SPECIFICATIONS

Resistor	Detail
Outline	EIA 0402
Package	Glass wafer sandwich
Maximum Voltage	1 KV
Resistance Value Range	From 16.6 Ohms to 200 Ohms
Termination	FLEXITERM <sup>®</sup> (Ag/Epoxy), plated
Power Rating	125 mW
Operating Temperature Range	-40°C to +125°C
Tolerances	0.5%, 1%, 2%, 5%

### MECHANICAL DIMENSIONS


mm (inches)

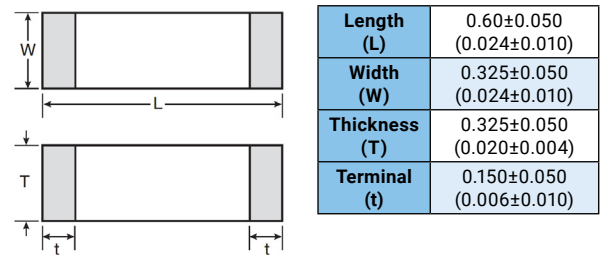

### 0201 SPECIFICATIONS


Resistor	Detail
Outline	EIA 0201
Package	Glass wafer sandwich
Maximum Voltage	1 KV
Resistance Value Range	From 16.6 Ohms to 200 Ohms
Termination	FLEXITERM <sup>®</sup> (Ag/Epoxy), plated
Power Rating	125 mW
Operating Temperature Range	-40°C to +125°C
Tolerances	0.5%, 1%, 2%, 5%

### SUGGESTED MOUNTING PAD DIMENSIONS



Normal Pads

W = Chip Width    L = Chip Length    T = Chip Thickness

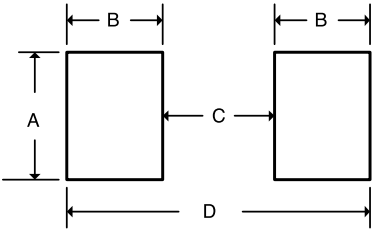


Case Size	A Min.	B Min.	C Min.	D Min.
0201	0.0256	0.0075	0.0130	0.0268
0402	0.0213	0.0125	0.0206	0.0436


Dimensions are in inches.

#### NOTES:


Mounting will allow the solder fillet to travel up approximately 0.015" of the chip's end and side termination surface. Heavier fillets require a pre-deposition of solder paste and or an increase in pad dimensions. Typical solder paste application is a .008" to 0.01" thickness with >50% of volume in solder alloy. Can be mounted in both vertical and horizontal orientation without changing electrical performance

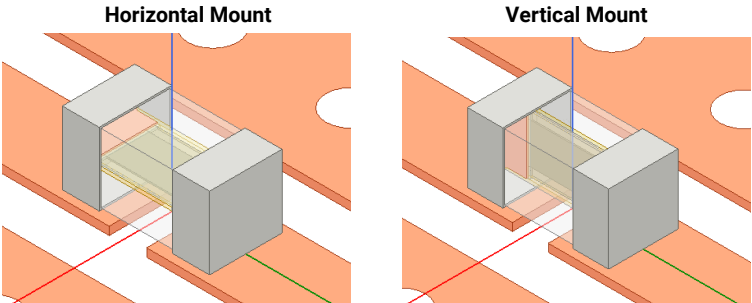

POWER DERATING

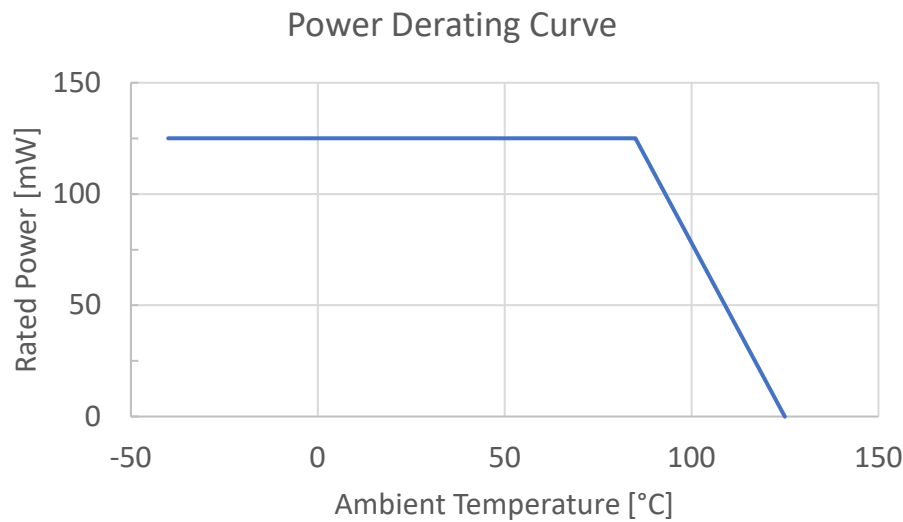

INTERNAL IMPEDANCE CURVES

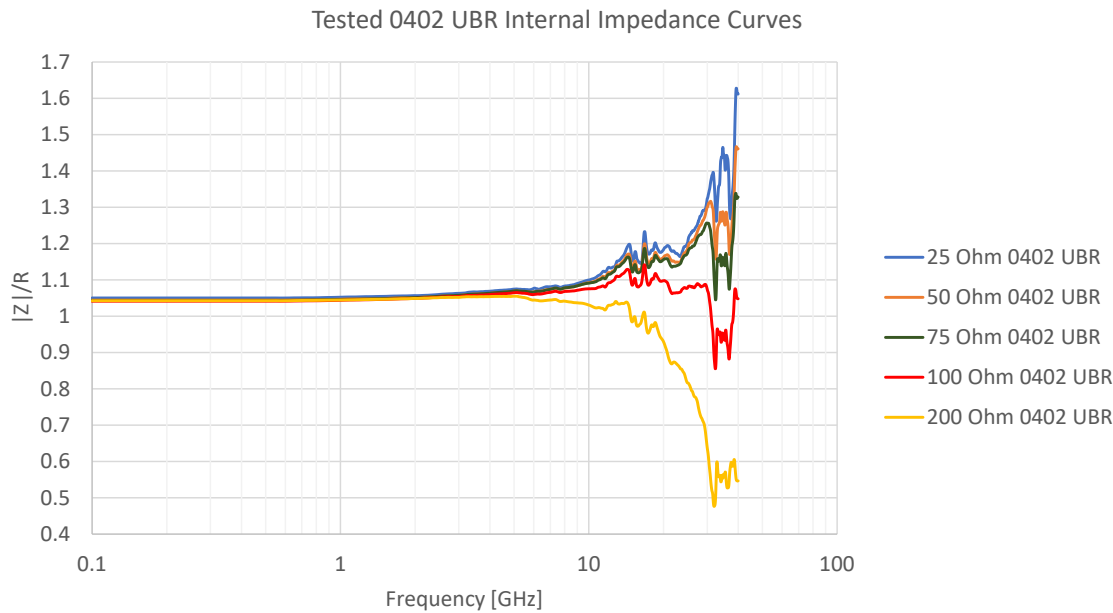

ENVIRONMENTAL TEST

Test	Limits	Specification
Life Test/Stability	±0.25% Max Δ R/R	MIL-STD-202 MTD 108, 1000hrs, 125°C, 50mW
Thermal Shock	±0.25% Max Δ R/R	MIL-STD-202 MTD 107
High Temperature Exposure	±0.25% Max Δ R/R	100 Hrs @ 150°C
Moisture Resistance	±0.25% Max Δ R/R	MIL-STD-202 MTD 106

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kyocera AVX:](#)

[UBR0402A101FZTR](#) [UBR0402A201FZTR](#) [UBR0402A250FZTR](#) [UBR0402A360FZTR](#) [UBR0402A430FZTR](#)  
[UBR0402A500FZTR](#) [UBR0402A860FZTR](#)