


Advanced Ceramic Capacitors



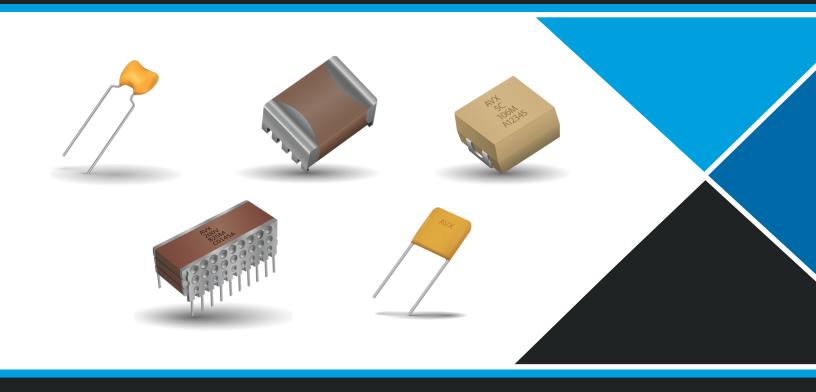

IMPORTANT INFORMATION/DISCLAIMER

All product specifications, statements, information and data (collectively, the "Information") in this datasheet or made available on the website are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KYOCERA AVX's knowledge of typical operating conditions for such applications, but are not intended to constitute and KYOCERA AVX specifically disclaims any warranty concerning suitability for a specific customer application or use.

ANY USE OF PRODUCT OUTSIDE OF SPECIFICATIONS OR ANY STORAGE OR INSTALLATION INCONSISTENT WITH PRODUCT GUIDANCE VOIDS ANY WARRANTY.

The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KYOCERA AVX with reference to the use of KYOCERA AVX's products is given without regard, and KYOCERA AVX assumes no obligation or liability for the advice given or results obtained.

Although KYOCERA AVX designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Unless specifically agreed to in writing, KYOCERA AVX has not tested or certified its products, services or deliverables for use in high risk applications including medical life support, medical device, direct physical patient contact, water treatment, nuclear facilities, weapon systems, mass and air transportation control, flammable environments, or any other potentially life critical uses. Customer understands and agrees that KYOCERA AVX makes no assurances that the products, services or deliverables are suitable for any highrisk uses. Under no circumstances does KYOCERA AVX warrant or guarantee suitability for any customer design or manufacturing process.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.

Advanced Ceramic Capacitors



Table of Contents




Introduction - Application Specific MLCs	1
SMPS Capacitors	
SM Style Stacked MLC Capacitors	
RM Style Stacked MLC Capacitors	
SMM Style Stacked MLC Capacitors Exteded Range	
RMM Style Stacked MLC CapacitorsExtended Range	
SMX Style for High Temperature Applications up to 200°C	
CH/CV – Radial, Dual-in-Line, 4 Terminatinal/SMT 'J' & 'L' Ranges	
SXP Style for High Temperature Application up to 200°C	
TurboCap™	
RoHS Compliant TurboCap™	
Mini-TurboCap™	
RoHS Compliant Mini-TurboCap™	
MH Style Ceramic Capacitor	
RH Style – Surface Mount 'J' Lead Range	
Custom Geometrics and Lead Configurations	
SK Style – Commercial Radial Range	
SE Style – Extended Commercial Radial Range	
· · · · · · · · · · · · · · · · · · ·	
CECC Offering	
High Voltage MLC Capacitors	
ESCC Qualified SMPS Capacitors	74
·	
HV Styles (US Preferred Sizes) DIP Lead	
RV Style – RoHS Compliant High Voltage DIP Leaded	
CH Style – Radial, Dual-in-line & 'L' Lead SMT	
CV Style – Chip Assemblies	
CH/CV Style - Chip Assemblies	
SV Style Radial Lead – Application Information	
DSCC Radials	
SV Style Automotive Grade Radial Lead – Application Information	93
MLC Chip Capacitors	
Basic Construction	95
General Description	
Surface Mounting Guide	
MIL-PRF-123/Chips	
AT Series – 200°C & 250°C Rated	
High Voltage MLC Chips - For 600V to 5000V Applications	
Tip & Ring Chips	
Tip & Ring Tin/Lead Termination "B"	
Packaging – Automatic Insertion Packaging Embossed Carrier Configuration – 4, 8 & 12mm Tape Only	
Embossed Carrier Comiguration = 4, 8 & 12mm rape Only	123
Surface Mount CapGuard™	
Varistor/Capacitor Combination for EMI/Surge Suppression	124
varistor/Capacitor Combination for EMI/Surge Suppression	
Filtered Arrays XD Type	125
Baseline Management	
A Dedicated Facility / BS9100 Requirements	126
··· 9. · · · · · · · · · · · · · · · · ·	
Advanced Application Specific Products	

Introduction – Application Specific MLCs

Problem Solving at the Leading Edge



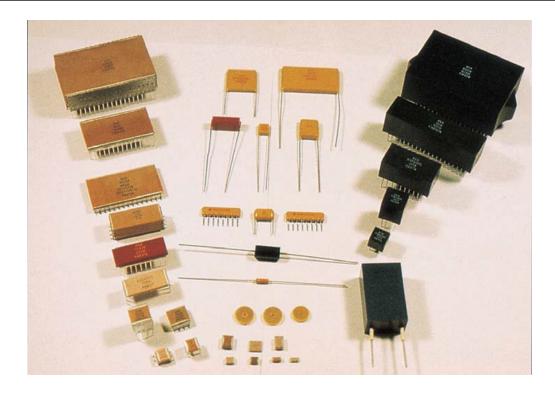

As the world's leading manufacturer and innovator in application specific multilayer ceramic (ASMLC) capacitors, KYOCERA AVX offers a unique technological and production capability to the field. KYOCERA AVX actively pursues and satisfies the high reliability and custom needs of a variety of governmental and industrial customers. Successful involvement in missile programs, extensive work in ultra-high reliability telecommunications and sophisticated capacitor design applications - all have established KYOCERA AVX as the source for advanced and high reliability ASMLC capacitors.

KYOCERA AVX Advanced Products are ISO9001 certified organizations for design and manufacturing of MLC capacitors.

KYOCERA AVX Advanced Application Capacitors are organized around three distinct functions:

- · Application Specific Development Laboratories
- · Advanced Manufacturing Facilities
- · Quality Control

For designs or applications not listed please consult KYOCERA AVX Advanced Products.

Coleraine, Northern Ireland - ++44(0) 28703 44188 St. Appollinaire, France - ++33(0) 38071 7400



International Space Station



Defense / Military



Telecommunications Undersea Cable Repeater



Application Specific MLCs

Problem Solving at the Leading Edge



APPLICATION SPECIFIC DEVELOPMENT **LABORATORIES**

Initially, KYOCERA AVX technical personnel communicate with customers to learn the requirements that the new capacitor must satisfy. The personnel involved are well-versed in material, manufacturing and electronic application technologies. They study the overall application and the environment in which the part will function. Programs are begun for selection of appropriate ceramic formulations, metal systems and designs. These programs yield a detailed technology profile from which mechanical design and process specifications follow.

ADVANCED MANUFACTURING FACILITIES

The ability and reputation of KYOCERA AVX in high reliability MLCs is due in part to the company's complete control over all phases of the production process. This includes powder processing. tape casting and/or wet build-up, green MLC assembly and final capacitor assembly/packaging. Recent renovations at KYOCERA AVX have upgraded green MLC assembly areas to certified clean room levels

A favorite feature with many customers of KYOCERA AVX is our ability to work with customers in solving special packaging requirements. This includes special lead configurations and multiple chip packaging that simplifies the mounting of specialty capacitors.

To the customer, the total capability of KYOCERA AVX assures a high level of consistent control at all steps of production.

OUALITY CONTROL

The Q. A. organization is an integral part of manufacturing. Quality Control tests the product of each manufacturing process, detects flaws or variations from the narrow acceptable standard and isolates the cause of the deviation. Corrective action can then be taken to return the process to within its predetermined control levels.

Quality Assurance has large and well-equipped laboratories where statistical samples are evaluated and tested to determine failure rates, characterize products and assure compliance with specification. Both destructive and non-destructive testing are used, including advanced ultrasonic inspection equipment for nondestructive inspection of an entire production quantity.

Put the experience, technology and facilities of the leading company in multilayer ceramics to work for you. No other source offers the unique combination of capability and commitment to advanced application specific components.







SMPS Capacitors

SMPS Capacitor Applications



FOREWORD

High speed switch mode power supplies place high demands on the capacitors used in the input or output filters of Resonant DC-DC or Pulse Modulated DC-DC converters. KYOCERA AVX has developed several multilayer ceramic (MLC) capacitor styles for these switcher applications. These capacitors have been extensively tested and characterized and found to have almost ideal performances to meet the stringent requirements of these applications.

Input Filter Capacitor

The Input Filter capacitor is required to perform two functions: To supply an unrestricted burst of current to the power supply switch circuitry and to not only do it without generating any noise, but to help suppress noise generated in the switch circuitry. It is, in effect, a very large decoupling capacitor. It must have very low ESL, capabilities for very high dv/dt, as well as di/dt and it must have a very low ESR to eliminate power loss.

The distance from the primary DC source, as well as the type of capacitor used in this source (usually electrolytics), presents a very high inductance to the input of the Switcher. The MLC input capacitor, with its excellent ESL and ESR characteristics, is located physically close to the switch circuitry. Repetitive peak currents, inherent with the Switcher design, require a high ripple capability, as well as high surge capability for transients, both induced and conducted from other sources. MLCs have both these capabilities.

Output Filter Capacitor

The output from the switching circuit of a Switcher consists of current on and off. From an elevated DC reference, this current is an AC ripple additive on the DC. In order to smooth this ripple effect, a filter circuit (usually inductive input) is built to allow a storage of energy to take place during the rising ripple portion and to allow a discharge of energy during the falling ripple portion.

The ESR and ESL of the capacitor contribute to the net ripple effect. The output filter capacitor is chosen for ESR, and with previous types of capacitors, multiples were used in an attempt to lower the net ESR. The MLC offers ESRs well below the minimum allowable to lower noise levels, thus eliminating the need for multiple units.

Other MLC Capacitors for **SMPS Applications**

KYOCERA AVX also manufactures coupling, decoupling, resonant and snubber capacitors for SMPS applications. Contact KYOCERA AVX for Application Specific S.M.P.S. capacitor requirements.


Coleraine, Northern Ireland ++44(0) 28703 44188 ++33(0) 38071 7400 St. Apollinaire, France




ASMLC CAPACITOR SELECTION

SMPS Design Information (SM, CH, CV, RH and SK Styles)


Absolute Maximum Output Capacitance Assuming no ESL and no ESR



Absolute Maximum Capacitance ESL Assuming no ESR - Capacitive Induced Ripple




Absolute Maximum Capacitance ESR Assuming no ESL - Capacitive Induced Ripple



ASMLC CAPACITOR PERFORMANCE

Capacitance as Measured from dv/dt Slope

200 mA/ns Current Pulse Measurement starts after Inductive Ring Decay

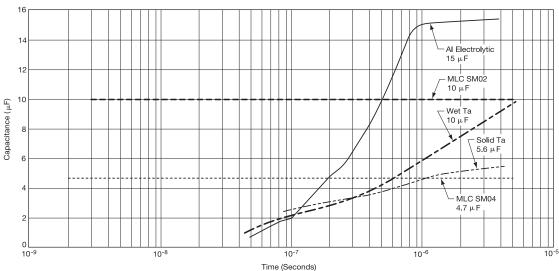

SMPS Capacitors

Capacitor Performance



AC Ripple Capability

Due to the wide range of product offering in this catalog, the AC ripple capabilities for switch mode power supply capacitors and high voltage capacitors are provided in the form of IBM compatible software package called SpiCalci. It is available free from KYOCERA AVX and can be downloaded for free from KYOCERA AVX website: http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip.




SpiCalci program will provide answers to most of the design engineers' questions on critical parameters for their specific applications:


- · Equivalent Series Resistance
 - function of frequency and temperature
- · Equivalent Series Inductance
 - function of design
- · Self Resonant Frequency $f = 1/(2 \times \pi \sqrt{L \times C})$
- · Thermal Characteristics
 - function of design
- **AC Ripple Capabilities**
 - function of frequency, temperature and design

Examples of Product Performance


TYPICAL ESR -vs- Frequency FOR SM04 STYLE CAPACITORS




MAXIMUM RMS CURRENT FOR 50 VDC, CH - X7R @ 100 KHz & 25°C Ambient



MAXIMUM RMS CURRENT FOR 50 WVDC, SM - X7R @ 100 KHz & 25°C Ambient



MAXIMUM RMS CURRENT FOR 25 WVDC, SK - Z5U @ 100 KHz & 25°C Ambient

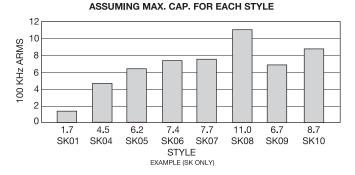




SUPRACAP® - LARGE CAPACITANCE VALUE MLCS


High speed switch mode power supplies require extremely low equivalent series resistance (ESR) and equivalent series inductance (ESL) capacitors for input and output filtering. These requirements are beyond the practical limits of electrolytic capacitors, both aluminum and tantalums, but are readily met by multilayer ceramic (MLCs) capacitors (Figure 1).

Theoretical SMPS's output filter capacitor values are in the range of 6-10 μ F/amp at 40KHz and drop to less than 1 μ F/amp at 1MHz. Most electrolytic applications use 10 to 100 times the theoretical value in order to obtain lower ESR from paralleling many capacitors. This is not necessary with SupraCap® MLC capacitors which inherently have ESRs in the range of milliohms. These extremely low values of ESR mean low ripple voltage and less self-heating of the capacitor.

> ESR Comparison of Different Capacitor Technologies **ESR** -vs- Frequency 100uF Filter Capacitors



Figure



Output noise spikes are reduced by lowering the filter capacitance self-inductance. The ripple current is a triangle wave form with constant di/dt except when it changes polarity, then the di/dt is very high. The noise voltage generated by the filter capacitor is

$$V_{\text{Noise}} = L_{\text{Capacitor}} \frac{\text{di}}{\text{dt}}$$

SupraCap® devices have inductance value less than 3nH.

Figure 2 compares a 5.6 µF MLC to a 5.6 µF tantalum which was specially designed for low ESR and ESL. When subjected to a di/dt of 200 mA/ns the tantalum shows an ESR of 165 m Ω and an ESL of 18nH versus the MLC's 4 m Ω and 0.3 nH. These performance differences allow considerable reduction in size and weight of the filter capacitor.

Additionally, MLCs are compatible with surface mount technology reflow and assembly techniques which is the desirable assembly for conversion frequencies exceeding 1 MHz. Electrolytic capacitors (both aluminum and tantalum) are not compatible with normal vapor phase (VPS) or infrared (IR) reflow temperatures (205-215°C) due to electrolyte and structural problems. SupraCap® devices are supplied with lead frames for either thru-hole or surface mount assembly. The lead frames act as stress relief for differences in coefficients of expansion between the large ceramic chip (10 ppm/°C) and the PC boards.






Figure 2



SM Style Stacked MLC Capacitors

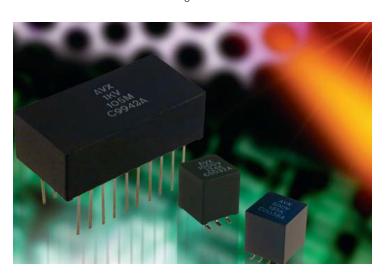



KYOCERA AVX is the original inventor of large capacitance value, stacked MLCC capacitors constructed with DIP leads. The SM-style, Switch Mode Power Supply (SMPS) capacitors were introduced by KYOCERA AVX in 1980s. These capacitors are the closest to the ideal electrical energy storage devices due to high CV product and extremely low ESR and ESL.

In addition to traditionally offered COG (Class I) and X7R (Class II) type dielectrics, KYOCERA AVX introduces another class I, temperature compensated N1500 dielectric characterized with very low dissipation factor. Thanks to considerably higher relative dielectric constant of N1500 dielectric, the CV product is more than doubled in comparison to ultra-stable COG dielectric, resulting in a significant reduction in the size of capacitor and a significant improvement of volumetric efficiency.

The typical applications for different type dielectrics are:

High frequency resonant capacitors, avionic AC line filters (400Hz to 800Hz),

snubbers, timing circuits, high current repetitive discharge

Avionic AC line filters (400Hz to 800Hz), snubbers, high current repetitive discharge, N1500:

capacitive temperature compensation

X7R: General filtering, input and output filters in DC/DC converters, bulk filters, DC link

capacitors, motor drive filters, high current non-repetitive discharge

Not RoHS Compliant

GENERAL SPECIFICATIONS FOR ALL DIELECTRIC TYPES

Operating Temperature Range

-55° to +125°C

Voltage Ratings

50VDC through 500VDC (+125°C)

Dielectric Withstanding Voltage

250% rated voltage for 5 seconds with 30 to 50mA charging current (500 Volt units @ 750VDC)

Insulation Resistance (25°C, rated DC voltage) 100KMΩ min. or 1000MΩ- μ F min. whichever is less Insulation Resistance (125°C, rated DC voltage)

10KM Ω min. or 100M Ω -μF min. whichever is less

Thermal Shock Capabilities 5 cycles (-55°C to +125°C)

Life Test Capabilities (1000 hours)

200% rated voltage at +125°C (500 Volt units @ 600VDC)

GENERAL SPECIFICATIONS FOR ALL DIELECTRIC TYPES

COG Dielectric

Capacitance Range

 $0.01 \mu F$ to $15 \mu F$ (+25°C, 1.0 ± 0.2Vrms at 1kHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Temperature Characteristic

0 ± 30 ppm/°C

Dissipation Factor 0.15% max

(+25°C, 1.0 ± 0.2Vrms at 1kHz)

N1500

Capacitance Range

 $0.018 \mu F$ to $33 \mu F$

(+25°C, 1.0 ± 0.2Vrms at 1kHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Temperature Characteristic

-1500 ± 250 ppm/°C

Dissipation Factor

0.15% max.

(+25°C, 1.0 ± 0.2Vrms at 1kHz)

X7R Dielectric

Capacitance Range

 $0.1 \mu F$ to $390 \mu F$

(+25°C, 1.0 ± 0.2Vrms at 1kHz)

Capacitance Tolerances

±10%, ±20%, +80%, -20%

Temperature Characteristic

±15%

Dissipation Factor

2.5% max.

(+25°C, 1.0 ± 0.2Vrms at 1kHz)

SM Style Stacked MLC Capacitors



HOW TO ORDER

KYOCERA AVX Styles: SM-1, SM-2, SM-3, SM-4, SM-5, SM-6

B = Hi-Rel*

5 = Standard/MIL**

6 = Hi-Rel/MIL***

AVX Style SM0 = Uncoated SM5 = Epoxy Coated

SM₀

Size See Dimensions chart

C Voltage Temperature Coefficient 50V = 5100V = 1 COG = A200V = 2 N1500 = 4 500V = 7X7R = C

<u> 10</u>6 Capacitance Cod€apacitance Tolerance Test Level (2 significant digits C0G/N1500: A = Standard + number of zeros) $J = \pm 5\%$

1,000 pF = 102 $K = \pm 10\%$ 22,000 pF = 223 $M = \pm 20\%$ 220,000 pF = 224 X7R: $1\mu F = 105$

 $K = \pm 10\%$ 10 µF = 106 $M = \pm 20\%$ 100 µF = 107 Z = +80%, -20%

650 Termination Height N = Straight Lead Max Dimension "A"

J = Leads formed in 120 = 0.120" L = Leads formed out 240 = 0.240" P = P Style Leads 360 = 0.360" Z = Z Style Leads 480 = 0.480" 650 = 0.650"

> See tables for capacitance available in specific height and dielectric

> > part.

Note: Capacitors with X7R dielectric are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations. screening option. Screening 100% consists of Group

(B Level), Subgroup 1 per MIL-PRF-49470. Form,

function

equivalent

MIL-PRF-49470

Applies to 50V rated parts only. No screening. function equivalent Form,


MIL-PRF-49470 Applies to 50V rated parts only. Hi-Rel screening the same as option B.


	Typical ESR Performance (mΩ)												
	Aluminum Electrolytic 100µF/50V	Low ESR Solid Tantalum 100µF/10V	Solid Aluminum Electrolytic 100µF/16V	MLCC SMPS 100µF/50V	MLCC SMPS 4.7µF/50V								
ESR @ 10KHz	300	72	29	3	66								
ESR @ 50KHz	285	67	22	2	23								
ESR @ 100KHz	280	62	20	2.5	15								
ESR @ 500KHz	265	56	18	4	8								
ESR @ 1MHz	265	56	17	7	7.5								
ESR @ 5MHz	335	72	17	12.5	8								
ESR @ 10MHz	560	91	22	20	14								


Performance of SMPS capacitors can be simulated by downloading SpiCalci software program - http:// www.kyocera-avx.com/download/software/SpiCalci-AVX.zip



SM Style Surface Mount and Thru-Hole Styles (SM0, SM5)

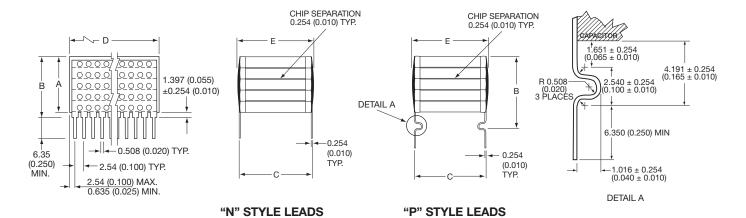







CHIP SEPARATION 0.254 (0.010) TYP. 0.254 (0.010) RAD. (TYP.) 0.254 (0.010) TYP. 1.905 (0.075) 1.778 (0.070) ±0.635 (0.025) ±0.254 (0.010)

"J" STYLE LEADS

"L" STYLE LEADS





 -1.270 ± 0.254 (0.050 \pm 0.010) -2.794 ± 0.254 (0.110 ± 0.010) 1.778 ±0.254 (0.070 ± 0.010) 3.048 ± 0.381 (0.120 ± 0.015) DETAIL B

"Z" STYLE LEADS

DIMENSIONS millimeters (inches)

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
SM-1			11.4 (0.450)	52.1 (2.050)	12.7 (0.500)	20
SM-2	See canacitance	For "N" Style Leads: "A" Dimension Plus 1.651 (0.065) For	20.3 (0.800)	38.4 (1.510)	22.1 (0.870)	15
SM-3	range table for		11.4 (0.450)	26.7 (1.050)	12.7 (0.500)	10
SM-4	maximum "A"	"P" Style Leads: "A" Dimension Plus 4.445 (0.175) For "Z"	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
SM-5	dimensions	Style Leads: "A" Dimension Plus 3.048 (0.120)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
SM-6			31.8 (1.250)	52.1 (2.050)	34.3 (1.350)	20

Note: For SM5 add 0.127 (0.005) to max. and nominal dimensions A, B, D, & E





COG CLASS I DIELECTRIC, ULTRA STABLE CERAMIC

		SM	101			SM02			SM03				SM	104		SM05					SM	106		
Cap µF	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.01																				120				
0.012																120			120	240				
0.015																120			120	240				
0.018																120			120	240				
0.022																240			240	360				
0.027																240		120	240	360				
0.033																240	120	120	240	480				
0.039																240	120	120	240	480				
0.047															120	240	120	240	240	650				
0.056												120			120	360	240	240	360					
0.068												120			120	360	240	240	360					
0.082												120		120	240	480	240	360	480					
0.1												240	120	120	240	480	240	360	480					
0.12				120							120	240	120	120	240	650	360	360	650					
0.15				120				120			120	240	120	240	360		360	480						
0.18				120				120			120	240	240	240	360		480	650						
0.22				240				120			240	360	240	240	480		650							
0.27			120	240				240		120	240	360	240	360	480									
0.33			120	240				240	120	120	240	480	360	360	650									120
0.39			120	360			120	240	120	120	240	650	360	360										120
0.47			240	360			120	240	120	240	360	650	360	480										120
0.56		120	240	480			120	360	240	240	360		480	650										240
0.68		120	240	480		120	240	360	240	240	480		650											240
0.82	120	240	360	650	120	120	240	480	240	360	650												120	240
1	120	240	360		120	120	240	480	240	360	650												120	240
1.2	240	240	360		120	240	240	650	360	360												120	120	360
1.5	240	360	480		240	240	360		360	480												120	240	360
1.8	240	360	650		240	240	360		480	650											120	120	240	480
2.2	360	480			240	360	480		650												120	120	240	650
2.7	360	480			360	360	650														120	240	360	
3.3	480	650			360	480															240	240	360	
3.9	480				480	480															240	240	360	
4.7	650				480	650															240	240	480	
5.6					650																240	360	650	
6.8																					360	360		
8.2																					360	480		
10																					480	650		
12																					480	650		
15																					650			

The number represented in each cell corresponds to the maximum "A" dimension (in mils) and to the last 3 digits of the part number.

CUSTOM VALUES, RATING AND CONFIGURATIONS ARE ALSO AVAILABLE.





N1500 CLASS I DIELECTRIC, TEMPERATURE COMPENSATED CERAMIC

SM01		SM02			SM03			SM04			SM05				SM06									
Cap µF	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.018																				120				
0.022																				120				
0.027																120			120	120				
0.033																120			120	240				
0.039																120			120	240				
0.047																120			120	240				
0.056																120			120	360				
0.068																120		120	120	360				
0.082																240	120	120	240	360				
0.1															120	240	120	120	240	480				
0.12															120	240	120	240	240	650				
0.15															120	240	240	240	360					
0.18												120		120	120	360	240	240	360					
0.22												120	120	120	240	480	240	360	480					
0.27												120	120	120	240	480	360	360	480					
0.33				120								240	120	240	240	650	360	480	650					
0.39				120				120				240	240	240	360		480	480						
0.47				120				120			120	240	240	240	360		480	650						
0.56				240				120			120	360	240	360	480		650							
0.68				240				240		120	120	360	240	360	480									
0.82			120	240				240	120	120	240	360	360	360	650									
1			120	360				240	120	120	240	480	360	480										120
1.2		120	120	360			120	360	120	240	240	650	480	650										120
1.5		120	240	480			120	360	240	240	360		650											120
1.8	120	120	240	480			120	480	240	240	360													240
2.2	120	240	240	650	120	120	240	480	240	360	480													240
2.7	240	240	360		120	120	240	650	360	360	480												120	240
3.3	240	240	360		120	240	240		360	480	650												120	360
3.9	240	360	480		240	240	360		480	480												120	120	360
4.7	360	360	480		240	240	360		480	650											120	120	240	480
5.6	360	480	650		240	360	480		650												120	120	240	480
6.8	480	480			360	360	480														120	240	240	650
8.2	480	650			360	360	650														240	240	360	
10	650				360	480															240	240	360	
12					480	650															240	360	480	
15					650																360	360	480	
18																					360	480	650	
22																					480	480		
27																					480	650		
33																					650			

The number represented in each cell corresponds to the maximum "A" dimension (in mils) and to the last 3 digits of the part number.

CUSTOM VALUES, RATING AND CONFIGURATIONS ARE ALSO AVAILABLE.





X7R CLASS II DIELECTRIC, STABLE CERAMIC

	SM01			SM02			SM03			SM04			SM05					SN	106					
Cap µF	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.1																				120				
0.12																				120				
0.15																			120	120				
0.18																120			120	240				
0.22																120			120	240				
0.27																120			120	240				
0.33																120			120	360				
0.39																120		120	120	360				<u> </u>
0.47																240		120	240	360				
0.56															120	240		120	240	480				
0.68												120			120	240		120	240	650				
0.82												120			120	360		240	360					
1												120		120	120	360	120	240	360					
1.2				46.								120		120	240	360	120	240	360					
1.5				120							465	240		120	240	480	120	360	480					
1.8				120							120	240		120	240	650	120	360	650					
2.2				120				120			120	240		240	240		120	480						
2.7				240				120			120	360		240	360		120	480						
3.3			100	240				120		120	120	360	120	240	360		240	650						
3.9			120	240				120		120	240	360	120	360	480		240							100
4.7			120	240			400	240		120	240	480	120	360	650		240							120
5.6		100	120	360			120	240		120	240	650	120	480			240							120
6.8		120	120	360			120	240	100	240	240		120	480			360							120
8.2		120	240	480		100	120	360	120	240	360		240	650			360							120
10		120	240	480		120	120	360	120	240	360		240				480						120	240
12 15	120	120 240	240 360	650		120 120	240	360 480	120 120	240 360	480 650		240				650						120	240
18	120	240	360		120	120	240	650	120	360	650		360										120	240
22	120	240	480		120	240	240	030	240	480	030		360									120	120	360
27	120	360	480		120	240	360		240	650			480									120	240	360
33	240	360	650		120	240	360		240	030			650								120	120	240	480
39	240	480	030		120	360	480		360				030								120	120	240	650
47	240	480			240	360	650		360												120	240	240	650
56	360	650			240	480	650		480												120	240	360	000
68	360	000			240	480	000		480												120	240	360	
82	360				240	650			650												240	360	480	
100	480				360																240	360	650	
120	650				360																240	360	650	
150					480																240	480		
180					650																360	650		
220																					360			
270																					480			
330																					650			
390																					650			

The number represented in each cell corresponds to the maximum "A" dimension (in mils) and to the last 3 digits of the part number.

CUSTOM VALUES, RATING AND CONFIGURATIONS ARE ALSO AVAILABLE.

090518

SM Style SM Military Styles MIL-PRF-49470



KYOCERA AVX IS QUALIFIED TO MIL-PRF-49470/1 AND MIL-PRF-49470/2

The SMPS capacitors are designed for high current, high-power and high-temperature applications. These capacitors have very low ESR (Equivalent Series Resistance) and ESL (Equivalent Series Inductance). SMPS Series capacitors offer design and component engineers a proven technology specifically designed for programs requiring high reliability performance in harsh environments.

MIL-PRF-49470 SMPS Series capacitors are primarily used in input/output filters of high-power and high-voltage power supplies as well as in bus filters and DC snubbers for high power inverters and other high-current applications. These capacitors are available with through-hole and surface mount leads. The operating temperature is -55°C to +125°C.

The MIL-PRF-49470 capacitors are preferred over the DSCC drawing 87106 capacitors. MIL-PRF-49470 specification was created to produce a robust replacement for DSCC 87106. MIL-PRF-49470 offers two product levels.

Level "B" is the standard reliability. Level "T" is the high reliability suitable for space application.

KYOCERA AVX is qualified to supply MIL-PRF-49470/1 parts. These are unencapsulated ceramic dielectric, switch mode power supply capacitors. KYOCERA AVX is also qualified to supply MIL-PRF-49470/2 parts. These are encapsulated ceramic dielectric, switch mode power supply capacitors.

PLEASE CONTACT THE DLA WEBSITE


http://www.landandmaritime.dla.mil/programs/milspec/DocS earch.aspx for details on testing, electrical, mechanical and part number options.

PLEASE CONTACT THE DLA WEBSITE

http://www.landandmaritime.dla.mil/Programs/QmlQpl/ for the latest QPL (Qualified Products List).

Not RoHS Compliant

HOW TO ORDER

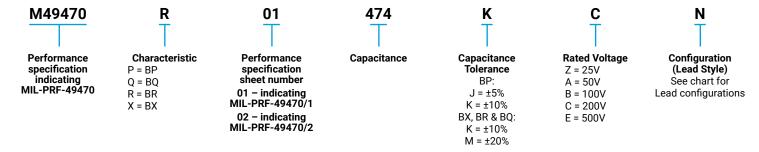

For "T" level parts, replace the "M" in the pin with "T" (for example M49470R01474KCN becomes T49470R01474KCN) PRF-49470 contains additional capacitors that are not available in 87106, such as additional lead configurations and lower profile parts.

On the pages to follow is the general dimensional outline along with a cross reference from 87106 parts to MIL-PRF-49470 parts.

LEAD CONFIGURATION

millimeters (inches)

Symbol (Last digit of military PN, 12th digit of PN)	Lead Style	Height Profile (Dimension A)	Formed lead length, L
N	N (straight)	Standard	N/A
L	L (formed)	Standard	1.78 ± 0.25 (0.070 ± 0.010)
M	L (formed)	Standard	1.14 ± 0.25 (0.045 ± 0.010)
J	J (formed)	Standard	1.78 ± 0.25 (0.070 ± 0.010)
К	J (formed)	Standard	1.14 ± 0.25 (0.045 ± 0.010)
A	N (straight)	Low	N/A
В	L (formed)	Low	1.78 ± 0.25 (0.070 ± 0.010)
D	L (formed)	Low	1.14 ± 0.25 (0.045 ± 0.010)
С	J (formed)	Low	1.78 ± 0.25 (0.070 ± 0.010)
F	J (formed)	Low	1.14 ± 0.25 (0.045 ± 0.010)

Note: Lead options available marked with a "-" as a place holder. See lead configuration column for available lead options to replace the "-".

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip










MIL-PRF-49470/1

MIL-PRF-49470/1 - capacitor, fixed, ceramic dielectric, switch mode power supply (general purpose and temperature stable), standard reliability and high reliability unencapsulated, Style PS01.

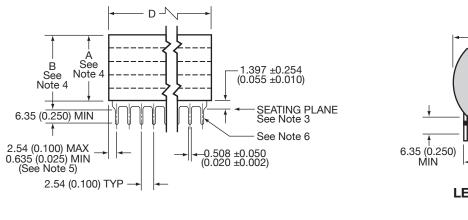





LEAD STYLE N AND A



LEAD STYLE J AND C



CIRCUIT DIAGRAM



LEAD STYLE L AND B

DIMENSIONS:

millimeters (inches)

Case Code	C ±0.635 (±0.025))	E (may)	Number of Leads
Case Code	C ±0.635 (±0.025)	Min.	Max.	E (max.)	per side
1	11.4 (0.450)	49.5 (1.950)	52.7 (2.075)	12.7 (0.500)	20
2	20.3 (0.800)	36.8 (1.450)	40.0 (1.535)	22.1 (0.870)	15
3	11.4 (0.450)	24.1 (0.950)	27.3 (1.075)	12.7 (0.500)	10
4	10.2 (0.400)	8.89 (0.350)	10.8 (0.425)	11.2 (0.440)	4
5	6.35 (0.250)	6.20 (0.224)	6.97 (0.275)	7.62 (0.300)	3
6	31.8 (1.250)	49.5 (1.950)	52.7 (2.075)	34.3 (1.350)	20

NOTES:


- 1. Dimensions are in millimeters (inches)
- 2. Unless otherwise specified, tolerances are 0.254 (±0.010).
- 3. Lead frame configuration is shown as typical above the seating plane.
- 4. See table I of MIL-PRF-49470/1 for specific maximum A dimension. For maximum B dimension, add 1.65 (0.065) to the appropriate A dimension. For all lead styles, the number of chips is determined by the capacitance and voltage rating.
- 5. For case code 5, dimensions shall be 2.54 (0.100) maximum and 0.305 (0.012) minimum.
- 6. Lead alignment within pin rows shall be within ±0.10 (0.005).







MIL-PRF-49470/2


MIL-PRF-49470/2 - capacitor, fixed, ceramic dielectric, switch mode power supply (general purpose and temperature stable), standard reliability and high reliability encapsulated, Style PS02.






LEAD STYLE N AND A







LEAD STYLE J AND C

CIRCUIT DIAGRAM

LEAD STYLE L AND B

millimeters (inches)

DIMENSIONS:

Case Code	C ±0.635 (±0.025)	D ±0.635 (±0.025)	E (max)	Number of Leads per side
1	11.4 (0.450)	54.7 (2.155)	14.7 (0.580)	20
2	20.3 (0.800)	41.0 (1.615)	24.1 (0.950)	15
3	11.4 (0.450)	29.3 (1.155)	14.7 (0.580)	10
4	10.2 (0.400)	12.3 (0.485)	12.3 (0.485)	4
5	6.35 (0.250)	9.02 (0.355)	9.02 (0.355)	3
6	31.8 (1.250)	54.7 (2.155)	36.3 (1.430)	20

NOTES:

- 1. Dimensions are in millimeters (inches)
- 2. Unless otherwise specified, tolerances are 0.254 (±0.001).
- 3. See table I of MIL-PRF-49470/2 for specific maximum A dimension. For all lead styles, the number of chips is determined by the capacitance and voltage rating.
- 4. Lead alignment within pin rows shall be within ±0.10 (0.004).



MIL-PRF-49470 PIN 1/	PART NUMBER (for reference only) 2/	Capacitance µF	Tolerance	Characteristic	Case Code	Lead Configuration
		25V				
-49470X0-155-Z-	SM-53C155-H-120	1.5	K, M	BX	5	N, L, M, J, K
-49470X0-185-Z-	SM-53C185-H-120	1.8	K, M	BX	5	N, L, M, J, K
-49470X0-225-Z-	SM-53C225-H-120	2.2	K, M	BX	5	N, L, M, J, K
-49470X0-275-Z-	SM-53C275-H-240	2.7	K, M	BX	5	N, L, M, J, K
-49470X0-335-Z-	SM-53C335-H-240	3.3	K, M	BX	5	N, L, M, J, K
-49470X0-395-Z-	SM-53C395-H-240	3.9	K, M	BX	5	N, L, M, J, K
-49470X0-475-Z-	SM-53C475-H-240	4.7	K, M	BX	5	N, L, M, J, K
-49470X0-565-Z-	SM-53C565-H-360	5.6	K, M	BX	5	N, L, M, J, K
-49470X0-685-Z-	SM-53C685-H-360	6.8	K, M	BX	5	N, L, M, J, K
-49470X0-685-Z-	SM-43C685-H-120	6.8	K, M	ВХ	4	A, B, D, C, F
-49470X0-825-Z-	SM-53C825-H-480	8.2	K, M	BX	5	N, L, M, J, K
-49470X0-825-Z-	SM-43C825-H-240	8.2	K, M	BX	4	A, B, D, C, F
-49470X0-106-Z-	SM-53C106-H-650	10	K, M	BX	5	N, L, M, J, K
-49470X0-106-Z-	SM-43C106-H-240	10	K, M	BX	4	A, B, D, C, F
-49470X0-126-Z-	SM-43C126-H-240	12	K, M	BX	4	N, L, M, J, K
-49470X0-156-Z-	SM-43C156-H-360	15	K, M	BX	4	N, L, M, J, K
-49470X0-156-Z-	SM-33C156-H-120	15	K, M	BX	3	A, B, D, C, F
-49470X0-186-Z-	SM-43C186-H-360	18	K, M	BX	4	N, L, M, J, K
-49470X0-186-Z-	SM-33C186-H-120	18	K, M	BX	3	A, B, D, C, F
-49470X0-226-Z-	SM-43C226-H-480	22	K, M	BX	3	N, L, M, J, K
-49470X0-226-Z-	SM-33C226-H-240	22	K, M	BX		A, B, D, C, F
-49470X0-276-Z-	SM-43C276-H-480	27 27	K, M	BX BX	4	N, L, M, J, K
-49470X0-276-Z-	SM-33C276-H-240	33	K, M	BX	3 4	A, B, D, C, F
-49470X0-336-Z- -49470X0-336-Z-	SM-43C336-H-650 SM-33C336-H-240	33	K, M K, M	BX	3	N, L, M, J, K
-49470X0-336-Z- -49470X0-396-Z-	SM-33C336-H-240 SM-33C396-H-360	39	K, M	BX	3	A, B, D, C, F N, L, M, J, K
-49470X0-396-Z-	SM-13C396-H-240	39	K, M	BX	1	A, B, D, C, F
-49470X0-390-2-	SM-33C476-H-480	47	K, M	BX	3	N, L, M, J, K
-49470X0-476-Z-	SM-13C476-H-360	47	K, M	BX	1	A, B, D, C, F
-49470X0-566-Z-	SM-33C566-H-480	56	K, M	BX	3	N, L, M, J, K
-49470X0-566-Z-	SM-13C566-H-360	56	K, M	BX	1	A, B, D, C, F
-49470X0-686-Z-	SM-33C686-H-480	68	K, M	BX	3	N, L, M, J, K
-49470X0-686-Z-	SM-13C686-H-360	68	K, M	BX	1	A, B, D, C, F
-49470X0-826-Z-	SM-33C826-H-650	82	K, M	BX	3	N, L, M, J, K
-49470X0-826-Z-	SM-13C826-H-360	82	K, M	BX	1	A, B, D, C, F
-49470X0-107-Z-	SM-13C107-H-480	100	K, M	BX	1	N, L, M, J, K
-49470X0-107-Z-	SM-23C107-H-360	100	K, M	BX	2	A, B, D, C, F
-49470X0-127-Z-	SM-13C127-H-650	120	K, M	BX	1	N, L, M, J, K
-49470X0-127-Z-	SM-23C127-H-360	120	K, M	BX	2	A, B, D, C, F
-49470X0-157-Z-	SM-23C157-H-480	150	K, M	ВХ	2	N, L, M, J, K
-49470X0-157-Z-	SM-63C157-H-240	150	K, M	ВХ	6	A, B, D, C, F
-49470X0-187-Z-	SM-23C187-H-650	180	K, M	BX	2	N, L, M, J, K
-49470X0-187-Z-	SM-63C187-H-360	180	K, M	BX	6	A, B, D, C, F
-49470X0-227-Z-	SM-63C227-H-360	220	K, M	BX	6	N, L, M, J, K
-49470X0-277-Z-	SM-63C277-H-480	270	K, M	BX	6	N, L, M, J, K
-49470X0-337-Z-	SM-63C337-H-650	330	K, M	BX	6	N, L, M, J, K
-49470X0-397-Z-	SM-63C397-H-650	390	K, M	BX	6	N, L, M, J, K
		50V				
-49470P0-563-A-	SM-55A563-H-120	0.056	J, K	BP	5	N, L, M, J, K
-49470P0-683-A-	SM-55A683-H-240	0.068	J, K	BP	5	N, L, M, J, K
-49470P0-823-A-	SM-55A823-H-240	0.082	J, K	BP	5	N, L, M, J, K
-49470P0-104-A-	SM-55A104-H-240	0.1	J, K	BP	5	N, L, M, J, K
-49470P0-124-A-	SM-55A124-H-360	0.12	J, K	BP	5	N, L, M, J, K
-49470P0-154-A-	SM-55A154-H-360	0.15	J, K	BP	5	N, L, M, J, K
-49470P0-184-A-	SM-55A184-H-480	0.18	J, K	BP	5	N, L, M, J, K
-49470P0-184-A-	SM-45A184-H-240	0.18	J, K	BP	4	A, B, D, C, F

^{1/} Complete PIN shall include additional symbols replacing dashes (from left to right): product level (M for B level, or T for T level), part style (1 for unencapsulated, 2 for encapsulated), capacitance tolerance, lead configuration

The last 3 digits of the Part Number represent the chip height of the unencapsulated version. For the encapsulated version, replace the last 3 digits as follows: (120 replace with 270, 240 replace with 390, 360 replace with 530, 480 replace with 660 and 650 replace with 800).



^{2/} Complete Part Number (provided for reference only) shall include additional symbols replacing dashes (from left to right): part style (0 for unencapsulated and 9 for encapsulated), capacitance tolerance, lead configuration



MIL-PRF-49470 PIN 1/	PART NUMBER (for reference only) 2/	Capacitance μF	Tolerance	Characteristic	Case Code	Lead Configuration
-49470P0-224-A-	SM-55A224-H-480	0.22	J, K	BP	5	N, L, M, J, K
-49470P0-224-A-	SM-45A224-H-240	0.22	J, K	BP	4	A, B, D, C, F
-49470P0-274-A-	SM-55A274-H-650	0.27	J, K	BP	5	N, L, M, J, K
-49470P0-274-A-	SM-45A274-H-240	0.27	J, K	BP	4	A, B, D, C, F
-49470P0-334-A-	SM-45A334-H-360	0.33	J, K	BP	4	N, L, M, J, K
-49470P0-394-A-	SM-45A394-H-480	0.39	J, K	BP	4	N, L, M, J, K
-49470P0-474-A-	SM-45A474-H-480	0.47	J, K	BP	4	N, L, M, J, K
-49470P0-564-A-	SM-45A564-H-650	0.56	J, K	BP	4	N, L, M, J, K
-49470P0-564-A-	SM-35A564-H-240	0.56	J, K	BP	3	A, B, D, C, F
-49470P0-684-A-	SM-35A684-H-240	0.68	J, K	BP	3	N, L, M, J, K
-49470P0-824-A-	SM-35A824-H-240	0.82	J, K	BP	3	N, L, M, J, K
-49470P0-105-A-	SM-35A105-H-360	1	J, K	BP	3	N, L, M, J, K
-49470X0-105-A-	SM-55C105-H-120	1	K, M	BX	5	N, L, M, J, K
-49470P0-125-A-	SM-35A125-H-360	1.2	J, K	BP	3	N, L, M, J, K
-49470X0-125-A-	SM-55C125-H-120	1.2	K, M	BX	5	N, L, M, J, K
-49470P0-155-A-	SM-35A155-H-480	1.5	J, K	BP	3	N, L, M, J, K
-49470X0-155-A-	SM-55C155-H-240	1.5	K, M	BX	5	N, L, M, J, K
-49470P0-185-A-	SM-35A185-H-480	1.8	J, K	BP	3	N, L, M, J, K
-49470X0-185-A-	SM-55C185-H-240	1.8	K, M	BX	5	N, L, M, J, K
-49470P0-225-A-	SM-35A225-H-650	2.2	J, K	BP	3	N, L, M, J, K
-49470X0-225-A-	SM-55C225-H-240	2.2	K, M	BX	5	N, L, M, J, K
-49470X0-275-A-	SM-55C275-H-360	2.7	K, M	BX	5	N, L, M, J, K
-49470X0-335-A-	SM-55C335-H-360	3.3	K, M	BX	5	N, L, M, J, K
-49470X0-395-A-	SM-55C395-H-480	3.9	K, M	BX	5	N, L, M, J, K
-49470X0-475-A-	SM-55C475-H-480	4.7	K, M	BX	5	N, L, M, J, K
-49470X0-475-A-	SM-45C475-H-240	4.7	K, M	BX	4	A, B, D, C, F
-49470X0-565-A-	SM-55C565-H-650	5.6	K, M	BX	5	N, L, M, J, K
-49470X0-565-A-	SM-45C565-H-240	5.6	K, M	BX	4	A, B, D, C, F
-49470X0-685-A-	SM-45C685-H-360	6.8	K, M	BX	4	N, L, M, J, K
-49470X0-825-A-	SM-45C825-H-360	8.2	K, M	BX	4	N, L, M, J, K
-49470X0-106-A-	SM-45C106-H-480	10 12	K, M	BX BX	4	N, L, M, J, K
-49470X0-126-A- -49470X0-156-A-	SM-45C126-H-480 SM-45C156-H-650	15	K, M K, M	BX	4	N, L, M, J, K
-49470X0-136-A-	SM-35C156-H-240	15	K, M	BX	3	N, L, M, J, K A, B, D, C, F
-49470X0-130-A-	SM-35C130-11-240	18	K, M	BX	3	N, L, M, J, K
-49470X0-180-A-	SM-35C226-H-360	22	K, M	BX	3	N, L, M, J, K
-49470X0-276-A-	SM-35C276-H-360	27	K, M	BX	3	N, L, M, J, K
-49470X0-336-A-	SM-35C27611300	33	K, M	BX	3	N, L, M, J, K
-49470X0-396-A-	SM-35C396-H-480	39	K, M	BX	3	N, L, M, J, K
-49470X0-476-A-	SM-35C476-H-650	47	K, M	BX	3	N, L, M, J, K
-49470X0-476-A-	SM-25C476-H-240	47	K, M	BX	2	A, B, D, C, F
-49470X0-566-A-	SM-15C566-H-360	56	K, M	BX	1	N, L, M, J, K
-49470X0-566-A-	SM-25C566-H-240	56	K, M	BX	2	A, B, D, C, F
-49470X0-686-A-	SM-15C686-H-480	68	K, M	BX	1	N, L, M, J, K
-49470X0-686-A-	SM-25C686-H-360	68	K, M	BX	2	A, B, D, C, F
-49470X0-826-A-	SM-15C826-H-480	82	K, M	BX	1	N, L, M, J, K
-49470X0-826-A-	SM-25C826-H-360	82	K, M	ВХ	2	A, B, D, C, F
-49470X0-107-A-	SM-15C107-H-650	100	K, M	BX	1	N, L, M, J, K
-49470X0-107-A-	SM-25C107-H-480	100	K, M	BX	2	A, B, D, C, F
-49470X0-127-A-	SM-25C127-H-480	120	K, M	BX	2	N, L, M, J, K
-49470X0-157-A-	SM-25C157-H-650	150	K, M	BX	2	N, L, M, J, K
-49470X0-187-A-	SM-65C187-H-480	180	K, M	BX	6	N, L, M, J, K
-49470X0-227-A-	SM-65C227-H-480	220	K, M	BX	6	N, L, M, J, K
-49470X0-277-A-	SM-65C277-H-650	270	K, M	ВХ	6	N, L, M, J, K
		100V				
-49470P0-473-B-	SM-51A473-H-240	0.047	J, K	BP	5	N, L, M, J, K
-49470P0-563-B-	SM-51A563-H-240	0.056	J, K	BP	5	N, L, M, J, K

^{1/} Complete PIN shall include additional symbols replacing dashes (from left to right): product level (M for B level, or T for T level), part style (1 for unencapsulated, 2 for encapsulated), capacitance tolerance, lead configuration

The last 3 digits of the Part Number represent the chip height of the unencapsulated version. For the encapsulated version, replace the last 3 digits as follows: (120 replace with 270, 240 replace with 390, 360 replace with 530, 480 replace with 660 and 650 replace with 800).



^{2/} Complete Part Number (provided for reference only) shall include additional symbols replacing dashes (from left to right): part style (0 for unencapsulated and 9 for encapsulated), capacitance tolerance, lead configuration



MIL-PRF-49470 PIN 1/	PART NUMBER (for reference only) 2/	Capacitance µF	Tolerance	Characteristic	Case Code	Lead Configuration
-49470P0-683-B-	SM-51A683-H-240	0.068	J, K	BP	5	N, L, M, J, K
-49470P0-823-B-	SM-51A823-H-240	0.082	J, K	BP	5	N, L, M, J, K
-49470P0-104-B-	SM-51A104-H-360	0.1	J, K	BP	5	N, L, M, J, K
-49470P0-124-B-	SM-51A124-H-360	0.12	J, K	BP	5	N, L, M, J, K
-49470P0-154-B-	SM-51A154-H-480	0.15	J, K	BP	5	N, L, M, J, K
-49470P0-154-B-	SM-41A154-H-240	0.15	J, K	BP	4	A, B, D, C, F
-49470P0-184-B-	SM-51A184-H-650	0.18	J, K	BP	5	N, L, M, J, K
-49470P0-184-B-	SM-41A184-H-240	0.18	J, K	BP	4	A, B, D, C, F
-49470P0-224-B-	SM-51A224-H-650	0.22	J, K	BP	5	N, L, M, J, K
-49470P0-224-B-	SM-41A224-H-240	0.22	J, K	BP	4	A, B, D, C, F
-49470P0-274-B-	SM-41A274-H-360	0.27	J, K	BP	4	N, L, M, J, K
-49470P0-334-B-	SM-41A334-H-480	0.33	J, K	BP	4	N, L, M, J, K
-49470P0-394-B-	SM-41A394-H-480	0.39	J, K	BP	4	N, L, M, J, K
-49470P0-474-B-	SM-41A474-H-650	0.47	J, K	BP	4	N, L, M, J, K
-49470P0-474-B-	SM-31A474-H-240	0.47	J, K	BP	3	A, B, D, C, F
-49470P0-564-B-	SM-41A564-H-650	0.56	J, K	BP	4	N, L, M, J, K
-49470P0-564-B-	SM-31A564-H-240	0.56	J, K	BP	3	A, B, D, C, F
-49470P0-684-B-	SM-31A684-H-240	0.68	J, K	BP	3	N, L, M, J, K
-49470X0-684-B-	SM-51C684-H-120	0.68	K, M	BX	5	N, L, M, J, K
-49470P0-824-B-	SM-31A824-H-360	0.82	J, K	BP	3	N, L, M, J, K
-49470X0-824-B-	SM-51C824-H-240	0.82	K, M	BX	5	N, L, M, J, K
-49470P0-105-B-	SM-31A105-H-360	1	J, K	BP	3	N, L, M, J, K
-49470X0-105-B-	SM-51C105-H-240	1	K, M	BX	5	N, L, M, J, K
-49470P0-125-B-	SM-31A125-H-480	1.2	J, K	BP	3	N, L, M, J, K
-49470X0-125-B-	SM-51C125-H-240	1.2	K, M	BX	5	N, L, M, J, K
-49470P0-155-B-	SM-31A155-H-480	1.5	J, K	BP	3	N, L, M, J, K
-49470X0-155-B-	SM-51C155-H-360	1.5	K, M	BX	5	N, L, M, J, K
-49470P0-185-B-	SM-31A185-H-650	1.8	J, K	BP	3	N, L, M, J, K
-49470X0-185-B-	SM-51C185-H-360	1.8	K, M	BX	5	N, L, M, J, K
-49470X0-225-B-	SM-51C225-H-480	2.2	K, M	BX	5	N, L, M, J, K
-49470X0-225-B-	SM-41C225-H-240	2.2	K, M	BX	4	A, B, D, C, F
-49470X0-275-B-	SM-51C275-H-480	2.7	K, M	BX	5	N, L, M, J, K
-49470X0-335-B-	SM-51C335-H-650	3.3	K, M	BX	5	N, L, M, J, K
-49470X0-335-B-	SM-41C335-H-240	3.3	K, M	BX	4	A, B, D, C, F
-49470X0-395-B-	SM-41C395-H-360	3.9	K, M	BX	4	N, L, M, J, K
-49470X0-475-B-	SM-41C475-H-360	4.7	K, M	BX	4	N, L, M, J, K
-49470X0-565-B-	SM-41C565-H-480	5.6	K, M	BX	4	N, L, M, J, K
-49470X0-685-B-	SM-41C685-H-480	6.8	K, M	BX	4	N, L, M, J, K
-49470X0-825-B-	SM-41C825-H-650	8.2	K, M	BX	4	N, L, M, J, K
-49470X0-825-B-	SM-31C825-H-240	8.2	K, M	BX	3	A, B, D, C, F
-49470X0-106-B-	SM-31C106-H-240	10	K, M	BX	3	N, L, M, J, K
-49470X0-126-B-	SM-31C126-H-240	12	K, M	BX	3	N, L, M, J, K
-49470X0-156-B-	SM-31C156-H-360	15	K, M	BX	3	N, L, M, J, K
-49470X0-186-B- -49470X0-226-B-	SM-31C186-H-360	18	K, M	BX BX	3	N, L, M, J, K
	SM-31C226-H-480		K, M			N, L, M, J, K
-49470X0-276-B-	SM-31C276-H-650	27 27	K, M	BX BX	3 2	N, L, M, J, K
-49470X0-276-B- -49470X0-336-B-	SM-21C276-H-240 SM-11C336-H-360	33	K, M K, M	BX	1	A, B, D, C, F
-49470X0-336-В-	SM-11C336-H-360 SM-21C336-H-240	33	K, M	BX	2	N, L, M, J, K A, B, D, C, F
-49470X0-336-B-	SM-21C336-H-240 SM-11C396-H-480	39	K, M	BX	1	N, L, M, J, K
-49470X0-396-В-	SM-21C396-H-360	39	K, M	BX	2	A, B, D, C, F
-49470X0-396-В- -49470X0-476-В-	SM-21C396-H-360 SM-11C476-H-480	47	K, M	BX	1	N, L, M, J, K
-49470X0-476-B-	SM-21C476-H-360	47	K, M	BX	2	A, B, D, C, F
-49470X0-470-B-	SM-11C566-H-650	56	K, M	BX	1	N, L, M, J, K
-49470X0-586-B-	SM-21C686-H-480	68	K, M	BX	2	N, L, M, J, K
-49470X0-826-B-	SM-21C826-H-650	82	K, M	BX	2	N, L, M, J, K
-49470X0-020-B-	SM-61C107-H-360	100	K, M	BX	6	N, L, M, J, K
1/ Complete DIN shall include additions	desired a series in a deches (from left to		A for Diaval or Tfor	Tlavel) part atula (1 fau		14, L, 141, U, 1

^{1/} Complete PIN shall include additional symbols replacing dashes (from left to right): product level (M for B level, or T for T level), part style (1 for unencapsulated, 2 for encapsulated), capacitance tolerance, lead configuration

The last 3 digits of the Part Number represent the chip height of the unencapsulated version. For the encapsulated version, replace the last 3 digits as follows: (120 replace with 270, 240 replace with 390, 360 replace with 530, 480 replace with 660 and 650 replace with 800).



^{2/} Complete Part Number (provided for reference only) shall include additional symbols replacing dashes (from left to right): part style (0 for unencapsulated and 9 for encapsulated), capacitance tolerance, lead configuration



MIL-PRF-49470 PIN 1/	PART NUMBER (for reference only) 2/	Capacitance µF	Tolerance	Characteristic	Case Code	Lead Configuration
-49470X0-127-B-	SM-61C127-H-360	120	K, M	BX	6	N, L, M, J, K
-49470X0-157-B-	SM-61C157-H-480	150	K, M	BX	6	N, L, M, J, K
-49470X0-187-B-	SM-61C187-H-540	180	K, M	BX	6	N, L, M, J, K
		200V				
-49470P0-223-C-	SM-52A223-H-120	0.022	J, K	BP	5	N, L, M, J, K
-49470P0-273-C-	SM-52A273-H-240	0.027	J, K	BP	5	N, L, M, J, K
-49470P0-333-C-	SM-52A333-H-240	0.033	J, K	BP	5	N, L, M, J, K
-49470P0-393-C-	SM-52A393-H-240	0.039	J, K	BP	5	N, L, M, J, K
-49470P0-473-C-	SM-52A473-H-360	0.047	J, K	BP	5	N, L, M, J, K
-49470P0-563-C-	SM-52A563-H-360	0.056	J, K	BP	5	N, L, M, J, K
-49470P0-683-C-	SM-52A683-H-480	0.068	J, K	BP	5	N, L, M, J, K
-49470P0-683-C-	SM-42A683-H-120	0.068	J, K	BP	4	A, B, D, C, F
-49470P0-823-C-	SM-52A823-H-480	0.082	J, K	BP	5	N, L, M, J, K
-49470P0-823-C-	SM-42A823-H-240	0.082	J, K	BP	4	A, B, D, C, F
-49470P0-104-C-	SM-52A104-H-650	0.1	J, K	BP	5	N, L, M, J, K
-49470P0-104-C-	SM-42A104-H-240	0.1	J, K	BP	4	A, B, D, C, F
-49470P0-124-C-	SM-42A124-H-360	0.12	J, K	BP	4	N, L, M, J, K
-49470P0-154-C-	SM-42A154-H-360	0.15	J, K	BP BP	4	N, L, M, J, K
-49470P0-184-C-	SM-42A184-H-480	0.18	J, K J, K	BP BP	4	N, L, M, J, K
-49470P0-224-C-	SM-42A224-H-480	0.22	J, K J, K		4	N, L, M, J, K
-49470P0-274-C- -49470P0-274-C-	SM-42A274-H-650 SM-32A274-H-240	0.27	J, K J, K	BP BP	3	N, L, M, J, K A, B, D, C, F
-49470P0-274-C-	SM-32A334-H-240	0.27	J, K	BP BP	3	N, L, M, J, K
-49470P0-334-C-	SM-32A334-H-240	0.39	J, K	BP	3	N, L, M, J, K
-49470P0-394-C-	SM-32A474-H-360	0.39	J, K	BP BP	3	N, L, M, J, K
-49470R0-474-C-	SM-52C474-H-240	0.47	K, M	BR	5	N, L, M, J, K
-49470P0-564-C-	SM-32A564-H-480	0.56	J, K	BP	3	N, L, M, J, K
-49470P0-564-C-	SM-32A564-H-360	0.56	J, K	BP	3	N, L, M, J, K
-49470R0-564-C-	SM-52C564-H-240	0.56	K, M	BR	5	N, L, M, J, K
-49470P0-684-C-	SM-32A684-H-480	0.68	J, K	BP	3	N, L, M, J, K
-49470R0-684-C-	SM-52C684-H-360	0.68	K, M	BR	5	N, L, M, J, K
-49470P0-824-C-	SM-32A824-H-650	0.82	J, K	BP	3	N, L, M, J, K
-49470R0-824-C-	SM-52C824-H-360	0.82	K, M	BR	5	N, L, M, J, K
-49470P0-105-C-	SM-32A105-H-650	1	J, K	BP	3	N, L, M, J, K
-49470R0-105-C-	SM-52C105-H-480	1	K, M	BR	5	N, L, M, J, K
-49470R0-105-C-	SM-42C105-H-120	1	K, M	BR	4	A, B, D, C, F
-49470R0-125-C-	SM-52C125-H-480	1.2	K, M	BR	5	N, L, M, J, K
-49470R0-125-C-	SM-42C125-H-240	1.2	K, M	BR	4	A, B, D, C, F
-49470R0-155-C-	SM-52C155-H-650	1.5	K, M	BR	5	N, L, M, J, K
-49470R0-155-C-	SM-42C155-H-240	1.5	K, M	BR	4	A, B, D, C, F
-49470R0-185-C-	SM-42C185-H-360	1.8	K, M	BR	4	N, L, M, J, K
-49470R0-225-C-	SM-42C225-H-360	2.2	K, M	BR	4	N, L, M, J, K
-49470R0-275-C-	SM-42C275-H-480	2.7	K, M	BR	4	N, L, M, J, K
-49470R0-335-C-	SM-42C335-H-480	3.3	K, M	BR	4	N, L, M, J, K
-49470R0-395-C-	SM-42C395-H-650	3.9	K, M	BR	4	N, L, M, J, K
-49470R0-395-C-	SM-32C395-H-240	3.9	K, M	BR	3	A, B, D, C, F
-49470R0-475-C-	SM-32C475-H-240	4.7	K, M	BR	3	N, L, M, J, K
-49470R0-565-C-	SM-32C565-H-240	5.6	K, M	BR	3	N, L, M, J, K
-49470R0-685-C-	SM-32C685-H-360	6.8	K, M	BR	3	N, L, M, J, K
-49470R0-825-C-	SM-32C825-H-360	8.2	K, M	BR	3	N, L, M, J, K
-49470R0-106-C-	SM-32C106-H-480	10	K, M	BR	3	N, L, M, J, K
-49470R0-126-C-	SM-32C126-H-650	12	K, M	BR	3	N, L, M, J, K
-49470R0-126-C-	SM-22C126-H-240	12	K, M	BR	2	A, B, D, C, F
-49470R0-156-C-	SM-12C156-H-360	15	K, M	BR	1	N, L, M, J, K
-49470R0-156-C-	SM-22C156-H-240	15	K, M	BR	2	A, B, D, C, F
-49470R0-186-C-	SM-12C186-H-480	18	K, M	BR	1	N, L, M, J, K
-49470R0-186-C-	SM-22C186-H-360	18	K, M	BR	2	A, B, D, C, F

^{1/} Complete PIN shall include additional symbols replacing dashes (from left to right): product level (M for B level, or T for T level), part style (1 for unencapsulated, 2 for encapsulated), capacitance tolerance, lead configuration

The last 3 digits of the Part Number represent the chip height of the unencapsulated version. For the encapsulated version, replace the last 3 digits as follows: (120 replace with 270, 240 replace with 390, 360 replace with 530, 480 replace with 660 and 650 replace with 800).



^{2/} Complete Part Number (provided for reference only) shall include additional symbols replacing dashes (from left to right): part style (0 for unencapsulated and 9 for encapsulated), capacitance tolerance, lead configuration



SM Style SM Military Styles MIL-PRF-49470

MIL-PRF-49470 PIN 1/	PART NUMBER (for reference only) 2/	Capacitance µF	Tolerance	Characteristic	Case Code	Lead Configuration
-49470R0-226-C-	SM-12C226-H-650	22	K, M	BR	1	N, L, M, J, K
-49470R0-226-C-	SM-22C226-H-360	22	K, M	BR	2	A, B, D, C, F
-49470R0-276-C-	SM-12C276-H-650	27	K, M	BR	1	N, L, M, J, K
-49470R0-276-C-	SM-22C276-H-480	27	K, M	BR	2	A, B, D, C, F
-49470R0-336-C-	SM-22C336-H-480	33	K, M	BR	2	N, L, M, J, K
-49470R0-396-C-	SM-22C396-H-650	39	K, M	BR	2	N, L, M, J, K
-49470R0-476-C-	SM-62C476-H-240	47	K, M	BR	6	N, L, M, J, K
-49470R0-566-C-	SM-62C566-H-360	56	K, M	BR	6	N, L, M, J, K
-49470R0-686-C-	SM-62C686-H-360	68	K, M	BR	6	N, L, M, J, K
-49470R0-826-C-	SM-62C826-H-480	82	K, M	BR	6	N, L, M, J, K
-49470R0-107-C-	SM-62C107-H-650	100	K, M	BR	6	N, L, M, J, K
-49470R0-127-C-	SM-62C127-H-650	120	K, M	BR	6	N, L, M, J, K
		500V				
-49470P0-103-E-	SM-57A103-H-120	0.01	J, K	BP	5	N, L, M, J, K
-49470P0-123-E-	SM-57A123-H-240	0.012	J, K	BP	5	N, L, M, J, K
-49470P0-153-E-	SM-57A153-H-240	0.015	J, K	BP	5	N, L, M, J, K
-49470P0-183-E-	SM-57A183-H-240	0.018	J, K	BP	5	N, L, M, J, K
-49470P0-223-E-	SM-57A223-H-360	0.022	J, K	BP	5	N, L, M, J, K
-49470P0-273-E-	SM-57A273-H-360	0.027	J, K	BP	5	N, L, M, J, K
-49470P0-333-E-	SM-57A333-H-480	0.033	J, K	BP	5	N, L, M, J, K
-49470P0-333-E-	SM-47A333-H-240	0.033	J, K	BP	4	A, B, C, D, F
-49470P0-393-E-	SM-57A393-H-480	0.039	J, K	BP	5	N, L, M, J, K
-49470P0-393-E-	SM-47A393-H-240	0.039	J, K	BP	4	A, B, C, D, F
-49470P0-473-E-	SM-57A473-H-650	0.047	J, K	BP	5	N, L, M, J, K
-49470P0-473-E-	SM-47A473-H-360	0.047	J, K	BP	4	A, B, C, D, F
-49470P0-563-E-	SM-47A563-H-360	0.056	J, K	BP	4	N, L, M, J, K
-49470P0-683-E-	SM-47A683-H-360	0.068	J, K	BP	4	N, L, M, J, K
-49470P0-823-E-	SM-47A823-H-480	0.082	J, K	BP	4	N, L, M, J, K
-49470P0-104-E-	SM-47A104-H-480	0.1	J, K	BP	4	N, L, M, J, K
-49470P0-124-E-	SM-47A124-H-650	0.12	J, K	BP	4	N, L, M, J, K
-49470P0-124-E- -49470P0-154-E-	SM-37A124-H-240 SM-37A154-H-240	0.12 0.15	J, K J, K	BP BP	3	A, B, C, D, F N, L, M, J, K
-49470P0-134-E-	SM-57C154-H-120	0.15	K, M	BQ	5	N, L, M, J, K
-49470P0-184-E-	SM-37A184-H-240	0.13	J, K	BP BP	3	N, L, M, J, K
-49470Q0-184-E-	SM-57C184-H-240	0.18	K, M	BQ	5	N, L, M, J, K
-49470P0-224-E-	SM-37A224-H-360	0.22	J, K	BP	3	N, L, M, J, K
-49470Q0-224-E-	SM-57C224-H-240	0.22	K, M	BQ	5	N, L, M, J, K
-49470P0-274-E-	SM-37A274-H-360	0.27	J, K	BP	3	N, L, M, J, K
-49470Q0-274-E-	SM-57C274-H-240	0.27	K, M	BQ	5	N, L, M, J, K
-49470P0-334-E-	SM-37A334-H-480	0.33	J, K	BP	3	N, L, M, J, K
-49470Q0-334-E-	SM-57C334-H-360	0.33	K, M	BQ	5	N, L, M, J, K
-49470P0-394-E-	SM-37A394-H-650	0.39	J, K	BP	3	N, L, M, J, K
-49470Q0-394-E-	SM-57C394-H-360	0.39	K, M	BQ	5	N, L, M, J, K
-49470Q0-474-E-	SM-57C474-H-360	0.47	K, M	BQ	5	N, L, M, J, K
-49470Q0-564-E-	SM-57C564-H-480	0.56	K, M	BQ	5	N, L, M, J, K
-49470Q0-564-E-	SM-47C564-H-240	0.56	K, M	BQ	4	A, B, D, C, F
-49470Q0-684-E-	SM-57C684-H-650	0.68	K, M	BQ	5	N, L, M, J, K
-49470Q0-684-E-	SM-47C684-H-240	0.68	K, M	BQ	4	A, B, D, C, F
-49470Q0-824-E-	SM-47C824-H-360	0.82	K, M	BQ	4	N, L, M, J, K
-49470Q0-105-E-	SM-47C105-H-360	1	K, M	BQ	4	N, L, M, J, K
-49470Q0-125-E-	SM-47C125-H-360	1.2	K, M	BQ	4	N, L, M, J, K
-49470Q0-155-E-	SM-47C155-H-480	1.5	K, M	BQ	4	N, L, M, J, K
-49470Q0-185-E-	SM-47C185-H-650	1.8	K, M	BQ	4	N, L, M, J, K
-49470Q0-185-E-	SM-37C185-H-240	1.8	K, M	BQ	3	A, B, D, C, F
-49470Q0-225-E-	SM-37C225-H-240	2.2	K, M	BQ	3	N, L, M, J, K
-49470Q0-275-E-	SM-37C275-H-360	2.7	K, M	BQ	3	N, L, M, J, K
-49470Q0-335-E-	SM-37C335-H-360	3.3	K, M	BQ	3	N, L, M, J, K

^{1/} Complete PIN shall include additional symbols replacing dashes (from left to right): product level (M for B level, or T for T level), part style (1 for unencapsulated, 2 for encapsulated), capacitance tolerance, lead configuration

The last 3 digits of the Part Number represent the chip height of the unencapsulated version. For the encapsulated version, replace the last 3 digits as follows: (120 replace with 270, 240 replace with 390, 360 replace with 530, 480 replace with 660 and 650 replace with 800).



^{2/} Complete Part Number (provided for reference only) shall include additional symbols replacing dashes (from left to right): part style (0 for unencapsulated and 9 for encapsulated), capacitance tolerance, lead configuration



MIL-PRF-49470 PIN 1/	PART NUMBER (for reference only) 2/	Capacitance µF	Tolerance	Characteristic	Case Code	Lead Configuration
-49470Q0-395-E-	SM-37C395-H-360	3.9	K, M	BQ	3	N, L, M, J, K
-49470Q0-475-E-	SM-37C475-H-480	4.7	K, M	BQ	3	N, L, M, J, K
-49470Q0-565-E-	SM-37C565-H-650	5.6	K, M	BQ	3	N, L, M, J, K
-49470Q0-565-E-	SM-27C565-H-240	5.6	K, M	BQ	2	A, B, D, C, F
-49470Q0-685-E-	SM-17C685-H-480	6.8	K, M	BQ	1	N, L, M, J, K
-49470Q0-685-E-	SM-27C685-H-240	6.8	K, M	BQ	2	A, B, D, C, F
-49470Q0-825-E-	SM-17C825-H-480	8.2	K, M	BQ	1	N, L, M, J, K
-49470Q0-825-E-	SM-27C825-H-360	8.2	K, M	BQ	2	A, B, D, C, F
-49470Q0-106-E-	SM-17C106-H-480	10	K, M	BQ	1	N, L, M, J, K
-49470Q0-106-E-	SM-27C106-H-360	10	K, M	BQ	2	A, B, D, C, F
-49470Q0-126-E-	SM-17C126-H-650	12	K, M	BQ	1	N, L, M, J, K
-49470Q0-126-E-	SM-27C126-H-480	12	K, M	BQ	2	A, B, D, C, F
-49470Q0-156-E-	SM-27C156-H-650	15	K, M	BQ	2	N, L, M, J, K
-49470Q0-186-E-	SM-27C186-H-650	18	K, M	BQ	2	N, L, M, J, K
-49470Q0-226-E-	SM-67C226-H-360	22	K, M	BQ	6	N, L, M, J, K
-49470Q0-276-E-	SM-67C276-H-360	27	K, M	BQ	6	N, L, M, J, K
-49470Q0-336-E-	SM-67C336-H-480	33	K, M	BQ	6	N, L, M, J, K
-49470Q0-396-E-	SM-67C396-H-650	39	K, M	BQ	6	N, L, M, J, K

^{1/} Complete PIN shall include additional symbols replacing dashes (from left to right): product level (M for B level, or T for T level), part style (1 for unencapsulated, 2 for


encapsulated), capacitance tolerance, lead configuration

2/ Complete Part Number (provided for reference only) shall include additional symbols replacing dashes (from left to right): part style (0 for unencapsulated and 9 for encapsulated), capacitance tolerance, lead configuration

The last 3 digits of the Part Number represent the chip height of the unencapsulated version. For the encapsulated version, replace the last 3 digits as follows: (120 replace with 270, 240 replace with 390, 360 replace with 530, 480 replace with 660 and 650 replace with 800).



SM Style SM Military Styles DSCC Dwg. #87106 & #88011

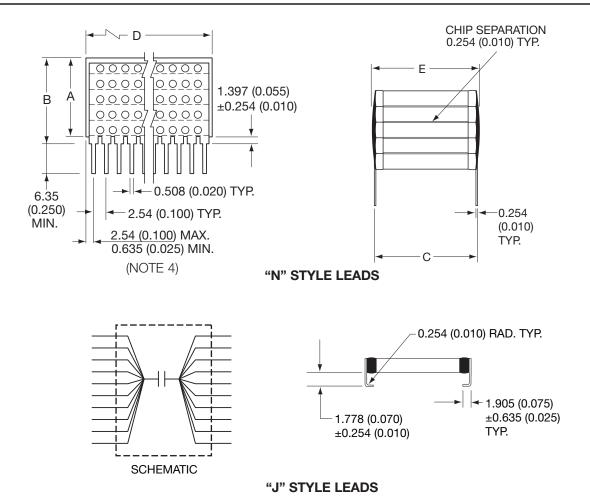

DIMENSIONS: millimeters (inches)

Case Code	A (max.) (See Note 2)	B (max.) (See Note 2)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
1	16.5 (0.650)	18.2 (0.715)	11.4 (0.450)	52.1 (2.050)	12.7 (0.500)	20
2	16.5 (0.650)	18.2 (0.715)	20.3 (0.800)	38.4 (1.510)	22.1 (0.870)	15
3	16.5 (0.650)	18.2 (0.715)	11.4 (0.450)	26.7 (1.050)	12.7 (0.500)	10
4	16.5 (0.650)	18.2 (0.715)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
5	16.5 (0.650)	18.2 (0.715)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
6	16.5 (0.650)	18.2 (0.715)	31.8 (1.250)	52.1 (2.050)	34.3 (1.350)	20

NOTES:

- 1. Unless otherwise specified, tolerances 0.254 (±0.010).
- 2. "A" dimensions are maximum (see tables on pages 26 thru 29 for specific part number dimensions).
- 3. "N" straight leads; "J" leads formed in.
- 4. For case code 5, dimensions shall be 2.54 (0.100) maximum, 0.305 (0.012) minimum.

090518

SM Style SM Military Styles DSCC Dwg. #87106 & #88011



Ordering Information

Part Number: The complete part number shall be as follows:

X7R: <u>87106</u>	XXX
Drawing number	Dash number (see list)

Ordering Data. The contract or purchase order should specify the following:

- a. Complete part number.
- b. Requirements for delivery of one copy of the quality conformance inspection data with each shipment of parts by the manufacturer.
- c. Whether the manufacturer performs the group B tests, or provides certification of compliance with group B requirements.
- d. Requirements for notification of change of products to acquiring activity, if applicable.
- e. Requirements for packaging and packing.

Source of Supply.

Vendor CAGE	Vendor name
number	and address
Contact factory	KYOCERA AVX

Performance Characteristics

Operating Temperature Range. The operating temperature range shall be -55°C to +125°C.

Electrical Characteristics.

Rated Voltage. See tables on pages 26-29.

Capacitance. Measured in accordance with method 305 of MIL-STD-202 (1KHz at 1.0Vrms, open circuit voltage, at +25°C).

Dissipation Factor (+25°C). X7R: Dissipation factor shall be 2.5 percent maximum (measured under the same conditions as capacitance.) COG: Dissipation factor shall be 0.15 percent maximum.

Temperature Coefficient.

DSCC D	wg.		Bias = 0 volt	Bias =	rated voltage
88011	All Voltages		0±30 ppm/	°C	0±30 ppm/°C
87106	50	WVDC	±15%		+15, -25%
	and 100 W	'VDC			
87106	200 WVDC		±15%		+15, -40%
87106	500 WVDC		±15%		+15, -50%

Insulation Resistance.

At +25°C, rated voltage: 100K M Ω or 1,000 M Ω - μ F, whichever is less.

At +125°C, rated voltage: 10K M Ω or 100 M Ω - μ F, whichever is less.

Dielectric Withstanding Voltage. Dielectric withstanding voltage shall be 250 percent of rated voltage except 500V rated parts at 150 percent of rated voltage.

Capacitance Tolerance. J = ±5 percent, K = ±10 percent, $M = \pm 20$ percent.

Solderability of Terminals. In accordance with MIL-PRF-49470.

Resistance to Soldering Heat. In accordance with MIL-STD-202, method 210, condition B, for 20 seconds.

Shock. In accordance with MIL-PRF-49470.

Immersion Cycling. In accordance with MIL-PRF-49470.

Moisture Resistance. In accordance with MIL-PRF-49470.

Life. Life shall be 200 percent of rated voltage except 500V rated parts at 120 percent of rated voltage applied at +125°C for 1,000 hours.

Thermal Shock. MIL-STD-202, method 107, test condition A, except high temperature is +125°C.

Voltage Conditioning. In accordance with MIL-PRF-49470, except 500V rated parts at 120 percent of rated voltage at +125°C.

Terminal Strength. MIL-STD-202, method 211, condition B, except that each lead shall be bent away from the body 90 degrees from the original position and back, two bends.

Marking. Marking shall be in accordance with MIL-STD-1285, except the part number shall be as specified in paragraph 1.2 of 87106, or 88011 with the manufacturer's name or code and date code minimum, except case sizes 4 and 5 shall be marked with coded cap and tolerance minimum. Full marking shall be included on the package.

SM Style DSCC #87106 and #88011



Table II. Group A inspection.

Inspection	Requirement paragraph of MIL-PRF-49470	Test method paragraph of MIL-PRF-49470	Sampling procedure
Subgroup 1			
Thermal shock and voltage conditioning 1/	3.9	4.8.5	100% inspection
Subgroup 2			
Visual and mechanical examination:			
Material	3.4	4.8.4	
Physical dimensions	3.1		13 samples
Interface requirements	3.5 and 3.5.1		0 failures
(other than physical dimensions)			
Marking 2/	3.28		
Workmanship	3.30		

^{1/} Post checks are required (see paragraph 3.9 of MIL-PRF-49470).

Table III. Group B inspection. 1/

Inspection	Requirement paragraph of MIL-PRF-49470			Number of defectives permitted 2/	
Subqroup 1 3/			-		
Temperature coefficient	4/	4/			
Resistance to solvents 5/ 6/	3.23	4.8.20			
Immersion	3.18	4.8.15	12	1	
Terminal strength 5/	al strength 5/ 3.24 4.8.10				
Subqroup 2					6/1
Resistance to soldering heat	3.20	4.8.17	12	1	
Moisture resistance	3.21	4.8.18			
Subqroup 3 Marking legibility (laser marking only)	3.28.1	4.8.4.1	6	1	
Subqroup 4					
Solderability	3.15	4.8.12	3		0
Subqroup 5					
Life	3.26	4.8.22	5 minimum per case code		

^{1/ 1/} Unless otherwise specified herein, when necessary, mounting of group B samples shall be at the discretion of the manufacturer.

^{2/} Marking defects are based on visual examination only. Any subsequent electrical defects shall not be used as a basis for determining marking defects.

^{2/} A sample unit having one or more defects shall be charged as a single defective.

^{3/} Order of tests is at discretion of manufacturer.

^{4/} See 3.2.3 of DSCC 87106.

^{5/} Sample size shall be 3 pieces with zero defectives permitted.

^{6/} Total of one defect allowed for combination of subgroup 1, subgroup 2, and subgroup 3 inspections.



SM Style SM Military Styles DSCC Dwg. #87106 (X7R)

Electrical characteristics

ST106-)))))))))))))))
001 1.0 K 5 N 3.05 (0.120) 002 1.0 M 5 N 3.05 (0.120) 241 1.0 K 5 N 3.05 (0.120) 242 1.0 M 5 J 3.05 (0.120) 003 1.2 K 5 N 3.05 (0.120) 004 1.2 M 5 N 3.05 (0.120) 2443 1.2 K 5 J 3.05 (0.120) 2444 1.2 M 5 J 3.05 (0.120) 244 1.2 M 5 J 6.10 (0.240) 244 1.2 M 5 J 6.10 (0.240) 245 1.5 M 5 J <t< th=""><th>)))))))))))))))</th></t<>)))))))))))))))
002 1.0 M 5 N 3.05 (0.120) 241 1.0 K 5 J 3.05 (0.120) 242 1.0 M 5 J 3.05 (0.120) 003 1.2 K 5 N 3.05 (0.120) 243 1.2 K 5 J 3.05 (0.120) 244 1.2 M 5 J 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 245 1.5 M 5 N 6.10 (0.240) 247 1.8 K 5 J)))))))))))))))
241 1.0 K 5 J 3.05 (0.120) 242 1.0 M 5 J 3.05 (0.120) 003 1.2 K 5 N 3.05 (0.120) 004 1.2 M 5 N 3.05 (0.120) 243 1.2 K 5 J 3.05 (0.120) 244 1.2 M 5 J 3.05 (0.120) 2005 1.5 K 5 N 6.10 (0.240) 006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 N 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 J <td< td=""><td>))))))))))))))))</td></td<>))))))))))))))))
242 1.0 M 5 J 3.05 (0.120) 003 1.2 K 5 N 3.05 (0.120) 004 1.2 M 5 N 3.05 (0.120) 243 1.2 K 5 J 3.05 (0.120) 244 1.2 M 5 J 3.05 (0.120) 005 1.5 K 5 N 6.10 (0.240) 006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 007 1.8 K 5 N	o) 0) 0) 0) 0) 0) 0) 0)
003 1.2 K 5 N 3.05 (0.120) 004 1.2 M 5 N 3.05 (0.120) 243 1.2 K 5 J 3.05 (0.120) 244 1.2 M 5 J 3.05 (0.120) 006 1.5 M 5 J 3.05 (0.120) 006 1.5 M 5 N 6.10 (0.240) 2445 1.5 K 5 J 6.10 (0.240) 246 1.5 M 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 J 6.10 (0.240) 2447 1.8 K 5 J 6.10 (0.240) 2448 1.8 M 5 J 6.10 (0.240) 2449 2.2 K 5 N 6.10 (0.240) 250 2.2 M 5 J))))))))))))))
004 1.2 M 5 N 3.05 (0.120) 2443 1.2 K 5 J 3.05 (0.120) 244 1.2 M 5 J 3.05 (0.120) 005 1.5 K 5 N 6.10 (0.240) 006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 246 1.5 M 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 249 2.2 K 5 N 6.10 (0.240) 249 2.2 K 5 J <td< td=""><td>)) ()) ()) ()) ()) ()) ())</td></td<>)) ()) ()) ()) ()) ()) ())
243 1.2 K 5 J 3.05 (0.120) 244 1.2 M 5 J 3.05 (0.120) 005 1.5 K 5 N 6.10 (0.240) 006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 J 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 011 2.7 K 5 N)) 0) 0) 0) 0) 0)
244 1.2 M 5 J 3.05 (0.120) 005 1.5 K 5 N 6.10 (0.240) 006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 008 1.8 M 5 J 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 010 2.2 K 5 J 6.10 (0.240) 010 2.2 K 5 J 6.10 (0.240) 010 2.2 K 5 N	0) 0) 0) 0) 0) 0)
005 1.5 K 5 N 6.10 (0.240) 006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 246 1.5 M 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 251 2.7 K 5 N))))))))
006 1.5 M 5 N 6.10 (0.240) 245 1.5 K 5 J 6.10 (0.240) 246 1.5 M 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 250 2.2 M 5 J	o) 0) 0) 0)
245 1.5 K 5 J 6.10 (0.240) 246 1.5 M 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 250 2.2 M 5 N 9.14 (0.360) 251 2.7 M 5 N 9.14 (0.360) 251 2.7 M 5 N)))))
246 1.5 M 5 J 6.10 (0.240) 007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 250 2.2 M 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 N 9.14 (0.360) 252 2.7 M 5 N	o) 0)
007 1.8 K 5 N 6.10 (0.240) 008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 012 2.7 M 5 N 9.14 (0.360) 251 2.7 K 5 N 9.14 (0.360) 252 2.7 M 5 N 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 253 3.3 K 5 N	O)
008 1.8 M 5 N 6.10 (0.240) 247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 9.14 (0.360) 251 2.7 K 5 N 9.14 (0.360) 251 2.7 M 5 N 9.14 (0.360) 252 2.7 M 5 N	
247 1.8 K 5 J 6.10 (0.240) 248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 012 2.7 M 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 N 9.14 (0.360) 015 3.9 K 5 J	
248 1.8 M 5 J 6.10 (0.240) 009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 9.14 (0.360) 011 2.7 K 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 N 9.14 (0.360) 254 3.3 M 5 N 9.14 (0.360) 254 3.3 M 5 N 9.14 (0.360) 015 3.9 K 5 N	
009 2.2 K 5 N 6.10 (0.240) 010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 012 2.7 M 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 N	
010 2.2 M 5 N 6.10 (0.240) 249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 250 2.2 M 5 J 9.14 (0.360) 011 2.7 K 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 N	
249 2.2 K 5 J 6.10 (0.240) 250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 012 2.7 M 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 015 3.9 K 5 N 12.2 (0.480) 015 3.9 K 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 255 3.9 K 5 N	
250 2.2 M 5 J 6.10 (0.240) 011 2.7 K 5 N 9.14 (0.360) 012 2.7 M 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 015 3.9 K 5 N 12.2 (0.480) 015 3.9 K 5 N 12.2 (0.480) 016 3.9 M 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 255 3.9 M 5 N	
011 2.7 K 5 N 9.14 (0.360 012 2.7 M 5 N 9.14 (0.360 251 2.7 K 5 J 9.14 (0.360 252 2.7 M 5 J 9.14 (0.360 013 3.3 K 5 N 9.14 (0.360 014 3.3 M 5 N 9.14 (0.360 253 3.3 K 5 J 9.14 (0.360 254 3.3 M 5 J 9.14 (0.360 255 3.9 K 5 N 12.2 (0.480 </td <td></td>	
012 2.7 M 5 N 9.14 (0.360) 251 2.7 K 5 J 9.14 (0.360) 252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 255 3.9 K 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 N	
251 2.7 K 5 J 9.14 (0.360 252 2.7 M 5 J 9.14 (0.360 013 3.3 K 5 N 9.14 (0.360 014 3.3 M 5 N 9.14 (0.360 253 3.3 K 5 J 9.14 (0.360 254 3.3 M 5 J 9.14 (0.360 015 3.9 K 5 N 12.2 (0.480 016 3.9 M 5 N 12.2 (0.480 255 3.9 K 5 J 12.2 (0.480 255 3.9 M 5 J 12.2 (0.480 017 4.7 K 5 N 12.2 (0.480 017 4.7 K 5 J 12.2 (0.480 257 4.7 K 5 J 12.2 (0.480 258 4.7 M 5 J 12.2 (0.480 </td <td></td>	
252 2.7 M 5 J 9.14 (0.360) 013 3.3 K 5 N 9.14 (0.360) 014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 015 3.9 K 5 N 12.2 (0.480) 016 3.9 M 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 259 5.6 K 5 N	
013 3.3 K 5 N 9.14 (0.360 014 3.3 M 5 N 9.14 (0.360 253 3.3 K 5 J 9.14 (0.360 254 3.3 M 5 J 9.14 (0.360 015 3.9 K 5 N 12.2 (0.480 016 3.9 M 5 N 12.2 (0.480 255 3.9 K 5 J 12.2 (0.480 256 3.9 M 5 J 12.2 (0.480 017 4.7 K 5 N 12.2 (0.480 018 4.7 M 5 N 12.2 (0.480 257 4.7 K 5 J 12.2 (0.480 258 4.7 M 5 J 12.2 (0.480 019 5.6 K 5 N 16.5 (0.650 020 5.6 K 5 N 16.5 (0.650 </td <td></td>	
014 3.3 M 5 N 9.14 (0.360) 253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 015 3.9 K 5 N 12.2 (0.481) 016 3.9 M 5 N 12.2 (0.481) 255 3.9 K 5 J 12.2 (0.481) 256 3.9 M 5 J 12.2 (0.481) 017 4.7 K 5 N 12.2 (0.481) 018 4.7 M 5 N 12.2 (0.481) 257 4.7 K 5 J 12.2 (0.481) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 K 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J	
253 3.3 K 5 J 9.14 (0.360) 254 3.3 M 5 J 9.14 (0.360) 015 3.9 K 5 N 12.2 (0.480) 016 3.9 M 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J	
254 3.3 M 5 J 9.14 (0.360) 015 3.9 K 5 N 12.2 (0.480) 016 3.9 M 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	,
015 3.9 K 5 N 12.2 (0.480) 016 3.9 M 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
016 3.9 M 5 N 12.2 (0.480) 255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
255 3.9 K 5 J 12.2 (0.480) 256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
256 3.9 M 5 J 12.2 (0.480) 017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
017 4.7 K 5 N 12.2 (0.480) 018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
018 4.7 M 5 N 12.2 (0.480) 257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
257 4.7 K 5 J 12.2 (0.480) 258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
258 4.7 M 5 J 12.2 (0.480) 019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
019 5.6 K 5 N 16.5 (0.650) 020 5.6 M 5 N 16.5 (0.650) 259 5.6 K 5 J 16.5 (0.650) 260 5.6 M 5 J 16.5 (0.650)	
020 5.6 M 5 N 16.5 (0.650 259 5.6 K 5 J 16.5 (0.650 260 5.6 M 5 J 16.5 (0.650	
259 5.6 K 5 J 16.5 (0.650 260 5.6 M 5 J 16.5 (0.650	
260 5.6 M 5 J 16.5 (0.650	
- 	
223 0.8 K 4 N 9.14 (0.30)	_
224 6.8 M 4 N 9.14 (0.360	
224 6.8 M 4 N 9.14 (0.360 261 6.8 K 4 J 9.14 (0.360	
262 6.8 M 4 J 9.14 (0.360	
``	_
021 8.2 K 4 N 9.14 (0.360	
022 8.2 M 4 N 9.14 (0.360	
263 8.2 K 4 J 9.14 (0.360	
264 8.2 M 4 J 9.14 (0.360	J)
023 10 K 4 N 12.2 (0.480	- \
024 10 M 4 N 12.2 (0.480	
265 10 K 4 J 12.2 (0.480	O)
266 10 M 4 J 12.2 (0.480	O) O)
025 12 K 4 N 12.2 (0.480	o) o) o)
026 12 M 4 N 12.2 (0.480	o) 0) 0) 0)
267 12 K 4 J 12.2 (0.480	o) 0) 0) 0) 0)
268 12 M 4 J 12.2 (0.480) () () () () () () ()
027 15 K 4 N 16.5 (0.650) () () () () () () () ()
028 15 M 4 N 16.5 (0.650	0) 0) 0) 0) 0) 0) 0) 0)
269 15 K 4 J 16.5 (0.650	o) 0) 0) 0) 0) 0) 0) 0)
270 15 M 4 J 16.5 (0.650	o) 0) 0) 0) 0) 0) 0) 0) 0)
029 18 K 3 N 6.10 (0.240	o) o) o) o) o) o) o) o)
030)) ()) ()) ()) ()) ()) ()) ())

DSCC	Cap.	_			Max. A
Dwg.	Value	Cap. Tol.	Case Code	Lead Style	Dimension mm
87106-	(µF)		50V	,	(inches)
272	18	М	3	J	6.10 (0.240)
272	18	M	3	Ĵ	6.10 (0.240)
031	22	К	3	N	9.14 (0.360)
032 273	22 22	M K	3	N J	9.14 (0.360) 9.14 (0.360)
273	22	M	3	J	9.14 (0.360)
033	27	K	3	N	9.14 (0.360)
034	27	M	3	N	9.14 (0.360)
275 276	27 27	K M	3	J	9.14 (0.360) 9.14 (0.360)
035	33	K	3	Ň	9.14 (0.360)
036	33	М	3	Ŋ	9.14 (0.360)
277 278	33 33	K M	3	J	9.14 (0.360) 9.14 (0.360)
037	39	K	3	N	12.2 (0.480)
038	39	М	3	N	12.2 (0.480)
279 280	39 39	K M	3	J	12.2 (0.480) 12.2 (0.480)
039	47	K	3	N	16.5 (0.650)
040	47	M	3	N	16.5 (0.650)
281	47	K	3	J	16.5 (0.650)
282	47 56	M K	3 1	J N	16.5 (0.650) 9.14 (0.360)
226	56	M		N	9.14 (0.360)
283	56	К	1	J	9.14 (0.360)
284	56	М	1	J	9.14 (0.360)
041 042	68 68	K M	1 1	N N	12.2 (0.480) 12.2 (0.480)
285	68	K	1	j	12.2 (0.480)
286	68	М	1	J	12.2 (0.480)
043 044	82 82	K M	1	N N	12.2 (0.480) 12.2 (0.480)
287	82	K	i	j	12.2 (0.480)
288	82	М	1	J	12.2 (0.480)
045 046	100 100	K M	1 1	N N	16.5 (0.650) 16.5 (0.650)
289	100	K		J	16.5 (0.650)
290	100	М	1	J	16.5 (0.650)
227	120	K	2	N	12.2 (0.480)
228 291	120 120	M K	2 2	N J	12.2 (0.480) 12.2 (0.480)
292	120	М	2	Ĵ	12.2 (0.480)
047	150	K	2	N	16.5 (0.650)
048 293	150 150	M K	2 2	N J	16.5 (0.650) 16.5 (0.650)
293	150	M	2	J	16.5 (0.650)
049	180	K	6	N	12.2 (0.480)
050	180	М	6	Ŋ	12.2 (0.480)
295 296	180 180	K M	6	J	12.2 (0.480) 12.2 (0.480)
051	220	K	6	Ň	12.2 (0.480)
052	220	М	6	N	12.2 (0.480)
297 298	220 220	K M	6 6	J	12.2 (0.480) 12.2 (0.480)
053	270	K	6	N	16.5 (0.650)
054	270	М	6	N	16.5 (0.650)
299	270 270	K M	6 6	J	16.5 (0.650)
300	2/0	IVI	1 0		16.5 (0.650)

DSCC	Con				Max. A
Dwg.	Cap. Value	Cap.	Case	Lead	Dimension mm
87106-	(μF)	Tol.	Code	Style	(inches)
			100V		
055 056	.68 .68	K M	5 5	N N	3.05 (0.120) 3.05 (0.120)
301	.68	K	5	J	3.05 (0.120)
302	.68	М	5	J	3.05 (0.120)
057	.82	K	5	N	6.10 (0.240)
058 303	.82 .82	M K	5 5	N J	6.10 (0.240) 6.10 (0.240)
304	.82	M	5	J	6.10 (0.240)
059	1.0	K	5	N	6.10 (0.240)
060 305	1.0 1.0	M K	5 5	N J	6.10 (0.240) 6.10 (0.240)
306	1.0	M	5	J	6.10 (0.240)
061	1.2	K	5	N	6.10 (0.240)
062	1.2	M K	5	N	6.10 (0.240)
307 308	1.2 1.2	M	5 5	J	6.10 (0.240) 6.10 (0.240)
063	1.5	K	5	N	9.14 (0.360)
064	1.5	М	5	N	9.14 (0.360)
309 310	1.5 1.5	K M	5 5	J	9.14 (0.360) 9.14 (0.360)
065	1.8	K	5	N	9.14 (0.360)
066	1.8	М	5	N	9.14 (0.360)
311	1.8	K M	5 5	J	9.14 (0.360)
312 067	1.8 2.2	K	5	J N	9.14 (0.360) 12.2 (0.480)
068	2.2	M	5	N	12.2 (0.480)
313	2.2	K	5	J	12.2 (0.480)
314 069	2.2 2.7	M K	5 5	J N	12.2 (0.480) 12.2 (0.480)
070	2.7	M	5	N	12.2 (0.480)
315	2.7	K	5	J	12.2 (0.480)
316	2.7	M	5	J	12.2 (0.480)
071 072	3.3 3.3	K M	5 5	N N	16.5 (0.650) 16.5 (0.650)
317	3.3	K	5	J	16.5 (0.650)
318	3.3	М	5	J	16.5 (0.650)
073 074	3.9 3.9	K M	4 4	N N	9.14 (0.360) 9.14 (0.360)
319	3.9	K	4	J	9.14 (0.360)
320	3.9	М	4	J	9.14 (0.360)
075 076	4.7 4.7	K M	4	N N	9.14 (0.360) 9.14 (0.360)
321	4.7	K	4	J	9.14 (0.360)
322	4.7	М	4	J	9.14 (0.360)
077	5.6	K	4	N	12.2 (0.480)
078 323	5.6 5.6	M K	4	N J	12.2 (0.480) 12.2 (0.480)
324	5.6	М	4	Ĵ	12.2 (0.480)
079	6.8	K	4	N	12.2 (0.480)
080 325	6.8 6.8	M K	4 4	N J	12.2 (0.480) 12.2 (0.480)
326	6.8	M	4	Ĵ	12.2 (0.480)
081	8.2	K	4	N	16.5 (0.650)
082 327	8.2 8.2	M K	4 4	N J	16.5 (0.650) 16.5 (0.650)
328	8.2	M	4	J	16.5 (0.650)
229	10	K	3	N	6.10 (0.240)
230	10	M K	3 3	N	6.10 (0.240)
329	10 10	M	3	J	6.10 (0.240) 6.10 (0.240)
330					
330 083	12	K	3	N	6.10 (0.240)
			3 3 3	N N J	



SM Style SM Military Styles DSCC Dwg. #87106 (X7R)

	(inches)
100V	
085 15 K 3 N	9.14 (0.360)
086 15 M 3 N	9.14 (0.360)
333 15 K 3 J	9.14 (0.360)
334 15 M 3 J	9.14 (0.360)
087 18 K 3 N	9.14 (0.360)
088 18 M 3 N	9.14 (0.360)
335 18 K 3 J	9.14 (0.360)
336 18 M 3 J	9.14 (0.360)
089 22 K 3 N	12.2 (0.480)
090 22 M 3 N	12.2 (0.480)
337 22 M 3 K	12.2 (0.480)
338 22 M 3 J	12.2 (0.480)
091 27 K 3 N	16.5 (0.650)
092 27 M 3 N	16.5 (0.650)
339 27 K 3 J	16.5 (0.650)
340 27 M 3 J	16.5 (0.650)
093 33 K 1 N	9.14 (0.360)
094 33 M 1 N	9.14 (0.360)
341 33 K 1 J	9.14 (0.360)
342 33 M 1 J	9.14 (0.360)
095 39 K 1 N	12.2 (0.480)
096 39 M 1 N	12.2 (0.480)
343 39 K 1 J	12.2 (0.480)
344 39 M 1 J	12.2 (0.480)
097 47 K 1 N	12.2 (0.480)
098 47 M 1 N	12.2 (0.480)
345 47 K 1 J	12.2 (0.480)
346 47 M 1 J	12.2 (0.480)
099 56 K 1 N	16.5 (0.650)
100 56 M 1 N	16.5 (0.650)
347 56 K 1 J	16.5 (0.650)
348 56 M 1 J	16.5 (0.650)
101 68 K 2 N	12.2 (0.480)
102 68 M 2 N	12.2 (0.480)
349 68 K 2 J	12.2 (0.480)
350 68 M 2 J	12.2 (0.480)
103 82 K 2 N	16.5 (0.650)
104 82 M 2 N	16.5 (0.650)
351 82 K 2 J	16.5 (0.650)
352 82 M 2 J	16.5 (0.650)
105 100 K 6 N	9.14 (0.360)
106 100 M 6 N	9.14 (0.360)
353 100 K 6 J	9.14 (0.360)
354 100 M 6 J	9.14 (0.360)
107 120 K 6 N	9.14 (0.360)
108 120 M 6 N	9.14 (0.360)
355 120 K 6 J	9.14 (0.360)
356 120 M 6 J	9.14 (0.360)
109 150 K 6 N	12.2 (0.480)
110 150 M 6 N	12.2 (0.480)
357 150 K 6 J	12.2 (0.480)
358 150 M 6 J	12.2 (0.480)
111 180 K 6 N	16.5 (0.650)
111 180 K 6 N	16.5 (0.650)
359 180 K 6 J	16.5 (0.650)
360 180 M 6 J	16.5 (0.650)
299 270 K 6 J	16.5 (0.650)
300 270 M 6 J	16.5 (0.650)

DSCC	Cap.				Max. A
Dwg.	Value	Cap.	Case	Lead	Dimension
87106-	(µF)	Tol.	Code	Style	mm (inches)
			200V		
113	.47	K	5	N	6.10 (0.240)
114	.47	М	5	N	6.10 (0.240)
361 362	.47 .47	K M	5 5	J	6.10 (0.240) 6.10 (0.240)
115	.56	K	5	Ň	6.10 (0.240)
116	.56	М	5	N	6.10 (0.240)
363	.56	K	5	J	6.10 (0.240)
364 117	.56 .68	M K	5 5	J N	6.10 (0.240) 9.14 (0.360)
117	.68	M	5	N	9.14 (0.360)
365	.68	K	5	J	9.14 (0.360)
366	.68	M	5	J	9.14 (0.360)
119 120	.82 .82	K M	5 5	N N	9.14 (0.360) 9.14 (0.360)
367	.82	M	5	J	9.14 (0.360)
368	.82	М	5	J	9.14 (0.360)
121	1.0	K	5	N	12.2 (0.480)
122 369	1.0 1.0	M K	5 5	N J	12.2 (0.480) 12.2 (0.480)
370	1.0	M	5	J	12.2 (0.480)
123	1.2	K	5	N	12.2 (0.480)
124	1.2	M	5	N	12.2 (0.480)
371 372	1.2 1.2	K M	5 5	J	12.2 (0.480) 12.2 (0.480)
125	1.5	K	5	N	16.5 (0.650)
126	1.5	М	5	N	16.5 (0.650)
373	1.5	K	5	J	16.5 (0.650)
374	1.5	M	5 4	J	16.5 (0.650)
127 128	1.8 1.8	K M	4	N N	9.14 (0.360) 9.14 (0.360)
375	1.8	K	4	J	9.14 (0.360)
376	1.8	М	4	J	9.14 (0.360)
129 130	2.2 2.2	K M	4	N N	9.14 (0.360) 9.14 (0.360)
377	2.2	K	4	J	9.14 (0.360)
378	2.2	М	4	J	9.14 (0.360)
131	2.7	K	4	N	12.2 (0.480)
132 379	2.7 2.7	M K	4	N	12.2 (0.480) 12.2 (0.480)
380	2.7	M	4	J	12.2 (0.480)
133	3.3	K	4	N	12.2 (0.480)
134	3.3	M	4	N	12.2 (0.480)
381 382	3.3 3.3	K M	4	J	12.2 (0.480) 12.2 (0.480)
135	3.9	K	4	N	16.5 (0.650)
136	3.9	М	4	N	16.5 (0.650)
383	3.9	K	4	J	16.5 (0.650)
384 137	3.9 4.7	M K	3	J N	16.5 (0.650) 6.10 (0.240)
138	4.7	M	3	N	6.10 (0.240)
385	4.7	K	3	J	6.10 (0.240)
386	4.7 5.6	M	3	J	6.10 (0.240)
139 140	5.6 5.6	K M	3	N N	6.10 (0.240) 6.10 (0.240)
387	5.6	K	3	Ĵ	6.10 (0.240)
388	5.6	М	3	J	6.10 (0.240)
141 142	6.8	K	3	N	9.14 (0.360)
389	6.8 6.8	M K	3	N J	9.14 (0.360) 9.14 (0.360)
390	6.8	М	3	Ĵ	9.14 (0.360)
143	8.2	К	3	N	9.14 (0.360)
144 391	8.2 8.2	M K	3	N	9.14 (0.360) 9.14 (0.360)
392	8.2	M	3	J	9.14 (0.360)
	8.2 8.2			J	9.14 (0.360) 9.14 (0.360)

DSCC	Con				Max. A
Dwg.	Cap. Value	Cap.	Case	Lead	Dimension
вуд. 87106-		Tol.	Code	Style	
8/100-	(µF)		2001/		mm (inches)
1.45	10		200V		10.0 (0.400)
145 146	10 10	K M	3	N N	12.2 (0.480) 12.2 (0.480)
393	10	K	3	J	12.2 (0.480)
394	10	M	3	Ĵ	12.2 (0.480)
147	12	К	3	N	16.5 (0.650)
148	12	М	3	N	16.5 (0.650)
395	12	K	3	J	16.5 (0.650)
396	12	М	3	J	16.5 (0.650)
149	15 15	K	1	N	9.14 (0.360)
150 397	15 15	M K	1	N J	9.14 (0.360) 9.14 (0.360)
398	15	M		J	9.14 (0.360)
151	18	K	1	N	12.2 (0.480)
152	18	M	i	N	12.2 (0.480)
399	18	K	1	J	12.2 (0.480)
400	18	М	1	J	12.2 (0.480)
153	22	K	1	N	16.5 (0.650)
154	22	M	1	N	16.5 (0.650)
401 402	22 22	K M	1	J	16.5 (0.650)
155	27	K	1	N	16.5 (0.650) 16.5 (0.650)
156	27	M	i	N	16.5 (0.650)
403	27	K	1	Ĵ	16.5 (0.650)
404	27	М	1	J	16.5 (0.650)
157	33	K	2	N	12.2 (0.480)
158	33	M	2	N	12.2 (0.480)
405	33	K	2	J	12.2 (0.480)
406 159	33 39	K	2	J	12.2 (0.480) 16.5 (0.650)
160	39	M	2	N	16.5 (0.650)
407	39	K	2	Ĵ	16.5 (0.650)
408	39	М	2	Ĵ	16.5 (0.650)
161	47	K	6	N	6.10 (0.240)
162	47	М	6	N	6.10 (0.240)
409	47	K	6	J	6.10 (0.240)
410	47	M	6	J	6.10 (0.240)
163 164	56 56	K M	6	N N	9.14 (0.360) 9.14 (0.360)
411	56	K	6	J	9.14 (0.360)
412	56	M	6	Ĵ	9.14 (0.360)
165	68	K	6	N	9.14 (0.360)
166	68	М	6	N	9.14 (0.360)
413	68	K	6	J	9.14 (0.360)
414	68	M	6	J	9.14 (0.360)
167 168	82 82	K M	6 6	N N	12.2 (0.480) 12.2 (0.480)
415	82	K	6	J	12.2 (0.480)
416	82	M	6	Ĵ	12.2 (0.480)
169	100	K	6	N	16.5 (0.650)
170	100	М	6	N	16.5 (0.650)
417	100	K	6	J	16.5 (0.650)
418	100	M	6	J	16.5 (0.650)
171 172	120 120	K M	6	N N	16.5 (0.650) 16.5 (0.650)
419	120	K	6	J	16.5 (0.650)
420	120	М	6	Ĵ	16.5 (0.650)
					/

090518



SM Style SM Military Styles DSCC Dwg. #87106 (X7R)

Electrical characteristics

DSCC Dwg.	Cap. Value	Сар.	Case		Max. A Dimension
87106-	(μF)	Tol.	Code	Style	mm (inches)
			500V		
173	.15	K	5	N	3.05 (0.120)
174	.15	M	5	N	3.05 (0.120)
421 422	.15 .15	K M	5 5	J	3.05 (0.120) 3.05 (0.120)
175	.18	K	5	N	6.10 (0.240)
176	.18	М	5	N	6.10 (0.240)
423	.18	K	5	J	6.10 (0.240)
424 177	.18 .22	M K	5 5	J	6.10 (0.240) 6.10 (0.240)
178	.22	M	5	N	6.10 (0.240)
425	.22	K	5	J	6.10 (0.240)
426 179	.22 .27	M K	5 5	J	6.10 (0.240) 6.10 (0.240)
180	.27	M	5	N	6.10 (0.240)
427	.27	K	5	J	6.10 (0.240)
428	.27	M	5	J	6.10 (0.240)
181 182	.33 .33	K M	5 5	N N	9.14 (0.360) 9.14 (0.360)
429	.33	K	5	J	9.14 (0.360)
430	.33	М	5	J	9.14 (0.360)
183	.39	K	5 5	N	9.14 (0.360)
184 431	.39 .39	M K	5	N J	9.14 (0.360) 9.14 (0.360)
432	.39	M	5	Ĵ	9.14 (0.360)
185	.47	K	5	N	9.14 (0.360)
186 433	.47 .47	M K	5 5	N J	9.14 (0.360) 9.14 (0.360)
434	.47	M	5	J	9.14 (0.360)
187	.56	K	5	N	12.2 (0.480)
188	.56	М	5	N	12.2 (0.480)
435 436	.56 .56	K M	5 5	J	12.2 (0.480) 12.2 (0.480)
189	.68	K	5	N	16.5 (0.650)
190	.68	М	5	N	16.5 (0.650)
437	.68	K	5	J	16.5 (0.650)
438 231	.68 .82	M K	5 4	J N	16.5 (0.650)
231	.82 .82	M	4	N N	9.14 (0.360) 9.14 (0.360)
439	.82	K	4	J	9.14 (0.360)
440	.82	М	4	J	9.14 (0.360)
191 192	1.0 1.0	K M	4	N N	9.14 (0.360) 9.14 (0.360)
441	1.0	K	4	J	9.14 (0.360)
442	1.0	М	4	J	9.14 (0.360)
193 194	1.2	K	4	N	9.14 (0.360)
443	1.2 1.2	M K	4	N J	9.14 (0.360) 9.14 (0.360)
444	1.2	М	4	Ĵ	9.14 (0.360)
195	1.5	K	4	N	12.2 (0.480)
196 445	1.5	M K	4	N J	12.2 (0.480)
446	1.5 1.5	M	4	J	12.2 (0.480) 12.2 (0.480)
197	1.8	K	4	N	16.5 (0.650)
198	1.8	М	4	N	16.5 (0.650)
447	1.8	K	4	J	16.5 (0.650)
448 233	1.8 2.2	M K	3	J N	16.5 (0.650) 6.10 (0.240)
234	2.2	M	3	N	6.10 (0.240)
449	2.2	K	3	J	6.10 (0.240)
450	2.2	M	3	J	6.10 (0.240)
199 200	2.7 2.7	K M	3	N N	9.14 (0.360) 9.14 (0.360)
451	2.7	K	3	J	9.14 (0.360)
452	2.7	М	3	J	9.14 (0.360)

DSCC	Сар.	Cap.	Case	Lead	Max. A
Dwg. 87106-	Value (µF)	Tol.	Code	Style	Dimension mm (inches)
87100-	(μΓ)				min (inches)
201	2.2	K	500V	N	9.14 (0.360)
201 202	3.3 3.3	M	3	N	9.14 (0.360)
453	3.3	K	3	J	9.14 (0.360)
454	3.3	M	3	J	9.14 (0.360)
203 204	3.9 3.9	K M	3	N N	9.14 (0.360) 9.14 (0.360)
455	3.9	K	3	J	9.14 (0.360)
456	3.9	М	3	J	9.14 (0.360)
205	4.7	K	3	N	12.2 (0.480)
206 457	4.7 4.7	M K	3	N J	12.2 (0.480) 12.2 (0.480)
458	4.7	M	3	J	12.2 (0.480)
207	5.6	К	3	N	16.5 (0.650)
208	5.6	М	3	N	16.5 (0.650)
459	5.6	K	3	J	16.5 (0.650)
460 235	5.6 6.8	M K	3 1	J N	16.5 (0.650) 12.2 (0.480)
236	6.8	M		N	12.2 (0.480)
461	6.8	K	1	J	12.2 (0.480)
462	6.8	M	1	J	12.2 (0.480)
209 210	8.2 8.2	K M	1 1	N N	12.2 (0.480) 12.2 (0.480)
463	8.2	K	1	J	12.2 (0.480)
464	8.2	М	1	J	12.2 (0.480)
211	10	K	1	N	12.2 (0.480)
212 465	10 10	M K	1 1	N J	12.2 (0.480) 12.2 (0.480)
466	10	М	i	Ĵ	12.2 (0.480)
213	12	K	1	N	16.5 (0.650)
214	12	M	1 1	N	16.5 (0.650)
467 468	12 12	K M		J	16.5 (0.650) 16.5 (0.650)
237	15	K	2	Ň	16.5 (0.650)
238	15	М	2	N	16.5 (0.650)
469 470	15 15	K M	2 2	J	16.5 (0.650) 16.5 (0.650)
215	18	K	2	N	16.5 (0.650)
216	18	М	2	N	16.5 (0.650)
471	18	K	2 2	J	16.5 (0.650)
472 239	18 22	M K	6	J N	16.5 (0.650) 9.14 (0.360)
240	22	M	6	N	9.14 (0.360)
473	22	K	6	J	9.14 (0.360)
474	22	M	6	J	9.14 (0.360)
217 218	27 27	K M	6 6	N N	9.14 (0.360) 9.14 (0.360)
475	27	K	6	J	9.14 (0.360)
476	27	М	6	J	9.14 (0.360)
219	33	K	6	N	12.2 (0.480)
220 477	33 33	M K	6 6	N J	12.2 (0.480) 12.2 (0.480)
478	33	М	6	J	12.2 (0.480)
221	39	К	6	N	16.5 (0.650)
222	39	М	6	N	16.5 (0.650)
479 480	39 39	K M	6 6	J	16.5 (0.650) 16.5 (0.650)
.50					(3.000)





CG (COG) Electrical characteristics

Note	DSCC Dwg.	Cap. Value	Cap. Tol.	Case	Lead	Max. A Dimension mm
001* .056 J 5 N 3.05 (0.120) 002* .056 K 5 N 3.05 (0.120) 003* .068 J 5 N 6.10 (0.240) 005* .082 J 5 N 6.10 (0.240) 006* .082 J 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 008* .10 K 5 N 6.10 (0.240) 009* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 010* .15 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 9.12 (0.480) 013* .18 K 5	88011-	(μF)	101.		Style	(inches)
002* .056 K 5 N 3.05 (0.120) 003* .0688 J 5 N 6.110 (0.240) 005* .082 J 5 N 6.10 (0.240) 005* .082 J 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 008* .10 K 5 N 6.10 (0.240) 009* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 9.14 (0.360) 013* .18 J 5 N 9.14 (0.360) 016* .22 J 5 N 12.2 (0.480) 015* .22 J 5 <td< td=""><td></td><td></td><td></td><td>50V</td><td></td><td></td></td<>				50V		
003* .068 J 5 N 6.10 (0.240) 004* .068 K 5 N 6.10 (0.240) 005* .082 J 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 008* .10 K 5 N 6.10 (0.240) 009* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 015* .22 K 5 N 12.2 (0.480) 017* .27 J 5 N<	001*				N	3.05 (0.120)
004* .068 K 5 N 6.10 (0.240) 005* .082 J 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 009* .10 K 5 N 6.10 (0.240) 009* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 011* .15 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 12.2 (0.480) 014* .18 K 5 N 12.2 (0.480) 016* .22 J 5 N 16.5 (0.650) 017* .27 J 5 N </td <td>002*</td> <td>.056</td> <td>K</td> <td></td> <td></td> <td>3.05 (0.120)</td>	002*	.056	K			3.05 (0.120)
005* .082 J 5 N 6.10 (0.240) 006* .082 K 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 008* .10 K 5 N 9.14 (0.360) 010* .12 J 5 N 9.14 (0.360) 010* .12 J 5 N 9.14 (0.360) 012* .15 J 5 N 9.14 (0.360) 013* .18 J 5 N 9.14 (0.360) 013* .18 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 015* .22 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 12.2 (0.480) 020* .33 K 4 N </td <td>003*</td> <td>.068</td> <td>J</td> <td>5</td> <td>N</td> <td>6.10 (0.240)</td>	003*	.068	J	5	N	6.10 (0.240)
005* .082 J 5 N 6.10 (0.240) 006* .082 K 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 008* .10 K 5 N 9.14 (0.360) 010* .12 J 5 N 9.14 (0.360) 010* .12 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 9.14 (0.360) 013* .18 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 020* .33 K 4 N </td <td>004*</td> <td>.068</td> <td>Ιĸ</td> <td>5</td> <td>l N</td> <td>6.10 (0.240)</td>	004*	.068	Ιĸ	5	l N	6.10 (0.240)
006* .082 K 5 N 6.10 (0.240) 007* .10 J 5 N 6.10 (0.240) 009* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 011* .15 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 9.14 (0.360) 014* .18 K 5 N 12.2 (0.480) 016* .22 J 5 N 12.2 (0.480) 016* .22 K 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 021* .39 J 4 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
007* 1.0 J 5 N 6.10 (0.240) 008* .10 K 5 N 6.10 (0.240) 009* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 011* .15 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 9.12 (0.480) 015* .22 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 12.2 (0.480) 021* .399 J 4 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
008* 1.0 K 5 N 6.10 (0.240) 009* 1.2 J 5 N 9.14 (0.360) 010* 1.2 K 5 N 9.14 (0.360) 011* 1.15 J 5 N 9.14 (0.360) 012* 1.15 K 5 N 9.14 (0.360) 013* 1.8 J 5 N 12.2 (0.480) 014* 1.8 K 5 N 12.2 (0.480) 015* 222 J 5 N 12.2 (0.480) 016* .22 K 5 N 16.5 (0.650) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
000* .12 J 5 N 9.14 (0.360) 010* .12 K 5 N 9.14 (0.360) 011* .15 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 12.2 (0.480) 014* .18 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 016* .22 K 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
010* .12 K 5 N 9.14 (0.360) 011* .15 J 5 N 9.14 (0.360) 012* .15 K 5 N 9.14 (0.360) 013* .18 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 015* .22 J 5 N 12.2 (0.480) 016* .22 K 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .399 J 4 N 12.2 (0.480) 022* .399 K 4 N 12.2 (0.480) 023* .47 J 4 N </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
011*						
012*						
013* 1.8 J 5 N 12.2 (0.480) 014* 1.8 K 5 N 12.2 (0.480) 015* 2.2 J 5 N 12.2 (0.480) 016* .22 K 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 J 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N <td>011*</td> <td></td> <td></td> <td></td> <td>N</td> <td>9.14 (0.360)</td>	011*				N	9.14 (0.360)
014*	012*		K		N	9.14 (0.360)
015* .22 J 5 N 12.2 (0.480) 016* .22 K 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 024* .47 K 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 K 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N <td>013*</td> <td>.18</td> <td>J</td> <td></td> <td>N</td> <td>12.2 (0.480)</td>	013*	.18	J		N	12.2 (0.480)
016* .22 K 5 N 12.2 (0.480) 017* .27 J 5 N 16.5 (0.650) 018* .27 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 024* .47 K 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 031* 1.0 J 3 N 6.10 (0.240) 032* 8.2 J 3 N <td>014*</td> <td>.18</td> <td>K</td> <td>5</td> <td>N</td> <td>12.2 (0.480)</td>	014*	.18	K	5	N	12.2 (0.480)
017* 2.7 J 5 N 16.5 (0.650) 018* 2.7 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N <td>015*</td> <td>.22</td> <td>J</td> <td>5</td> <td>N</td> <td>12.2 (0.480)</td>	015*	.22	J	5	N	12.2 (0.480)
017* 2.7 J 5 N 16.5 (0.650) 018* 2.7 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N <td>016*</td> <td>.22</td> <td>Ιĸ</td> <td>5</td> <td>l N</td> <td>12.2 (0.480)</td>	016*	.22	Ιĸ	5	l N	12.2 (0.480)
018* 2.7 K 5 N 16.5 (0.650) 019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 024* .47 K 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 038* .68 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 6.10 (0.240) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N <td></td> <td></td> <td></td> <td></td> <td>l N</td> <td></td>					l N	
019* .33 J 4 N 9.14 (0.360) 020* .33 K 4 N 9.14 (0.360) 022* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 029* .82 J 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 035* 1.5 K 3 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
020* .33 K 4 N 9.14 (0.360) 021* .39 J 4 N 12.2 (0.480) 022* .39 K 4 N 12.2 (0.480) 023* .47 J 4 N 12.2 (0.480) 025* .56 J 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 028* .68 K 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 035* 1.5 J 3 N 9.14 (0.360) 035* 1.5 J 3 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
021*						
022* .39 K 4 N 12.2 (0.480 023* .47 J 4 N 12.2 (0.480 024* .47 K 4 N 12.2 (0.480 025* .56 J 4 N 16.5 (0.650 026* .56 K 4 N 16.5 (0.650 027* .68 J 3 N 6.10 (0.240 028* .68 K 3 N 6.10 (0.240 029* .82 J 3 N 6.10 (0.240 030* .82 K 3 N 6.10 (0.240 031* 1.0 K 3 N 9.14 (0.360 032* 1.0 K 3 N 9.14 (0.360 033* 1.2 J 3 N 9.14 (0.360 035* 1.5 K 3 N 9.14 (0.360 035* 1.5 K 3 N <td< td=""><td></td><td></td><td></td><td>1</td><td></td><td></td></td<>				1		
023* .47 J 4 N 12.2 (0.480 024* .47 K 4 N 12.2 (0.480 025* .56 J 4 N 16.5 (0.650 026* .56 K 4 N 16.5 (0.650 027* .68 J 3 N 6.10 (0.240 028* .68 K 3 N 6.10 (0.240 030* .82 K 3 N 6.10 (0.240 031* 1.0 J 3 N 9.14 (0.360 032* 1.0 K 3 N 9.14 (0.360 033* 1.2 J 3 N 9.14 (0.360 034* 1.2 K 3 N 9.14 (0.360 035* 1.5 K 3 N 9.14 (0.360 035* 1.5 K 3 N 9.14 (0.360 035* 1.5 K 3 N <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td></td<>						
024* .47 K 4 N 12.2 (0.480 025* .56 J 4 N 16.5 (0.650 027* .68 J 3 N 6.10 (0.240 028* .68 K 3 N 6.10 (0.240 029* .82 J 3 N 6.10 (0.240 030* .82 K 3 N 6.10 (0.240 031* 1.0 J 3 N 9.14 (0.360 032* 1.0 K 3 N 9.14 (0.360 033* 1.2 J 3 N 9.14 (0.360 034* 1.2 K 3 N 9.14 (0.360 035* 1.5 J 3 N 12.2 (0.480 037* 1.8 J 3 N 12.2 (0.480 037* 1.8 J 3 N 12.2 (0.480 039* 2.2 J 3 N <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td></td<>						
025* .56 J 4 N 16.5 (0.650) 026* .56 K 4 N 16.5 (0.650) 027* .68 J 3 N 6.10 (0.240) 028* .68 K 3 N 6.10 (0.240) 030* .82 J 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 034* 1.2 J 3 N 9.14 (0.360) 035* 1.5 J 3 N 9.14 (0.360) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 K 3 N 12.2 (0.480) 039* 2.2 J 3 N 12.2 (0.480) 039* 2.2 J 3 N 12.2 (0.480) 040* 2.7 K 1 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
026* .56 K 4 N 16.5 (0.650 027* .68 J 3 N 6.10 (0.240 028* .68 K 3 N 6.10 (0.240 029* .82 J 3 N 6.10 (0.240 030* .82 K 3 N 9.14 (0.360 031* 1.0 J 3 N 9.14 (0.360 032* 1.0 K 3 N 9.14 (0.360 033* 1.2 J 3 N 9.14 (0.360 035* 1.5 K 3 N 9.14 (0.360 035* 1.5 K 3 N 9.14 (0.360 036* 1.5 K 3 N 12.2 (0.480 037* 1.8 J 3 N 12.2 (0.480 039* 2.2 J 3 N 16.5 (0.650 040* 2.2 K 3 N <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td></td<>						
027*				1		
028* .68 K 3 N 6.10 (0.240) 029* .82 J 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 034* 1.2 K 3 N 9.14 (0.360) 035* 1.5 J 3 N 12.2 (0.480) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 039* 2.2 J 3 N 12.2 (0.480) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
029* .82 J 3 N 6.10 (0.240) 030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 035* 1.5 K 3 N 12.2 (0.480) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 038* 1.8 K 3 N 12.2 (0.480) 039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
030* .82 K 3 N 6.10 (0.240) 031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 035* 1.5 J 3 N 12.2 (0.480) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 038* 1.8 K 3 N 12.2 (0.480) 039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 045* 3.9 J 1 N <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>						
031* 1.0 J 3 N 9.14 (0.360) 032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 034* 1.2 K 3 N 9.14 (0.360) 035* 1.5 J 3 N 12.2 (0.480) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 044* 3.3 K 1 N <td>-</td> <td></td> <td></td> <td></td> <td></td> <td></td>	-					
032* 1.0 K 3 N 9.14 (0.360) 033* 1.2 J 3 N 9.14 (0.360) 034* 1.2 K 3 N 9.14 (0.360) 035* 1.5 J 3 N 12.2 (0.480) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 038* 1.8 K 3 N 12.2 (0.480) 039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 K 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 044* 3.3 K 1 N 12.2 (0.480) 045* 3.9 K 1 N <td></td> <td>.82</td> <td>K</td> <td></td> <td>N</td> <td>6.10 (0.240)</td>		.82	K		N	6.10 (0.240)
033* 1.2 J 3 N 9.14 (0.360) 034* 1.2 K 3 N 9.14 (0.360) 035* 1.5 J 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 038* 1.8 K 3 N 12.2 (0.480) 039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 045* 3.9 J 1 N 12.2 (0.480) 045* 3.9 J 1 N 12.2 (0.480) 046* 3.9 K 1 N 12.2 (0.480) 047* 4.7 J 1 N <td>031*</td> <td>1.0</td> <td>J</td> <td></td> <td>N</td> <td>9.14 (0.360)</td>	031*	1.0	J		N	9.14 (0.360)
034* 1.2 K 3 N 9.14 (0.360) 035* 1.5 J 3 N 12.2 (0.480) 036* 1.5 K 3 N 12.2 (0.480) 037* 1.8 J 3 N 12.2 (0.480) 038* 1.8 K 3 N 12.2 (0.480) 039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 044* 3.3 K 1 N 12.2 (0.480) 045* 3.9 J 1 N 12.2 (0.480) 046* 3.9 K 1 N 12.2 (0.480) 047* 4.7 J 1 N <td>032*</td> <td>1.0</td> <td>K</td> <td>3</td> <td>N</td> <td>9.14 (0.360)</td>	032*	1.0	K	3	N	9.14 (0.360)
035* 1.5 J 3 N 12.2 (0.480 036* 1.5 K 3 N 12.2 (0.480 037* 1.8 J 3 N 12.2 (0.480 038* 1.8 K 3 N 12.2 (0.480 039* 2.2 J 3 N 16.5 (0.650 040* 2.2 K 3 N 16.5 (0.650 041* 2.7 K 1 N 9.14 (0.360 042* 2.7 K 1 N 9.14 (0.360 043* 3.3 J 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 046* 3.9 K 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 049* 5.6 J 2 N <td< td=""><td>033*</td><td>1.2</td><td>J</td><td>3</td><td>N</td><td>9.14 (0.360)</td></td<>	033*	1.2	J	3	N	9.14 (0.360)
036* 1.5 K 3 N 12.2 (0.480	034*	1.2	K	3	N	9.14 (0.360)
037* 1.8 J 3 N 12.2 (0.480 038* 1.8 K 3 N 12.2 (0.480 039* 2.2 J 3 N 16.5 (0.650 040* 2.2 K 3 N 16.5 (0.650 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 047* 4.7 J 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 048* 4.7 K 1 N 16.5 (0.650 050* 5.6 K 2 N 16.5 (0.650 050* 5.6 K 2 N <	035*	1.5	J	3	N	12.2 (0.480)
037* 1.8 J 3 N 12.2 (0.480 038* 1.8 K 3 N 12.2 (0.480 039* 2.2 J 3 N 16.5 (0.650 040* 2.2 K 3 N 16.5 (0.650 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 048* 4.7 K 1 N 16.5 (0.650 050* 5.6 K 2 N <	036*	1.5	К	3	N	12.2 (0.480)
038* 1.8 K 3 N 12.2 (0.480	037*	1.8	J	3	N	12.2 (0.480)
039* 2.2 J 3 N 16.5 (0.650) 040* 2.2 K 3 N 16.5 (0.650) 041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 044* 3.3 K 1 N 12.2 (0.480) 045* 3.9 K 1 N 12.2 (0.480) 046* 3.9 K 1 N 12.2 (0.480) 047* 4.7 J 1 N 12.2 (0.480) 049* 4.7 K 1 N 16.5 (0.650) 050* 5.6 K 2 N 16.5 (0.650) 050* 5.6 K 2 N 16.5 (0.650) 051* 6.8 J 6 N 9.14 (0.360) 052* 6.8 K 6 N <td>038*</td> <td>1.8</td> <td>K</td> <td>3</td> <td>N</td> <td>12.2 (0.480)</td>	038*	1.8	K	3	N	12.2 (0.480)
040*						
041* 2.7 J 1 N 9.14 (0.360) 042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 045* 3.9 J 1 N 12.2 (0.480) 046* 3.9 K 1 N 12.2 (0.480) 047* 4.7 J 1 N 16.5 (0.650) 049* 5.6 J 2 N 16.5 (0.650) 050* 5.6 K 2 N 16.5 (0.650) 050* 5.6 K 2 N 16.5 (0.650) 050* 6.8 K 6 N 9.14 (0.360) 052* 6.8 K 6 N 9.14 (0.360) 052* 6.8 K 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 057* 12 J 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480)						
042* 2.7 K 1 N 9.14 (0.360) 043* 3.3 J 1 N 12.2 (0.480) 044* 3.3 K 1 N 12.2 (0.480) 045* 3.9 J 1 N 12.2 (0.480) 046* 3.9 K 1 N 12.2 (0.480) 047* 4.7 J 1 N 16.5 (0.650) 049* 5.6 J 2 N 16.5 (0.650) 050* 5.6 K 2 N 16.5 (0.650) 050* 5.6 K 2 N 16.5 (0.650) 051* 6.8 J 6 N 9.14 (0.360) 052* 6.8 K 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 057* 12 J 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 059* 15 J 6 N 16.5 (0.650)						
043* 3.3 J 1 N 12.2 (0.480 044* 3.3 K 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 046* 3.9 K 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 048* 4.7 K 1 N 16.5 (0.650 049* 5.6 J 2 N 16.5 (0.650 050* 5.6 K 2 N 16.5 (0.650 051* 6.8 J 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 054* 8.2 K 6 N 9.14 (0.360 055* 10 J 6 N 12.2 (0.480 055* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650 060*						
044* 3.3 K 1 N 12.2 (0.480 045* 3.9 J 1 N 12.2 (0.480 046* 3.9 K 1 N 12.2 (0.480 046* 3.9 K 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 049* 5.6 J 2 N 16.5 (0.650 050* 5.6 K 2 N 16.5 (0.650 051* 6.8 J 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 055* 10 J 6 N 9.14 (0.360 055* 10 J 6 N 12.2 (0.480 055* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 057* 15 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650						
045* 3.9 J 1 N 12.2 (0.480 046* 3.9 K 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 049* 5.6 J 2 N 16.5 (0.650 050* 5.6 K 2 N 16.5 (0.650 051* 6.8 J 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 053* 8.2 K 6 N 9.14 (0.360 054* 8.2 K 6 N 9.14 (0.360 055* 10 J 6 N 12.2 (0.480 056* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650 060*						
046* 3.9 K 1 N 12.2 (0.480 047* 4.7 J 1 N 16.5 (0.650 048* 4.7 K 1 N 16.5 (0.650 050* 5.6 J 2 N 16.5 (0.650 050* 6.8 J 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 054* 8.2 K 6 N 9.14 (0.360 055* 10 J 6 N 12.2 (0.480 056* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 058* 15 J 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650						
047*						
048* 4.7 K 1 N 16.5 (0.650 049* 5.6 J 2 N 16.5 (0.650 050* 5.6 K 2 N 16.5 (0.650 051* 6.8 J 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480 056* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650						
049* 5.6 J 2 N 16.5 (0.650 050* 5.6 K 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 053* 8.2 K 6 N 9.14 (0.360 055* 10 J 6 N 12.2 (0.480 055* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 057* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650						
050* 5.6 K 2 N 16.5 (0.650 051* 6.8 J 6 N 9.14 (0.360 052* 6.8 K 6 N 9.14 (0.360 053* 8.2 J 6 N 9.14 (0.360 054* 8.2 K 6 N 9.14 (0.360 055* 10 J 6 N 12.2 (0.480 056* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 058* 12 K 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650						
051* 6.8 J 6 N 9.14 (0.360) 052* 6.8 K 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 057* 12 J 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 059* 15 J 6 N 16.5 (0.650) 060* 15 K 6 N 16.5 (0.650)						
052* 6.8 K 6 N 9.14 (0.360) 053* 8.2 J 6 N 9.14 (0.360) 054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 057* 12 J 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 059* 15 J 6 N 16.5 (0.650) 060* 15 K 6 N 16.5 (0.650)						
053* 8.2 J 6 N 9.14 (0.360) 054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 057* 12 J 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 059* 15 J 6 N 16.5 (0.650) 060* 15 K 6 N 16.5 (0.650)						
054* 8.2 K 6 N 9.14 (0.360) 055* 10 J 6 N 12.2 (0.480) 056* 10 K 6 N 12.2 (0.480) 057* 12 J 6 N 12.2 (0.480) 058* 12 K 6 N 12.2 (0.480) 059* 15 J 6 N 16.5 (0.650) 060* 15 K 6 N 16.5 (0.650)						9.14 (0.360)
055* 10 J 6 N 12.2 (0.480 056* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650	053*	8.2		6	N	9.14 (0.360)
055* 10 J 6 N 12.2 (0.480 056* 10 K 6 N 12.2 (0.480 057* 12 J 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650	054*	8.2	K	6	N	9.14 (0.360)
057* 12 J 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650	055*	10		6	N	12.2 (0.480)
057* 12 J 6 N 12.2 (0.480 058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650	056*	10	K	6	N	12.2 (0.480)
058* 12 K 6 N 12.2 (0.480 059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650	057*	12	J	6	N	12.2 (0.480)
059* 15 J 6 N 16.5 (0.650 060* 15 K 6 N 16.5 (0.650					N	12.2 (0.480)
060* 15 K 6 N 16.5 (0.650			J		N	16.5 (0.650)
1007	060*	15	K	6	N	16.5 (0.650)
1004				100V		
						6.10 (0.240)
						6.10 (0.240)
						6.10 (0.240)
	064*	.056	K		N	6.10 (0.240)
					N	6.10 (0.240)
						6.10 (0.240)
						6.10 (0.240)
						6.10 (0.240)
						9.14 (0.360)
						9.14 (0.360)
						9.14 (0.360)
						9.14 (0.360)
						12.2 (0.480)
				5		
				٦		12.2 (0.480)
				٦		12.2 (0.480)
						12.2 (0.480)
						16.5 (0.650)
						16.5 (0.650) 9.14 (0.360)

	per MIL-C-20 DSCC Cap. Cap. Cap. Load Max. A												
DSCC Dwg. 88011-	Cap. Value (µF)	Cap. Tol.	Case Code	Lead Style	Max. A Dimension mm (inches)								
	. ,	100V	(continu	ued)									
080*	.27	K	4	N	9.14 (0.360)								
081*	.33	J	4	N	12.2 (0.480)								
082* 083*	.33 .39	K	4	N N	12.2 (0.480)								
084*	.39	K	4	N	12.2 (0.480) 12.2 (0.480)								
085*	.47	Ĵ	4	N	16.5 (0.650)								
086*	.47	K	4	N	16.5 (0.650)								
087*	.56	J	4	N	16.5 (0.650)								
088* 089*	.56 .68	K	4	N N	16.5 (0.650)								
090*	.68	K	3	l N	6.10 (0.240) 6.10 (0.240)								
091*	.82	J	3	N	9.14 (0.360)								
092*	.82	K	3	N	9.14 (0.360)								
093*	1.0	J	3	N	9.14 (0.360)								
094* 095*	1.0 1.2	K	3	N N	9.14 (0.360) 12.2 (0.480)								
096*	1.2	K	3	N	12.2 (0.480)								
097*	1.5	Ĵ	3	N	12.2 (0.480)								
098*	1.5	K	3	N	12.2 (0.480)								
099*	1.8	J	3	N	16.5 (0.650)								
100*	1.8	K	3 1	N	16.5 (0.650)								
101* 102*	2.2 2.2	J K	1	N N	12.2 (0.480) 12.2 (0.480)								
102*	2.7	Ĵ	1	l N	12.2 (0.480)								
104*	2.7	K	1	N	12.2 (0.480)								
105*	3.3	J	1	N	16.5 (0.650)								
106*	3.3	K	1	N	16.5 (0.650)								
107* 108*	3.9 3.9	J K	2	N N	12.2 (0.480) 12.2 (0.480)								
109*	4.7	Ĵ	2	N	16.5 (0.650)								
110*	4.7	K	2	N	16.5 (0.650)								
111*	5.6	J	6	N	9.14 (0.360)								
112*	5.6	K	6	N N	9.14 (0.360)								
113* 114*	6.8 6.8	J K	6 6	N N	9.14 (0.360) 9.14 (0.360)								
115*	8.2	Ĵ	6	l N	12.2 (0.480)								
116*	8.2	K	6	N	12.2 (0.480)								
117*	10	J	6	N	16.5 (0.650)								
118* 119*	10 12	K	6 6	N N	16.5 (0.650) 16.5 (0.650)								
120*	12	K	6	l N	16.5 (0.650)								
			200V										
121* 122*	.022 .022	J K	5 5	N N	3.05 (0.120) 3.05 (0.120)								
123*	.027	Ĵ	5	N	6.10 (0.240)								
124*	.027	K	5	N	6.10 (0.240)								
125*	.033	J	5	N	6.10 (0.240)								
126* 127*	.033	K	5 5	N N	6.10 (0.240)								
128*	.039 .039	K	5	N N	6.10 (0.240) 6.10 (0.240)								
129*	.047	Ĵ	5	N	9.14 (0.360)								
130*	.047	K	5	N	9.14 (0.360)								
131*	.056	J	5	N	9.14 (0.360)								
132* 133*	.056 .068	K J	5 5	N N	9.14 (0.360) 12.2 (0.480)								
134*		K	5										
	.068			l N	1 12.2(0.480)								
135*	.068 .082	J	5	N N	12.2 (0.480) 12.2 (0.480)								
136*	.082 .082	J K	5 5	N N	12.2 (0.480) 12.2 (0.480)								
136* 137*	.082 .082 .10	J K J	5 5 5	N N N	12.2 (0.480) 12.2 (0.480) 16.5 (0.650)								
136* 137* 138*	.082 .082 .10 .10	K N K	5 5 5	N N N	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650)								
136* 137* 138* 139*	.082 .082 .10 .10 .12	J K J	5 5 5 4	N N N N	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360)								
136* 137* 138*	.082 .082 .10 .10) K 1 K	5 5 5	N N N	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650)								
136* 137* 138* 139* 140* 141* 142*	.082 .082 .10 .10 .12 .12 .15	X	5 5 5 4 4 4 4	X	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360)								
136* 137* 138* 139* 140* 141* 142* 143*	.082 .082 .10 .10 .12 .12 .15 .15	7	5 5 5 4 4 4 4	X	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480)								
136* 137* 138* 139* 140* 141* 142* 143* 144*	.082 .082 .10 .10 .12 .12 .15 .15	X	5 5 5 4 4 4 4 4	2 2 2 2 2 2 2 2 2	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145*	.082 .082 .10 .10 .12 .12 .15 .15 .18	7	5 5 5 4 4 4 4	X	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147*	.082 .082 .10 .10 .12 .12 .15 .15) K J K J K J K J K J K J K J K J K J K	5 5 5 4 4 4 4 4 4	222222222	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147*	.082 .082 .10 .10 .12 .12 .15 .15 .18 .18 .22 .22	X	5 5 5 4 4 4 4 4 4 4 4 4 4	N	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147* 148* 149*	.082 .082 .10 .10 .12 .15 .15 .18 .18 .22 .22 .27 .27	7 K 7 K 7 K 7 K 7 K 7 K 7 K 7 K 7 K 7 K	5 5 5 5 4 4 4 4 4 4 4 4 4 4 4 4 3	N	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 6.10 (0.240)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147* 148* 149* 150*	.082 .082 .10 .10 .12 .12 .15 .15 .18 .18 .22 .27 .27 .33 .33	X	5 5 5 4 4 4 4 4 4 4 4 3 3	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 6.10 (0.240) 6.10 (0.240)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147* 148* 149* 150* 151*	.082 .082 .10 .10 .12 .15 .15 .18 .22 .22 .27 .27 .33 .33		5 5 5 5 4 4 4 4 4 4 4 4 4 3 3 3	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 6.10 (0.240) 6.10 (0.240) 6.10 (0.240)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147* 148* 149* 150*	.082 .082 .10 .10 .12 .12 .15 .15 .18 .18 .22 .27 .27 .33 .33	X	5 5 5 5 4 4 4 4 4 4 4 4 4 3 3 3 3 3	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 6.10 (0.240) 6.10 (0.240) 6.10 (0.240) 6.10 (0.240)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147* 148* 150* 151* 152*	.082 .082 .100 .10 .12 .15 .15 .15 .18 .22 .22 .27 .27 .33 .39 .39		5 5 5 5 4 4 4 4 4 4 4 4 4 4 4 4 3 3 3 3	222222222222222	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 6.10 (0.240) 6.10 (0.240) 6.10 (0.240)								
136* 137* 138* 140* 141* 142* 144* 145* 146* 147* 148* 150* 151* 152* 153* 154* 155*	.082 .082 .100 .10 .12 .15 .15 .15 .18 .22 .22 .27 .27 .33 .39 .39 .47 .47		5 5 5 5 4 4 4 4 4 4 4 4 4 4 3 3 3 3 3 3	22222222222222222	12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 6.10 (0.240) 6.10 (0.240) 6.10 (0.240) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360)								
136* 137* 138* 139* 140* 141* 142* 143* 144* 145* 146* 147* 148* 150* 151* 152* 153* 154*	.082 .082 .100 .10 .12 .12 .15 .15 .18 .18 .22 .27 .27 .27 .33 .39 .39 .47 .47	X	5 5 5 5 4 4 4 4 4 4 4 4 4 4 4 4 3 3 3 3	2222222222222222	12.2 (0.480) 12.2 (0.480) 16.5 (0.650) 16.5 (0.650) 9.14 (0.360) 9.14 (0.360) 9.14 (0.360) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.2 (0.480) 12.6 (0.650) 16.5 (0.650) 16.10 (0.240) 6.10 (0.240) 6.10 (0.240) 9.14 (0.360) 9.14 (0.360)								

DSCC Dwg.	Cap. Value	Cap.	Case	Lead	Max. A Dimension mm
88011-	(μ F)	Tol.	Code	Style	(inches)
159*	.82	200V ((continu	u ed) N	16.5 (0.650)
160*	.82	K	3	N	16.5 (0.650)
161*	1.0	J	3	N	16.5 (0.650)
162*	1.0	K	3	N	16.5 (0.650)
163*	1.2	J	1	N	12.2 (0.480)
164*	1.2	K	1	N	12.2 (0.480)
165*	1.5	J	1	N	12.2 (0.480)
166*	1.5	K	1	N	12.2 (0.480)
167*	1.8	J	1	N	16.5 (0.650)
168*	1.8	K	1	N	16.5 (0.650)
169*	2.2	J	2	N	12.2 (0.480)
170*	2.2	K	2 2	N	12.2 (0.480)
171*	2.7	J		N	16.5 (0.650)
172*	2.7	K	2	N	16.5 (0.650)
173*	3.3	J	6	N	9.14 (0.360)
174*	3.3	K	6	N	9.14 (0.360)
175*	3.9	J	6	N	9.14 (0.360)
176*	3.9	K	6	N	9.14 (0.360)
177* 178*	4.7 4.7	J K	6	N N	12.2 (0.480)
179*	5.6	J	6	N	12.2 (0.480) 16.5 (0.650)
180*	5.6	K	6 500V	N	16.5 (0.650)
181*	.010	J	5	N	3.05 (0.120)
182*	.010	K	5	N	3.05 (0.120)
183*	.012	J	5	N	6.10 (0.240)
184*	.012	K	5	N	6.10 (0.240)
185*	.015	J	5	N	6.10 (0.240)
186*	.015	K	5	N	6.10 (0.240)
187*	.018	J	5	N	6.10 (0.240)
188*	.018	K	5	N	6.10 (0.240)
189*	.022	J	5	N	9.14 (0.360)
190*	.022	K	5	N	9.14 (0.360)
191*	.027	J	5	N	9.14 (0.360)
192*	.027	K	5	N	9.14 (0.360)
193*	.033	J	5	N	12.2 (0.480)
194*	.033	K	5	N	12.2 (0.480)
195*	.039	J	5	N	12.2 (0.480)
196*	.039	K	5	N	12.2 (0.480)
197*	.047	J	5	N	16.5 (0.650)
198*	.047	K	5	N	16.5 (0.650)
199*	.056	J	4	N	9.14 (0.360)
200*	.056	K	4	N	9.14 (0.360)
201*	.068	J	4	N	9.14 (0.360)
202*	.068	K	4	N	9.14 (0.360)
203*	.082	J	4	N	12.2 (0.480)
204*	.082	K	4	N	12.2 (0.480)
205*	.10	J	4	N	12.2 (0.480)
206*	.10	K	4	N	12.2 (0.480)
207*	.12	J	4	N	16.5 (0.650)
208*	.12	K	4	N	16.5 (0.650)
209*	.15	J	3	N	6.10 (0.240)
210* 211*	.15 .18	K	3	N N	6.10 (0.240)
212*	.18	K	3	N	6.10 (0.240) 6.10 (0.240)
213*	.22	J	3	N	9.14 (0.360)
214*	.22	K	3	N	9.14 (0.360)
215*	.27	J	3	N	9.14 (0.360)
216*	.27	K	3	N	9.14 (0.360)
217*	.33	J	3	N	12.2 (0.480)
218*	.33	K	3	N	12.2 (0.480)
219*	.39	J	3	N	16.5 (0.650)
220*	.39	K	3	N	16.5 (0.650)
221*	.47	J	1	N	9.14 (0.360)
222*	.47	K	1	N	9.14 (0.360)
223*	.56	J	1	N	12.2 (0.480)
224*	.56	K		N	12.2 (0.480)
225*	.68	J	1	N	12.2 (0.480)
226*	.68	K	1	N	12.2 (0.480)
227*	.82	J	1	N	16.5 (0.650)
228*	.82	K	1	N	16.5 (0.650)
229*	1.0	J	2	N	12.2 (0.480)
230*	1.0	K	2 2	N	12.2 (0.480)
231*	1.2	J		N	16.5 (0.650)
232*	1.2	K	2	N	16.5 (0.650)
233*	1.5	J	6	N	9.14 (0.360)
234*	1.5 1.8	K	6	N	9.14 (0.360)
235* 236*	1.8	J K	6	N N	12.2 (0.480) 12.2 (0.480)
237*	2.2	J	6	N	16.5 (0.650)
238*	2.2	K	6	N	16.5 (0.650)

^{*}Add J or L for applicable formed leads

SM9 Style Technical Information on SMPS Capacitors





KYOCERA AVX is the original inventor of large capacitance value, stacked MLCC capacitors constructed with DIP leads. Similar to SM-product, the SM9-sytle, encapsulated Switch Mode Power Supply (SMPS) capacitors offer high CV product and extremely low ESR and ESL. SM9style capacitors offer additional mechanical and thermal protection and are recommended for applications where they will undergo extreme high frequency vibration or mechanical shock. Encapsulated version allows for "strapping" the parts or bonding to the board on the perimeter of the plastic case and thus preventing oscillation and lead breakage.

In addition to traditionally offered COG (Class I) and X7R (Class II) type dielectrics, KYOCERA AVX introduces another class I, temperature compensated N1500 dielectric characterized with very low dissipation factor. Thanks to considerably higher relative dielectric constant of N1500 dielectric, the CV product is more than doubled in comparison to ultra-stable COG dielectric, resulting in a significant reduction in the size of capacitor and a significant improvement of volumetric efficiency.

The typical applications for different type dielectrics are:

COG: High frequency resonant capacitors, avionic AC line filters (400Hz to 800Hz),

snubbers, timing circuits, high current repetitive discharge

Avionic AC line filters (400Hz to 800Hz), snubbers, high current repetitive discharge, N1500:

capacitive temperature compensation

X7R: General filtering, input and output filters in DC/DC converters, bulk filters, DC link

capacitors, motor drive filters, high current non-repetitive discharge

Not RoHS Compliant

GENERAL SPECIFICATIONS FOR ALL DIELECTRIC TYPES

Operating Temperature Range -55° to +125°C

Voltage Ratings

50VDC through 500VDC (+125°C)

Dielectric Withstanding Voltage

250% rated voltage for 5 seconds with 30 to 50mA charging current (500 Volt units @ 750VDC)

Insulation Resistance (25°C, rated DC voltage) 100KM Ω min. or 1000M Ω -μF min. whichever is less Insulation Resistance (125°C, rated DC voltage)

10KM Ω min. or 100M Ω -μF min. whichever is less

Thermal Shock Capabilities 5 cycles (-55°C to +125°C)

Life Test Capabilities (1000 hours)

200% rated voltage at +125°C (500 Volt units @ 600VDC)

GENERAL SPECIFICATIONS FOR ALL DIELECTRIC TYPES

COG Dielectric

Capacitance Range

 $0.01 \mu F$ to $15 \mu F$ (+25°C, 1.0 ± 0.2Vrms at 1kHz)

Capacitance Tolerances +5% +10% +20%

Temperature Characteristic 0 ± 30 ppm/°C

Dissipation Factor

0.15% max. (+25°C, 1.0 ± 0.2Vrms at 1kHz) N1500

Capacitance Range

 $0.018\mu F$ to $33\mu F$

 $(+25^{\circ}\text{C}, 1.0 \pm 0.2\text{Vrms at 1kHz})$

Capacitance Tolerances

±5%, ±10%, ±20%

Temperature Characteristic

-1500 ± 250 ppm/°C

Dissipation Factor

0.15% max.

 $(+25^{\circ}C, 1.0 \pm 0.2 \text{Vrms at 1kHz})$

X7R Dielectric

Capacitance Range

 $0.1 \mu F$ to $390 \mu F$ (+25°C, 1.0 ± 0.2Vrms at 1kHz)

Capacitance Tolerances

±10%, ±20%, +80%, -20%

Temperature Characteristic

±15%

Dissipation Factor

2.5% max.

(+25°C, 1.0 ± 0.2Vrms at 1kHz)





SM9 Style Technical Information on SMPS Capacitors

HOW TO ORDER

Styles: SM91, SM92, SM93, SM94, SM95, SM96

SM9 Style SM9 = Plastic Case	Size See	7 Voltage 50V = 5	Temperature	106 Capacitance Codea (2 significant digits	C0G/N1500:	A = Standard	N Termination N = Straight Lead	Height Max Dimension
	Dimensions chart	100V = 1 200V = 2 500V = 7	COG = A N1500 = 4 X7R = C	+ number of zeros) 1,000 pF = 102 22,000 pF = 223 220,000 pF = 224 1µF = 105 10 µF = 106 100 µF = 107	J = ±5% K = ±10% M = ±20% X7R: K = ±10% M = ±20% Z = +80%, -20%	B = Hi-Rel* 5 = Standard/MIL** 6 = Hi-Rel/MIL***	J = Leads formed in L = Leads formed out	"A" 270 = 0.270" 390 = 0.390" 530 = 0.530" 660 = 0.660" 800 = 0.800"
					,		capa	See tables for citance available ecific height and dielectric

Note: Capacitors with X7R dielectric are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations. screening option. Screening consists of 100%

(B Level), Subgroup 1 per MIL-PRF-49470.

fit function equivalent MIL-PRF-49470

Applies to 50V rated parts only. No screening. *** Form, fit & function equivalent MIL-PRF-49470 to part. Applies to 50V rated parts only. Hi-Rel screening the same as option B.

	Typical ESR Performance (mΩ)													
	Aluminum Electrolytic 100µF/50V	Low ESR Solid Tantalum 100µF/10V	Solid Aluminum Electrolytic 100µF/16V	MLCC SMPS 100µF/50V	MLCC SMPS 4.7μF/50V									
ESR @ 10KHz	300	72	29	3	66									
ESR @ 50KHz	285	67	22	2	23									
ESR @ 100KHz	280	62	20	2.5	15									
ESR @ 500KHz	265	56	18	4	8									
ESR @ 1MHz	265	56	17	7	7.5									
ESR @ 5MHz	335	72	17	12.5	8									
ESR @ 10MHz	560	91	22	20	14									


Performance of SMPS capacitors can be simulated by downloading SpiCalci software program - http:// www.kyocera-avx.com/download/software/SpiCalci-AVX.zip



090518



Encapsulated in DAP (Diallyl Phthalate) Case (SM9 Style)

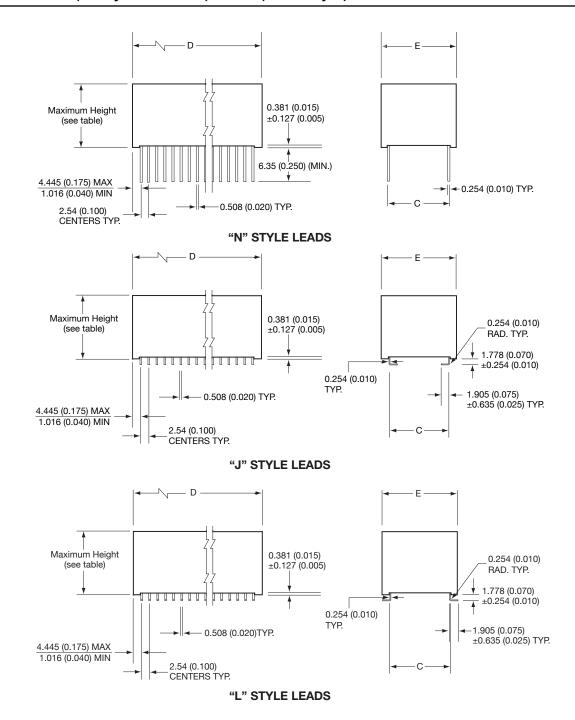

DIMENSIONS millimeters (inches)

Case Code	C ±0.635 (0.025)	D ±0.254 (0.010)	E +0.000 (0.000) -0.254 (0.010)	No. of Leads per side*
SM91	11.4 (0.450)	54.7 (2.155)	14.7 (0.580)	20
SM92	20.3 (0.800)	41.0 (1.615)	24.1 (0.950)	15
SM93	11.4 (0.450)	29.3 (1.155)	14.7 (0.580)	10
SM94	10.2 (0.400)	12.3 (0.485)	12.3 (0.485)	4
SM95	6.35 (0.250)	9.02 (0.355)	9.02 (0.355)	3
SM96	31.8 (1.250)	54.7 (2.155)	36.3 (1.430)	20

^{*}Leads styles N, J or L available





Encapsulated in DAP (Diallyl Phthalate) Case (SM9 Style)

COG CLASS I DIELECTRIC, ULTRA STABLE CERAMIC

		SM	191			SM	192		SM93		SM94			SM95				SM96						
Cap µF	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.01																				270				
0.012																270			270	390				
0.015																270			270	390				
0.018																270			270	390				
0.022																390			390	530				
0.027																390		270	390	530				
0.033																390	270	270	390	660				
0.039																390	270	270	390	660				
0.047															270	390	270	390	390	800				
0.056												270			270	530	390	390	530					
0.068												270			270	530	390	390	530					
0.082												270		270	390	660	390	530	660					
0.1												390	270	270	390	660	390	530	660					
0.12				270							270	390	270	270	390	800	530	530	800					
0.15				270				270			270	390	270	390	530		530	660						
0.18				270				270			270	390	390	390	530		660	800						
0.22				390				270			390	530	390	390	660		800							
0.27			270	390				390		270	390	530	390	530	660									
0.33			270	390				390	270	270	390	660	530	530	800									270
0.39			270	530			270	390	270	270	390	800	530	530										270
0.47			390	530			270	390	270	390	530	800	530	660										270
0.56		270	390	660			270	530	390	390	530		660	800										390
0.68		270	390	660		270	390	530	390	390	660		800											390
0.82	270	390	530	800	270	270	390	660	390	530	800												270	390
1	270	390	530		270	270	390	660	390	530	800												270	390
1.2	390	390	530		270	390	390	800	530	530												270	270	530
1.5	390	530	660		390	390	530		530	660												270	390	530
1.8	390	530	800		390	390	530		660	800											270	270	390	660
2.2	530	660			390	530	660		800												270	270	390	800
2.7	530	660			530	530	800														270	390	530	
3.3	660	800			530	660															390	390	530	
3.9	660				660	660															390	390	530	
4.7	800				660	800															390	390	660	
5.6					800																390	530	800	
6.8																					530	530		
8.2																					530	660		
10																					660	800		
12																					660	800		
15																					800			

The number represented in each cell corresponds to the maximum "A" dimension (in mils) and to the last 3 digits of the part number.

CUSTOM VALUES, RATING AND CONFIGURATIONS ARE ALSO AVAILABLE.



Encapsulated in DAP (Diallyl Phthalate) Case (SM9 Style)

N1500 CLASS I DIELECTRIC, TEMPERATURE COMPENSATED CERAMIC

	SM91				SM92				SM93				SM94				SM95				SM96			
Cap µF	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.018																				270				
0.022																				270				
0.027																270			270	270				
0.033																270			270	270				
0.039																270			270	270				
0.047																270			270	39/0				
0.056																270			270	390				
0.068																270		270	270	530				
0.082																390	270	270	390	530				
0.1															270	390	270	270	390	660				
0.12															270	390	270	390	390	800				
0.15															270	390	270	390	390					
0.18												270		270	270	530	390	390	530					
0.22												270	270	270	390	660	390	530	660					
0.27												270	270	270	390	660	530	530	660					
0.33				270								390	270	390	390	800	530	660	800					
0.39				270				270				390	390	390	530		660	660						
0.47				270				270			270	390	390	390	530		660	800						
0.56				390				270			270	530	390	530	660		800							
0.68				390				390		270	270	530	390	530	660									
0.82			270	390				390	270	270	390	530	530	530	800									
1			270	530				390	270	270	390	660	530	660										270
1.2		270	270	530			270	5430	270	390	390	800	660	800										270
1.5		270	390	660			270	530	390	390	530		800											270
1.8	270	270	390	660			270	660	390	390	530													390
2.2	270	390	390	800	270	270	390	660	390	530	660													390
2.7	390	390	530		270	270	390	800	530	530	660												270	390
3.3	390	390	530		270	390	390		530	660	800												270	530
3.9	390	530	660		390	390	530		660	660												270	270	530
4.7	530	530	660		390	390	530		660	800											270	270	390	660
5.6	530	660	800		390	530	660		800												270	270	390	660
6.8	660	660			530	530	660														270	390	390	800
8.2	660	800			530	530	800														390	390	530	
10	800				530	660															390	390	530	
12					660	800															390	530	660	
15					800																530	530	660	
18																					530	660	800	
22																					660	660		
27																					660	800		
33																					800			

The number represented in each cell corresponds to the maximum "A" dimension (in mils) and to the last 3 digits of the part number.

CUSTOM VALUES, RATING AND CONFIGURATIONS ARE ALSO AVAILABLE.



Encapsulated in DAP (Diallyl Phthalate) Case (SM9 Style)

X7R CLASS II DIELECTRIC, STABLE CERAMIC

		SN	191			SM	92			SM	193			SM	194			SN	195			SM	196	
Cap µF	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.1																				270				
0.12																				270				
0.15																			270	270				
0.18																270			270	39/0				
0.22																270			270	390				
0.27																270			270	390				
0.33																270			270	530				
0.39																270		270	270	530				
0.47																390		270	390	530				
0.56															270	390		270	390	660				
0.68												270			270	390		270	390	800				
0.82												270			270	530		390	530					
1												270		270	270	530	270	390	530					
1.2												270		270	390	530	270	390	530					
1.5				270								390		270	390	660	270	530	660					
1.8				270							270	390		270	390	800	270	530	800					
2.2				270				270			270	390		390	390		270	660						
2.7				390				270			270	530		390	530		270	660						
3.3				390				270		270	270	530	270	390	530		390	800						
3.9			270	390				270		270	390	530	270	530	660		390							
4.7			270	390				390		270	390	660	270	530	800		390							270
5.6			270	530			270	390		270	390	800	270	660			390							270
6.8		270	270	530			270	390	070	390	390		270	660			530							270
8.2		270	390	660		070	270	530	270	390	530		390	800			530							270
10		270	390	660		270	270	530	270	390	530		390				660						070	390
12	070	270	390	800		270	390	530	270	390	660		390				800						270 270	390
15	270	390	530		270	270	390	660	270	530	800		390											390
18 22	270 270	390 390	530 660		270 270	270 390	390 390	800	270 390	530 660	800		530 530									270	270 270	530
27	270	530	660		270	3.90	530		390	800			660									270	390	530 660
33	390	530	800		270	3.90	530		390	800			800								270	270	390	800
39	390	660	800		270	530	660		530				800								270	270	390	800
47	390	660			390	530	800		530												270	390	390	000
56	530	800			390	660	800		660												270	390	530	
68	530	300			390	660	000		660												270	390	530	
82	530				390	800			800												390	530	660	
100	660				530	000			000												390	530	800	
120	800				530																390	530	800	
150	500				660																390	660	000	
180					800																530	800		
220					500																530	000		
270																					660			
330																					800			
390																					800			

The number represented in each cell corresponds to the maximum "A" dimension (in mils) and to the last 3 digits of the part number.

CUSTOM VALUES, RATING AND CONFIGURATIONS ARE ALSO AVAILABLE.



RM Style Stacked MLC Capacitors

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

COG: A Temperature Coefficient - 0 ±30 ppm/°C, -55° to +125°C X7R: C Temperature Coefficient - ±15%, -55° to +125°C

Capacitance Test (MIL-STD-202 Method 305)

COG: 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz X7R: 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor 25°C

COG: 0.15% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz X7R: 2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302) COG and X7R: 100K M Ω or 1000 M Ω - μ F, whichever is less.

Insulation Resistance 125°C (MIL-STD-202 Method 302) COG and X7R: 10K M Ω or 100 M Ω - μ F, whichever is less.

Dielectric Withstanding Voltage 25°C (Flash Test)

COG and X7R: 250% rated voltage for 5 seconds with 50 mA max charging current. (500 Volt units @ 750 VDC)

Life Test (1000 hrs)

COG and X7R: 200% rated voltage at +125°C. (500 Volt units @ 600 VDC)

Moisture Resistance (MIL-STD-202 Method 106)

Ten cycles with no voltage applied.

Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)

Resistance To Solder Heat (MIL-STD-202, Method 210, Condition B, for 20 seconds)



	Т	ypical ESR Pe	erformance (mΩ	2)	
	Aluminum Electrolytic 100µF/50V	Low ESR Solid Tantalum 100µF/10V	Solid Aluminum Electrolytic 100µF/16V	MLCC SMPS 100µF/50V	MLCC SMPS 4.7µF/50V
ESR @ 10KHz	300	72	29	3	66
ESR @ 50KHz	285	67	22	2	23
ESR @ 100KHz	280	62	20	2.5	15
ESR @ 500KHz	265	56	18	4	8
ESR @ 1MHz	265	56	17	7	7.5
ESR @ 5MHz	335	72	17	12.5	8
ESR @ 10MHz	560	91	22	20	14

HOW TO ORDER

RM0 Style RM0 = Uncoated RM5 = Epoxy Coated

Size See **Dimensions** chart

Voltage 50V = 5100V = 1200V = 2500V = 7

C Temperature Coefficient COG = A

X7R = C

+ number of zeros)

106 Capacitance Cod€apacitance Tolerance Test Level (2 significant digits COG: A = Standard

 $J = \pm 5\%$ 10 pF = 100 $K = \pm 10\%$ 100 pF = 101 $M = \pm 20\%$ 1,000 pF = 102 X7R:

22,000 pF = 223 $K = \pm 10\%$ 220,000 pF = 224 $M = \pm 20\%$ $1\mu F = 105$ Z = +80%, -20%

10 µF = 106 100 μF = 107

Styles: RM-1, RM-2, RM-3, RM-4, RM-5, RM-6 Ν 650

> Termination N = Straight Lead J = Leads formed in L = Leads formed out P = P Style Leads

Z = Z Style Leads

360 = 0.360" 480 = 0.480" 650 = 0.650"

Heiaht

Dimension "A"

120 = 0.120"

240 = 0.240"


Note: Capacitors with X7R and Z5U dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.





(RM Style) Surface Mount and Thru-Hole Sytles (RM0, RM5)

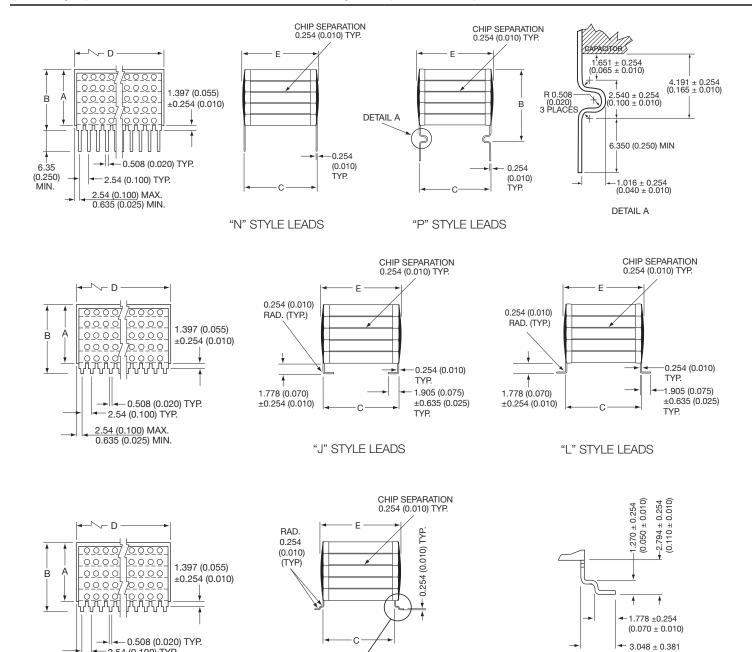

DIMENSIONS

millimeters (inches)

 (0.120 ± 0.015)

DETAIL B

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
RM-1			11.4 (0.450)	52.1 (2.050)	12.7 (0.500)	20
RM-2		For "N" Style Leads: "A" Dimension Plus 1.651 (0.065)	20.3 (0.800)	38.4 (1.510)	22.1 (0.870)	15
RM-3	See page 38 for maximum "A"	For "J" & "L" Style Leads: "A" Dimension Plus 2.032 (0.080)	11.4 (0.450)	26.7 (1.050)	12.7 (0.500)	10
RM-4	Dimension	For "P" Style Leads: "A" Dimension Plus 4.445 (0.175)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
RM-5		For "Z" Style Leads: "A" Dimension Plus 3.048 (0.120)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
RM-6			31.8 (1.250)	52.1 (2.050)	34.3 (1.350)	20

DETAIL B

"Z" STYLE LEADS

Note: For RM5 add 0.127 (0.005) to max. and nominal dimensions A, B, D, & E

-2.54 (0.100) TYP.

2.54 (0.100) MAX. 0.635 (0.025) MIN.





(RM Style)

Max Capacitance (µF) Available Versus Style with Height (A) of 0.120" - 3.05mm

	RMC)1	A1	N120	RMC)2	AN	1120	RMC	3	A1	N120	RMC	4	A	N120	RMC	5	AN	N120	RMC	6	A	N120
STYLE	50V	100V	200V	500V																				
COG	1.0	.70	.40	.18	1.2	1.0	.60	.26	.47	.40	.20	.09	.16	.13	.07	.02	.05	.04	.02	.01	3.2	2.4	1.3	.50
X7R	27	12	7.0	2.6	41	18	11	4.0	18	6.0	3.6	1.3	7.5	1.8	1.1	.40	2.8	.68	.40	.16	80	40	24	9.4

Max Capacitance (µF) Available Versus Style with Height (A) of 0.240" - 6.10mm

	RM0	1		N240	RM02	2	A	N240	RM03	3	A	N240	RM0	4	A	N240	RM0	5	A	N240	RM0	6	A	N240
STYLE	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V
COG	2.0	1.4	.80	.36	2.4	2.0	1.2	.52	1.0	.80	.40	.18	.32	.26	.14	.05	.10	.08	.05	.02	6.4	4.8	2.6	1.0
X7R	54	24	14	5.2	82	36	22	8.0	36	12	7.2	2.6	15	3.6	2.2	.80	5.6	1.3	.80	.32	160	80	48	18

Max Capacitance (µF) Available Versus Style with Height (A) of 0.360" - 9.14mm

	RM0	1		N360	RM02	2	A	N360	RM0	3	A	N360	RM0	4	A	N360	RM0	5	A	N360	RM0	6		N360
STYLE	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V
COG	3.0	2.1	1.2	.54	3.6	3.0	1.8	.78	1.5	1.2	.60	.27	.48	.39	.21	.07	.15	.12	.07	.03	9.6	7.2	3.9	1.5
X7R	82	36	21	7.8	120	54	33	12	54	18	10	3.9	22	5.4	3.3	1.2	8.2	2.0	1.2	.48	240	120	72	28

Max Capacitance (µF) Available Versus Style with Height (A) of 0.480" - 12.2mm


	RM0	1		N480	RM02	2	A	N480	RM0	3	A	N480	RM0	4	A	N480	RM0	5	A	N480	RM0	6	4	N480
STYLE	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V
COG	4.0	2.8	1.6	.72	4.8	4.0	2.2	1.0	2.0	1.6	.80	.36	.64	.52	.28	.10	.20	.16	.10	.04	12	9.6	5.2	2.0
X7R	110	48	28	10	160	72	44	16	72	24	14	5.2	30	7.2	4.4	1.6	10	2.7	1.6	.64	320	160	96	37

Max Capacitance (μF) Available Versus Style with Height (A) of 0.650" - 16.5mm

		-		•						-			_	•	•										
ſ		RM0	1	A	N650	RM02	2	A	N650	RM0	3	A	N650	RM0	4	A	N650	RM0	5	A	N650	RM0	6	A	N650
	STYLE	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V
	COG	5.0	3.5	2.0	.90	6.0	5.0	3.0	1.3	2.5	2.0	1.0	.47	.80	.65	.35	.12	.25	.20	.12	.05	16	12	6.5	2.5
ſ	X7R	130	60	35	13	200	90	55	20	90	30	18	6.5	36	9.0	5.5	2.0	12	3.4	2.0	.80	400	200	120	47







GENERAL DESCRIPTION

The SMM series SMPS capacitors incorporate the Super X7R dielectric material. SMM stacked capacitors offer high dielectric constant (K) characteristics allowing for an extended capacitance range. The higher capacitance values in the smaller case sizes reduce the amount of board space needed to mount these components. The SMM series capacitors are designed for use in applications ranging from high end DC/DC converters to general power supplies, telecom networks, snubbers, aerospace instrumentation panels, hybrid power applications and more.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

±15%, -55°C to +125°C

Capacitance Test (MIL-STD-202 Method 305) 25°C, 1.0 ± 0.2 Vrms (open circuit voltage) at 1 kHz

Dissipation Factor 25°C

2.5% Max @ 25°C, 1.0 ± 0.2 Vrms (open circuit voltage) at 1 kHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

1000 M Ω - μ F, whichever is less

Insulation Resistance 125°C (MIL-STD-202 Method 302)

100 MΩ-μF, whichever is less

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA maximum charging current (500 Volt units @ 750 VDC)

Life Test (1000 hrs)

200% rated voltage for at 125°C (500 Volts units @ 600 VDC)

Not RoHS Compliant

HOW TO ORDER


SMM4	<u>5</u> T	C T	<u>186</u>	M T	A T	K T	120
Style SMM3 SMM4 SMM5	Voltage 50V = 5 100V = 1 200V = 2 500V = 7	Temperature Coefficient X7R = C	Capacitance Code (pF - 2 significant digits + number of zeros) 1 \(\mu F = 105 \) 10 \(\mu F = 106 \) 100 \(\mu F = 107	Tolerance K = ±10% M = ±20%	Test Level A = Standard B = Hi-Rel*	Leads N = Straight Lead K = Leads formed in M = Leads formed out	Height Max Dimension "A" 120 = 0.120" 240 = 0.240" 360 = 0.360" 480 = 0.480" 600 = 0.600"


^{*}Hi-Rel screening for consists of 100% Group A (B Level), Subgroup 1 per MIL-PRF-49470.

090518













"N" STYLE LEADS





"K" STYLE LEADS





"M" STYLE LEADS

DIMENSIONS

millimeters (inches)

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
SMM3	See next table		11.4 (0.450)	26.7 (1.050)	12.7 (0.500)	10
SMM4	below for maximum "A"	For "N" Style Leads: "A" Dimension Plus 1.651 (0.065) For "K" & "M" Style Leads: "A" Dimension Plus 1.39 (0.055)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
SMM5	Dimension	(6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3


CAPACITANCE RANGE

Max Capacitance (µF) Available Versus Style and Height (Diminsion "A")

STYLE		SM	IM3			SM	M4			SM	M5	
Height "A"	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V
0.120"	27	15	8.2	3.9	10	4.7	3.3	1.2	3.9	1.8	1.2	0.56
0.240"	56	27	15	6.8	18	8.2	6.8	2.2	6.8	3.3	2.2	1.0
0.360"	82	47	22	12	27	12	10	3.3	12	5.6	3.3	1.6
0.480"	100	56	33	15	39	18	12	4.7	15	6.8	4.7	2.2
0.600"	120	68	39	18	49	22	15	5.6	18	8.2	5.6	2.7

KYOCERa

RMM Style Stacked MLC Capacitors Extended Range



GENERAL DESCRIPTION

The RMM series SMPS capacitors incorporate the Super X7R dielectric material. RMM stacked capacitors offer high dielectric constant (K) characteristics allowing for an extended capacitance range. The higher capacitance values in the smaller case sizes reduce the amount of board space needed to mount these components. The RMM series capacitors are designed for use in applications ranging from high end DC/DC converters to general power supplies, telecom networks, snubbers, aerospace instrumentation panels, hybrid power applications and more.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

±15%, -55°C to +125°C

Capacitance Test (MIL-STD-202 Method 305) 25°C, 1.0 ± 0.2 Vrms (open circuit voltage) at 1 kHz

Dissipation Factor 25°C

2.5% Max @ 25°C, 1.0 ± 0.2 Vrms (open circuit voltage) at 1 kHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

1000 M Ω - μ F, whichever is less

Insulation Resistance 125°C (MIL-STD-202 Method 302)

100 M Ω - μ F, whichever is less

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA maximum charging current (500 Volt units @ 750 VDC)

Life Test (1000 hrs)

200% rated voltage for at 125°C (500 Volts units @ 600 VDC)



HOW TO ORDER


RMM4	<u>5</u>	Ç	<u>186</u>	M	A	K T	120
Style RMM3 RMM4 RMM5	Voltage 50V = 5 100V = 1 200V = 2 500V = 7	Temperature Coefficient X7R = C	Capacitance Code (pF - 2 significant digits + number of zeros) 1µF = 105 10 µF = 106 100 µF = 107	Tolerance K = ±10% M = ±20%	Test Level A = Standard B = Hi-Rel*	Leads N = Straight Lead K = Leads formed in M = Leads formed out	Height Max Dimension "A" 120 = 0.120" 240 = 0.240" 360 = 0.360" 480 = 0.480" 600 = 0.600"

^{*}Hi-Rel screening for consists of 100% Group A (B Level), Subgroup 1 per MIL-PRF-49470.


090518




RMM Style Stacked MLC Capacitors Extended Range

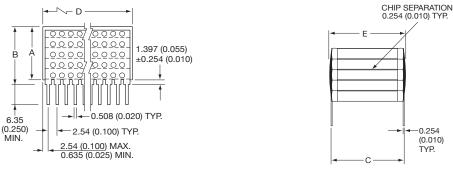



"N" STYLE LEADS





"K" STYLE LEADS





"M" STYLE LEADS

DIMENSIONS millimeters (inches)

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
RMM3	See next table		11.4 (0.450)	26.7 (1.050)	12.7 (0.500)	10
RMM4	below for maximum "A"	For "N" Style Leads: "A" Dimension Plus 1.651 (0.065) For "K" & "M" Style Leads: "A" Dimension Plus 1.39 (0.055)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
RMM5	Dimension		6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3

CAPACITANCE RANGE

Max Capacitance (µF) Available Versus Style and Height (Diminsion "A")

STYLE		SM	М3			SM	M4			SM	M5	
Height "A"	50V	100V	200V	500V	50V	100V	200V	500V	50V	100V	200V	500V
0.120"	27	15	8.2	3.9	10	4.7	3.3	1.2	3.9	1.8	1.2	0.56
0.240"	56	27	15	6.8	18	8.2	6.8	2.2	6.8	3.3	2.2	1.0
0.360"	82	47	22	12	27	12	10	3.3	12	5.6	3.3	1.6
0.480"	100	56	33	15	39	18	12	4.7	15	6.8	4.7	2.2
0.600"	120	68	39	18	49	22	15	5.6	18	8.2	5.6	2.7








SMX-style, stacked Switch Mode Power Supply Capacitors (SMPS) utilizing Multilayer Ceramic (MLCC) construction are ideally suited for high temperature applications up to 200°C. This product is intended for downhole oil exploration, including logging while drilling, geophysical probes, as well as space and aerospace electronics. The high temperature solder utilized in the construction of SMX-style parts assures reliable operation in harsh environments. The wide product offering provides designers a solution for high capacitance value and high voltage capacitors rated at 200°C. The SMX-style capacitors are ideally suited for applications as DC filters in high power, high frequency motor drives, high pulsed-current circuitry, as well as low power electronics.

SMX-style, SMPS capacitors are characterized with excellent performance in comparison to wet tantalum products. The main benefits of SMX-product over wet tantalum capacitors include:

- · Much lower ESR and lower losses
- · Excellent capacitance retention with frequency
- · Excellent high frequency performance
- Low DC leakage current
- · Much higher current handling capabilities


Typical Extended Temperature TCC Characterization of C0G, SMPS Capacitors

Test conditions: 1 Vrms, 1 kHz, 0 VDC bias




Typical Extended Temperature TCC Characterization of VHT/X7R, SMPS Capacitors


Test conditions: 1 Vrms, 1 kHz, 0 VDC bias



Typical Extended Temperature IR Characterization of C0G, SMPS Capacitors




Typical Extended Temperature IR Characterization of VHT/X7R, SMPS Capacitors









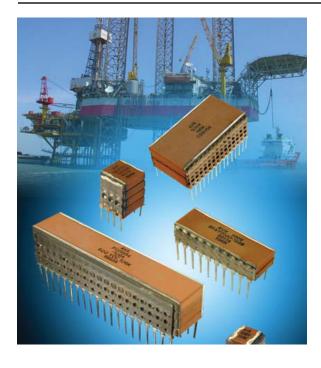

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

A Temperature Coefficient 0 ±30 ppm/°C, -55° to +200°C VHT/X7R: C Temperature Coefficient ±15%, -55°C to +125°C +15% - 56%, -55°C to +200°C

Capacitance Test (MIL-STD-202 Method 305) 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor 25°C

0.15% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz VHT/X7R: 2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

100K M Ω or 1000 M Ω -μF, whichever is less.

Insulation Resistance 125°C (MIL-STD-202 Method 302)

10K M Ω or 100 M Ω - μ F, whichever is less.

Insulation Resistance 200°C (MIL-STD-202 Method 302)

1K M Ω or 10 M Ω - μ F, whichever is less.

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA max charging current. (500 Volt units @ 750 VDC)

Moisture Resistance (MIL-STD-202 Method 106)

Ten cycles with no voltage applied.

Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)


Resistance To Solder Heat (MIL-STD-202, Method 210, Condition B, for 20 seconds)


Not RoHS Compliant

Styles: SMX1, SMX2, SMX3, SMX4, SMX5, SMX6

HOW TO ORDER

SMX Size Voltage Style Temperature SMX = Uncoated See 25 = 3Coefficient COG = ADimensions 50V = 5VHT/X7R = Cchart 100V = 1 200V = 2500V = 7







Note: Capacitors with VHT/X7R dielectric is not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.


 $10 \, \mu F = 106$ 100 µF = 107

KYOCERa

SMX Style for High Temperature Applications up to 200°C

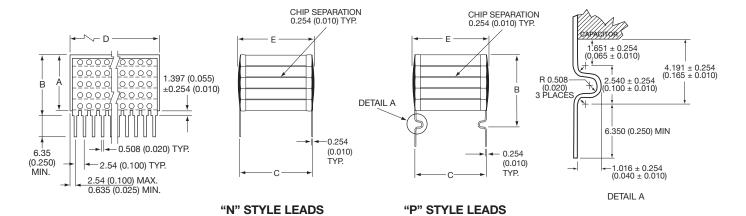








CHIP SEPARATION 0.254 (0.010) TYP. 0.254 (0.010) RAD. (TYP.) -0.254 (0.010) TYP. 1.905 (0.075) 1.778 (0.070) ±0.635 (0.025) ±0.254 (0.010)

"J" STYLE LEADS

"L" STYLE LEADS







DETAIL B

DIMENSIONS

millimeters (inches)

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
SMX1			11.4 (0.450)	52.1 (2.050)	12.7 (0.500)	20
SMX2		For "N" Style Leads: "A" Dimension Plus 1.651 (0.065)	20.3 (0.800)	38.4 (1.510)	22.1 (0.870)	15
SMX3	See page 46 for maximum "A"	For "J" & "L" Style Leads: "A" Dimension Plus 2.032 (0.080)	11.4 (0.450)	26.7 (1.050)	12.7 (0.500)	10
SMX4	Dimension	For "P" Style Leads: "A" Dimension Plus 4.445 (0.175)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
SMX5		For "Z" Style Leads: "A" Dimension Plus 3.048 (0.120)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
SMX6			31.8 (1.250)	52.1 (2.050)	34.3 (1.350)	20



SMX Style for High Temperature Applications up to 200°C

Max Capacitance (μF) Available Versus Style with Height (A) of 0.120" - 3.05mm

	SI	MX1_		_AN	120	SM	IX2		_AN	120	SM	IX3 _		_AN1	120	SM	IX4		_ AN	120	SM	X5		_ AN	120	SM	X6		_ AN1	20
STYLE	25V	′ 50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V
COG	1.0	.70	.40	.18	.068	1.2	1.0	.60	.26	.10	.50	.40	.20	.09	.033	.16	.13	.07	.02	.01	.05	.04	.02	.01	.0039	3.2	2.4	1.3	.50	.20
VHT/X7I	₹ -	18	10	3.9	1.8	-	27	15	5.6	2.7	12	8.2	4.7	1.8	.82	3.9	2.7	1.5	.56	.27	1.5	1.0	.56	.22	.10	-	56	33	12	5.6

Max Capacitance (µF) Available Versus Style with Height (A) of 0.240" - 6.10mm

		SM	IX1 _		_AN	240	SM	X2		_ AN2	240	SM	X3		_ AN	240	SM	X4_		_ AN	240	SM	X5		_ AN	240	SM	X6		_AN2	240
ST	YLE	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V
C)G	2.0	1.4	.80	.36	.13	2.4	2.0	1.2	.52	.20	1.0	.80	.40	.18	.068	.33	.26	.14	.05	.02	.10	.08	.05	.02	.0078	6.4	4.8	2.6	1.0	.40
VHT	/X7R	-	33	18	6.8	3.3	ı	47	27	10	4.7	22	15	8.2	3.3	1.5	6.8	4.7	2.7	1.0	.47	2.7	1.8	1.0	.39	.18	-	100	56	22	10

Max Capacitance (μF) Available Versus Style with Height (A) of 0.360" - 9.14mm

	SM	X1		_ AN	1360	SMX	(2		_AN	360	SMX	(3		_ AN	1360	SMX	K4		_ AN	1360	SMX	(5		_ AN	1360	SMX	6		_ AN	1360
STYLE	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V
COG	3.0	2.1	1.2	.54	.22	3.6	3.0	1.8	.78	.30	1.5	1.2	.60	.27	.10	.48	.39	.21	.07	.03	.15	.12	.07	.03	.011	10	7.2	3.9	1.5	.60
VHT/X7R	-	47	27	10	4.7	ı	68	39	15	6.8	33	22	12	5.6	2.2	12	6.8	3.9	1.5	.68	3.9	2.7	1.5	.56	.27	1	150	82	33	15

Max Capacitance (µF) Available Versus Style with Height (A) of 0.480" - 12.2mm

	SI	ΜX	1		_ AN	1480	SMX	(2		_ AN	480	SMX	(3		_ AN	1480	SMX	K4		_ AN	1480	SMX	(5		_AN	1480	SMX	6		_ AN	480
STYLE	25	5V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V
COG	4.	.0	2.8	1.6	.72	.27	4.8	4.0	2.2	1.0	.40	2.0	1.6	.80	.36	.130	.64	.52	.28	.10	.04	.20	.16	.10	.04	.015	13	9.6	5.2	2.0	.80
VHT/X7	'R -	-	68	39	15	6.8	-	100	56	22	10	47	33	18	6.8	3.3	15	10	5.6	2.2	1.0	5.6	3.9	2.2	.82	.39	-	220	120	47	22


Max Capacitance (μF) Available Versus Style with Height (A) of 0.650" - 16.5mm

	SM	Κ1		_ AN	1650	SMX	(2		_ AN	650	SMX	(3		_AN	1650	SMX	K4		_ AN	1650	SMX	(5		_AN	1650	SMX	6		_ AN	650
STYLE	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V	25V	50V	100V	200V	500V
COG	5.0	3.5	2.0	.90	.34	6.0	5.0	3.0	1.3	.50	2.5	2.0	1.0	.45	.160	.82	.65	.35	.12	.05	.25	.20	.12	.05	.019	16	12	6.5	2.5	1.0
VHT/X7R	-	82	47	18	8.2	-	120	68	27	12	56	39	22	8.2	3.9	18	12	6.8	2.7	1.2	6.8	4.7	2.7	1.0	.47	-	270	150	56	27

SMPS Capacitors Chip Assemblies

CH/CV - Radial, Dual-in-Line, 4 Terminal/SMT 'J' & 'L' Ranges





The CH/CV range exhibits low ESR/ESL making them well suited for high frequency applications. With its' PME technology, the range exhibits high current handling capabilities where as other technologies may not, making them the ideal choice for filtering, smoothing and decoupling circuit applications.

The CH/CV range uses a number of different lead frames types which reduces the thermomechanical stresses which makes them the designer's choice for high reliability applications. In combination with this the range uses a stacked capacitor design which saves on PCB space.

FEATURES

- BS9100 approved
- Voltage range 50-500 V DC
- Dielectrics 2C1/X7R
- · Customised ceramic capacitor packages and lead frames available.

Note: KYOCERA AVX does not recommend or advise the use of adhesives to secure the CH/ CV components to the PCB

ELECTRICAL SPECIFICATIONS

Temperature Coefficient CECC 30 000, (4.24.1)

2C1/X7R: C Temperature Characteristic - ± 15%, -55° to +125°C

Capacitance Test 25°C

2C1/X7R: Measured at 1 VRMS max at 1KHz

Dissipation Factor 25°C

2C1/X7R: 2.5% max at 1KHz, 1 VRMS max

Insulation Resistance 25°C

2C1/X7R: 100K megohms 1000 megohms-μF, whichever

is less

Dielectric Withstanding Voltage 25°C (Flash Test)

2C1/X7R: 250% rated voltage for 5 seconds with 50 mA max charging

current. (500 Volt units @ 150% rated voltage)

Life Test (1000 hrs) CECC 30 000 (4.23) 2C1/X7R: 200% rated voltage at +125°C.

(500 Volt units @ 120% rated voltage)

Damp Heat IEC 68-2-3, 56 days.

Thermal Shock IEC 68-2-14 -55°C to +125°C, 5 cycles

Resistance to Solder Heat IEC 68-2-20

Vibration IEC 68-2-6

10Hz - 2000Hz, 0.75mm or 98m/sec², 6 hrs.

Bump IEC 68-2-29 390m/sec2, 4000 bumps

MARKING

CH and CV 4x, 5x, 81-84

A5C 225K XXXXXX

Top line A (AVX). Voltage code, dielectric code. Middle line capacitance code, tolerance code. Bottom line 6 digit batch code.

Other CH, CV Styles

AVX 5C 156M

XXXXXX

Top line AVX.

Second line voltage code, dielectric code. Third line capacitance code, tolerance code.

Bottom line, 6 digit batch code.

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kvocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.




SMPS Capacitors (CV Style)





VERTICALLY MOUNTED RADIAL PRODUCT

Part Number format (CVxxxxxxxxxxxA2) Typical Part Number CV525C106MA30A2



DIMENSIONS

millimeters (inches)

Style	L (max)	H (max)	S (nom)	Lead Dia (nom)
CV41-44	10.6 (0.417)	8.7 (0.342)	8.2 (0.322)	0.7 (0.028)
CV51-54	11.9 (0.468)	10.7 (0.421)	10.2 (0.400)	0.9 (0.035)
CV61-64	16.5 (0.649)	13.6 (0.535)	15.2 (0.600)	0.9 (0.035)
CV71-74	17.8 (0.700)	21.6 (0.850)	15.2 (0.600)	0.9 (0.035)
CV76-79	22.7 (0.893)	16.6 (0.653)	21.2* (0.834)	0.9 (0.035)


^{*}Tolerance ± 0.8

millimeters (inches)

Style	T max
CV41/51/61/71/76	3.80 (0.150)
CV42/52/62/72/77	7.40 (0.291)
CV43/53/63/73/78	11.1 (0.437)
CV44/54/64/74/79	14.8 (0.583)

VERTICALLY MOUNTED 4 TERMINAL RADIAL PRODUCT

Part Number format (CVxxxxxxxxxxxxxxx4) Typical Part Number CV435C106MA30A4



DIMENSIONS

millimeters (inches)

Style	L (max)	H (max)	S (nom)	Lead Dia (nom)
CV43-44	10.6 (0.417)	8.7 (0.342)	8.2 (0.322)	0.7 (0.028)
CV53-54	11.9 (0.468)	10.7 (0.421)	10.2 (0.400)	0.9 (0.035)
CV63-64	16.5 (0.649)	13.6 (0.535)	15.2 (0.600)	0.9 (0.035)
CV73-74	17.8 (0.700)	21.6 (0.850)	15.2 (0.600)	0.9 (0.035)
CV78-79	22.7 (0.893)	16.6 (0.653)	21.2* (0.834)	0.9 (0.035)


^{*}Tolerance ± 0.8 (0.031)

millimeters (inches)

Style	T max	S 1
CV43/53/63/73/78	11.1 (0.437)	5.08 (0.200)
CV44/54/64/74/79	14.8 (0.583)	7.62 (0.300)

Note 1. This style is only available in 3 & 4 chip assemblies

HOW TO ORDER

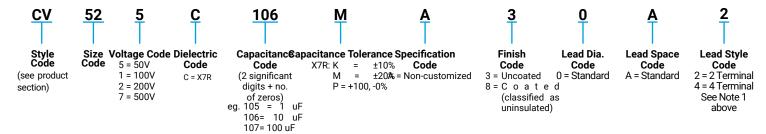

Not RoHS Compliant

Note: See page 139 for How to Order BS9100 parts


SMPS Capacitors (CH Style)

Chip Assemblies



HORIZONTALLY MOUNTED 4 TERMINAL RADIAL PRODUCT

Part Number format (CHxxxxxxxxxx3xx4) Typical Part Number CH782C106MA30A4



DIMENSIONS

millimeters (inches)

Style	L (max)	W (max)	S (nom)	S Lead Dia (nom)	S1 (nom)
CH42-44	10.6 (0.417)	8.7 (0.342)	8.2 (0.322)	0.7 (0.028)	5.08 (0.200)
CH52-54	11.9 (0.468)	10.7 (0.421)	10.2 (0.400)	0.9 (0.035)	7.62 (0.300)
CH62-64	16.5 (0.649)	13.6 (0.535)	15.2 (0.600)	0.9 (0.035)	7.62 (0.300)
CH72-74	17.8 (0.700)	21.6 (0.850)	15.2 (0.600)	0.9 (0.035)	15.2 (0.600)
CH77-79	22.7 (0.893)	16.6 (0.653)	21.2* (0.834)	0.9 (0.035)	10.2 (0.400)
CH82-84	14.1 (0.555)	38.2 (1.503)	10.2 (0.400)	0.9 (0.035)	27.9 (1.100)
CH87-89	17.8 (0.700)	38.2 (1.503)	15.2 (0.600)	1.0 (0.039)	27.9 (1.100)
CH92-94	24.0 (0.944)	40.6 (1.598)	21.2* (0.834)	1.2 (0.047)	30.5 (1.200)

^{*}Tolerance ± 0.8

NOTE: This style is only available in 2, 3 & 4 chip assemblies only


millimeters (inches)

Style	T max
CH42/52/62/72/77/87/92	7.4 (0.291)
CH43/53/63/73/78/88/93	11.1 (0.437)
CH44/54/64/74/79/89/94	14.8 (0.583)

HORIZONTALLY MOUNTED DUAL-IN-LINE PRODUCT

Part Number format (CHxxxxxxxxxx0A0)

Typical Part Number CH615C106MA30A0



Lead thickness 0.254 (0.010) $L1 = L2 \pm 0.5 (0.020)$

DIMENSIONS

millimeters (inches)


Style	L (max)	W (max)	S (nom)	No. of Leads per side
CH41-44	9.2 (0.362)	8.7 (0.342)	8.2 (0.322)	3
CH51-54	10.7 (0.421)	10.7 (0.421)	10.2 (0.400)	4
CH61-64	14.9 (0.586)	13.6 (0.535)	14.0 (0.551)	5
CH71-74	16.8 (0.661)	21.6 (0.850)	15.2 (0.600)	7
CH76-79	21.6 (0.850)	16.6 (0.653)	20.3* (0.800)	6
CH81-84	12.0 (0.472)	38.2 (1.503)	10.2 (0.400)	14
CH86-89	18.9 (0.744)	38.2 (1.503)	15.2 (0.600)	14
CH91-94	24.0 (0.944)	40.6 (1.598)	20.3* (0.800)	14

^{*}Tolerance ± 0.8 (0.031)

millimeters (inches)

Style	T max
CH41/51/61/71/76/81/86/91	3.8 (0.150)
CH42/52/62/72/77/82/87/92	7.4 (0.291)
CH43/53/63/73/78/83/88/93	11.1 (0.437)
CH44/54/64/74/79/84/89/94	14.8 (0.583)

HOW TO ORDER

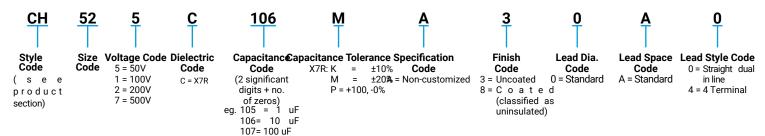

Not RoHS Compliant

Note: See page 139 for How to Order BS9100 parts

121219

SMPS Capacitors (CH Style)


Chip Assemblies



HORIZONTALLY MOUNTED 'L' LEAD SMT PRODUCT

Part Number format (CHxxxxxxxxxx0A7)

Typical Part Number CH411C275KA30A7

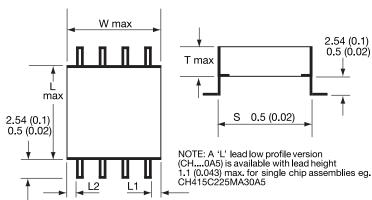

Lead width 0.5 (0.020) Lead thickness 0.254 (0.010) $L1 = L2 \pm 0.5 (0.020)$

DIMENSIONS

millimeters (inches)

Style	L (max)	W (max)	S (nom)	No. of Leads per side
CH41-44	9.2 (0.362)	8.7 (0.342)	8.2 (0.322)	3
CH51-54	10.7 (0.421)	10.7 (0.421)	10.2 (0.400)	4
CH61-64	14.9 (0.586)	13.6 (0.535)	14.0 (0.551)	5
CH71-74	16.8 (0.661)	21.6 (0.850)	15.2 (0.600)	7
CH76-79	21.6 (0.850)	16.6 (0.653)	20.3* (0.800)	6
CH81-84	12.0 (0.472)	38.2 (1.503)	10.2 (0.400)	14
CH86-89	18.9 (0.744)	38.2 (1.503)	15.2 (0.600)	14
CH91-94	24.0 (0.944)	40.6 (1.598)	20.3* (0.800)	14

^{*}Tolerance ± 0.8 (0.031)


millimeters (inches)

Style	T max
CH41/51/61/71/76/81/86/91	3.8 (0.150)
CH42/52/62/72/77/82/87/92	7.4 (0.291)
CH43/53/63/73/78/83/88/93	11.1 (0.437)
CH44/54/64/74/79/84/89/94	14.8 (0.583)

HORIZONTALLY MOUNTED 'J' LEAD SMT PRODUCT

Part Number format (CHxxxxxxxxxx0A8)

Typical Part Number CH411C275KA30A8

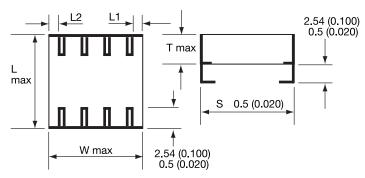

NOTE: A 'J' lead low profile version (CH....0A3) is available with lead height 1.1 (0.043) max. for single chip assemblies eg. CH515C475MA30A3

Lead width 0.5 (0.020) Lead thickness 0.254 (0.010) L1 = L2 + 0.5 (0.020)

DIMENSIONS

millimeters (inches)


				- (/
Style	L (max)	W (max)	S (nom)	No. of Leads per side
CH41-44	9.2 (0.362)	8.7 (0.342)	8.2 (0.322)	3
CH51-54	10.7 (0.421)	10.7 (0.421)	10.2 (0.400)	4
CH61-64	14.9 (0.586)	13.6 (0.535)	14.0 (0.551)	5
CH71-74	16.8 (0.661)	21.6 (0.850)	15.2 (0.600)	7
CH76-79	21.6 (0.850)	16.6 (0.653)	20.3* (0.800)	6
CH81-84	12.0 (0.472)	38.2 (1.503)	10.2 (0.400)	14
CH86-89	18.9 (0.744)	38.2 (1.503)	15.2 (0.600)	14
CH91-94	24.0 (0.944)	40.6 (1.598)	20.3* (0.800)	14

^{*}Tolerance ± 0.8 (0.031)

millimeters (inches)

Style	T max
CH41/51/61/71/76/81/86/91	3.8 (0.150)
CH42/52/62/72/77/82/87/92	7.4 (0.291)
CH43/53/63/73/78/83/88/93	11.1 (0.437)
CH44/54/64/74/79/84/89/94	14.8 (0.583)

HOW TO ORDER

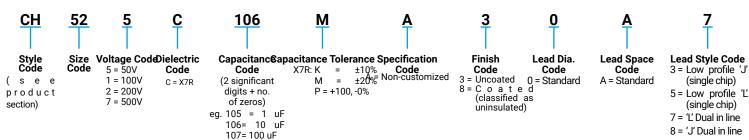

Note: See page 139 for How to Order BS9100 parts

Not RoHS Compliant



SMPS Capacitors (CH/CV Style)





X7R DIELECTRIC STABLE CERAMIC

CH/CV41-44 CH/CV51-54 Styles Styles			54	CH/CV61-64 CH/CV71-74 Styles Styles				CI	H/CV Sty		79			1-84 /les			CH8 Sty	6-89 les	•	CH91-94 Styles												
														V	oltag	je D(c															
Сар µF	50	100	200	500	50	100	200	500	50	100	200	500	50					100	200	500	50	100	200	500	50	100	200	500	50	100	200	500
0.12				41																												
0.15				41																												
0.18				41																												
0.22				41																												
0.27				42				51																								
0.33			41	42				51																								
0.39			41	42				51																								
0.47			41	42				51				61																				
0.56			41	43				52				61																				
0.68			42	43			51	52				61																				
0.82			42	44			51	52				61				71				76				81								
1		41	42	44			51	53			61	62				71				76				81								
1.2		41	42				52	53			61	62				71				76				81								
1.5		41	43				52	54			61	62				71				76				81				86				
1.8	41	41	43				52				61	62				72				77				82				86				
2.2	41	41	44			51	52				61	63			71	72			76	77			81	82				86				
2.7	41	41				51	53				62	63			71	72			76	77			81	82				87				91
3.3	41	42				51	53				62	64			71	72			76	77			81	82				87				91
3.9	42	42			51	51	54				62				72	73			77	78			81	83			86	87				91
4.7	42	42			51	52				61	62				72	73			77	78			82	83			86	87				91
5.6	42	42			51	52				61	63				72	74			77	79			82	84			86	88				92
6.8	42	43			52	52			61	61	63				72				77				82				86	88				92
8.2	43	43			52	52			61	61	64			71	73			76	78				82				87	89			91	92
10	43	44			52	53			61	62	64			71	73			76	78				83				87				91	92
12	44				53	53			62	62			71	71	74		76	76	79			81	83				87				92	93
15					53	54			62	62			71	71			76	76			81	81	84			86	87				92	93
18					54				62	63			71	72			76	77			81	81				86	88				92	94
22					54				62	63			72	72			77	77			81	82			86	86	88				92	
27									63	64			72	72			77	77			82	82			86	86	89				93	_
33									63	64			72	73			77	78			82	82			86	87			0.4	91	93	_
39									64				72	73			77	78			82	82			87	87			91	91	94	
47													73	74			78	79			82	83			87	87			91	92		<u> </u>
56													73				78				83	83			87	87			92	92		
68													74				79				83	84			87	88			92	92		_
82	-																				84				88	88			92	92		
100																									88	89			92	93		_
120 150																									89				93	93 94		
																													_	94		
180																													94			


NB Figures in cells refer to size within ordering information

090518

SMPS Molded Radial MLC Capacitors



SXP Style for High Temperature Applications up to 200°C

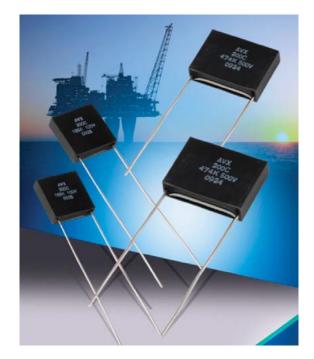

SXP-style, encapsulated radial leaded MLC capacitors are ideally suited for high temperature applications up to 200°C. This product is intended for downhole oil exploration, including logging while drilling, geophysical probes, as well as space, aerospace and hybrid automotive applications. This product supplements the SMX family of capacitors and offers mechanical protection to the ceramic element in extreme harsh environment. The high temperature solder utilized in the construction of SXP-style parts assures reliable operation in high temperature and rugged environments. The SXP-style capacitors are ideally suited for applications as DC filters in high power, high frequency motor drives, high pulsed-current circuitry, as well as standard electronic equipment designed for high temperature applications.

SXP-style, switch mode power supply capacitors are characterized with excellent performance. The main benefits of SXP product include:

- · Low ESR, low ESL
- · Low DC leakage
- Excellent high frequency performance

HOW TO ORDER





Voltage 50V = 5100V = 1200V = 2500V = 71000V = A 1500V = S

2000V = G

3000V = H



Temperature Coefficient COG = AVHT/X7R = C

104 **Capacitance Code**

(2 significant digits + number of zeros) 100 pF = 101 22,000 pF = 223 $1\mu F = 105$





Tolerance A = Standard COG: $J = \pm 5\%$

 $K = \pm 10\%$ $M = \pm 20\%$ VHT/X7R: $K = \pm 10\%$ $M = \pm 20\%$ Z = +80%, -20%

Tighter tolerances available upon request



Leads A = Standard Sn/Pb (min. 5% Pb)

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

A Temperature Coefficient 0 ±30 ppm/°C, -55° to +200°C VHT/X7R: C Temperature Coefficient ±15%, -55°C to +125°C +15% - 56%, -55°C to +200°C

Capacitance Test (MIL-STD-202 Method 305) 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor 25°C

0.15% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz VHT/X7R: 2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

100K M Ω or 1000 M Ω - μ F, whichever is less.

Insulation Resistance 125°C (MIL-STD-202 Method 302)

10K M Ω or 100 M Ω - μ F, whichever is less.

Insulation Resistance 200°C (MIL-STD-202 Method 302) 1K M Ω or 10 M Ω - μ F, whichever is less.


Dielectric Withstanding Voltage 25°C (Flash Test) 250% rated voltage for 5 seconds with 50 mA max charging current. (150% for 500 VDC and 120% for 1000 VDC and higher voltage ratings)

SMPS Molded Radial MLC Capacitors



SXP Style for High Temperature Applications up to 200°C

STYLE



DIMENSIONS millimeters (inches)

Style	Length (L) ±0.25 (±0.010)	Height (H) ±0.25 (±0.010)	Thickness (T) ±0.25 (±0.010)	Lead Spacing ±0.76 (±0.030)	LD ±0.05 (±0.002)	LL
SXP1	8.9 (0.350)	8.9 (0.350)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)	
SXP2	11.4 (0.450)	11.4 (0.450	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)	25.4 (1.000)
SXP3	12.7 (0.500)	12.7 (0.500)	5.08 (0.200)	10.2 (0.400)	0.64 (0.025)	25.4 (1.000)
SXP4	22.4 (0.880)	16.3 (0.640)	5.84 (0.230)	19.8 (0.780)	0.81 (0.032)	

CAPACITANCE RANGE

C₀G


St	yle	50V	100V	200V	500V	1000V	1500V	2000V	3000V
SXP1	(MIN)	1000pF	1000pF	1000pF	100pF	100pF	100pF	100pF	100pF
SAPI	(MAX)	.047µF	.027µF	8200pF	4700pF	2200pF	1000pF	560pF	270pF
SXP2	(MIN)	,01µF	1000pF	1000pF	100pF	100pF	100pF	100pF	100pF
SAFZ	(MAX)	.10µF	.056µF	.018µF	8200pF	4700pF	1800pF	1200pF	560pF
SXP3	(MIN)	.01µF	1000pF	1000pF	1000pF	1000pF	100pF	100pF	100pF
SAFS	(MAX)	.15µF	.068µF	.022pF	.012pF	6800pF	2700pF	1500pF	1000pF
SXP4	(MIN)	.01µF	.01µF	1000pF	1000pF	1000pF	1000pF	100pF	100pF
SAP4	(MAX)	.39µF	.22µF	.068pF	.033pF	.018µF	8200pF	4700pF	2700pF

VHT/X7R

St	yle	50V	100V	200V	500V	1000V	1500V	2000V	3000V
SXP1	(MIN)	.1μF	.01µF	.01µF	.01µF	.01µF	.01µF	1000pF	1000pF
SAPI	(MAX)	1.5µF	1.0µF	.33µF	.12µF	.056µF	.022µF	.012µF	4700pF
SXP2	(MIN)	.1μF	.1μF	.01µF	.01µF	.01µF	.01µF	.01µF	1000pF
SAPZ	(MAX)	2.7µF	1.8µF	.68µF	.27µF	.10µF	.056µF	.022µF	8200pF
SXP3	(MIN)	.01µF	.1μF	.01µF	.01µF	.01µF	.01µF	.01µF	.01µF
SAPS	(MAX)	3.9µF	2.7µF	1.0µF	.33µF	.15µF	.082µF	.033µF	.015µF
SXP4	(MIN)	1μF	.1μF	.1μF	.01µF	.01µF	.01µF	.01µF	.01µF
SAP4	(MAX)	12µF	8.2µF	2.7µF	1.0µF	.47µF	.22µF	.10µF	.039µF


TurboCap™



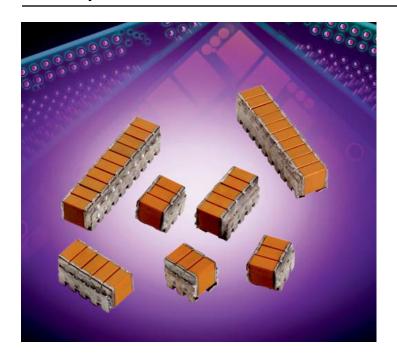

The TurboCap™, MLC capacitors from KYOCERA AVX are characterized with very high capacitance in a small volume. By vertical stacking of the ceramic elements, the footprint required for mounting the capacitors is greatly reduced. TurboCapsTM are ideally suited as filters in the input and output stages of switch mode power supplies (SMPS). With their ultra-low ESR, these capacitors are designed to handle high ripple current at high frequencies and high power levels. The DIP leads in either thruhole or surface mount configurations offer superior stress relief to the ceramic elements. The leads effectively decouple the parts from the board and minimize thermally or mechanically induced stresses encountered during assembly, temperature cycling or other environmental conditions.

TYPICAL APPLICATION OF TURBOCAP™ SMPS CAPACITORS FOR INPUT AND OUTPUT FILTERS IN DC/DC CONVERTERS

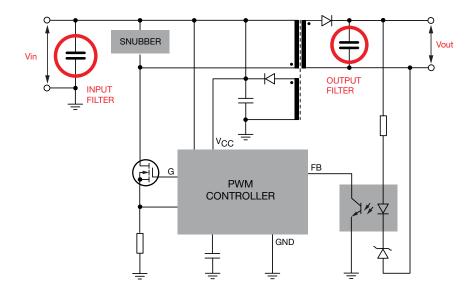

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.

TurboCap™



ELECTRICAL SPECIFICATIONS

Temperature Coefficient

Temperature Coefficient ±15%, -55° to +125°C

Capacitance Test (MIL-STD-202 Method 305) 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor 25°C


2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

500 M Ω - μ F, whichever is less.

Insulation Resistance 125°C (MIL-STD-202 Method 302)

50 M Ω -μF, whichever is less.

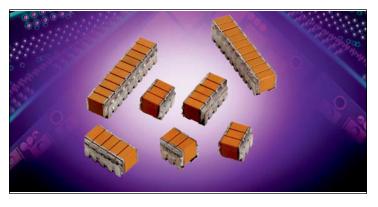

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA max charging current.

Life Test (1000 hrs)

X7R: 150% rated voltage at +125°C.

Moisture Resistance (MIL-STD-202 Method 106)

Ten cycles with no voltage applied.

Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)

Resistance To Solder Heat (MIL-STD-202, Method 210,

Condition B, for 20 seconds)

Typical ESR Performance (Ω)					
	27µF	47µF	100μF		
ESR @ 10KHz	0.007	0.004	0.003		
ESR @ 50KHz	0.003	0.002	0.0015		
ESR @ 100KHz	0.002	0.0015	0.001		

Not RoHS Compliant

HOW TO ORDER

ST12 Voltage Style 25V = 350V = 5 ST12 100V = 1ST20

Temperature Coefficient X7R = C

186 **Capacitance Code** (2 significant digits + number of zeros) $1 \mu F = 105$

10 µF = 106 $100 \, \mu F = 107$

Μ Capacitance Tolerance

Test Level A = Standard $M = \pm 20\%$

Termination

N = Straight Lead J = Leads formed in L = Leads formed out


03 Number of Leads Per Side 03 = 3 05 = 510 = 10

Styles: ST12 and ST20


CAPACITANCE (MF)

	S	Γ12		ST20			
		Volt	age				
Cap (µF)	50V	100V	25V	50V	100V		
.82							
1.3							
2.7							
8.2		03					
12		05					
14					03		
18	03						
22		10			05		
27	05			03			
47				05	10		
50	10						
68			03				
100			05	10			
220			10				




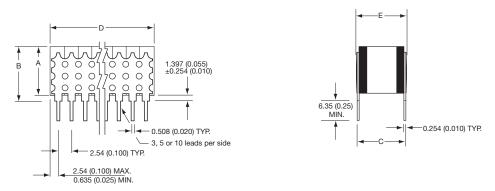

"N" STYLE LEADS

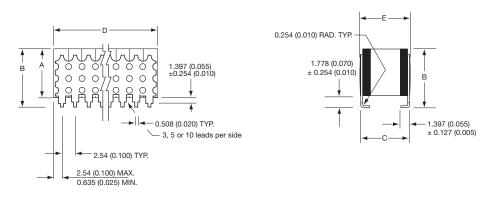

"J" STYLE LEADS

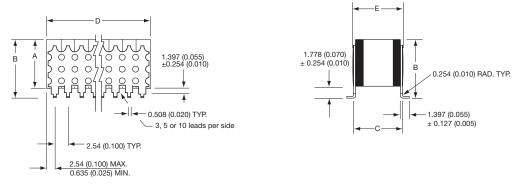

"L" STYLE LEADS


DIMENSIONS millimeters (inches)

Style	A (max.)	B (max.)*	C ± 0.635 (± 0.025)	D (max.)	E (max.)	Lead Style	No. of Leads Per Side
ST125C***M*N03	3.56 (0.140)	5.21 (0.205)	5.08 (0.200)	10.8 (0.425)	6.35 (0.250)	N	03
ST125C***M*N05	3.56 (0.140) 5.21 (0.205)		5.08 (0.200) 15.9 (0.625)		6.35 (0.250)	N	05
ST125C***M*N10	3.56 (0.140)	5.21 (0.205)	5.08 (0.200)	27.9 (1.100)	6.35 (0.250)	N	10
ST205C***M*N03	5.59 (0.220)	7.24 (0.285)	6.35 (0.250)	9.5(0.375)	7.62 (0.300)	N	03
ST205C***M*N05	5.59 (0.220)	7.24 (0.285)	6.35 (0.250)	14.6 (0.575)	7.62 (0.300)	N	05
ST205C***M*N10	5.59 (0.220)	7.24 (0.285)	6.35 (0.250)	27.3 (1.075)	7.62 (0.300)	N	10

^{*}The "B" dimension is defined for the "N" Style leads. The "L" and "J" Style Leads are 0.381 (0.015) longer. The ST12 will be 5.89 (0.220), the ST20 will be 7.62 (0.300).


RoHS Compliant TurboCap™



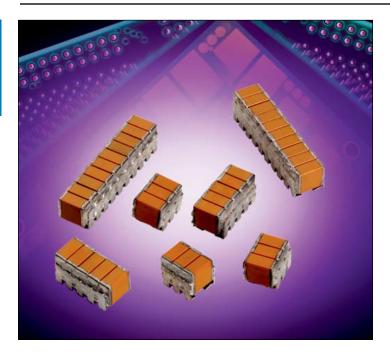

The RoHS Compliant TurboCapTM, MLC capacitors from KYOCERA AVX are characterized with very high capacitance in a small volume. By vertical stacking of the ceramic elements, the footprint required for mounting the capacitors is greatly reduced. TurboCapsTM are ideally suited as filters in the input and output stages of switch mode power supplies (SMPS). With their ultra-low ESR, these capacitors are designed to handle high ripple current at high frequencies and high power levels. The DIP leads in either thru-hole or surface mount configurations offer superior stress relief to the ceramic elements. The leads effectively decouple the parts from the board and minimize thermally or mechanically induced stresses encountered during assembly, temperature cycling or other environmental conditions.

TYPICAL APPLICATION OF TURBOCAP™ SMPS CAPACITORS FOR INPUT AND OUTPUT FILTERS IN DC/DC CONVERTERS

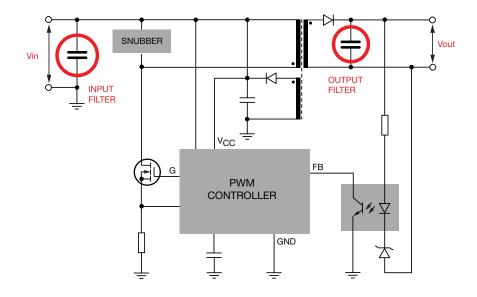

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.



RoHS Compliant TurboCap™



ELECTRICAL SPECIFICATIONS

Temperature Coefficient

±15%, -55° to +125°C **Temperature Coefficient**

Capacitance Test (MIL-STD-202 Method 305) 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor 25°C


2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302)

 $500 \text{ M}\Omega$ -μF, whichever is less.

Insulation Resistance 125°C (MIL-STD-202 Method 302)

 $50 \text{ M}\Omega$ -μF, whichever is less.

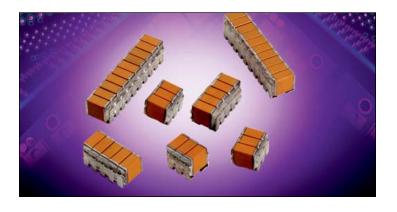

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA max charging current.

Life Test (1000 hrs)

X7R: 150% rated voltage at +125°C.

Moisture Resistance (MIL-STD-202 Method 106)

Ten cycles with no voltage applied.

Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)

Resistance To Solder Heat (MIL-STD-202, Method 210,

Condition B, for 20 seconds)

Ту	pical ESR Pe	erformance (G	2)
	27μF	47μF	100µF
ESR @ 10KHz	0.007	0.004	0.003
ESR @ 50KHz	0.003	0.002	0.0015
ESR @ 100KHz	0.002	0.0015	0.001



HOW TO ORDER

RT12 Style

Voltage 25V = 350V = 5 RT12 100V = 1

Temperature Coefficient X7R = C

186

Capacitance Code (2 significant digits + number of zeros) $1 \mu F = 105$ 10 μF = 106 100 μF = 107

М

Capacitance **Tolerance** $M = \pm 20\%$

Test Level A = Standard

Termination N = Straight Lead J = Leads formed in

L = Leads formed out

Per Side 03 = 305 = 510 = 10

03

Number

of Leads


Styles: RT12 and RT20

CAPACITANCE (MF)


	RT	12	RT20			
		Volta	ige			
Cap (µF)	50V	100V	25V	50V	100V	
.82						
1.3						
2.7						
8.2		03				
12		05				
14					03	
18	03					
22		10			05	
27	05			03		
47				05	10	
50	10					
68			03			
100			05	10		
220			10			

RoHS Compliant TurboCap™




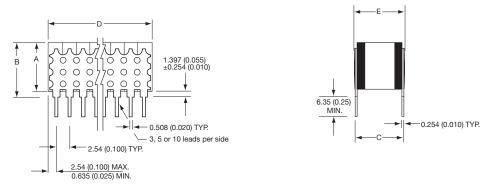

"N" STYLE LEADS

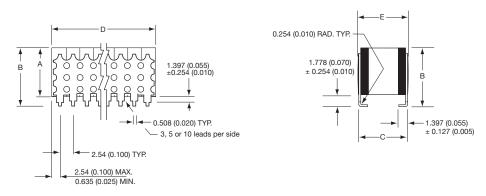

"J" STYLE LEADS

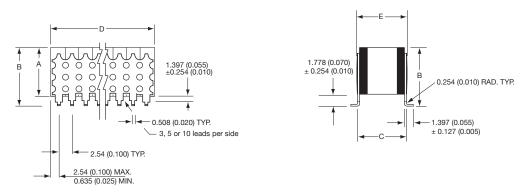

"L" STYLE LEADS


DIMENSIONS millimeters (inches)

Style	A (max.)	B (max.)*	C ± 0.635 (± 0.025)	D (max.)	E (max.)	Lead Style	No. of Leads Per Side
RT125C***M*N03	3.56 (0.140)	5.21 (0.205)	5.08 (0.200)	10.8 (0.425)	6.35 (0.250)	N	03
RT125C***M*N05	3.56 (0.140)	5.21 (0.205)	5.08 (0.200)	15.9 (0.625)	6.35 (0.250)	N	05
RT125C***M*N10	3.56 (0.140)	5.21 (0.205)	5.08 (0.200)	27.9 (1.100)	6.35 (0.250)	N	10
RT205C***M*N03	5.59 (0.220)	7.24 (0.285)	6.35 (0.250)	9.50 (0.375)	7.62 (0.300)	N	03
RT205C***M*N05	5.59 (0.220)	7.24 (0.285)	6.35 (0.250)	14.6 (0.575)	7.62 (0.300)	N	05
RT205C***M*N10	5.59 (0.220)	7.24 (0.285)	6.35 (0.250)	27.3 (1.075)	7.62 (0.300)	N	10

^{*}The "B" dimension is defined for the "N" Style leads. The "L" and "J" Style Leads are 0.381 (0.015) longer. The RT12 will be 5.89 (0.220), the RT20 will be 7.62 (0.300).

Mini-TurboCap™



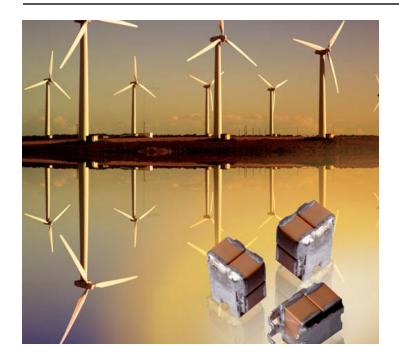


The Mini-TurboCap is constructed from state-of-the-art BME (Base Metal Electrode) MLC Capacitors achieving very high CV, as well as, ultra low ESR and ESL. The resulting, very large capacitance values allow for component and board space reduction. Stress relieving lead frames provide effective mechanical decoupling of the ceramic chips from the board, minimizing the stress created by board flexing, vibration and temperature cycling. High temperature solder is used to attach chips to the lead frame thus eliminating the risk of solder reflow during assembly to the board.

CAPACITANCE (MF)

Voltage						
Cap (μF) 25V 50V 100V						
8.2						
18						
39*						
82*						

Not RoHS Compliant

HOW TO ORDER



Additional stacked/lead configurations available upon request. Consult with KYOCERA AVX factory personnel for details.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

±15%, -55° to +125°C

Capacitance Test (MIL-STD-202, Method 305) 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor

5% Max @ 25°C, for 50VDC and 100VDC voltage ratings

Insulation Resistance 25°C (MIL-STD-202, Method 302) 500 MΩ- μ F (*100 MΩ- μ F)

Insulation Resistance 125°C (MIL-STD-202, Method 302) 50 MΩ- μ F (*10 MΩ- μ F)

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA max charging current.

Life Test Capabilities (1000 hrs)


150% rated voltage at +125°C.




Mini-TurboCap™




STYLE/DIMENSIONS



"N" STYLE LEADS

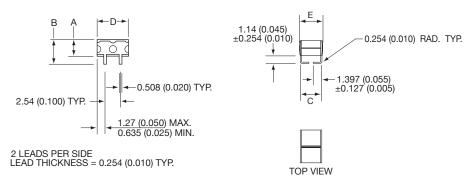

"K" STYLE LEADS

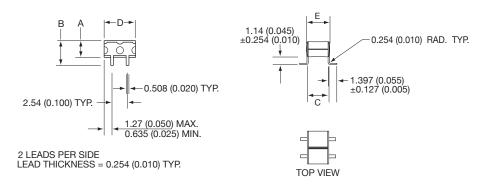

"M" STYLE LEADS

DIMENSIONS millimeters (inches)


Style	A (max.)	B (max.)	C ± 0.635 (± 0.025)	D ± 0.635 (± 0.025)	E (max.)	No. of Leads Per Side
ST10	5.59 (0.220)	7.00 (0.275)	3.81 (0.150)	5.33 (0.210)	4.83 (0.190)	02

PART NUMBER AVAILABLE OPTIONS (2X2)

Part Number	Temperature Coefficeient	Voltage	Capacitance Code	Capacitance	Capacitance Tolerance	Number Of Leads	Lead Styles
ST103C826MA-02	X7R	25	826	82µF	±20%	2	N, K, M
ST105C186MA-02	X7R	50	186	18µF	±20%	2	N, K, M
ST105C396MA-02	X7R	50	396	39µF	±20%	2	N, K, M
ST101C825MA-02	X7R	100	825	8.2µF	±20%	2	N, K, M

RoHS Compliant Mini-TurboCap™



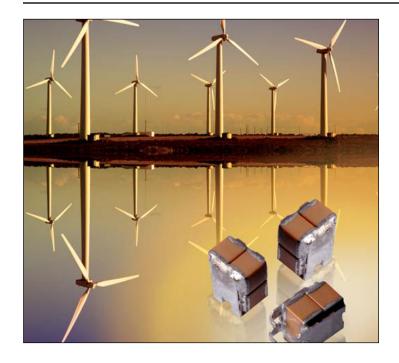


The RoHS Compliant Mini-TurboCapTM is constructed from stateof-the-art BME (Base Metal Electrode) MLC Capacitors achieving very high CV, as well as, ultra low ESR and ESL. The resulting, very large capacitance values allow for component and board space reduction. Stress relieving lead frames provide effective mechanical decoupling of the ceramic chips from the board, minimizing the stress created by board flexing, vibration and temperature cycling. High temperature solder is used to attach chips to the lead frame thus eliminating the risk of solder reflow during assembly to the board.

CAPACITANCE RANGE

Voltage						
Cap (μF) 25V 50V 100V						
8.2						
18						
39*						
82*						



HOW TO ORDER



Additional stacked/lead configurations available upon request. Consult with KYOCERA AVX factory personnel for details.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

±15%, -55° to +125°C

Capacitance Test (MIL-STD-202, Method 305) 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor

5% Max @ 25°C, for 50VDC and 100VDC voltage ratings

Insulation Resistance 25°C (MIL-STD-202, Method 302) 500 MΩ- μ F (*100 MΩ- μ F)

Insulation Resistance 125°C (MIL-STD-202, Method 302) 50 MΩ- μ F (*10 MΩ- μ F)

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA max charging current.

Life Test Capabilities (1000 hrs)


150% rated voltage at +125°C.




RoHS Compliant Mini-TurboCap™




STYLE/DIMENSIONS



"N" STYLE LEADS

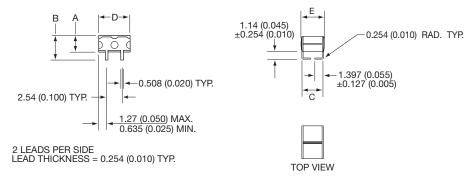

"K" STYLE LEADS

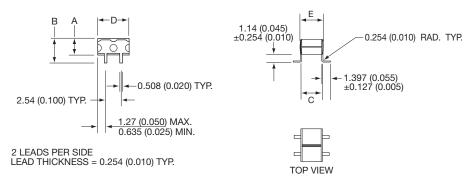

"M" STYLE LEADS

DIMENSIONS millimeters (inches)

Style	A (max.)	B (max.)	C ± 0.635 (± 0.025)	D ± 0.635 (± 0.025)	E (max.)	No. of Leads Per Side
RT10	5.59 (0.220)	7.00 (0.275)	3.81 (0.150)	5.33 (0.210)	4.83 (0.190)	02

PART NUMBER AVAILABLE OPTIONS (2X2)

Part Number	Temperature Coefficeient	Voltage	Capacitance Code	Capacitance	Capacitance Tolerance	Number Of Leads	Lead Styles
RT103C826MA-02	X7R	25	826	82µF	±20%	2	N, K, M
RT105C186MA-02	X7R	50	186	18µF	±20%	2	N, K, M
RT105C396MA-02	X7R	50	396	39µF	±20%	2	N, K, M
RT101C825MA-02	X7R	100	825	8.2µF	±20%	2	N, K, M

Lead Free Ceramic Capacitor in Molded

SM Leadframe

MH Style Ceramic Capacitor





The MH components use a X7R high capacitance value ceramic capacitor in a surface mount precision made moulded case.

The MH capacitor combine the ceramic attributes of very low ESR, non-polar construction, excellent high frequency behaviour and voltage stress capabilities and wide temperature range; with the enhanced mechanical protection of a moulded case. The moulded case is UL94 V-0 flame retardant and the MH is RoHs and also AEC-Q200 compliant.

The MH range provides a lead frame solution to customers who have previously been unable to use large case ceramic capacitors because of mechanical stressing concerns.

For those applications where a tin termination is not acceptable, a Tin/Lead termination is available.

FEATURES

- Capacitance: 2.2u F 22 μF
- · MHs are AEC-Q200 compliant
- Voltage Range DC: 25V 100V
- Enhanced thermo mechanical stress resistance.

HOW TO ORDER

MH MH Series

Case see table MLCC Count

1 Voltage 5 = 50V 1 = 100V

C Dielectric

Capacitance Code (In pF) 2 Sig. Digits + Number of

Zeros

475

M Capacitance Tolerance K = ±10%

M = ±20%

Failure Rate A = Not Applicable

Т Termination T = Tin Plated B = Tin/Lead Plated

Packaging 4 = 13" Reel 6 = Waffle


Special Code A = Std.Product

MH X7R RANGE

	Cap µF	25V	50V	100V
225	2.2			
335	3.3			
475	4.7			
685	6.8			
106	10			
156	15			
226	22			

"V" CASE DIMENSIONS: MILLIMETERS (INCHES)

L	7.3±0.2 0 (0.287 ±0.008)
W	6.1 + 0.20 - 0.10 (0.24 + 0.008 - 0.004)
Н	3.45±0.30 (0.136±0.012)
W ₁	3.1±0.20 (0.120±0.008)
Α	1.4 + 0.30 - 0.20 (0.055 + 0.012 - 0.008)
S Min	4.40 (0.173)



PACKAGING QUANTITY

7" Reels 400 13" Reels 1500 Waffle Pack 108





TS 16949, ISO 14001 Certified Manufacture

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip

RH Style - Surface Mount 'J' Lead Range





The RH range uses high volumetric efficient X7R capacitors in a "J" style lead frame.

The range of components are uncoated and are suitable for input or output filter capacitors in high frequency DC-DC convertor, automotive, telecom, industrial and military applications.

When large ceramic capacitors are used in applications they can easily be affected by stresses caused by temperature variations, thermal shock, mechanical vibrations and PCB bend movement. The RH range is designed with a "J" type lead frame which greatly reduces all of these thermo mechanical stresses experienced by large capacitors. The RH range allows the capacitors to be doubled stacked so a higher volumetric efficiency can be achieved by the customer and this saves PCB space.

FEATURES

- RH 21/22 are AEC-Q200 compliant.
- RH range has low ESR/ESL capability
- PCB space saving using double stacked MLCCs
- · Enhanced thermo mechanical stress resistance Note: KYOCERA AVX does not recommend or advise the use of adhesives to secure the RH components to the PCB.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient CECC 30 000, (4.24.1) X7R: C Temperature Characteristic - ± 15%, -55°C to +125°C

Capacitance Test

Measured at 1 VRMS max at 1KHz

Dissipation Factor 25°C

2.5% max at 1KHz, 1 VRMS max

Insulation Resistance 25°C

100K megohms or 1000 megohms-µF, whichever is less

Dielectric Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50 mA max charging current. (500 Volt units @ 150% rated voltage)

Life Test (1000 hrs) CECC 30 000 (4.23)

200% rated voltage at +125°C.

(500 Volt units @ 120% rated voltage)

Thermal Shock IEC 68.2.14

-55°C to +125°C, 5 cycles

Resistance to Solder Heat IEC 68.2.20


DIMENSIONS: MILLIMETERS (INCHES)

Typical ESR (mΩ) 3 μF, 100V X7R					
ESR @ 100KHz	17				
ESR @ 500KHz	12				
ESR @ 1MHz	14				

DIMENSIONS

millimeters (inches)

					0 (11101100)	
Style	L max	W max	H max	S ± 0.1 (±0.004)	h	No. of leads per side
RH21	7.20 (0.283)	5.40 (0.213)	4.60 (0.181)	2.50 (0.098)	1.50 ±0.30 (0.059 ±0.012)	2
RH22	7.20 (0.283)	5.40 (0.213)	7.50 (0.295)	2.50 (0.098)	1.50 ±0.30 (0.059 ±0.012)	2
RH31	7.62 (0.300)	7.00 (0.270)	5.08 (0.200)	5.08 (0.200)	1.78 ±0.25 (0.070 ±0.010)	3
RH32	7.62 (0.300)	7.00 (0.270)	8.13 (0.320)	5.08 (0.200)	1.78 ±0.25 (0.070 ±0.010)	3
RH41	9.20 (0.362)	8.70 (0.342)	4.90 (0.192)	5.08 (0.200)	1.60 ±0.10 (0.062 ±0.004)	3
RH42	9.20 (0.362)	8.70 (0.342)	8.20 (0.323)	5.08 (0.200)	1.60 ±0.10 (0.062 ±0.004)	3
RH51	10.7 (0.421)	10.7 (0.421)	4.90 (0.192)	7.62 (0.300)	1.60 ±0.10 (0.062 ±0.004)	4
RH52	10.7 (0.421)	10.7 (0.421)	8.20 (0.323)	7.62 (0.300)	1.60 ±0.10 (0.062 ±0.004)	4
RH61	14.9 (0.586)	13.6 (0.535)	4.90 (0.192)	10.2 (0.400)	1.60 ±0.10 (0.062 ±0.004)	5
RH62	14.9 (0.586)	13.6 (0.535)	8.20 (0.323)	10.2 (0.400)	1.60 ±0.10 (0.062 ±0.004)	5

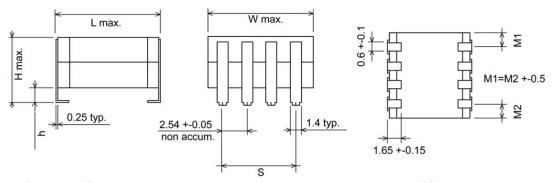

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.







X7R STABLE DIELECTRIC

	RH21/RH22 Style			RH31/RH32 Style					RH41/RH42 Style			RH51/RH52 Style				RH61/RH62 Style					
									Vo	ltage D											
Сар µF	25	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	500	50	100	200	50
0.047					İ																
0.056																					
0.068					İ				RH31												
0.082																					
0.1																					
0.12																					
0.15									RH32				RH41								
0.18																					
0.22																					
0.27								RH31													
0.33													RH42				RH51				
0.39												RH41									
0.47																					
0.56								RH32									RH52				
0.68																					RI
0.78																RH51					
0.82							RH31					RH42									
1																					
1.2																					RH
1.5						RH31					RH41					RH52				RH61	
1.8																					
2.2					ļ		RH32			RH41											
3			DI IO1		ļ	DLIGO					DILIAO									DUIGO	
3.3 3.9			RH21		-	RH32					RH42				RH51					RH62	
4.7										RH42					кнэт						
5.6										RH4Z		<u> </u>			RH52		 				
6.8					1			-						RH51	КПЭД		-		RH61		-
8.2		RH21			-									КПЭТ				RH61	KHOT		\vdash
10		KHZI			-									RH52	RH51			КПОТ			╁
12			RH22		<u> </u>									KHIJZ	1(1131				RH62		\vdash
15	RH21	RH22	MIZZ											RH51				RH62	KITOZ		+
18	111121	111122			1									111101	RH52			MIOZ			
22														RH52	.11102						\vdash
33	RH22	DEV	DEV											.11102	DEV						t
47					<u> </u>									DEV							
68	DEV				1																t

PACKAGING

For availability of further parts in the RH21/RH22 Series, contact manufacturing.

Qty/Reel 13"	Max. Qty/Waffle Pack
800	270
500	270
800	108
500	108
see note	108
500	100
750	88
see note	88
500	42
see note	42
	500 800 500 see note 500 750 see note 500

Note: T&R is not yet available. Contact manufacturing for further information as this will be available in the future.

BME Available in RoHS and Non-RoHS PME Available Only in Non-RoHS



HOW TO ORDER

5 C 225 3 RH 31 M 0 3 Voltage **Lead Style** Size Code Specification **Lead Space** Style Code Dielectric Capacitance Capacitance Package Lead Dia. Code Code Code Tolerance Code Code 3 = Waffle Pack Code Code Code (see table (2 significant 3 = 'J' Lead 3 = 25V C = X7R $K = \pm 10\%$ A = Standard 0 = Standard A = Tape & Reel 5 = 50Vabove) digits + no. of $M = \pm 20\%$ 1 = 100Vzeros) 2 = 200Veg. 105 = 1 uF 7 = 500V104= 0.1 uF

Custom Geometries and Lead Configurations



For the requirements that cannot be satisfied by standard SMPS style products (SM0-style or SM9-style), KYOCERA AVX offers leading edge solutions in custom configuration and packaging. Ranging from unique geometries, lead configurations, packaging and stress relief mounting options, KYOCERA AVX has optimized solutions for a wide range of customer specific designs. The solutions provided by KYOCERA AVX maintain high reliability of stacked capacitor product originally developed by KYOCERA AVX and historically recognized as the highest reliability product in the market. Custom packaging options provide solutions that eliminate reliability concerns in the next level assembly. These custom options provide the following benefits:


eliminate soldering requirements altogether by providing means

of electrical/mechanical connection to the circuit

 provide options for remote soldering away from large ceramic capacitor body and eliminating the risk of thermal shock (refer to photograph with soft, insulated leads soldered to the stacked capacitor using high melting point SN10 solder)

Many other innovations are available from KYOCERA AVX. Let them apply these ideas to your application specific requirements. Please contact KYOCERA AVX for a solution that will meet demands of your program requirements.

CUSTOM LEAD CONFIGURATIONS...



CUSTOM PACKAGING...



Assembly Guidelines



Reliability

KYOCERA AVX has been involved in numerous military and customer High Reliability programs for over 40 years.

Reliability [% Failure Rate (FR%) or Mean Time Between Failure (MTBF)] is based on the number of failures and the cumulative test hours expanded by test versus use acceleration factors. The acceleration factors are calculated according to the following relationships:

Military Reliability levels are usually expressed in terms of rated

$$\begin{array}{ll} \textit{Temperature} \\ \textit{Acceleration} &= 10 \\ & & & \\ & & \\ \textit{T}_T = \textit{test temp. (°C)} \\ & & \\ \textit{T}_U = \textit{use temp. (°C)} \\ & & \\ \textit{V}_U \\ & & \\ \textit{V}_T = \textit{test voltage} \\ & \\ \textit{V}_U = \textit{use voltage} \\ & \\ \textit{V}_U = \textit{use voltage} \\ \end{array}$$

conditions versus test conditions (generally 125°C and 2X WVDC). If actual conditions are less than rated, the reliability levels will improve significantly over rated and can be calculated by use of the above relationship for determining accelerated test hours. For example, if the actual use conditions were 75°C and 1/2 WVDC rating for a 125°C rated part, the acceleration factors are 64X for voltage and 100X for temperature. Reliabilities based on current testing can be obtained by contacting KYOCERA AVX.

General Processing Guidelines Soldering

The SM styles capacitors are generally quite large relative to other types of MLC capacitors. As a result of the size, precautions must be taken before subjecting the parts to any soldering operation in order to prevent thermal shock. Preheat prior to sol dering is essential. The heating rate of the SupraCap® ceramic bodies during preheat must not exceed 4°C/second. The preheat temperature must be within 50°C of the peak temperature reached by the ceramic bodies, adjacent to lead material, through the soldering process. The leads are attached to the chip stack with 10 / 88 / 2 (Sn / Pb / Ag, Solidus 268°C, Liquidus 290°C).

Vibration Specifications*

Due to the weight of the SupraCap® and the size and strength of the lead frame used, when the SupraCap® is to be used in an application where it will undergo high frequency vibration, we strongly recommend using our potted SM9 styles SupraCap®.

If other DIP styles SupraCap® are to be used in a high frequency vibration environment, the SupraCap® should be supported in some way to prevent oscillation of the capacitor assembly which will result in lead breakage. If "strapping" the SupraCap® to the board is the chosen method of support, care should be taken not to chip the ceramic or apply undue pressure so that cracking of the ceramic results.

If bonding the SupraCap® to the board with adhesive, consideration of the CTE (coefficient of thermal expansion) is necessary. A mismatch between the CTE of the ceramic and adhesive can cause the ceramic to crack during temperature cycles.

Processing Guidelines*

There are practical size limitations for MLCs which prohibit reliable direct mounting of chip capacitors larger than 2225 (.22" x .25") to a substrate. These large chips are subject to thermal shock racking and thermal cycling solder joint fatigue. Even 1812 (.18" x .12") and 2225 chip capacitors will have solder joint failures due to mechanical fatique after ≈ 1500 thermal cycles from 0 to 85°C on FR4 and ≈ 3000 cycles on alumina from -55 to 125°C. This is due to differences in the Coefficient of Thermal Expansion (CTE) between MLCs and substrate materials used in hybrids and surface mount assemblies. Materials used in the manufacture of all electronic components and substrates have wide ranges of CTEs as shown in Table 1.

Table I CTEs of Typical Components and Substrates

Material	CTE (ppm/°C)
Alloy 42	5.3
Alumina	~7
Barium Titanate Capacitor Body	10-12
Copper	17.6
Copper Clad Invar	6-7
Filled Epoxy Resin (<tr)< td=""><td>18-25</td></tr)<>	18-25
FR4/G-10 PC Board (X, Y)	~18
Nickel or Steel	15
Polyimide/Glass PCB (X, Y)	~12
Polyimide/Kevlar PCB (X, Y)	~7
Tantalum	6.5
Tin Lead Alloys	~27

Linear Displacement

This CTE difference translates into mechanical stress that is due to the linear displacement of substrate and component. Linear displacement is a function of Δ CTE (CTE_{sub} – CTE_{comp}) and the overall length of the component. Long components/ substrates have large linear displacements even with a small Δ CTE which will cause high stress in the solder joints and fatigue after a few temperature cycles. Figure 1 shows linear displacement for conditions where Δ CTE is positive and negative.

 $^{{\}rm *Reference\ KYOCERA\ AVX\ Technical\ Information\ paper,\ "Processing\ Guidelines\ for}$ SMPS Capacitors."

Assembly Guidelines






Figure 1. Linear Displacement Between Component and Substrate

General Processing Guidelines

Figure 2 shows the location of maximum stress in the solder joint due to positive and negative DCTE and linear displacement.




Figure 2

Stress Relief

Leadframes on larger capacitor sizes (greater than 2225) must be used to minimize mechanical stress on the solder joints during temperature cycling which is normal operation for power supplies (Figure 3). Failing solder joints increase both ESR and ESL causing an increase in ripple, noise and heat, accelerating failure.

Lavout

Effective solder dams must be used to keep all molten solder on the solder lands during reflow or solder will migrate away from the land, causing opens or weak solder joints. High frequency output filters cannot use low power layout techniques such as necked down conductors because of the stringent inductance requirements.




Figure 3. "J" and "L" Leadframes Mounted on Capacitors to Relieve Stress

Inductance

Adding leadframes has a small impact on component inductance but this is the price that must be paid for reliable operation over temperature. Figure 4 shows typical leadframe inductance that is added for two lead standoff distances (0.020" and 0.050") versus the number of leads along one side of SupraCap® which are specifically designed output filter capacitors for 1 MHz and above switchers. The actual inductance will be somewhat less because the leadframes flare out from the lead where the lead-frame is attached to the capacitor body.




Figure 4. Number of Leads on One Side of Capacitor vs. Total Leadframe Inductance vs. Substrate Standoff Height

Very high frequency switch mode power supplies place tremendous restrictions on output filter capacitors. In addition to handling high ripple current (low ESR), ESL must approach zero nano henrys, part must be truly surface mountable and be available in new configurations to be integrated into transmission lines to further reduce inductance with load currents greater than 40A at 1 MHz and as frequencies move above 1-2 MHz.

The total inductance is the sum of each side of the part where the inductance of one side is the parallel combination of each lead in the leadframe. That inductance is given by:

 $L(nH) = 5x\ell [ln(2x\ell)/(B+C) + 1/2]$ Where ℓ = lead length in inches In = natural log B+C = lead cross section in inches so $L_1(nH) = 2xL(nH)$ where L_1 is the total inductance of the leadframe.

SK Style - Commercial Radial Range



PRODUCT OFFERING - COG, N1500 AND X7R


SK styles are conformally coated MLC capacitors for input or output filtering in switch mode power supplies. They are specially processed to handle high currents and are low enough in cost for commercial SMPS application.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

COG: A Temperature Coefficient - 0 ±30 ppm/°C, -55° to +125°C N1500: 4 Temperature Coefficient - -1500 ±250 ppm/°C X7R: C Temperature Coefficient - ±15%, -55° to +125°C Capacitance Test (MIL-STD-202 Method 305) COG, N1500: 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz X7R: 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz Dissipation Factor 25°C

COG, N1500: 0.15% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz X7R: 2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz Insulation Resistance 25°C (MIL-STD-202 Method 302) COG, N1500, X7R: 100K M Ω or 1000 M Ω - μ F, whichever is less.



Insulation Resistance 125°C (MIL-STD-202 Method 302) COG, N1500, X7R: 10K M Ω or 100 M Ω - μ F, whichever is less. Dielectric Withstanding Voltage 25°C (Flash Test)

COG, N1500, X7R: 250% rated voltage for 5 seconds with 50 mA max charging current. (500 Volt units @ 750 VDC)

Life Test (1000 hrs)

COG, N1500, X7R: 200% rated voltage at +125°C. (500 Volt units @ 600 VDC)

Moisture Resistance (MIL-STD-202 Method 106)


COG, N1500, X7R, Z5U: Ten cycles with no voltage applied.

Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)

Resistance To Solder Heat (MIL-STD-202, Method 210, Condition B, for 20 seconds)

HOW TO ORDER

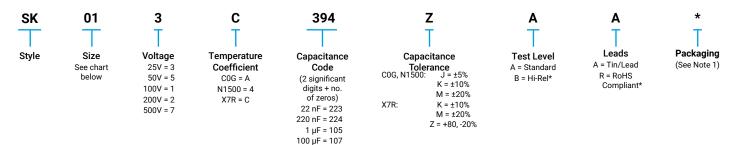

Note 1: No suffix signifies bulk packaging, which is KYOCERA AVX standard packaging. SK01, SK*3, SK*4, SK*5, SK*6, SK*9 & SK*0 are available taped and reel per EIA-468. Use suffix "TR1" if tape & reel is required.

Note 2: Capacitors with X7R dielectric are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations. *Hi-Rel screening consists of 100% Group A (B Level), Subgroup 1 per MIL-PRF-49470.

TAPE & REEL QUANTITY						
Part	Pieces					
SK01	2000					
SK03/SK53	1000					
SK04/SK54	1000					
SK05/SK55	500					
SK06/SK56	500					
SK07	N/A					
SK08	N/A					
SK09/SK59	500					
SK10/SK60	400					

RoHS						
Part	Available					
SK01	Yes					
SK03/SK53	Yes					
SK04/SK54	Yes					
SK05/SK55	Yes					
SK06/SK56	Yes					
SK07	Yes					
SK08	Yes					
SK09/SK59	Yes					
SK10/SK60	Yes					

Not RoHS Compliant





For RoHS compliant products, please select correct termination style.

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.





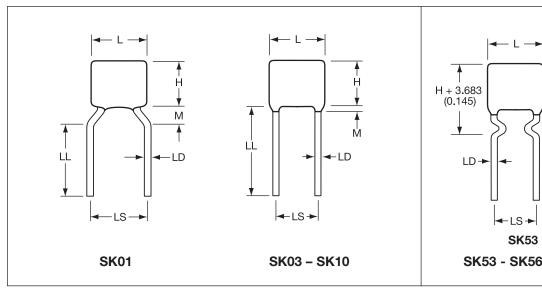



C0G Capacitance Range (µF)

Style	25 WVDC min./max.	50 WVDC min./max.	100 WVDC min./max.	200 WVDC min./max.	500 WVDC min./max.
SK01	.001/0.015	.001/0.012	.001/0.010	.0010/0.0056	.0010/0.0018
SK03/SK53	.01/0.056	.01/0.047	.01/0.039	.001/0.022	.001/0.0068
SK04/SK54	.01/0.12	.01/0.10	.01/0.082	.01/0.047	.001/0.015
SK05/SK55	.01/0.18	.01/0.15	.01/0.12	.01/0.068	.001/0.022
SK06/SK56	.10/0.56	.01/0.47	.01/0.39	.01/0.22	.01/0.068
SK07	.10/0.68	.01/0.56	.01/0.47	.01/0.27	.01/0.082
SK08	.82/1.20	.68/1.10	.56/0.82	.33/0.47	.10/0.15
SK09/SK59	.10/0.27	.01/0.22	.01/0.18	.01/0.10	.001/0.039
SK10/SK60	.10/0.68	.01/0.56	.01/0.47	.01/0.27	.01/0.082

X7R Capacitance Range (µF)

Style	25 WVDC min./max.	50 WVDC min./max.	100 WVDC min./max.	200 WVDC min./max.	500 WVDC min./max.
SK01	.01/0.39	.01/0.33	.01/0.27	.01/0.12	.001/0.047
SK03/SK53	.10/2.2	.10/1.8	.01/1.5	.01/0.68	.01/0.27
SK04/SK54	.10/4.7	.10/3.3	.10/2.7	.01/1.0	.01/0.47
SK05/SK55	.10/6.8	.10/6.8	.10/3.9	.10/1.8	.01/0.68
SK06/SK56	1.0/15	1.0/10	.10/5.6	.10/3.9	.10/1.5
SK07	1.0/18	1.0/14	1.0/8.2	.10/4.7	.10/2.2
SK08	22/33	15/22	10/15	5.6/8.2	2.2/3.9
SK09/SK59	.10/8.2	.10/5.6	.10/3.3	.10/2.2	.10/1.2
SK10/SK60	1.0/18	1.0/12	.10/6.8	.10/4.7	.10/2.2

N1500 Capacitance Range (µF)

Style	50 WVDC min./max.	100 WVDC min./max.	200 WVDC min./max.	500 WVDC min./max.
SK01	.001/0.022	.001/0.018	.001/0.012	.001/0.0027
SK03/SK53	.01/0.10	.01/0.082	.01/0.056	.001/0.012
SK04/SK54	.01/0.22	.01/0.15	.01/0.12	.001/0.027
SK05/SK55	.01/0.27	.01/0.22	.01/0.18	.001/0.039
SK06/SK56	.01/0.82	.01/0.68	.01/0.47	.01/0.12
SK07	.01/1.00	.01/0.82	.01/0.56	.01/0.15
SK08	.68/2.00	.88/1.60	.62/1.20	.21/0.30
SK09/SK59	.01/0.56	.01/0.39	.01/0.27	.01/0.068
SK10/SK60	.01/1.00	.01/0.82	.01/0.68	.01/0.15

DIMENSIONS millimeters (inches)

Style	L (max.)	H (max.)	T (max.)	LS (nom.)	LD (nom.)
SK01	5.08 (0.200)	5.08 (0.200)	5.08 (0.200)	5.08 (0.200)	0.508 (0.020)
SK03/SK53	7.62 (0.300)	7.62 (0.300)	5.08 (0.200)	5.08 (0.200)	0.508 (0.020)
SK04/SK54	10.2 (0.400)	10.2 (0.400)	5.08 (0.200)	5.08 (0.200)	0.508 (0.020)
SK05/SK55	12.7 (0.500)	12.7 (0.500)	5.08 (0.200)	10.2 (0.400)	0.635 (0.025)
SK06/SK56	22.1 (0.870)	15.2 (0.600)	5.08 (0.200)	20.1 (0.790)	0.813 (0.032)
SK07	27.9 (1.100)	15.2 (0.600)	5.08 (0.200)	24.9 (0.980)	0.813 (0.032)
SK08	27.9 (1.100)	15.2 (0.600)	8.89 (0.350)	24.9 (0.980)	0.813 (0.032)
SK09/SK59	17.0 (0.670)	13.7 (0.540)	5.08 (0.200)	14.6 (0.575)	0.635 (0.025)
SK10/SK60	23.6 (0.930)	18.3 (0.720)	6.35 (0.250)	20.3 (0.800)	0.813 (0.032)
L = Length		T = Thickness	LS	S = Lead Spacing Nominal ±.787 (0.031)
H = Height		M = Meniscus 1.52 (0.060) r		. = Lead Length 50.8 (2.000) max	


SMPS Capacitors

SE Style - Extended Commercial Radial Range



PRODUCT OFFERING - X7R

SE styles offer capacitance extension to popular SK ranges. The CV product for SE-series, X7R capacitors (TCC: ±15% over -55 to +125°C) compares favorably to high CV ranges offered by other suppliers in much less stable Y5U dielectric (TCC: +22/-56% over -30 to +85°C). SE style capacitors are conformally coated and are designed for input and output filtering applications in switch mode power supplies.



ELECTRICAL SPECIFICATIONS

Temperature Coefficient

X7R: Temperature Coefficient ±15%, -55° to +125°C Capacitance Test (MIL-STD-202 Method 305)

X7R: 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Dissipation Factor 25°C

X7R: 2.5% Max @ 25°C, 1.0±0.2 Vrms (open circuit voltage) at 1KHz

Insulation Resistance 25°C (MIL-STD-202 Method 302) X7R: $100K M\Omega$ or $1000 M\Omega$ - μ F, whichever is less. Insulation Resistance 125°C (MIL-STD-202 Method 302)

X7R: 10K MΩ or 100 MΩ- μ F, whichever is less.

Dielectric Withstanding Voltage 25°C (Flash Test)

X7R: 250% rated voltage for 5 seconds with 50 mA max charging current. Life Test (1000 hrs)

X7R: 200% rated voltage at +125°C

Moisture Resistance (MIL-STD-202 Method 106)


X7R: Ten cycles with no voltage applied.


Thermal Shock (MIL-STD-202 Method 107, Condition A)

Immersion Cycling (MIL-STD-202 Method 104, Condition B)

Resistance To Solder Heat (MIL-STD-202, Method 210, Condition B, for 20 seconds)

HOW TO ORDER

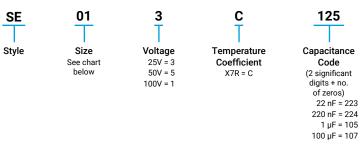







Note 1: No suffix signifies bulk packaging, which is KYOCERA AVX standard packaging. Parts available tape and reel per EIA-468. Use suffix "TR1" if tape & reel is

Packaging

(See Note 1)

required. *Hi-Rel screening consists of 100% Group A, Subgroup 1 per MIL-PRF-39014.

Note: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.

TAPE & REEL QUANTITY				
Part Pieces				
SE01	2000			
SE03/SE53	1000			
SE04/SE54	1000			
SE05/SE55	500			
SE06/SE56	500			

RoHS			
Part	Available		
SE01	Yes		
SE03/SE53	Yes		
SE04/SE54	Yes		
SE05/SE55	Yes		
SE06/SE56	Yes		

Not RoHS Compliant




For RoHS compliant products, please select correct termination style.

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.





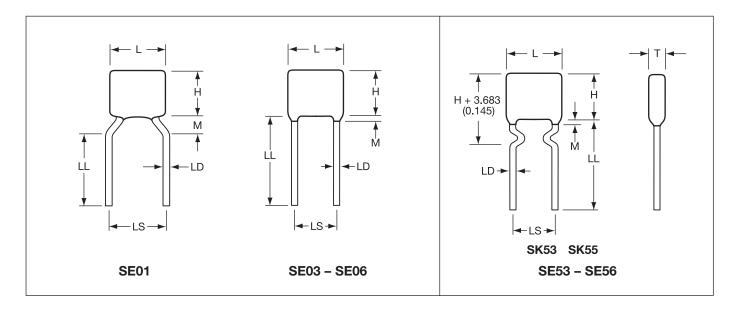

X7R Capacitance Range (µF)

Style	25 WVDC min./max.	50 WVDC min./max.	100 WVDC min./max.
SE01	0.47/1.5	0.39/1.0	0.33/0.68
SE03/SE53	2.7/6.8	2.2/4.7	1.8/3.3
SE04/SE54	5.6/12	3.9/10	3.3/6.8
SE05/SE55	8.2/18	6.8/12	4.7/10.0
SE06/SE56	18/39	12/27	6.8/15

DIMENSIONS millimeters (inches)

Style	L (max.)	H (max.)	T (max.)	LS (nom.)	LD (nom.)
SE01	5.08 (0.200)	5.08 (0.200)	5.08 (0.200)	5.08 (0.200)	0.508 (0.020)
SE03/SE53	7.62 (0.300)	7.62 (0.300)	5.08 (0.200)	5.08 (0.200)	0.508 (0.020)
SE04/SE54	10.2 (0.400)	10.2 (0.400)	5.08 (0.200)	5.08 (0.200)	0.508 (0.020)
SE05/SE55	12.7 (0.500)	12.7 (0.500)	5.08 (0.200)	10.2 (0.400)	0.635 (0.025)
SE06/SE56	22.1 (0.870)	15.2 (0.600)	5.08 (0.200)	20.1 (0.790)	0.813 (0.032)
L = Length H = Height		T = Thickness M = Meniscus 1.52 (0.060) max.		LS = Lead Spacing Nominal ±.787 LL = Lead Length 50.8 (2.000) ma LD = Lead Diameter Nominal ±.05	x./25.4 (1.000) min.


090518

SMPS Capacitors

CECC Offering



Range only available in 2C1/X7R



DIMENSIONS millimeters (inches)

Size Code	Length (L) (max.)	Height (H) (max.)	Thickness (T) (max.)	Nom (t)	S ±0.4
BR40	10.16 (0.400)	11.7 (0.460)	3.81 (0.150)	0.51 (0.020)	5.08 (0.200)
BR50	12.7 (0.500)	12.7 (0.500)	5.1 (0.200)	0.64 (0.025)	10.16 (0.400)
BR84	23.6 (0.930)	17.78 (0.700)	6.35 (0.250)	0.76 (0.030)	20.32 (0.800)

CECC APPROVED RANGE

	2C1/X7R CECC 30 701 801 Issue 1					
	50V 100V 200V 500V					
BR40	185-275	125-185	334-474	473-154		
BR50	395-475	225-275	684-105	104-394		
BR84	475-186	475-156	105-335	474-155		

HOW TO ORDER

Not RoHS Compliant




Note: If tape and reel is required, add TR to the end of the part number

High Voltage MLC Capacitors

ESCC Qualified SMPS Capacitors





HIGH VOLTAGE CHIP CAPACITORS

Capacitors, Fixed, Chip, Ceramic Dielectric, Type II, High Voltage, Based on Styles 1812 and 1825 for use in ESCC space programs, according to ESCC Generic Specification 3009 and associated Detail Specification 3009/034 as recommended by the Space Components Coordination Group. (ranges in table below)

Note: Variants 01 to 12: metallized pads suitable for Hybird circuits, glue or wire bonding Variants 13 to 24: finished with Sn coating suitable for soldering Variants 13 - 24 are tested "in accordance with"

HOW TO ORDER

Parts should be ordered using the ESCC variant number as follows:

3009034 **Detail Spec** Type Variant Capacitance Number (per table) Code The first two digits represent significant figures and the third digit specifies the number of zeros to follow; 102 = 1000pF103 = 10000pF Eg 300903401223

Size	Variant	Rated Voltage (kV)	Tolerance (%)	Capacitance Code (E12)	
	01 / 13	1.0	±10	392 - 223	
	02 / 14	1.0	±20	392-223	
1812	03 / 15	2.0	±10	152 - 182	
1012	04 / 16	2.0	±20	102 - 102	
	05 / 17	3.0	±10	821 - 102	
	06 / 18		±20	021-102	
	07 / 19	1.0	±10	273 - 563	
	08 / 20	1.0	±20	2/3-303	
1825	1005 09 / 21		±10	222 - 682	
1825	10 / 22	2.0	±20	222-082	
	11 / 23	3.0	±10	821 - 392	
	12 / 24	3.0	±20	021-392	

HIGH VOLTAGE LEADED CAPACITORS

Capacitors, Fixed, Ceramic Dielectric, Type II, High Voltage, 1.0 to 5.0 kV, Based on Case Styles VR, CV and CH for use in ESCC space programs, according to ESCC Generic Specification 3001 and associated Detail Specification 3001/034 as recommended by the Space Components Coordination Group. (ranges in table)

Note 1: Lead Types

a - Leaded Radial (epoxy coated)

For LVT testing, please refer to 3009 LVT Spec

- b Leaded Radial (Polyurethane Varnish)
- c Straight Dual in Line
- d L Dual in Line

Note 2: Tolerances of ±10% and ±20% are available

Note 3: KYOCERA AVX does not recommend or advise the use of adhesives to secure these components to the PCB or any other component / device

Case	V:	Lead	Capacitance Code (E12)				
Size	Variant	Туре	1.0kV	2.0kV	3.0kV	4.0kV	5.0kV
VR30S	01	а	392 - 203	152 - 182	821 - 102		
VR30	02	а	273 - 563	222 - 682	821 - 392		
VR40	03	а	473 - 124	822 - 153	472 - 103	182 - 222	
VR50	04	а	154 - 274	183 - 333	123 - 183	562 - 822	332 - 392
VR66	05	а	224 - 564	393 - 823	223 - 393	103 - 153	682 - 103
VR84	06	а	684 - 105	473 - 154	473 - 683	183 - 393	123 - 183
VR90	07	а	125 - 275	184 - 334	823 - 184	473 - 124	223 - 563
CV41	08	b	473 - 124	822 - 153	472 - 103	182 - 222	
CH41	09	С	473 - 124	822 - 153	472 - 103	182 - 222	
CH41	10	d	473 - 124	822 - 153	472 - 103	182 - 222	
CV51	11	b	154 - 274	183 - 333	123 - 183	562 - 822	332 - 392
CH51	12	С	154 - 274	183 - 333	123 - 183	562 - 822	332 - 392
CH51	13	d	154 - 274	183 - 333	123 - 183	562 - 822	332 - 392
CV61	14	b	224 - 564	393 - 823	223 - 393	103 - 153	682 - 103
CH61	15	С	224 - 564	393 - 823	223 - 393	103 - 153	682 - 103
CH61	16	d	224 - 564	393 - 823	223 - 393	103 - 153	682 - 103
CV76	17	b	684 - 105	473 - 154	473 - 683	183 - 393	123 - 183
CH76	18	С	684 - 105	473 - 154	473 - 683	183 - 393	123 - 183
CH76	19	d	684 - 105	473 - 154	473 - 683	183 - 393	123 - 183
CV91	20	b	125 - 275	184 - 334	823 - 184	473 - 124	223 - 563
CH91	21	С	125 - 275	184 - 334	823 - 184	473 - 124	223 - 563
CH91	22	d	125 - 275	184 - 334	823 - 184	473 - 124	223 - 563

HOW TO ORDER

Parts should be ordered using the ESCC variant number as follows:

. a. to onouna b	e oracrea aomig a	ic 2000 fariant namber ao fonomo.		
3001034	XX	XXX	K T	X
Detail Spec Number	Type Variant (per table above)	Capacitance Code The first two digits represent significant figures and the third digit specifies the number of zeros to follow; i.e.	Capacitance Tolerance K = 10% M = 20%	Voltage M = 1kV P = 2kV R = 3kV S = 4kV Z = 5kV
Fa 300103/1227/M		102 = 1000pF 103 = 10000pF		Z = 3RV

LAT and Serialization testing can still be preformed. Contact plant for further details For LVT testing, please refer to 3001 LVT spec



High Capacitance

ESCC Qualified SMPS Capacitors



HIGH CAPACITANCE LEADED CAPACITORS

Capacitors, Fixed, Ceramic Dielectric, Type II, High Capacitance, Based on Case Styles BR, CV and CH for use in ESCC space programs, according to ESCC Generic Specification 3001 and associated Detail Specification 3001/030 as recommended by the Space Components Coordination Group. (see ranges in table below)

Capacitance Code (E12) Case **Variant Figure** 100V Size 50V 200V 500V BR40 01 185 - 335 125 - 395 334 - 564 124 - 224 а BR50 395 - 565 225 - 395 684 - 105 02 а 274 - 394 **BR66** 03 а 685 - 106 475 - 825 105 - 225474 - 105 825 - 156 225 - 335 BR72 04 126 - 186 824 - 155 а **BR84** 05 126 - 186 825 - 156 225 - 335 824 - 155 185 - 335 334 - 564 CV41 06 b 125 - 275 124 - 224 CH41 07 С 185 - 335 125 - 275 334 - 564 124 - 224 CH41 08 d 185 - 335 125 - 275 334 - 564 124 - 224 CH42 09 395 - 685 335 - 565 684 - 125 274 - 474 С 335 - 565 684 - 125 CH42 10 d 395 - 685 274 - 474 CH43 685 - 825 155 - 185 564 - 684 11 825 - 106 155 - 185 CH43 12 d 825 - 106 685 - 825 564 - 684 CH44 13 С 126 106 225 824 - 105 CH44 14 d 126 106 225 824 - 105 CV51 15 395 - 565 225 - 395 684 - 105 274 - 394 b CH51 16 395 - 565 225 - 395 684 - 105 274 - 394 С CH51 17 d 395 - 565 225 - 395 684 - 105 274 - 394 475 - 825 125 - 225 CH52 18 С 685 - 106 474 - 824 475 - 825 125 - 225 CH52 19 d 685 - 106 474 - 824 CH53 20 126 - 156 106 - 126 275 - 335 105 - 125 CH53 21 d 126 - 156 106 - 126 275 - 335 105 - 125 CH54 22 186 - 226 156 395 155 С CH54 23 d 186 - 226 156 395 155 CV61 24 685 - 106 475 - 825 105 - 225 474 - 105 b CH61 25 685 - 106 475 - 825 105 - 225 474 - 105 CH61 475 - 825 26 Ч 685 - 106 105 - 225 474 - 105 106 - 156 CH62 27 С 126 - 226 275 - 475 105 - 185 CH62 28 d 126 - 226 106 - 156 275 - 475 105 - 185 CH63 29 276 - 336 186 - 226 565 - 685 225 - 275 CH63 30 d 276 - 336 186 - 226 565 - 685 225 - 275 CH64 31 396 276 - 336 825 - 106 335 С CH64 32 d 396 276 - 336 825 - 106 335 225 - 335 824 - 155 CV71 33 b 126 - 186 825 - 156 CH71 34 С 126 - 186 825 - 156 225 - 335 824 - 155 CH71 35 d 126 - 186 825 - 156 225 - 335 824 - 155 Note 1: Lead Types

a - Leaded Radial (epoxy coated)

b - Leaded Radial (Polyurethane Varnish)

c - Straight Dual in Line

d - L Dual in Line

Note 2: Tolerances of ±10% and ±20% are available

Case	V	F:		Capacitance	Code (E12)	
Size	Variant	Figure	50V	100V	200V	500V
CH73	38	С	476 - 566	336 - 396	825 - 106	395 - 475
CH73	39	d	476 - 566	336 - 396	825 - 106	395 - 475
CH74	40	С	686	476	126	565
CH74	41	d	686	476	126	565
CV76	42	b	126 - 186	825 - 156	225 - 335	824 - 155
CH76	43	С	126 - 186	825 - 156	225 - 335	824 - 155
CH76	44	d	126 - 186	825 - 156	225 - 335	824 - 155
CH77	45	С	226 - 396	186 - 276	395 - 685	185 - 335
CH77	46	d	226 - 396	186 - 276	395 - 685	185 - 335
CH78	47	С	476 - 566	336 - 396	825 - 106	395 - 475
CH78	48	d	476 - 566	336 - 396	825 - 106	395 - 475
CH79	49	С	686	476	126	565
CH79	50	d	686	476	126	565
CH81	51	С	156 - 226	126 - 186	225 - 395	824 - 155
CH81	52	d	156 - 226	126 - 186	225 - 395	824 - 155
CH82	53	С	276 - 476	226 - 396	475 - 825	
CH82	54	d	276 - 476	226 - 396	475 - 825	
CH83	55	С	566 - 686	476 - 566	106 - 126	
CH83	56	d	566 - 686	476 - 566	106 - 126	
CH84	57	С	826	686	156	
CH84	58	d	826	686	156	
CH86	59	С	226 - 336	156 - 276	395 - 685	155 - 225
CH86	60	d	226 - 336	156 - 276	395 - 685	155 - 225
CH87	61	С	396 - 686	336 - 566	825 - 156	
CH87	62	d	396 - 686	336 - 566	825 - 156	
CH88	63	С	826 - 107	686 - 826	186 - 226	
CH88	64	d	826 - 107	686 - 826	186 - 226	
CH89	65	С	127	107	276	
CH89	66	d	127	107	276	
CH91	67	С	396 - 476	336 - 396	825 - 106	
CH91	68	d	396 - 476	336 - 396	825 - 106	
CH92	69	С	566 - 107	476 - 826	126 - 226	
CH92	70	d	566 - 107	476 - 826	126 - 226	
CH93	71	С	127 - 157	107 - 127	276 - 336	
CH93	72	d	127 - 157	107 - 127	276 - 336	
CH94	73	С	187	157	396	
CH94	74	d	187	157	396	

37 **HOW TO ORDER**

С

36

CH72

CH72


Parts should be ordered using the ESCC variant number as follows:

186 - 276

186 - 276

226 - 396

226 - 396

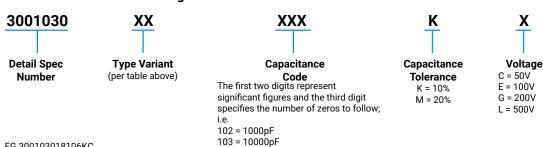

395 - 685

395 - 685

185 - 335

185 - 335

EG 300103018106KC


LAT and Serialization testing can still be preformed

Contact plant for further details

Note 3: KYOCERA AVX does not recommend or advise the use of adhesives to secure these components to the PCB or any other component / device



ESCC DETAIL SPECIFICATION NO. 3009/034 PHYSICAL DIMENSIONS




Millimeters (Inches)

Cumbal	Variants	01 to 06	Variants	07 to 12
Symbol	Min.	Max.	Min.	Max.
L	4.20	5.00	4.20	5.00
	(0.165)	(0.197)	(0.165)	(0.197)
Ţ	2.80	3.60	5.67	6.67
	(0.110)	(0.142)	(0.223)	(0.263)
е	-	3.00 (0.118)	-	3.30 (0.130)
М	0.25	0.75	0.25	0.75
	(0.010)	(0.030)	(0.010)	(0.030)

ESCC DETAIL SPECIFICATION NO. 3001/034 PHYSICAL DIMENSIONS - VR STYLE


Millimeters (Inches)

Millimeters (Inches)



Variant	Case	В	Ø	d	ı	Ē	F	Н	J	L
Vallalit	Size	Max.	Min.	Max.	Min.	Max.	Max.	Max.	Max.	Min.
01	VR30S	7.62 (0.300)	0.46 (0.018)	0.56 (0.022)	4.58 (0.180)	5.58 (0.220)	5.00 (0.197)	4.60 (0.181)	1.50 (0.059)	31.7 (1.248)
02	VR30	7.62 (0.300)	0.46 (0.018)	0.56 (0.022)	4.58 (0.180)	5.58 (0.220)	5.00 (0.197)	9.62 (0.379)	1.50 (0.059)	31.7 (1.248)
03	VR40	10.16 (0.400)	0.46 (0.018)	0.56 (0.022)	4.58 (0.180)	5.58 (0.220)	5.00 (0.197)	11.7 (0.461)	1.50 (0.059)	31.7 (1.248)
04	VR50	12.7 (0.500)	0.59 (0.023)	0.69 (0.027)	9.66 (0.380)	10.66 (0.420)	5.10 (0.201)	14.2 (0.559)	1.50 (0.059)	31.7 (1.248)
05	VR66	17.5 (0.689)	0.86 (0.034)	0.96 (0.038)	14.2 (0.559)	15.2 (0.598)	6.40 (0.252)	16.5 (0.650)	1.50 (0.059)	31.7 (1.248)
06	VR84	23.62 (0.930)	0.86 (0.034)	0.96 (0.038)	20.4 (0.803)	22.0 (0.866)	6.40 (0.252)	19.78 (0.779)	1.50 (0.059)	31.7 (1.248)
07	VR90	23.5 (0.925)	0.86 (0.034)	0.96 (0.038)	20.4 (0.803)	22.0 (0.866)	6.40 (0.252)	42.0 (1.654)	1.50 (0.059)	31.7 (1.248)

ESCC DETAIL SPECIFICATION NO. 3001/034 PHYSICAL DIMENSIONS - CV STYLE



Variant	Case	В	Ød			E	F	Н	L	
Variant	Size	Max.	Min.	Max.	Min.	Max.	Max.	Max.	Max.	Min.
08	CV41	10.6 (0.417)	0.65 (0.026)	0.75 (0.030)	7.70 (0.303)	8.70 (0.343)	3.80 (0.150)	8.70 (0.343)	22.0 (0.866)	28.0 (1.102)
11	CV51	11.9 (0.469)	0.85 (0.033)	0.95 (0.037)	9.66 (0.380)	10.66 (0.420)	3.80 (0.150)	10.7 (0.421)	22.0 (0.866)	28.0 (1.102)
14	CV61	16.5 (0.650)	0.85 (0.033)	0.95 (0.037)	14.74 (0.580)	15.74 (0.620)	3.80 (0.150)	13.6 (0.535)	22.0 (0.866)	28.0 (1.102)
17	CV76	22.7 (0.894)	0.85 (0.033)	0.95 (0.037)	20.4 (0.803)	22.0 (0.866)	3.80 (0.150)	16.6 (0.654)	22.0 (0.866)	28.0 (1.102)
20	CV91	22.7 (0.894)	1.15 (0.045)	1.25 (0.049)	20.4 (0.803)	22.0 (0.866)	3.80 (0.150)	40.6 (1.598)	22.0 (0.866)	28.0 (1.102)


– E –


SMPS Capacitors




ESCC DETAIL SPECIFICATION NO. 3001/034 PHYSICAL DIMENSIONS - CH STYLE, D.I.L.

Millimeters (Inches)







Symbol	Min.	Max.	Notes
a1	-	2.00 (0.079)	1
b	0.45 (0.018)	0.55 (0.022)	1
b1	0.204 (0.008)	0.304 (0.012)	1
е	2.49 (0.098)	2.59 (0.102)	2
L	12.0 (0.472)	14.0 (0.551)	1


Notes: 1 2 - Each space

	Case	Α	D		E	F
Variant	Size	Max.	Max.	Min.	Max.	Max.
07	CH41	3.80 (0.150)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
09	CH42	7.40 (0.291)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
11	CH43	11.1 (0.437)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
13	CH44	14.8 (0.583)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
16	CH51	3.80 (0.150)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
18	CH52	7.40 (0.291)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
20	CH53	11.1 (0.437)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
22	CH54	14.8 (0.583)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
25	CH61	3.80 (0.150)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
27	CH62	7.40 (0.291)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
29	CH63	11.1 (0.437)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
31	CH64	14.8 (0.583)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
34	CH71	3.80 (0.150)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
36	CH72	7.40 (0.291)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
38	CH73	11.1 (0.437)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
40	CH74	14.8 (0.583)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
43	CH76	3.80 (0.150)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
45	CH77	7.40 (0.291)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
47	CH78	11.1 (0.437)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
49	CH79	14.8 (0.583)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
51	CH81	3.80 (0.150)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
53	CH82	7.40 (0.291)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
55	CH83	11.1 (0.437)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
57	CH84	14.8 (0.583)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
59	CH86	3.80 (0.150)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
61	CH87	7.40 (0.291)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
63	CH88	11.1 (0.437)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
65	CH89	14.8 (0.583)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
67	CH91	3.80 (0.150)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
69	CH92	7.40 (0.291)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
71	CH93	11.1 (0.437)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
73	CH94	14.8 (0.583)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)

ESCC DETAIL SPECIFICATION NO. 3001/034 PHYSICAL DIMENSIONS - CH STYLE, L

leads

Millimeters (Inches)



Variant	Case	Α	D	E		F
Varialit	Size	Max.	Max.	Min.	Max.	Max.
10	CH41	3.80 (0.150)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
13	CH51	3.80 (0.150)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
16	CH61	3.80 (0.150)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
19	CH76	3.80 (0.150)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
22	CH91	3.80 (0.150)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)


Symbol	Min.	Max.	Notes
b	0.45 (0.018)	0.55 (0.022)	1
е	2.49 (0.098)	2.59 (0.102)	2
L	2.04 (0.080)	3.01 (0.120)	1
Notes: 1	_	All	leads

2 - Each space



ESCC DETAIL SPECIFICATION NO. 3001/030 PHYSICAL DIMENSIONS - BR STYLE


Millimeters (Inches)



Vaniant Case		В	Ød		E		F	Н	J	L
Variant	Size	Max.	Min.	Max.	Min.	Max.	Max.	Max.	Max.	Min.
01	BR40	10.16 (0.400)	0.46 (0.018)	0.56 (0.022)	4.58 (0.180)	5.58 (0.220)	5.00 (0.197)	11.7 (0.461)	1.50 (0.059)	31.7 (1.248)
02	BR50	12.7 (0.500)	0.59 (0.023)	0.69 (0.027)	9.66 (0.380)	10.66 (0.420)	5.10 (0.201)	14.2 (0.559)	1.50 (0.059)	31.7 (1.248)
03	BR66	17.5 (0.689)	0.86 (0.034)	0.96 (0.038)	14.2 (0.559)	15.2 (0.598)	6.40 (0.252)	16.5 (0.650)	1.50 (0.059)	31.7 (1.248)
04	BR72	19.3 (0.760)	0.86 (0.034)	0.96 (0.038)	14.74 (0.580)	15.74 (0.620)	6.40 (0.252)	24.0 (0.945)	1.50 (0.059)	31.7 (1.248)
05	BR84	23.62 (0.930)	0.71 (0.028)	0.81 (0.032)	18.93 (0.745)	20.83 (0.820)	6.40 (0.252)	19.78 (0.779)	1.50 (0.059)	31.7 (1.248)

ESCC DETAIL SPECIFICATION NO. 3001/030 PHYSICAL DIMENSIONS - CV STYLE

Millimeters (Inches)



Variant	Variant Case		Ød		E		F	Н		_
Variant	Size	Max.	Min.	Max.	Min.	Max.	Max.	Max.	Max.	Min.
06	CV41	10.6 (0.417)	0.65 (0.026)	0.75 (0.030)	7.70 (0.303)	8.70 (0.343)	3.80 (0.150)	8.70 (0.343)	22.0 (0.866)	28.0 (1.102)
15	CV51	11.9 (0.469)	0.85 (0.033)	0.95 (0.037)	9.66 (0.380)	10.66 (0.420)	3.80 (0.150)	10.7 (0.421)	22.0 (0.866)	28.0 (1.102)
24	CV61	16.5 (0.650)	0.85 (0.033)	0.95 (0.037)	14.74 (0.580)	15.74 (0.620)	3.80 (0.150)	13.6 (0.535)	22.0 (0.866)	28.0 (1.102)
33	CV71	17.8 (0.701)	0.85 (0.033)	0.95 (0.037)	14.74 (0.580)	15.74 (0.620)	3.80 (0.150)	21.6 (0.850)	22.0 (0.866)	28.0 (1.102)
42	CV76	22.7 (0.894)	0.85 (0.033)	0.95 (0.037)	20.4 (0.803)	22.0 (0.866)	3.80 (0.150)	16.6 (0.654)	22.0 (0.866)	28.0 (1.102)


090518

SMPS Capacitors



ESCC DETAIL SPECIFICATION NO. 3001/030 PHYSICAL DIMENSIONS - CH STYLE, D.I.L.

Millimeters (Inches)




Symbol	Min.	Max.	Notes				
a1	-	2.00 (0.079)	1				
	0.45	0.55					

a1	-	2.00 (0.079)	1
b	0.45 (0.018)	0.55 (0.022)	1
b1	0.204 (0.008)	0.304 (0.012)	1
е	2.49 (0.098)	2.59 (0.102)	2
L	2.04 (0.080)	3.04 (0.120)	1

2 - Each space

				_		era (menea)
Variant	Case Size	Α	D	E		F
variant	0000 0120	Max.	Max.	Min.	Max.	Max.
07	CH41	3.80 (0.150)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
09	CH42	7.40 (0.291)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
11	CH43	11.1 (0.437)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
13	CH44	14.8 (0.583)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343)	9.20 (0.362)
16	CH51	3.80 (0.150)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
18	CH52	7.40 (0.291)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
20	CH53	11.1 (0.437)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
22	CH54	14.8 (0.583)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
25	CH61	3.80 (0.150)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
27	CH62	7.40 (0.291)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
29	CH63	11.1 (0.437)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
31	CH64	14.8 (0.583)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
34	CH71	3.80 (0.150)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
36	CH72	7.40 (0.291)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
38	CH73	11.1 (0.437)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
40	CH74	14.8 (0.583)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
43	CH76	3.80 (0.150)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
45	CH77	7.40 (0.291)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
47	CH78	11.1 (0.437)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
49	CH79	14.8 (0.583)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
51	CH81	3.80 (0.150)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
53	CH82	7.40 (0.291)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
55	CH83	11.1 (0.437)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
57	CH84	14.8 (0.583)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
59	CH86	3.80 (0.150)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
61	CH87	7.40 (0.291)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
63	CH88	11.1 (0.437)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
65	CH89	14.8 (0.583)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
67	CH91	3.80 (0.150)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
69	CH92	7.40 (0.291)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
71	CH93	11.1 (0.437)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
73	CH94	14.8 (0.583)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)

ESCC DETAIL SPECIFICATION NO. 3001/030 PHYSICAL DIMENSIONS - CH STYLE, L



Symbol	Min.	Max.	Notes
b	0.45 (0.018)	0.55 (0.022)	1
е	2.49 (0.098)	2.59 (0.102)	2
L	2.04 (0.080)	3.04 (0.120)	1
Notoo: 1		ΛII	loodo

2 - Each space

Millimeters (Inches)

Variant	Case Size	Α	D			F
Variant	Case Size	Max.	Max.	Min.	Max.	Max.
08	CH41	3.80 (0.150)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343	9.20 (0.362)
10	CH42	7.40 (0.291)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343	9.20 (0.362)
12	CH43	11.1 (0.437)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343	9.20 (0.362)
14	CH44	14.8 (0.583)	8.70 (0.343)	7.70 (0.303)	8.70 (0.343	9.20 (0.362)
17	CH51	3.80 (0.150)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
19	CH52	7.40 (0.291)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
21	CH53	11.1 (0.437)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
23	CH54	14.8 (0.583)	10.7 (0.421)	9.66 (0.380)	10.66 (0.420)	10.7 (0.421)
26	CH61	3.80 (0.150)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
28	CH62	7.40 (0.291)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
30	CH63	11.1 (0.437)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
32	CH64	14.8 (0.583)	13.6 (0.535)	13.5 (0.531)	14.5 (0.571)	14.9 (0.587)
35	CH71	3.80 (0.150)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
37	CH72	7.40 (0.291)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
39	CH73	11.1 (0.437)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
41	CH74	14.8 (0.583)	21.6 (0.850)	14.74 (0.580)	15.74 (0.620)	16.8 (0.661)
44	CH76	3.80 (0.150)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
46	CH77	7.40 (0.291)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
48	CH78	11.1 (0.437)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
50	CH79	14.8 (0.583)	16.6 (0.654)	19.52 (0.769)	21.12 (0.831)	21.6 (0.850)
52	CH81	3.80 (0.150)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
54	CH82	7.40 (0.291)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
56	CH83	11.1 (0.437)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
58	CH84	14.8 (0.583)	38.2 (1.504)	9.66 (0.380)	10.66 (0.420)	12.0 (0.472)
60	CH86	3.80 (0.150)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
62	CH87	7.40 (0.291)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
64	CH88	11.1 (0.437)	38.2 (1.504)	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
66	CH89	14.8 (0.583)	38.2 (1.504))	14.74 (0.580)	15.74 (0.620)	18.9 (0.744)
68	CH91	3.80 (0.150)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
70	CH92	7.40 (0.291)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
72	CH93	11.1 (0.437)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)
74	CH94	14.8 (0.583)	40.6 (1.598)	19.52 (0.769)	21.12 (0.831)	24.0 (0.945)



COG Dielectric

General **Specifications**

Capacitance Range

100 pF to 1.2 μF

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz, for ≤100 pF use 1 MHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

 $0 \pm 30 \text{ ppm/°C}$

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max.

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz, for ≤100 pF use 1 MHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min., or 1000 M Ω -μF min.,

whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min.,

whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

N1500

General **Specifications**

Capacitance Range

100 pF to 1.9 μF

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

-1500 ±250 ppm/°C

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max.

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min., or 1000 M Ω - μ F min.,

whichever is less

Insulation Resistance (+125°C, at 500V)

10K MΩ min., or 100 MΩ- μ F min.,

whichever is less

Dielectric Strenath

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

X7R Dielectric

General **Specifications**

Capacitance Range

100 pF to 15μ F

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Capacitance Tolerances

±10%, ±20%, +80%, -20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

±15% (0 VDC)

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

2.5% max.

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min., or 1000 M Ω - μ F min.,

whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min., whichever is less


Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

HOW TO ORDER

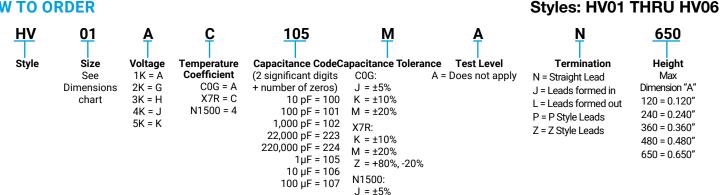

 $K = \pm 10\%$ $M = \pm 20\%$

Note: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.


Not RoHS Compliant


Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.




HV Styles (US Preferred Sizes) DIP Lead



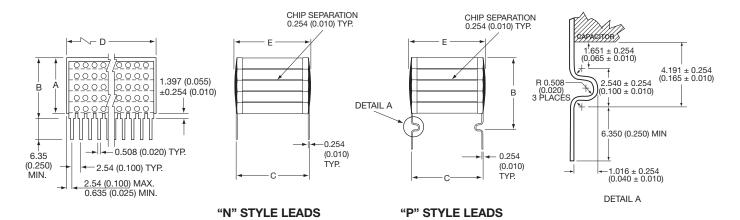







CHIP SEPARATION 0.254 (0.010) TYP. 0.254 (0.010) RAD. (TYP.) -0.254(0.010)TYP. 1.905 (0.075) 1.778 (0.070) ±0.635 (0.025) ±0.254 (0.010)


"J" STYLE LEADS

"L" STYLE LEADS





"Z" STYLE LEADS



DIMENSIONS

millimeters (inches)

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
HV01			53.3 (2.100)	10.5 (0.415)	54.9 (2.160)	4
HV02		For "N" Style Leads: "A" Dimension Plus 1.651 (0.065)	39.1 (1.540)	20.3 (0.800)	40.7 (1.600)	8
HV03	See page 83 for maximum "A"	For "J" & "L" Style Leads: "A" Dimension Plus 2.032 (0.080)	27.2 (1.070)	10.5 (0.415)	28.2 (1.130)	4
HV04	Dimension	For P Style Leads: A Dimension Plus 4.445 (0.175)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
HV05]	For "Z" Style Leads: "A" Dimension Plus 3.048 (0.120)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
HV06			53.3 (2.100)	29.0 (1.140)	54.9 (2.160)	11





Max Capacitance (μF) Available Versus Style with Height (A) of 0.120" - 3.05mm

STYLE		/01_		_ AN′	120	н	/02		AN	120	н	/03_		_ AN1	20	ŀ	IV04_		AN1	20	HV05	AN120	н	/06		_ AN1	20
STILL	1KV	2KV	зку	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.086	.024	.011	.0062	.0052	.120	.034	.015	.0088	.0074	.042	.013	.0058	.0030	.0024	.012	.0040	.0018	.0009	.0007	.0048	.0013	.240	.066	.028	.018	.015
N1500	.140	.042	.018	.010	.0084	.200	.058	.024	.014	.012	.068	.020	.0090	.0050	.0040	.020	.0066	.0028	.0014	.0012	.0078	.0022	.380	.100	.046	.030	.026
X7R	1.10	.260	.150	.066	.052	1.50	.360	.200	.094	.078	.520	.130	.072	.032	.024	.160	.042				.060		3.00	.700	.440	.200	.170

Max Capacitance (μF) Available Versus Style with Height (A) of 0.240" - 6.10mm

	н٧	/01 _		_AN2	240	Н١	/02		_ AN:	240	Н١	/03_		_AN2	40	H	IV04		_ AN2	40	HV05	AN240	Н١	/06		_AN2	40
STYLE	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.170	.048	.022	.012	.010	.240	.068	.031	.017	.015	.084	.026	.011	.0060	.0048	.025	.0082	.0036	.0018	.0014	.0096	.0027	.480	.130	.056	.036	.031
N1500	.280	.084	.036	.020	.016	.400	.110	.048	.028	.024	.130	.040	.018	.010	.0080	.040	.013	.0056	.0028	.0025	.015	.0044	.760	.210	.092	.060	.052
X7R	2.20	.520	.300	.130	.100	3.10	.720	.400	.180	.150	1.00	.270	.140	.064	.048	.330	.084				.120		6.00	1.40	.880	.400	.340

Max Capacitance (µF) Available Versus Style with Height (A) of 0.360" - 9.15mm

	HV	/01		_AN	360	H۱	′ 02		_AN	360	H۱	/03_		_AN3	60	H	IV04		AN3	60	HV05	AN360	Н١	/06		_AN3	60
STYLE	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.250	.072	.033	.018	.015	.360	.100	.047	.026	.022	.120	.039	.017	.0090	.0072	.038	.012	.0054	.0027	.0022	.014	.0040	.720	.200	.084	.055	.047
N1500	.420	.120	.055	.030	.025	.600	.170	.072	.043	.036	.200	.060	.027	.015	.012	.060	.020	.0084	.0043	.0037	.023	.0066	1.10	.310	.130	.090	.078
X7R	3.30	.780	.450	.200	.150	4.70	1.00	.600	.280	.230	1.50	.410	.210	.096	.072	.490	.120				.180		9.00	2.10	1.30	.600	.510

Max Capacitance (μF) Available Versus Style with Height (A) of 0.480" - 12.2mm

	HV	/01_		_AN	480	HV	/02		_AN	480	H\	/03_		_ AN4	80	H	IV04_		AN4	80	HV05	AN480	H\	/06		_AN4	80
STYLE	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.340	.096	.044	.024	.020	.480	.130	.063	.035	.030	.160	.052	.023	.012	.0096	.051	.016	.0072	.0036	.0029	.019	.0054	.960	.260	.110	.073	.062
N1500	.560	.160	.073	.040	.033	.800	.230	.096	.057	.048	.270	.080	.036	.020	.016	.080	.026	.011	.0057	.0050	.031	.0088	1.50	.420	.180	.120	.100
X7R	4.40	1.00	.600	.260	.200	6.30	1.40	.800	.370	.310	2.00	.550	.280	.120	.096	.650	.160				.240		12.0	2.80	1.70	.800	.68

Max Capacitance (µF) Available Versus Style with Height (A) of 0.650" - 16.5mm

	Н١	/01_		_ AN6	550	Н٧	/02		_ AN	650	Н١	/03_		_ AN6	50	F	1V04_		AN6	50	HV05	AN650	Н١	/06		_AN6	50
STYLE	1KV	2KV	ЗΚV	4KV	5KV	1KV	2KV	зкν	4KV	5KV	1KV	2KV	зку	4KV	5KV	1KV	2KV	зку	4KV	5KV	1KV	2KV	1KV	2KV	зку	4KV	5KV
COG	.430	.120	.056	.031	.026	.610	.170	.079	.044	.037	.210	.065	.029	.015	.012	.064	.020	.009	.0045	.0037	.024	.0068	1.20	.330	.140	.092	.078
N1500	.700	.210	.092	.050	.042	1.00	.290	.120	.072	.060	.340	.100	.045	.025	.020	.100	.033	.014	.0072	.0063	.039	.011	1.90	.530	.230	.150	.130
X7R	5.50	1.30	.750	.330	.260	7.90	1.80	1.00	.470	.390	2.60	.690	.360	.160	.120	.820	.210				.300		15.0	3.50	2.20	1.00	.850



COG Dielectric General **Specifications**

Capacitance Range

100 pF to 1.2 μ F

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz, for ≤100 pF use 1 MHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

 $0 \pm 30 \text{ ppm/°C}$

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max.

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz, for ≤100 pF use 1 MHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min.. or 1000 M Ω -uF min.. whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min., whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

N1500

General **Specifications**

Capacitance Range

100 pF to 1.9 µF

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

-1500 ±250 ppm/°C

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max.

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Insulation Resistance (+25°C, at 500V)

100K MΩ min., or 1000 MΩ-μF min.,

whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min.,

whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

X7R Dielectric

General **Specifications**

Capacitance Range

100 pF to 15 uF

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Capacitance Tolerances

±10%, ±20%, +80%, -20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

±15% (0 VDC)

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

2.5% max.

(25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min., or 1000 M Ω - μ F min., whichever is less

Insulation Resistance (+125°C, at 500V)

Z = Z Style Leads

10K M Ω min., or 100 M Ω - μ F min.,

whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

HOW TO ORDER

RV 01 Style Size See **Dimensions** chart

4K = J

5K = K

Voltage 1K = A 2K = G3K = H

Temperature Coefficient N1500 = 4

C COG = A

X7R = C

105

+ number of zeros)

1,000 pF = 102 22.000 pF = 223 220,000 pF = 224 $1\mu F = 105$ 10 μF = 106

(2 significant digits

10 pF = 100100 pF = 101

 $K = \pm 10\%$ M = +20% $K = \pm 10\%$ $M = \pm 20\%$ Z = +80%, -20%N1500: $100 \mu F = 107$ $J = \pm 5\%$

COG:

J = +5%

K = +10% $M = \pm 20\%$

М

Capacitance Code Capacitance Tolerance Test Level A = Does not apply

Styles: HV01 THRU HV06 650

Termination Height


Max N = Straight Lead Dimension "A" J = Leads formed in 120 = 0.120" L = Leads formed out 240 = 0.240"P = P Style Leads


360 = 0.360" 480 = 0.480" 650 = 0.650"


Note: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.





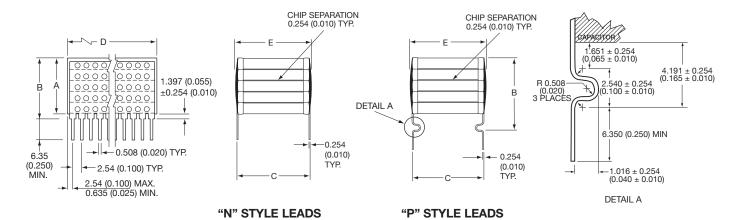







CHIP SEPARATION 0.254 (0.010) TYP. 0.254 (0.010) RAD. (TYP.) 0.254 (0.010) 1.905 (0.075) 1.778 (0.070) ±0.635 (0.025) ±0.254 (0.010)


"J" STYLE LEADS

"L" STYLE LEADS





"Z" STYLE LEADS



millimeters (inches)

DIMENSIONS

Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
RV01			53.3 (2.100)	10.5 (0.415)	54.9 (2.160)	4
RV02	1	For "N" Style Leads: "A" Dimension Plus 1.651 (0.065)	39.1 (1.540)	20.3 (0.800)	40.7 (1.600)	8
RV03	See page 86 for maximum "A"	For "J" & "L" Style Leads: "A" Dimension Plus 2.032 (0.080)	27.2 (1.070)	10.5 (0.415)	28.2 (1.130)	4
RV04	Dimension	For "P" Style Leads: "A" Dimension Plus 4.445 (0.175)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4
RV05	Dimension	For "Z" Style Leads: "A" Dimension Plus 3.048 (0.120)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
RV06	1		53 3 (2 100)	29 0 (1 140)	54 9 (2 160)	11



RV Style - RoHS Compliant High Voltage DIP Leaded

Max Capacitance (μF) Available Versus Style with Height (A) of 0.120" - 3.05mm

	RV	/01_		_AN	120	R۱	/02		_AN	120	R۱	/03 _		_AN1	20	F	V04_		AN1	20	RV05	AN120	R۱	/06		_ AN1:	20
STYLE	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.086	.024	.011	.0062	.0052	.120	.034	.015	.0088	.0074	.042	.013	.0058	.0030	.0024	.012	.0040	.0018	.0009	.0007	.0048	.0013	.240	.066	.028	.018	.015
N1500	.140	.042	.018	.010	.0084	.200	.058	.024	.014	.012	.068	.020	.0090	.0050	.0040	.020	.0066	.0028	.0014	.0012	.0078	.0022	.380	.100	.046	.030	.026
X7R	1.10	.260	.150	.066	.052	1.50	.360	.200	.094	.078	.520	.130	.072	.032	.024	.160	.042				.060		3.00	.700	.440	.200	.170

Max Capacitance (μF) Available Versus Style with Height (A) of 0.240" - 6.10mm

	RV	01		_ AN2	240	RV	02		_AN	240	R۱	/03_		_AN2	40	F	V04_		_AN2	40	RV05	AN240	R۱	/06		AN2	40
STYLE	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.170	.048	.022	.012	.010	.240	.068	.031	.017	.015	.084	.026	.011	.0060	.0048	.025	.0082	.0036	.0018	.0014	.0096	.0027	.480	.130	.056	.036	.031
N1500	.280	.084	.036	.020	.016	.400	.110	.048	.028	.024	.130	.040	.018	.010	.0080	.040	.013	.0056	.0028	.0025	.015	.0044	.760	.210	.092	.060	.052
X7R	2.20	.520	.300	.130	.100	3.10	.720	.400	.180	.150	1.00	.270	.140	.064	.048	.330	.084				.120		6.00	1.40	.880	.400	.340

Max Capacitance (µF) Available Versus Style with Height (A) of 0.360" - 9.15mm

	RV	01		_AN3	360	RV	02		_AN	360	RV	′ 03		_AN3	60	F	V04_		_ AN3	60	RV05	AN360	R۱	/06		_AN3	60
STYLE	1KV	2KV	зку	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.250	.072	.033	.018	.015	.360	.100	.047	.026	.022	.120	.039	.017	.0090	.0072	.038	.012	.0054	.0027	.0022	.014	.0040	.720	.200	.084	.055	.047
N1500	.420	.120	.055	.030	.025	.600	.170	.072	.043	.036	.200	.060	.027	.015	.012	.060	.020	.0084	.0043	.0037	.023	.0066	1.10	.310	.130	.090	.078
X7R	3.30	.780	.450	.200	.150	4.70	1.00	.600	.280	.230	1.50	.410	.210	.096	.072	.490	.120				.180		9.00	2.10	1.30	.600	.510

Max Capacitance (μF) Available Versus Style with Height (A) of 0.480" - 12.2mm

	RV	01		_AN4	180	RV	02		_AN4	180	R۱	/03 _		_AN4	80	F	V04_		_ AN4	80	RV05	AN480	R۱	/06		_AN4	80
STYLE	1KV	2KV	зку	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.340	.096	.044	.024	.020	.480	.130	.063	.035	.030	.160	.052	.023	.012	.0096	.051	.016	.0072	.0036	.0029	.019	.0054	.960	.260	.110	.073	.062
N1500	.560	.160	.073	.040	.033	.800	.230	.096	.057	.048	.270	.080	.036	.020	.016	.080	.026	.011	.0057	.0050	.031	.0088	1.50	.420	.180	.120	.100
X7R	4.40	1.00	.600	.260	.200	6.30	1.40	.800	.370	.310	2.00	.550	.280	.120	.096	.650	.160				.240		12.0	2.80	1.70	.800	.68

Max Capacitance (µF) Available Versus Style with Height (A) of 0.650" - 16.5mm

	RV	01		_AN6	550	RV	02		_AN	650	R۱	/03_		_AN6	50	F	V04_		AN6	50	RV05	AN650	R۱	/06		_AN6	50
STYLE	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	3KV	4KV	5KV	1KV	2KV	1KV	2KV	3KV	4KV	5KV
COG	.430	.120	.056	.031	.026	.610	.170	.079	.044	.037	.210	.065	.029	.015	.012	.064	.020	.009	.0045	.0037	.024	.0068	1.20	.330	.140	.092	.078
N1500	.700	.210	.092	.050	.042	1.00	.290	.120	.072	.060	.340	.100	.045	.025	.020	.100	.033	.014	.0072	.0063	.039	.011	1.90	.530	.230	.150	.130
X7R	5.50	1.30	.750	.330	.260	7.90	1.80	1.00	.470	.390	2.60	.690	.360	.160	.120	.820	.210				.300		15.0	3.50	2.20	1.00	.850

CH Style - Radial, Dual-in-line & 'L' Lead SMT



Capacitance range: 1.2 nF to 2.7 µF Voltage range: 1kV to 5kV Temperature range: -55°C to +125°C

This range of radial, dual-in-line for both through hole and surface mount products is intended for use in high voltage power supplies and voltage multiplier circuits. The multilayer ceramic construction offers excellent volumetric efficiency compared with other high voltage dielectrics. They are suitable for both high reliability and industrial applications.

ELECTRICAL SPECIFICATIONS

Temperature Coefficient CECC 30 000, (4.24.1)

2C1/X7R: C Temperature Characteristic - ± 15% (0v dc)

Capacitance Test 25°C

2C1/X7R: Measured at 1 VRMS max at 1KHz

Dissipation Factor 25°C

2C1/X7R: 2.5% max at 1KHz, 1 VRMS

Insulation Resistance

2C1/X7R: 100K 1000 megohms megohms-µF,

whichever is less


Dielectric Withstanding Voltage 25°C

130% rated voltage for 5 seconds

(1000 hrs) CECC 30000 Test (4.23)12C1/X7R: 120% rated voltage at +125°C.

2C1/X7R: 2.5%/decade hour

DUAL-IN-LINE

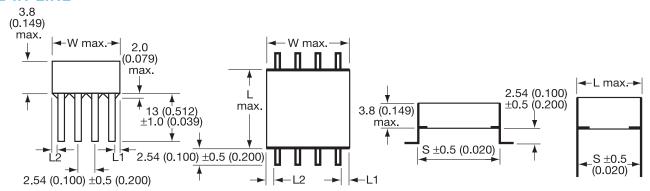


DIMENSIONS

millimeters (inches)

Style	L (max)	W (max)	S (nom)	No. of Leads per side
CH41	9.2 (0.362)	8.7 (0.342)	8.2 (0.323)	3
CH51	10.7 (0.421)	10.7 (0.421)	10.2 (0.400)	4
CH61	14.9 (0.587)	13.6 (0.535)	14.0 (0.551)	5
CH76	21.6 (0.850)	16.6 (0.654)	20.3* (0.800)	6
CH91	24.0 (0.944)	40.6 (1.598)	20.3* (0.800)	14

Lead width 0.5 (0.020) Lead thickness 0.254 (0.010) $L1 = L2 \pm 0.5 (0.020)$

HOW TO ORDER

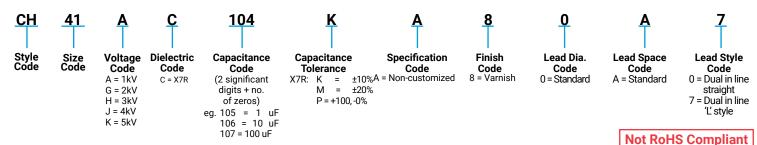

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.




KYDCER3 | The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.

^{*}Tolerance ± 0.8



VERTICALLY MOUNTED RADIAL PRODUCT

Part Number format (CVxxxxxxxxxxA2) Typical Part Number CV51AC154MA80A2



DIMENSIONS


millimeters (inches)

Style	L (max)	H (max)	T (max)	S (nom)	Lead Dia (nom)
CV41	10.6 (0.417)	8.70 (0.343)	3.80 (0.150)	8.20 (0.323)	0.70 (0.028)
CV51	11.9 (0.469)	10.7 (0.421)	3.80 (0.150)	10.2 (0.402)	0.90 (0.035)
CV61	16.5 (0.650)	13.6 (0.536)	3.80 (0.150)	15.2 (0.599)	0.90 (0.035)
CV76	22.7 (0.893)	16.6 (0.654)	3.80 (0.150)	21.2* (0.835)	0.90 (0.035)
CV91	24.0 (0.944)	40.6 (1.598)	3.80 (0.150)	21.2* (0.835)	1.20 (0.047)

^{*}Tolerance ± 0.8mm (0.031)

Not RoHS Compliant

HOW TO ORDER

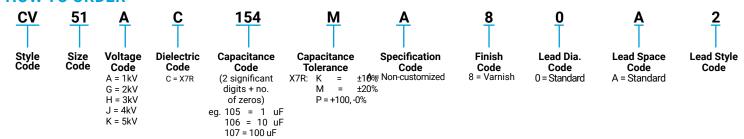

CH/CV Style - Chip Assemblies



2C1/X7R STABLE CERAMIC

			41-CH Styles	•				51-CH Styles	•				61-CF Styles	•				76-Cl Styles	;				91-Cl Style:	S	
	1 Kv	2 Kv	3 Kv	4 Kv	5 Kv	1 Kv	2 Kv	3 Kv	4 Kv	5 Kv	1 Kv	2 Kv	3 Kv	4 Kv	5 Kv	1 Kv	2 Kv	3 Kv	4 Kv	5 Kv	1 Kv	2 Kv	3 Kv	4 Kv	5 Kv
Cap nF																									
1.2					K																				
1.3					K																				
1.5				J	K																				
2.2				J	K																				
2.7				J	К																				
3.3				J						K															
3.9				J						К															
4.7			Н	J					J						K										
5.6			Н						J						К										
6.8			Н						J						К										
8.2		G	Н						J						К										
10		G						Н						J	K										
12		G						Н						J						К					
15		G						Н						J						K					
18	Α						G	Н					Н						J	K					
22	Α						G						Н						J						K
27	Α						G						Н						J						K
33	Α						G						Н						J						K
39	Α					Α						G	Н						J						К
47	Α					Α						G						Н						J	K
56	Α					Α						G						Н						J	K
68	Α					Α						G						Н						J	
82	Α					Α						G					G						Н	J	
100	Α					Α					Α						G						Н	J	
120	Α					Α					Α						G						Н	J	
150						Α					Α						G						Н		
180						Α					Α					Α						G	Н		
220						Α					Α					Α						G			
270						Α					Α					Α						G			
330											Α					Α						G			
390											Α					Α					Α				\perp
470											Α					Α					Α				
560											Α					Α					Α				<u> </u>
680																Α					Α				
820																Α					Α				
1000																Α					Α				
1200																					Α				
1500																					Α				
1800																					Α				
2200																					Α				
2700																					Α				Ь

NB Figures in cells refer to size within ordering information

090518

SV Style Radial Lead – Application Information





High value, low leakage and small size are difficult parameters to obtain in capacitors for high voltage systems. KYOCERA AVX special high voltage MLC radial leaded capacitors meet these performance characteristics. The added advantage of these capacitors lies in special internal design minimizing the electric field stresses within the MLC. These special design criteria result in significant reduction of partial discharge activity within the dielectric and having, therefore, a major impact on long-term reliability of the product. The SV high voltage radial capacitors are conformally coated with high insulation resistance, high dielectric strength epoxy eliminating the possibility of arc flashover.

The SV high voltage radial MLC designs exhibit low ESRs at high frequency. The same criteria governing the high voltage design carries the added benefits of extremely low ESR in relatively low capacitance and small packages. These capacitors are designed and are ideally suited for applications such as snubbers in high frequency power converters, resonators in SMPS, and high voltage coupling/DC blocking.

COG Dielectric **General Specifications**

Capacitance Range

10 pF to 0.15 μF (+25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤100 pF use 1 MHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

0 ± 30 ppm/°C

Voltage Ratings

600 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max. (+25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤100 pF use 1 MHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min. or 1000 M Ω -μF min., whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω -μF min., whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

N1500 **General Specifications**

Capacitance Range

100 pF to $0.47 \mu F$ (+25°C, 1.0 ±0.2 Vrms (open circuit voltage) at 1kHz)

Capacitance Tolerances

±5%, ±10%, ±20% Operating Temperature Range -55°C to +125°C

Temperature Characteristic

-1500 ±250 ppm/°C

Voltage Ratings

600 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max. (25°C, 1.0±0.2 Vrms (open circuit voltage) at 1 KHz)

Insulation Resistance (+25°C, at 500V)

100K MΩ min., or 1000 MΩ- μ F min., whichever is less

Insulation Resistance (+125°C, at 500V)

10K MΩ min., or 100 MΩ- μ F min., whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

X7R Dielectric **General Specifications**

Capacitance Range

100 pF to 2.2 μF (+25°C, 1.0 ±0.2 Vrms at 1kHz)

Capacitance Tolerances

±10%, ±20%, +80%, -20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

±15% (0 VDC)

Voltage Ratings

600 VDC thru 5000 VDC (+125°C)

Dissipation Factor

(+25°C, 1.0 ±0.2 Vrms at 1kHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min., or 1000 M Ω - μ F min., whichever is less

Insulation Resistance (+125°C, at 500V)

10K MΩ min., or 100 MΩ- μ F min., whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test


100% rated and +125°C


Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.



SV Style Radial Lead - Application Information







Not RoHS Compliant



For RoHS compliant products, please select correct termination style.

SV01 thru SV17


SV52 thru SV59 and SV63 thru SV67


K


HIGH VOLTAGE RADIAL LEAD **HOW TO ORDER**


4000V = J


5000V = K











Note 1: No suffix signifies bulk packaging which is KYOCERA AVX standard packaging. Use suffix "TR1" if tape and reel is required. Parts are reel packaged per EIA-468.

Styles: SV01 THRU SV67

Packaging

(See Note 1)

Note: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for *Hi-Rel screening consists of 100% Group A, Subgroup 1 per MIL-PRF-49467. (Except partial discharge testing is not performed and DWV is at 120% rated voltage).

DIMENSIONS

millimeters (inches)


Style	Length (L) max	Height (H) max	Thickness (T)	Lead Spacing ±.762 (.030) (S)	LD (Nom)
SV01	6.35 (0.250)	5.59 (0.220)	5.08 (0.200)	4.32 (0.170)	0.64 (0.025)
SV02/SV52	8.13 (0.320)	7.11 (0.280)	5.08 (0.200)	5.59 (0.220)	0.64 (0.025)
SV03/SV53	9.40 (0.370)	7.62 (0.300)	5.08 (0.200)	6.99 (0.275)	0.64 (0.025)
SV04/SV54	11.4 (0.450)	5.59 (0.220)	5.08 (0.200)	7.62 (0.300)	0.64 (0.025)
SV05/SV55	11.9 (0.470)	10.2 (0.400)	5.08 (0.200)	9.52 (0.375)	0.64 (0.025)
SV06/SV56	14.0 (0.550)	7.11 (0.280)	5.08 (0.200)	10.16 (0.400)	0.64 (0.025)
SV07/SV57	14.5 (0.570)	12.7 (0.500)	5.08 (0.200)	12.1 (0.475)	0.64 (0.025)
SV08/SV58	17.0 (0.670)	15.2 (0.600)	5.08 (0.200)	14.6 (0.575)	0.64 (0.025)
SV09/SV59	19.6 (0.770)	18.3 (0.720)	5.08 (0.200)	17.1 (0.675)	0.64 (0.025)
SV10	26.7 (1.050)	12.7 (0.500)	5.08 (0.200)	22.9 (0.900)	0.64 (0.025)
SV11	31.8 (1.250)	15.2 (0.600)	5.08 (0.200)	27.9 (1.100)	0.64 (0.025)
SV12	36.8 (1.450)	18.3 (0.720)	5.08 (0.200)	33.0 (1.300)	0.64 (0.025)
SV13/SV63	7.62 (0.300)	9.14 (0.360)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)
SV14/SV64	10.2 (0.400)	11.7 (0.460)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)
SV15/SV65	12.7 (0.500)	14.2 (0.560)	5.08 (0.200)	10.2 (0.400)	0.64 (0.025)
SV16/SV66	22.1 (0.870)	16.8 (0.660)	5.08 (0.200)	20.1 (0.790)	0.81 (0.032)
SV17/SV67	23.6 (0.930)	19.8 (0.780)	6.35 (0.250)	20.3 (0.800)	0.81 (0.032)

TAPE & REEL (QUANTITY
Part	Pieces
SV01	1000
SV02/SV52	1000
SV03/SV53	1000
SV04/SV54	1000
SV05/SV55	1000
SV06/SV56	500
SV07/SV57	500
SV08/SV58	500
SV09/SV59	500
SV10	N/A
SV11	N/A
SV12	N/A
SV13/SV63	1000
SV14/SV64	1000
SV15/SV65	500
SV16/SV66	500
SV17/SV67	400

TADE O DEEL OHANTITY

KOH	3
Part	Available
SV01	Yes
SV02/SV52	Yes
SV03/SV53	Yes
SV04/SV54	Yes
SV05/SV55	Yes
SV06/SV56	Yes
SV07/SV57	Yes
SV08/SV58	Yes
SV09/SV59	Yes
SV10	Yes
SV11	Yes
SV12	Yes
SV13/SV63	Yes
SV14/SV64	Yes
SV15/SV65	Yes
SV16/SV66	Yes
SV17/SV67	Yes

RoHS





CAPACITANCE VALUE

				COG				
Ctulo	600/630V	1000V	1500V	2000V	2500V	3000V	4000V	5000V
Style	min./max.	min./max.	min./max.	min./max.	min./max.	min./max.	min./max.	min./max.
SV01	100 pF / 1500 pF	100 pF / 1000 pF	10 pF / 330 pF	10 pF / 220 pF	10 pF / 120 pF	10 pF / 82 pF	-	-
SV02/SV52	100 pF / 6800 pF	100 pF / 4700 pF	100 pF / 1500 pF	10 pF / 1000 pF	10 pF / 680 pF	10 pF / 560 pF	10 pF / 150 pF	10 pF / 100 pF
SV03/SV53	100 pF / 0.012 μF	100 pF / 8200 pF	100 pF / 2700 pF	100 pF / 1800 pF	10 pF / 1000 pF	10 pF / 680 pF	10 pF / 390 pF	10 pF / 220 pF
SV04/SV54	100 pF / 3900 pF	100 pF / 2700 pF	10 pF / 820 pF	10 pF / 560 pF	10 pF / 270 pF	10 pF / 180 pF	10 pF / 100 pF	10 pF / 68 pF
SV05/SV55	1000 pF / 0.027 μF	1000 pF / 0.018 μF	100 pF / 6800 pF	100 pF / 4700 pF	100 pF / 2700 pF	100 pF / 1500 pF	10 pF /1000 pF	10 pF / 560 pF
SV06/SV56	100 pF / 0.012 μF	100 pF / 0.010 μF	100 pF / 3300 pF	100 pF / 2200 pF	10 pF / 1200 pF	10 pF / 820 pF	10 pF / 470 pF	10 pF / 390 pF
SV07/SV57	1000 pF / 0.056 μF	1000 pF / 0.033 μF	1000 pF / 0.015 μF	100 pF / 0.010 μF	100 pF / 5600 pF	100 pF / 3900 pF	100 pF /2200 pF	10 pF /1200 pF
SV08/SV58	1000 pF / 0.082 μF	1000 pF / 0.047 μF	1000 pF / 0.022 μF	1000 pF / 0.015 μF	100 pF /0.010 μF	100 pF / 6800 pF	100 pF /3300 pF	100 pF /2200 pF
SV09/SV59	1000 pF / 0.150 μF	1000 pF / 0.082 μF	1000 pF / 0.039 μF	1000 pF / 0.022 μF	1000 pF /0.015 μF	100 pF / 8200 pF	100 pF /4700 pF	100 pF /3300 pF
SV10	1000 pF / 0.100 μF	1000 pF / 0.056 μF	1000 pF / 0.022 μF	1000 pF / 0.012 μF	100 pF / 8200 pF	100 pF / 5600 pF	100 pF /3300 pF	100 pF /2200 pF
SV11	1000 pF / 0.150 μF	1000 pF / 0.082 μF	1000 pF / 0.039 μF	1000 pF / 0.022 μF	1000 pF /0.015 μF	100 pF / 8200 pF	100 pF /4700 pF	100 pF /3300 pF
SV12	0.01 µF / 0.220 µF	0.01 μF / 0.15 μF	1000 pF / 0.056 μF	1000 pF / 0.033 μF	1000 pF /0.022 μF	1000 pF / 0.015 μF	100 pF /8200 pF	100 pF /5600 pF
SV13/SV63	100 pF / 0.018 μF	100 pF / 0.012 μF	100 pF / 4700 pF	100 pF / 2700 pF	100 pF / 1800 pF	100 pF / 1000 pF	10 pF / 470 pF	10 pF / 390 pF
SV14/SV64	1000 pF / 0.039 μF	1000 pF / 0.022 μF	100 pF / 8200 pF	100 pF / 5600 pF	100 pF / 3300 pF	100 pF / 1800 pF	10 pF / 820 pF	10 pF / 680 pF
SV15/SV65	1000 pF / 0.056 μF	1000 pF / 0.033 μF	1000 pF /0.015 μF	100 pF / 0.01 μF	100 pF / 5600 pF	100 pF / 2700 pF	100 pF /1800 pF	100 pF /1200 pF
SV16/SV66	1000 pF / 0.120 μF	1000 pF / 0.082 μF	1000 pF /0.039 μF	1000 pF / 0.027 μF	1000 pF /0.015 μF	100 pF / 8200 pF	100 pF /4700 pF	100 pF /3300 pF
SV17/SV67	1000 pF / 0.150 μF	1000 pF / 0.10 μF	1000 pF /0.056 μF	1000 pF / 0.039 μF	1000 pF /0.022 μF	1000 pF / 0.012 μF	100 pF /6800 pF	100 pF /4700 pF
0117/0107	1000 рг 7 0.100 рг	1000 рг 7 оло рг	1000 рт 70.000 рт	N1500	1000 β1 70.022 β1	1000 рт 7 0.012 рт	100 pr 70000 pr	100 рт 747 00 рт
SV01	1000 pF / 2700 pF	1000 pF / 1800 pF	100 pF / 680 pF	100 pF / 470 pF	100 pF / 220 pF	100 pF / 150 pF	_	_
SV02/SV52	1000 pF / 0.012 μF	1000 pF / 8200 pF	1000 pF / 2700 pF	1000 pF / 1800 pF	100 pF / 1000 pF	100 pF / 680 pF	100 pF / 270 pF	100 pF / 150 pF
SV02/3V32 SV03/SV53	0.010 pF / 0.012 μF	0.010 pF / 0.018 μF	1000 pF / 2700 pF 1000 pF / 5600 pF	1000 pF / 1800 pF 1000 pF / 3900 pF	1000 pF / 2200 pF	1000 pF / 080 pF 1000 pF / 1500 pF	100 pF / 270 pF 100 pF / 680 pF	100 pF / 130 pF 100 pF / 470 pF
SV03/SV53	1000 pF / 8200 pF	1000 pF / 5600 pF	1000 pF / 3000 pF 1000 pF / 1800 pF	1000 pF / 3900 pF	1000 pF / 2200 pF	1000 pF / 1300 pF	100 pF / 080 pF 100 pF / 220 pF	100 pF / 470 pF 100 pF / 120 pF
SV04/3V34 SV05/SV55	0.010 μF / 0.068 μF	0.010 μF / 0.047 μF	0.010 μF / 0.015 μF	100 pF / 0.010 μF	1000 pF / 5600 pF	100 pF / 3300 pF	100 pF / 220 pF 1000 pF / 2200 pF	100 pF / 120 pF 1000 pF /1200 pF
SV05/SV55 SV06/SV56	0.010 μF / 0.068 μF				1000 pF / 3600 pF 1000 pF / 2200 pF	1000 pF / 3300 pF 1000 pF / 1500 pF		
SV06/SV56 SV07/SV57	0.010 μF / 0.027 μF 0.010 μF / 0.12 μF	0.010 μF / 0.018 μF 0.010 μF / 0.10 μF	1000 pF / 5600 pF	1000 pF / 3900 pF 0.010 μF / 0.018 μF			100 pF / 680 pF	100 pF / 470 pF
	 	·	0.010 μF / 0.027 μF		1000 pF /0.012 μF	1000 pF / 5600 pF	1000 pF /3900 pF	1000 pF /2200 pF
SV08/SV58	0.010 μF / 0.15 μF	0.010 μF / 0.12 μF	0.010 μF / 0.047 μF		0.010 μF /0.018 μF	1000 pF / 0.010 μF	1000 pF /6800 pF	1000 pF /3900 pF
SV09/SV59	0.10 µF / 0.220 µF	0.10 μF / 0.18 μF	0.010 μF / 0.082 μF	0.010 μF / 0.047 μF	0.010 pF /0.033 μF	0.010 μF / 0.015 μF	1000 pF /8200 pF	1000 pF /6800 pF
SV10	0.10 μF / 0.18 μF	0.10 μF / 0.15 μF	0.010 μF / 0.047 μF	0.010 μF / 0.027 μF	0.010 µF /0.018 µF	1000 pF / 0.010 μF	1000 pF /5600 pF	1000 pF /3900 pF
SV11	0.10 μF / 0.33 μF	0.10 μF / 0.22 μF	0.010 μF / 0.082 μF	0.010 μF / 0.039 μF	0.010 μF /0.027 μF	0.010 μF / 0.018 μF	1000 pF /0.010 μF	1000 pF /6800 pF
SV12	0.10 μF / 0.47 μF	0.10 μF / 0.33 μF	0.10 μF / 0.12 μF	0.010 μF / 0.068 μF	0.010 pF /0.047 μF	0.010 μF / 0.027 μF	0.010 pF /0.015 μF	1000 pF /0.010 μF
SV13/SV63	0.010 μF / 0.039 μF	0.010 μF / 0.027 μF	1000 pF / 8200 pF	1000 pF / 5600 pF	1000 pF / 3300 pF	1000 pF / 1800 pF	100 pF / 820 pF	100 pF / 680 pF
SV14/SV64	0.010 μF / 0.082 μF	0.010 μF / 0.056 μF	0.010 pF / 0.018 μF	1000 pF / 0.012 μF	1000 pF / 6800 pF	1000 pF / 3900 pF	1000 pF /1800 pF	1000 pF /1500 pF
SV15/SV65	0.010 μF / 0.10 μF	0.010 μF / 0.082 μF	0.010 μF / 0.027 μF	0.010 pF / 0.018 μF	1000 pF /0.012 μF	1000 pF / 5600 pF	1000 pF /3300 pF	1000 pF /2700 pF
SV16/SV66	0.10 μF / 0.22 μF	0.10 μF / 0.18 μF	0.010 μF / 0.082 μF	0.010 μF / 0.039 μF	0.010 μF /0.027 μF	0.010 μF / 0.015 μF	1000 pF /8200 pF	1000 pF /6800 pF
SV17/SV67	0.10 μF / 0.33 μF	0.10 μF / 0.22 μF	0.010 μF / 0.10 μF	0.010 μF / 0.056 μF	0.010 μF /0.033 μF	0.010 μF / 0.022 μF	1000 pF /0.012 μF	1000 pF /0.010 μF
21121				X7R	l	I		
SV01	1000 pF / 0.018 μF	1000 pF / 0.012 μF	100 pF / 5600 pF	100 pF / 3900 pF	-	-	-	-
SV02/SV52	1000 pF / 0.082 μF	1000 pF / 0.047 μF	1000 pF / 0.015 μF	100 pF / 6800 pF	100 pF / 3900 pF	100 pF / 2700 pF	-	_
SV03/SV53	1000 pF / 0.180 μF	1000 pF / 0.082 μF	1000 pF / 0.018 μF	1000 pF / 0.01 μF	100 pF / 6800 pF	100 pF / 4700 pF	100 pF /1800 pF	-
SV04/SV54	1000 pF / 0.056 μF	1000 pF / 0.033 μF	100 pF / 6800 pF	100 pF / 3900 pF	100 pF / 2200 pF	100 pF / 1800 pF	100 pF / 820 pF	-
SV05/SV55	0.01 μF / 0.470 μF	0.01 μF / 0.22 μF	1000 pF / 0.056 μF	1000 pF / 0.027 μF	1000 pF /0.018 μF	1000 pF / 0.012 μF	100 pF /4700 pF	-
SV06/SV56	0.01 μF / 0.180 μF	0.01 μF / 0.10 μF	1000 pF / 0.033 μF	1000 pF / 0.012 μF	100 pF / 8200 pF	100 pF / 6800 pF	100 pF /2700 pF	100 pF /1200 pF
SV07/SV57	0.01 μF / 0.820 μF	0.01 μF / 0.39 μF	0.01 μF / 0.10 μF	1000 pF / 0.047 μF	1000 pF /0.033 μF	1000 pF / 0.027 μF	1000 pF / 0.01 μF	100 pF /6800 pF
SV08/SV58	0.01 μF / 1.20 μF	0.01 μF / 0.68 μF	0.01 μF / 0.18 μF	1000 pF / 0.082 μF	1000 pF /0.068 μF	1000 pF / 0.047 μF	1000 pF /0.018 μF	1000 pF /0.012 μF
SV09/SV59	0.10 μF / 1.80 μF	0.10 μF / 1.00 μF	0.01 μF / 0.27 μF	0.01 μF / 0.12 μF	0.01 μF / 0.10 μF	1000 pF / 0.068 μF	1000 pF /0.027 μF	1000 pF /0.018 μF
SV10	0.01 μF / 1.50 μF	0.01 μF / 0.82 μF	0.01 μF / 0.22 μF	0.01 μF / 0.10 μF	1000 pF /0.082 μF	1000 pF / 0.056 μF	1000 pF /0.022 μF	1000 pF /0.022 μF
SV11	0.10 μF / 2.20 μF	0.10 μF / 1.2 μF	0.01 μF / 0.39 μF	0.01 μF / 0.18 μF	0.01 μF / 0.15 μF	0.01 μF / 0.10 μF	1000 pF /0.039 μF	1000 pF /0.027 μF
SV12	0.10 μF / 3.90 μF	0.10 μF / 2.20 μF	0.01 μF / 0.56 μF	0.01 μF / 0.27 μF	0.01 μF / 0.22 μF	0.01 μF / 0.15 μF	1000 pF /0.056 μF	1000 pF /0.033 μF
SV13/SV63	0.01 μF / 0.270 μF	0.01 μF / 0.10 μF	1000 pF / 0.033 μF	1000 pF / 0.012 μF	1000 pF / 0.01 μF	100 pF / 6800 pF	100 pF /2700 pF	_
SV14/SV64	0.01 μF / 0.470 μF	0.01 μF / 0.18 μF	1000 pF / 0.068 μF	1000 pF / 0.022 μF	1000 pF /0.018 μF	1000 pF / 0.015 μF	100 pF /5600 pF	-
SV15/SV65	0.01 μF / 0.680 μF	0.01 μF / 0.33 μF	0.01 μF / 0.10 μF	1000 pF / 0.033 μF	1000 pF /0.027 μF	1000 pF / 0.022 μF	1000 pF /8200 pF	100 pF /4700 pF
SV16/SV66	0.01 μF / 1.80 μF	0.01 μF / 1.0 μF	0.01 μF / 0.27 μF	0.01 μF / 0.12 μF	0.01 μF / 0.10 μF	1000 pF / 0.068 μF	1000 pF /0.027 μF	1000 pF /0.018 μF
SV17/SV67	0.01 μF / 2.20 μF	0.01 μF / 1.2 μF	0.01 μF / 0.39 μF	0.01 μF / 0.15 μF	0.01 μF / 0.12 μF	1000 pF / 0.082 μF	1000 pF /0.039 μF	1000 pF /0.027 μF
		ao rotingo or voluco						

Note: Contact factory for other voltage ratings or values.





KYOCERA AVX IS QUALIFIED TO THE FOLLOWING DSCC DRAWINGS

Specification #	Description	Capacitance Range
87046	C0G-1000 VDC	10 pF - 0.025 μF
87043	X7R-1000 VDC	100 pF - 0.47 μF
87040	X7R-2000 VDC	100 pF - 0.22 μF
87114	C0G-3000 VDC	10 pF - 8200 pF
87047	X7R-3000 VDC	100 pF - 0.1 μF
87076	C0G-4000 VDC	10 pF - 6800 pF
89044	X7R-4000 VDC	100 pF - 0.056 μF
87077	C0G-5000 VDC	10 pF - 5600 pF
87070	X7R-5000 VDC	100 pF - 0.033 μF

Group A inspection

Inspection	Requirement paragraph of MIL-PRF-49467	Test method paragraph of MIL-PRF-49467	Sampling procedure
Subqroup 1 Thermal Shock Voltage Conditioning	3.6 3.6	4.8.2.1 4.8.2.2	100% inspection
Subgroup 3			
Visual and mechanical examination:			
Material	3.4 and 3.4.1	4.8.4	
Physical dimensions	3.1		13 samples
Interface requirements			0 failures
(other than physical dimensions)	3.5		
Marking	3.25		
Workmanship	3.27		
Subgroup 4			5 samples
Solderability	3.13	4.8.9	0 failures

Group B inspection*

Inspection	Requirement paragraph of MIL-PRF-49467	Test method paragraph of MIL-PRF-49467	Number of sample units to be inspected	Number defectiv permitt	res
Subgroup 1					
Terminal strength	3.18	4.8.14	12	1	
Resistance to soldering heat	3.11	4.8.7	12	'	
Moisture resistance	3.19	4.8.15			
Subgroup 2] _
Voltage-temperature limits**	3.14	4.8.10	6	1	'
Low temperature storage	3.23	4.8.19	0	'	
Marking legibility	3.25.1	4.8.1.1			
Subqroup 3 Resistance to solvents	3.21	4.8.17	4	1	
Subgroup 4				1	
Life (at elevated ambient temperature)	3.22	4.8.18	10	'	

^{*}Customers may accept at their discretion, a certificate of compliance with group B requirements in lieu of performing group B tests.

^{**}For Steps E, F & G in Table VII of MIL-PRF-49467, 500 Vdc shall be applied.







Automotive grade, AEC-Q200 qualified SV-style capacitors are designed with COG (NPO), class I dielectric that is characterized with very low dielectric losses. This product is designed for AC applications requiring capacitors capable of handling high AC currents at high frequencies.

With emergence of strongly coupled magnetic resonance technology that allows for highly efficient wireless transmission of power to recharge batteries, the need for low loss capacitors is apparent. Thanks to their extremely low dissipation factor, automotive grade SV-style parts can reliably handle high rms currents with minimal power losses in medium to high power resonant converters. Multiple parts in parallel may be required depending on the power transmission levels.

The automotive grade SV-style capacitors are conformally coated eliminating possibility of arc flashover. The leaded construction provides mechanical decoupling of MLCC chip from the board and thus provides effective stress relief required for automotive applications.

COG Dielectric General Specifications

Capacitance Range

1000pF to $0.015 \mu F$ (+25°C, 1.0 ±0.2 Vrms at 1kHz)

Capacitance Tolerances

±5%, ±10%, ±20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

 $0 \pm 30 \text{ ppm/°C}$

Voltage Ratings

1000 VDC (+125°C)

Dissipation Factor

0.1% max.

(+25°C, 1.0 ±0.2 Vrms at 1kHz,

Insulation Resistance (+25°C, at 500V)

100K M Ω min. or 1000 M Ω - μ F min., whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min., whichever is less

Dielectric Strength


120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

Typical Impedance and ESR Characterization


P/N: SV05AA103K4R

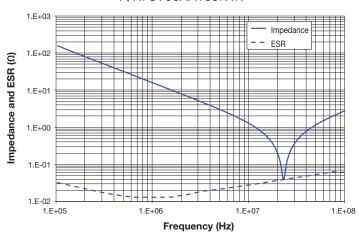


Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.



SV Style Automotive Grade Radial Lead - Application Information





Not RoHS Compliant



For RoHS compliant products, please select correct termination style.

SSV05, SV13 & SV14

SV55, SV63 & SV64

AUTOMOTIVE GRADE HIGH VOLTAGE MLC RADIALS HOW TO ORDER







Capacitance Code (2 significant digits + no. of zeros) Examples: 1.000 pF = 102 22.000 pF = 223

153



Test Level 4 = AEC-Q200J = +5% $K = \pm 10\%$ $M = \pm 20\%$

Styles: SV05, SV13 & SV14



Note 1: No suffix signifies bulk packaging which is KYOCERA AVX standard packaging. Use suffix "TR1" if tape and reel is required. Parts are reel packaged per EIA-468.

Note: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.

*Hi-Rel screening consists of 100% Group A, Subgroup 1 per MIL-PRF-49467. (Except partial discharge testing is not performed and DWV is at 120% rated voltage).

DIMENSIONS

millimeters (inches)

Style	Length (L) max	Height (H) max	Thickness (T) max	Lead Spacing ±.762 (.030) (S)	LD (Nom)
SV05/SV55	11.9 (0.470)	10.2 (0.400)	5.08 (0.200)	9.52 (0.375)	0.64 (0.025)
SV13/SV63	7.62 (0.300)	9.14 (0.360)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)
SV14/SV64	10.2 (0.400)	11.7 (0.460)	5.08 (0.200)	5.08 (0.200)	0.51 (0.020)

TAPE & REEL QUANTITY		
Part	Pieces	
SV05/SV55	1000	
SV13/SV63	1000	
SV14/SV64	1000	

CAPACITANCE VALUE

COG				
Style	1000V min./max.			
SV05/SV55	1000 pF / 0.015 μF			
SV13/SV63	1000 pF / 8200 pF			
SV14/SV64	1000 pF / 0.015 µF			

090518


Basic Construction




A multilayer ceramic (MLC) capacitor is a monolithic block of ceramic containing two sets of offset, interleaved planar electrodes that extend to two opposite surfaces of the ceramic dielectric. This simple structure requires a considerable amount of sophistication, both in material and in manufacture, to produce it in the quality and quantities needed in today's electronic equipment.

Terminations

- Standard Nickel Barrier Lead Free Tin Plate (RoHS Compliant) 5% minimum Lead Plated
- Leach resistance to 90 seconds at 260°C
- · Solderable plated for dimensional control
- · Special materials as required



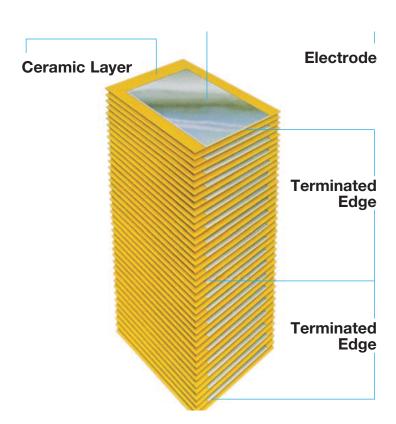

QUALITY STATEMENT

KYOCERA AVX focus is customer satisfaction - Customer satisfaction in the broadest sense: Products, service, price, delivery, technical support, and all the aspects of a business that impact you, the customer.

Our long term strategy is for continuous improvement which is defined by our Quality Vision 2000. This is a total quality management system developed by and supported by KYOCERA AVX management. The foundation of QV2000 is built upon military and

commercial standards and systems including ISO9001. QV2000 is a natural extension of past quality efforts with world class techniques for ensuring a total quality environment to satisfy our customers during this decade and into the 21st century.

As your components supplier, we invite you to experience the quality, service, and commitment of KYOCERA AVX.

General Description



Table 1: EIA and MIL Temperature Stable and **General Application Codes**

EIA CODE Percent Capacity Change Over Temperature Range			
RS198	Temperature Range		
X7	-55°C to +125°C		
X5	-55°C to +85°C		
Y5	-30°C to +85°C		
Z5 +10°C to +85°C			
Code	Percent Capacity Change		
D	±3.3%		
E	±4.7%		
F	±7.5%		
Р	±10%		
R	±15%		
S	±22%		
T +22%, -33%			
U +22%, - 56%			
V	+22%, -82%		

EXAMPLE - A capacitor is desired with the capacitance value at 25°C to increase no more than 7.5% or decrease no more than 7.5% from -30°C to +85°C. EIA Code will be Y5F.

MIL CODE					
Symbol	Temperature Range				
Α	-55°C t	o +85°C			
В	-55°C to	+125°C			
С	-55°C to +150°C				
Symbol	Cap. Change Zero Volts	Cap. Change Rated Volts			
Q	+15%, -15%	+15%, -50%			
R	+15%, -15%	+15%, -40%			
W	+22%, -56%	+22%, -66%			
Χ	+15%, -15%	+15%, -25%			
Υ	+30%, -70%	+30%, -80%			
Z	+20%, -20%	+20%, -30%			

Temperature characteristic is specified by combining range and change symbols, for example BR or AW. Specification slash sheets indicate the characteristic applicable to a given style of capacitor.

In specifying capacitance change with temperature for Class 2 materials, EIA expresses the capacitance change over an operating temperature range by a 3 symbol code.

The

first symbol represents the cold temperature end of the temperature range, the second represents the upper limit of the operating temperature range and the third symbol represents the capacitance change allowed over the operating temperature range. Table 1 provides a detailed explanation of the EIA system.

Effects of Voltage - Variations in voltage have little effect on Class 1 dielectric but does affect the capacitance and dissipation factor of Class 2 dielectrics. The application of DC voltage reduces both the capacitance and dissipation factor while the application of an AC voltage within a reasonable range tends to increase both capacitance and dissipation factor readings. If a high enough AC voltage is applied, eventually it will reduce capacitance just as a DC voltage will. Figure 2 shows the effects of AC voltage.




Figure 2

Volts AC at 1.0 KHz

Capacitor specifications specify the AC voltage at which to measure (normally 0.5 or 1 VAC) and application of the wrong voltage can cause spurious readings.

Typical Cap. Change vs. Temperature




Figure 3

General Description



Effects of Time - Class 2 ceramic capacitors change capacitance and dissipation factor with time as well as temperature, voltage and frequency. This change with time is known as aging. Aging is caused by a gradual re-alignment of the crystalline structure of the ceramic and produces an exponential loss in capacitance and decrease in dissipation factor versus time. A typical curve of aging rate for semistable ceramics is shown in Figure 4.

If a Class 2 ceramic capacitor that has been sitting on the shelf for a period of time, is heated above its curie point, (125°C for 4 hours or 150°C for 1/2 hour will suffice) the part will de-age and return to its initial capacitance and dissipation factor readings. Because the capacitance changes rapidly, immediately after de-aging, the basic capacitance measurements are normally referred to a time period sometime after the de-aging process. Various manufacturers use different time bases but the most popular one is one day or twenty-four hours after "last heat." Change in the aging curve can be caused by the application of voltage and other stresses. The possible changes in capacitance due to de-aging by heating the unit explain why capacitance changes are allowed after test, such as temperature cycling, moisture resistance, etc., in MIL specs. The application of high voltages such as dielectric withstanding voltages also tends to de-age capacitors and is why re-reading of capacitance after 12 or 24 hours is allowed in military specifications after dielectric strength tests have been performed.

Typical Curve of Aging Rate X7R +1.50 Capacitance Change Percent -1.5 -3.0 -4.5 -6.0 -7.5 10 1000 10,000 100,000 Hours Characteristic Max. Aging Rate %/Decade C0G (NP0) None X7R, X5R 2 Figure 4

Effects of Frequency - Frequency affects capacitance and impedance characteristics of capacitors. This effect is much more pronounced in high dielectric constant ceramic formulation than in low K formulations. KYOCERA AVX's SpiCalci software generates impedance, ESR, series inductance, series resonant frequency and capacitance all as functions of frequency, temperature and DC bias for standard chip sizes and styles. It is available free from KYOCERA AVX and can be downloaded for free from KYOCERA AVX website: http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip.



Effects of Mechanical Stress - High "K" dielectric ceramic capacitors exhibit some low level piezoelectric reactions under mechanical stress. As a general statement, the piezoelectric output is higher, the higher the dielectric constant of the ceramic. It is desirable to investigate this effect before using high "K" dielectrics as coupling capacitors in extremely low level applications.

Reliability - Historically ceramic capacitors have been one of the most reliable types of capacitors in use today. The approximate formula for the reliability of a ceramic capacitor is:

$$\frac{L_o}{L_t} = \left(\frac{V_t}{V_o}\right) \times \left(\frac{T_t}{T_o}\right) Y$$

where

L_o = operating life

L, = test life

T_t = test temperature and
T_o = operating temperature in °C
X,Y = see text

V_t = test voltage

 V_{o} = operating voltage

Historically for ceramic capacitors exponent X has been considered as 3. The exponent Y for temperature effects typically tends to run about 8.

General Description



A capacitor is a component which is capable of storing electrical energy. It consists of two conductive plates (electrodes) separated by insulating material which is called the dielectric. A typical formula for determining capacitance is:

C = capacitance (picofarads)
$$C = \frac{.224 \text{ KA}}{t}$$

K = dielectric constant (Vacuum = 1)

A = area in square inches

t = separation between the in inches plates (thickness of dielectric)

.224 = conversion constant (.0884 for metric system in cm)

Capacitance - The standard unit of capacitance is the farad. A capacitor has a capacitance of 1 farad when 1 coulomb charges it to 1 volt. One farad is a very large unit and most capacitors have values in the micro (10^{-6}) , nano (10^{-9}) or pico (10^{-12}) farad level.

Dielectric Constant - In the formula for capacitance given above the dielectric constant of a vacuum is arbitrarily chosen as the number 1. Dielectric constants of other materials are then compared to the dielectric constant of a vacuum.

Dielectric Thickness - Capacitance is indirectly proportional to the separation between electrodes. Lower voltage requirements mean thinner dielectrics and greater capacitance per volume.

Area - Capacitance is directly proportional to the area of the electrodes. Since the other variables in the equation are usually set by the performance desired, area is the easiest parameter to modify to obtain a specific capacitance within a material group.

Energy Stored - The energy which can be stored in a capacitor is given by the formula:

E = energy in joules (watts-sec)

V = applied voltage

C = capacitance in farads

Potential Change - A capacitor is a reactive component which

$$E = \frac{1}{2}CV^2$$

reacts against a change in potential across it. This is shown by the equation for the linear charge of a capacitor:

where

I = Current

C = Capacitance

dV/dt = Slope of voltage transition across capacitor

$$I_{ideal} = C \frac{dV}{dt}$$

Thus an infinite current would be required to instantly change the potential across a capacitor. The amount of current a capacitor can "sink" is determined by the above equation.


Equivalent Circuit - A capacitor, as a practical device, exhibits not only capacitance but also resistance and inductance. A simplified schematic for the equivalent circuit is:

C = Capacitance

L = Inductance

R_s = Series Resistance

R_n = Parallel Resistance

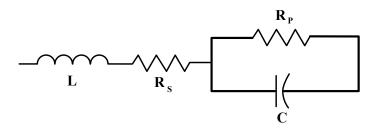

Reactance – Since the insulation resistance (Rp) is normally very high, the total impedance of a capacitor is:

$$Z = \sqrt{R_s^2 + (X_c - X_L)^2}$$
 where

Z = Total Impedance


R_s = Series Resistance

X_c = Capacitive Reactance

 X_{I} = Inductive Reactance

The variation of a capacitor's impedance with frequency determines its effectiveness in many applications.

Phase Angle - Power Factor and Dissipation Factor are often confused since they are both measures of the loss in a capacitor under AC application and are often almost identical in value. In a "perfect" capacitor the current in the capacitor will lead the voltage by 90°.



In practice the current leads the voltage by some other phase angle due to the series resistance RS. The complement of this angle is called the loss angle and:


> Power Factor (P.F.) = $\cos \phi$ or $\sin \delta$ Dissipation Factor (D.F.) = $\tan \delta$

for small values of δ the tan and sine are essentially equal which has led to the common interchangeability of the two terms in the industry.

General Description



Equivalent Series Resistance - The term E.S.R. or Equivalent Series Resistance combines all losses both series and parallel in a capacitor at a given frequency so that the equivalent circuit is reduced to a simple R-C series connection.



Dissipation Factor - The DF/PF of a capacitor tells what percent of the apparent power input will turn to heat in the capacitor.

Dissipation Factor =
$$\frac{\text{E.S.R.}}{X_c}$$
 = (2 π fC) (E.S.R.)

The watts loss are:

Watts loss =
$$(2 \pi fCV^2)$$
 (D.F.)

Very low values of dissipation factor are expressed as their reciprocal for convenience. These are called the "Q" or Quality factor of capacitors.

Parasitic Inductance - The parasitic inductance of capacitors is becoming more and more important in the decoupling of today's high speed digital systems. The relationship between the inductance and the ripple voltage induced on the DC voltage line can be seen from the simple inductance equation:

$$V = L \frac{di}{dt}$$

The $\frac{\mathit{cli}}{\mathit{clt}}$ seen in current microprocessors can be as high as 0.3 A/ ns, and up to 10A/ns. At 0.3 A/ns, 100pH of parasitic inductance can cause a voltage spike of 30mV. While this does not sound very drastic, with the Vcc for microprocessors decreasing at the current rate, this can be a fairly large percentage.

Another important, often overlooked, reason for knowing the parasitic inductance is the calculation of the resonant frequency. This can be important for high frequency, by-pass capacitors, as the resonant point will give the most signal attenuation. The resonant frequency second first calculated from the simple equation:

$$2\pi\sqrt{LC}$$

Insulation Resistance - Insulation Resistance is the resistance measured across the terminals of a capacitor and consists principally of the parallel resistance RP shown in the equivalent circuit. As capacitance values and hence the area of dielectric increases, the I.R. decreases and hence the product (C x IR or RC) is often specified in ohm farads or more commonly megohmmicrofarads. Leakage current is determined by dividing the rated voltage by IR (Ohm's Law).

Dielectric Strength - Dielectric Strength is an expression of the ability of a material to withstand an electrical stress. Although dielectric strength is ordinarily expressed in volts, it is actually dependent on the thickness of the dielectric and thus is also more generically a function of volts/mil.

Dielectric Absorption - A capacitor does not discharge instantaneously upon application of a short circuit, but drains gradually after the capacitance proper has been discharged. It is common practice to measure the dielectric absorption by determining the "reappearing voltage" which appears across a capacitor at some point in time after it has been fully discharged under short circuit conditions.


Corona – Corona is the ionization of air or other vapors which causes them to conduct current. It is especially prevalent in high voltage units but can occur with low voltages as well where high voltage gradients occur. The energy discharged degrades the performance of the capacitor and can in time cause catastrophic failures.

Surface Mounting Guide



10.16 (0.400)

REFLOW SOLDERING



millimeters (inches) Case Size D1 D2 **D4 0805** (LD05) 3.00 (0.120) 1.00 (0.040) 1.00 (0.040) 1.00 (0.040) 1.25 (0.050) 1206 (LD06) 4.00 (0.160) 1.00 (0.040) 2.00 (0.090) 1.00 (0.040) 1.60 (0.060) *1210 (LD10) 1.00 (0.040) 4.00 (0.160) 1.00 (0.040) 2.00 (0.090) 2.50 (0.100) *1808 (LD08) 5.60 (0.220) 1.00 (0.040) 3.60 (0.140) 1.00 (0.040) 2.00 (0.080) *1812 (LD12) 3.60 (0.140) 1.00 (0.040) 3.00 (0.120) 5.60 (0.220) 1.00 (0.040) *1825 (LD13) 5.60 (0.220) 1.00 (0.040) 3.60 (0.140) 1.00 (0.040) 6.35 (0.250) *2220 (LD20) 6.60 (0.260) 1.00 (0.040) 4.60 (0.180) 1.00 (0.040) 5.00 (0.200) *2225 (LD14) 6.60 (0.260) 1.00 (0.040) 4.60 (0.180) 1.00 (0.040) 6.35 (0.250) 6.60 (0.260) *HQCC 1.00 (0.040) 4.60 (0.180) 1.00 (0.040) 6.35 (0.250) *3640 (LD40) 10.67 (0.427) 1.52 (0.060) 7.62 (0.300) 1.52 (0.060) 10.16 (0.400)

1.52 (0.060)

*KYOCERA AVX recommends reflow soldering only.

10.67 (0.427)

*HQCE

Component Pad Design

Component pads should be designed to achieve good solder filets and minimize component movement during reflow soldering. Pad designs are given below for the most common sizes of multilayer ceramic capacitors for both wave and reflow soldering. The basis of these designs is:

• Pad width equal to component width. It is permissible to decrease this to as low as 85% of component width but it is not advisable to go below this.


1.52 (0.060)

· Pad overlap 0.5mm beneath component.

7.62 (0.300)

 Pad extension 0.5mm beyond components for reflow and 1.0mm for wave soldering.

WAVE SOLDERING




Case Size	D1	D2	D3	D4	D5
0805	4.00 (0.15)	1.50 (0.06)	1.00 (0.04)	1.50 (0.06)	1.25 (0.05)
1206	5.00 (0.19)	1.50 (0.06)	2.00 (0.09)	1.50 (0.06)	1.60 (0.06)

Dimensions in millimeters (inches)

Component Spacing

wave soldering components, must be sufficiently spaced apart to avoid bridging or shadowing (inability of solder to penetrate properly into small spaces). This is less important for reflow



soldering but sufficient space must be allowed to enable rework should it be required.

Preheat & Soldering

The rate of preheat should not exceed 4°C/second to prevent thermal shock. A better maximum figure is about 2°C/second. For capacitors size 1206 and below, with a maximum thickness of 1.25mm, it is generally permissible to allow a temperature differential from preheat to soldering of 150°C. In all other cases

this differential should not exceed 100°C.

For further specific application or process advice, please consult KYOCERA AVX.

Cleaning

Care should be taken to ensure that the capacitors are thoroughly cleaned of flux residues especially the space beneath the capacitor. Such residues may otherwise become conductive and effectively offer a low resistance bypass to the capacitor.

Ultrasonic cleaning is permissible, the recommended conditions being 8 Watts/litre at 20-45 kHz, with a process cycle of 2 minutes vapor rinse, 2 minutes immersion in the ultrasonic solvent bath and finally 2 minutes vapor rinse.

Surface Mounting Guide



REFLOW SOLDER PROFILES

KYOCERA AVX RoHS compliant products utilize termination finishes (e.g.Sn or SnAg) that are compatible with all Pb-Free soldering systems and are fully reverse compatible with SnPb soldering systems. A recommended SnPb profile is shown for comparison; for Pb-Free soldering, IPC/JEDECJ-STD-020C may be referenced. The upper line in the chart shows the maximum envelope to which products are qualified (typically 3x reflow cycles at 260°C max). The center line gives the recommended profile for optimum wettability and soldering in Pb-Free Systems.

Preheat:

The pre-heat stabilizes the part and reduces the temperature differential prior to reflow. The initial ramp to 125°C may be rapid, but from that point (2-3)°C/sec is recommended to allow ceramic parts to heat uniformly and plastic encapsulated parts to stabilize through the glass transition temperature of the body (~ 180°C).

Reflow:

In the reflow phase, the maximum recommended time > 230°C is 40secs. Time at peak reflow is 10secs max.; optimum reflow is achieved at 250°C, (see wetting balance chart opposite) but products are qualified to 260°C max. Please reference individual product datasheets for maximum limits

Cool Down:

Cool down should not be forced and 6°C/sec is recommended. A slow cool down will result in a finer grain structure of the reflow solder in the solder fillet.

WAVE SOLDER PROFILES

For wave solder, there is no change in the recommended wave profile; all standard Pb-Free (SnCu/SnCuAg) systems operate at the same 260°C max recommended for SnPb systems.

Preheat:


This is more important for wave solder; a higher temperature preheat will reduce the thermal shock to SMD parts that are immersed (please consult individual product data sheets for SMD parts that are suited to wave solder). SMD parts should ideally be heated from the bottom-Side prior to wave. PTH (Pin through hole) parts on the topside should not be separately heated.

Wave:

250°C - 260°C recommended for optimum solderability.


Cool Down:

As with reflow solder, cool down should not be forced and 6°C/sec is recommended. Any air knives at the end of the 2nd wave should be heated.

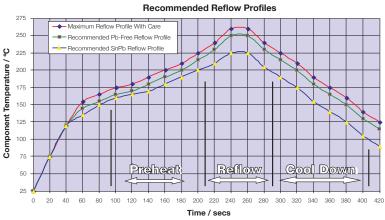



IMPORTANT NOTE: Typical Pb-Free reflow solders have a more dull and grainy appearance compared to traditional SnPb. Elevating the reflow temperature will not change this, but extending the cool down can help improve the visual appearance of the joint.



Surface Mounting Guide



APPLICATION NOTES

Storage

Good solderability is maintained for at least twelve months, provided the components are stored in their "as received" packaging at less than 40°C and 70% RH.

Solderability

Terminations to be well soldered after immersion in a 60/40 tin/lead solder bath at 235 ± 5°C for 2 ± 1 seconds.


Leaching

Terminations will resist leaching for at least the immersion times and conditions shown below.


Termination Type	Solder Tin/Lead/Silver	Solder Temp. °C	Immersion Time Seconds
Nickel Barrier	60/40/0	260 ± 5	30 ± 1

Recommended Soldering Profiles

Reflow




ad-Free Reflow Profile



- Max. Peak Gradient 2.5°C/s
- Peak Temperature: 245°C ±5°C
- Time at >230°C: 40s Max.

Wave



(Preheat chips before soldering) T/maximum 150°C

Lead-Free Wave Soldering

The recommended peak temperature for lead-free wave soldering is 250°C-260°C for 3-5 seconds. The other para meters of the profile remains the same as above.

The following should be noted by customers changing from lead based systems to the new lead free pastes.

- a) The visual standards used for evaluation of solder joints will need to be modified as lead free joints are not as bright as with tin-lead pastes and the fillet may not be as large.
- b) Resin color may darken slightly due to the increase in temperature required for the new pastes.
- c) Lead-free solder pastes do not allow the same self alignment as lead containing systems. Standard mounting pads are acceptable, but machine set up may need to be modified.

General

Surface mounting chip multilayer ceramic capacitors are designed for soldering to printed circuit boards or other substrates. The construction of the components is such that they will withstand the time/temperature profiles used in both wave and reflow soldering methods.

Handling

Chip multilayer ceramic capacitors should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of tweezers or vacuum pick ups is strongly recommended for individual components. Bulk handling should ensure that abrasion and mechanical shock are minimized. Taped and reeled components provides the ideal medium for direct presentation to the placement machine. Any mechanical shock should be minimized during handling chip multilayer ceramic capacitors.

Preheat

It is important to avoid the possibility of thermal shock during soldering and carefully controlled preheat is therefore required. The rate of preheat should not exceed 4°C/second and a target figure 2°C/second is recommended. Although an 80°C to 120°C temperature differential is preferred, recent developments allow a temperature differential between the component surface and the



Surface Mounting Guide



soldering temperature of 150°C (Maximum) for capacitors of 1210 size and below with a maximum thickness of 1.25mm. The user is cautioned that the risk of thermal shock increases as chip size or temperature differential increases.

Soldering

Mildly activated rosin fluxes are preferred. The minimum amount of solder to give a good joint should be used. Excessive solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. KYOCERA AVX terminations are suitable for all wave and reflow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

Cooling

Natural cooling in air is preferred, as this minimizes stresses within the soldered joint. When forced air cooling is used, cooling rate should not exceed 4°C/second. Quenching is not recommended but if used, maximum temperature differentials should be observed according to the preheat conditions above.

Cleaning


Flux residues may be hygroscopic or acidic and must be removed. KYOCERA AVX MLC capacitors are acceptable for use with all of the solvents described in the specifications MIL-STD-202 and EIA-RS-198. Alcohol based solvents are acceptable and properly controlled water cleaning systems are also acceptable. Many other solvents have been proven successful, and most solvents that are acceptable to other components on circuit assemblies are equally acceptable for use with ceramic capacitors.

POST SOLDER HANDLING


Once SMP components are soldered to the board, any bending or flexure of the PCB applies stresses to the soldered joints of the components. For leaded devices, the stresses are absorbed by the compliancy of the metal leads and generally don't result in problems unless the stress is large enough to fracture the soldered connection.

Ceramic capacitors are more susceptible to such stress because they don't have compliant leads and are brittle in nature. The most frequent failure mode is low DC resistance or short circuit. The second failure mode is significant loss of capacitance due to severing of contact between sets of the internal electrodes.

Cracks caused by mechanical flexure are very easily identified and generally take one of the following two general forms:



Type A: Angled crack between bottom of device to top of solder joint.



Type B: Fracture from top of device to bottom of device.

Mechanical cracks are often hidden underneath the termination and are difficult to see externally. However, if one end termination falls off during the removal process from PCB, this is one indication that the cause of failure was excessive mechanical stress due to board warping.

Surface Mounting Guide




COMMON CAUSES OF MECHANICAL CRACKING

The most common source for mechanical stress is board depanelization equipment, such as manual breakapart, v-cutters and shear presses. Improperly aligned or dull cutters may cause torqueing of the PCB resulting in flex stresses being transmitted to components near the board edge. Another common source of flexural stress is contact during parametric testing when test points are probed. If the PCB is allowed to flex during the test cycle, nearby ceramic capacitors may be broken.

A third common source is board to board connections at vertical connectors where cables or other PCBs are connected to the PCB. If the board is not supported during the plug/unplug cycle, it may flex and cause damage to nearby components.

Special care should also be taken when handling large (>6" on a side) PCBs since they more easily flex or warp than smaller boards.

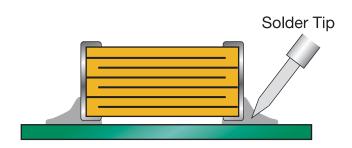


Preferred Method - No Direct Part Contact

REWORKING OF MLCS

Thermal shock is common in MLCs that are manually attached or reworked with a soldering iron. KYOCERA AVX strongly recommends that any reworking of MLCs be done with hot air reflow rather than soldering irons. It is practically impossible to cause any thermal shock in ceramic capacitors when using hot air reflow.


However direct contact by the soldering iron tip often causes thermal cracks that may fail at a later date. If rework by soldering iron is absolutely necessary, it is recommended that the wattage of the iron be less than 30 watts and the tip temperature be <300°C. Rework should be performed by applying the solder iron tip to the pad and not directly contacting any part of the ceramic capacitor.




Poor Method - Direct Contact with Part

PCB BOARD DESIGN

To avoid many of the handling problems, KYOCERA AVX recommends that MLCs be located at least .2" away from nearest edge of board. However when this is not possible, KYOCERA AVX recommends that the panel be routed along the cut line, adjacent to where the MLC is located.




No Stress Relief for MLCs



Routed Cut Line Relieves Stress on MLC

MIL-PRF-123/Chips





KYOCERA AVX's M123 series MIL-qualified ceramic capacitors are designed for high performance application in BX voltage temperature characteristics for general purpose dielectric and in BP voltage temperature characteristics for temperature stable dielectric.


M123 series capacitors offer design and component engineers a proven technology for SMD processing and applications requiring space-level reliability. They are designed for use in timing circuits and critical frequency applications where absolute stability of capacitance is required (BP), as well as in applications where a wider capacitance variation with temperature and voltage can be tolerated (BX)


 $M = \pm 20\%$

HOW TO ORDER

Military Type Designation: Capacitors, Fixed, Ceramic Dielectric, (Temperature Stable and General Purpose), High Reliability

Not RoHS Compliant

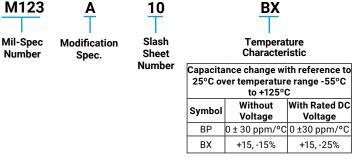






S = Silver – Nickel – Solder Coated Z = Silver – Nickel – Solder Plated (tin/ lead alloy with a minimum of 4 percent léad)

DIMENSIONS



mm (inches)

(L) Length	(W) Width	(T) Thickness	(S) Termination Band			
	CKS51, /10, 0	805 Size Chip				
2.03 (0.080)	1.27 (0.050)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	1.40 (0.055) Max.	± 0.254 (0.010)			
	CKS52, /11, 1	210 Size Chip				
3.05 (0.120)	2.54 (0.100)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	1.65 (0.065) Max.	± 0.254 (0.010)			
	CKS53, /12, 1	808 Size Chip				
4.57 (0.180)	2.03 (0.080)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	1.65 (0.065) Max.	± 0.254 (0.010)			
	CKS54, /13, 2	225 Size Chip				
5.59 (0.220)	6.35 (0.250)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	1.78 (0.070) Max.	± 0.254 (0.010)			
	CKS55, /21, 1	206 Size Chip				
3.05 (0.120)	1.52 (0.060)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	1.65 (0.065) Max.	± 0.254 (0.010)			
	CKS56, /22, 1	812 Size Chip				
4.57 (0.180)	3.18 (0.125)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	2.03 (0.080) Max.	± 0.254 (0.010)			
	CKS57, /23, 1825 Size Chip					
4.57 (0.180)	6.35 (0.250)	0.508 (0.020) Min.	0.508 (0.020)			
± 0.381 (0.015)	± 0.381 (0.015)	2.03 (0.080) Max.	± 0.254 (0.010)			

Slash Sheet	Case Size	Dielectric	Cap Range (pF)
10	0805	BP	1.0-680
10	0603	BX	330-18,000
11	1210	BP	300-3,300
11	1210	BX	5,600-100,000
12	1808	BP	300-1,000
12	1808	BX	5,600-100,000
13	2225	BP	1,100-10,000
13		BX	120,000-1,000,000
21	1206	BP	1.0-2,200
21		BX	4,700-39,000
22	1812	BP	1,200-10,000
22		BX	27,000-180,000
23	1825	BP	3,900-22,000
23		BX	56,000-470,000

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip



MIL-PRF-123/Chips



MIL-PRF-123/STYLE CKS51, -/10

Part Number 1/ (0805 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A10BP_1R0	1.0	C,D	BP	50,100
M123A10BP_1R1	1.1			
M123A10BP_1R2	1.2			
M123A10BP_1R3	1.3			
M123A10BP_1R5	1.5			
M123A10BP_1R6	1.6			
M123A10BP_1R8	1.8			
M123A10BP_2R0	2.0			
M123A10BP_2R2	2.2			
M123A10BP_2R4	2.4			
M123A10BP_2R7	2.7			
M123A10BP_3R0	3.0			
M123A10BP_3R3	3.3			
M123A10BP_3R6	3.6			
M123A10BP_3R9	3.9			
M123A10BP_4R3	4.3			
M123A10BP_4R7	4.7			
M123A10BP_5R1	5.1			
M123A10BP_5R6	5.6			
M123A10BP_6R2	6.2			
WITZSATOBI _ORZ	0.2			
M123A10BP_6R8	6.8			
M123A10BP_7R5	7.5			
M123A10BP_8R2	8.2	l J		
M123A10BP_9R1	9.1	▼		
M123A10BP_100	10	C, J, K		
		1		
M123A10BP_110	11			
M123A10BP_120	12			
M123A10BP_130	13			
M123A10BP_150	15			
M123A10BP_160	16			
M123A10BP_180	18			
M123A10BP_200	20			
M123A10BP_220	22	₩		
M123A10BP_240	24			
M123A10BP_270	27	F, J, K		
M123A10BP_300	30			
M123A10BP_330	33			
M123A10BP_360	36			
M123A10BP_390	39			
M123A10BP_430	43			
W1120A10DF_400	73			
M123A10BP_470	47			
M123A10BP_510	51			
M123A10BP_560	56			
M123A10BP_620	62			
M123A10BP_680	68			
		▼		\
M123A10BP_750	75	F, J, K	BP	50,100

			Voltage-	
Part Number 1/	Capacitance	Capacitance	Temperature	Rated
(0805 Size Chip)	pF	Tolerance	Limits	Voltage
M123A10BP_820_	82	F, J, K	BP	50,100
M123A10BP_910_	91			
M123A10BP_101_	100			
M123A10BP_111_	110			
M123A10BP_121_	120			
M123A10BP_131_	130			
M123A10BP_151_	150			
M123A10BP_161_	160			
M123A10BP_181_	180			
M123A10BP_201_	200			
M123A10BP_221_	220			
M123A10BP_241_	240			
M123A10BP_271_	270			
M123A10BP_301_	300			
267.1021.2001.2				
M123A10BP_331_	330			
M123A10BP_361_	360			
M123A10BP_391_	390			
M123A10BP_431_	430	↓	↓	↓
		, , , , , , , , , , , , , , , , , , ,	, v	50.100
M123A10BP_471_	470	F,J,K	BP	50,100
M123A10BPB511_	510	F,J,K	BP	50
M123A10BPB561_	560			l L
M123A10BPB621_	620	▼	▼	▼
M123A10BPB681_	680	F,J,K	BP	50
M123A10BX_331K_	330	K	BX	50,100
M123A10BX_391K_	390			
M123A10BX_471K_	470			
M123A10BX 561K_	560			
M123A10BX 681K_	680			
M123A10BX_821K_	820			
M123A10BX_102K_	1,000			
M123A10BX_122K_	1,200			
M123A10BX_152K_	1,500			
M123A10BX_182K_	1,800			
M123A10BX_222K_	2,200			
M123A10BX_272K_	2,700			
M123A10BX_332K_	3,300			
M123A10BX_392K_	3,900	₩	₩	\\
M123A10BX_472K_	4,700	К	BX	50,100
M123A10BXB562K_	5,600	Ķ	ВX	50
M123A10BXB682K_	6,800			
M123A10BXB822K	8,200			
M123A10BXB103K_	10,000			
M123A10BXB123K_	12,000			
_				
M123A10BXB153K_	15,000			
M123A10BXB183K_	18,000	ĸ	BX	50
1	.,	· ·		

MIL-PRF-123/Chips



MIL-PRF-123/STYLE CKS52, -/11

				, _
Part Number 1/ (1210 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A11BP_301_ M123A11BP_331_	300 330	F, J, K	BP	50,100
M123A11BP 361	360			
M123A11BP_391_	390			
M123A11BP_431_	430			
M123A11BP_471_	470			
M123A11BP_511_	510			
M123A11BP_561_	560			
M123A11BP_621_	620			
M123A11BP_681_	680			
M123A11BP_751_	750			
M123A11BP_821_	820			
M123A11BP_911_	910			
M123A11BP_102_	1,000			
M123A11BP_112_	1,100			
M123A11BP_122_	1,200			
M123A11BP_132_	1,300			
M123A11BP_152_	1,500			
M123A11BP_162_	1,600			
M123A11BP_182_	1,800			
M123A11BP_202_	2,000	₩	₩	♥
M123A11BP_222_	2,200	F, J, K	BP	50,100

Part Number 1/ (1210 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A11BPB242_	2,400	F, J, K	BP	50
M123A11BPB272_	2,700	1	1	1
M123A11BPB302_	3,000	₩	₩	₩
M123A11BPB332_	3,300	F, J, K	BP	50
M123A11BX_562_	5,600	K, M	BX	50,100
M123A11BX_682_	6,800	1	1 1	1
M123A11BX_822_	8,200			
M123A11BX_103_	10,000			
M123A11BX_123_	12,000			
M123A11BX_153_	15,000			
M123A11BX_183_	18,000			
M123A11BX_223_	22,000	▼	▼	▼
M123A11BX_273_	27,000	K, M	BX	50,100
M123A11BXB333	33.000	K, M	BX	50
M123A11BXB393_	39,000	i i	1	i
M123A11BXB473_	47,000			
M123A11BXB563_	56,000			
M123A11BXB683_	68,000			
M123A11BXB823_	82,000	₩	₩	₩
M123A11BXB104_	100,000	K, M	BX	50

MIL-PRF-123/STYLE CKS53, -/12

Part Number 1/ (1808 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A12BP_301_	300	F, J, K	BP	50,100
M123A12BP_331_	330	1	ı	
M123A12BP_361_	360			
M123A12BP_391_	390			
M123A12BP_431_	430			
M123A12BP_471_	470			
M123A12BP_511_	510			
M123A12BP_561_	560			
M123A12BP_621_	620			
M123A12BP_681_	680			
M123A12BP_751_	750			
M123A12BP_821_	820	.1.	.].	. .
M123A12BP_911_	910	₩	▼	♥
M123A12BP_102_	1,000	F, J, K	BP	50,100

Part Number 1/ (1808 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A12BX_562K_	5,600	K	BX	50,100
M123A12BX_682K_	6,800	1		I
M123A12BX_822K_	8,200			
M123A12BX_103K_	10,000			
M123A12BX_123K_	12,000			
M123A12BX_153K_	15,000			
M123A12BX_183K_	18,000			
M123A12BX_223K_	22,000	\	↓	\
M123A12BX_273K	27,000	,	,	
M123A12BX_333K_	33,000	K	BX	50,100
M123A12BXB393K_	39,000	K	BX	50
M123A12BXB473K_	47,000	1	1 1	l i
M123A12BXB563K_	56,000			
M123A12BXB683K_	68,000			
M123A12BXB823K_	82,000			
M123A12BXB104K_	100,000	K	BX	50

MIL-PRF-123/STYLE CKS54, -/13

Part Number 1/ (2225 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A13BPB112_	1,100	F, J, K	BP	50
M123A13BPB122_	1,200	1	1	
M123A13BPB132_	1,300			
M123A13BPB152_	1,500			
M123A13BPB162_	1,600			
M123A13BPB182_ M123A13BPB202_ M123A13BPB222_ M123A13BPB242_ M123A13BPB272_	1,800 2,000 2,200 2,400 2,700			
M123A13BPB302_	3,000			
M123A13BPB332_	3,300			
M123A13BPB362_	3,600			
M123A13BPB392_	3,900			
M123A13BPB432_	4,300			
M123A13BPB472_ M123A13BPB512_	4,700 5,100	↓ F, J, K	₩ BP	↓ 50

Part Number 1/ (2225 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A13BPB562_	5,600	F, J, K	BP	50
M123A13BPB622_	6,200			
M123A13BPB682_	6,800			
M123A13BPB752_	7,500			
M123A13BPB822_	8,200			
M123A13BPB912	9,100	₩		
M123A13BPB103_	10,000	F, J, K	BP	50
M123A13BXB124K_	120,000	K	BX	50
M123A13BXB154K_	150,000	1		1 1
M123A13BXB184K_	180,000			
M123A13BXB224K_	220,000			
M123A13BXB274K_	270,000			
M123A13BXB334K_	330,000			
M123A13BXB394K_	394,000			
M123A13BXB474K_	474,000	₩		↓
M123A13BXB105K_	1,000,000	к	вX	50

MIL-PRF-123/Chips



MIL-PRF-123/STYLE CKS55, -/21

Part Number 1/ (1206 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A21BPC1R0_	1.0	B, C	BP	100
M123A21BPC1R1_	1.1	1	1	
M123A21BPC1R2_	1.2			
M123A21BPC1R3_	1.3			
M123A21BPC1R5_	1.5			
M123A21BPC1R6_	1.6			
M123A21BPC1R8_	1.8			
M123A21BPC2R0_	2.0	L		
M123A21BPC2R2_	2.2	•		
M123A21BPC2R4_	2.4	B, C		
M123A21BPC2R7_	2.7	B, C, D		
M123A21BPC3R0_	3.0			
M123A21BPC3R3_	3.3			
M123A21BPC3R6_	3.6			
M123A21BPC3R9_	3.9			
M123A21BPC4R3_	4.3			
M123A21BPC4R7_	4.7			
M123A21BPC5R1_	5.1			
M123A21BPC5R6_	5.6			
M123A21BPC6R2_	6.2			
M123A21BPC6R8_	6.8			
M123A21BPC7R5_	7.5	Ţ		
M123A21BPC8R2_	8.2	▼	▼	▼
M123A21BPC9R1_	9.1	B, C, D	BP	100

Part Number 1/ (1206 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A21BPC100_	10	F, J, K	BP	100
M123A21BPC110_	11	ı	i	ı
M123A21BPC120	12			
M123A21BPC130	13			
M123A21BPC150	15			
M123A21BPC160	16			
M123A21BPC180_	18			
M123A21BPC200	20			
M123A21BPC240_	24			
M123A21BPC270_	27			
M123A21BPC330	33			
M123A21BPC360_	36			
M123A21BPC390	39			
M123A21BPC430	43			
M123A21BPC470	47			
M123A21BPC510_	51			
M123A21BPC560_	56			
M123A21BPC620	62			
M123A21BPC680_	68			
M123A21BPC750_	75			
M123A21BPC820_	82			
M123A21BPC910_	91	₩	₩	₩
M123A21BPC101_	100	F, J, K	BP	100

MIL-PRF-123/STYLE CKS55, -/21

Part Number 1/ (1206 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A21BPC111_	110	F, J, K	BP	100
M123A21BPC121_	120	1		
M123A21BPC131_	130			
M123A21BPC151_	150			
M123A21BPC161_	160			
M123A21BPC181_	180			
M123A21BPC201_	200			
M123A21BPC221_	220			
M123A21BPC241_	240			
M123A21BPC271_	270			
M123A21BPC301_	300			
M123A21BPC331_	330			
M123A21BPC361_	360			
M123A21BPC391_	390			
M123A21BPC431_	430			
M123A21BPC471_	470			
M123A21BPC511_	510			
M123A21BPC561_	560			
M123A21BPC621_	620			
M123A21BPC681_	680			
M123A21BPC751_	750			
M123A21BPC821_	820			
M123A21BPC911_	910	₩	₩	₩
M123A21BPC102_	1,000	F, J, K	BP	100

Part Number 1/ (1206 Size Chip)	Capacitance pF	Capacitance Tolerance	Temperature Limits	Rated Voltage
M123A21BPB112_	1,100	F, J, K	BP	50
M123A21BPB122_	1,200			
M123A21BPB132_	1,300			
M123A21BPB152_	1,500			
M123A21BPB162_	1,600			
M123A21BPB182_	1,800			
M123A21BPB202_	2,000	\		
M123A21BPB222_	2,200	F, J, K	BP	50
M123A21BXC472_	4,700	K, M	BX	100
M123A21BXC562_	5,600	l		
M123A21BXC682_	6,800			
M123A21BXC822_	8,200			
M123A21BXC103_	10,000			
M123A21BXC123_	12,000	. ↓		
M123A21BXC153_	15,000	к, М	вX	100
M123A21BXB183_	18,000	K, M	BX	50
M123A21BXB223_	22,000	I		
M123A21BXB273_	27,000			
M123A21BXB333_	33,000	*	₩	
M123A21BXB393_	39,000	K, M	BX	50

MIL-PRF-123/Chips



MIL-PRF-123/STYLE CKS56, -/22

Part Number 1/ (1812 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A22BPC122_	1,200	F, J, K	BP	100
M123A22BPC152_	1,500			
M123A22BPC182_	1,800			
M123A22BPC222_	2,200			
M123A22BPC242_	2,400			
M123A22BPC272	2,700			
M123A22BPC302	3,000			
M123A22BPC332	3,300			
M123A22BPC362	3,600			
M123A22BPC392	3,900			
M123A22BPC432_	4,300			
M123A22BPC472_	4,700	F, J, K	BP	100
M123A22BPB512	5,100	F, J, K	BP	50
M123A22BPB562_	5,600			
M123A22BPB622	6,200			
M123A22BPB682_	6,800			
M123A22BPB752_	7,500			
M123A22BPB822_	8,200	l J	l J	<u> </u>
M123A22BPB912_	9,100	▼	▼	▼
M123A22BPB103_	10,000	F, J, K	BP	50

Part Number 1/ (1812 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A22BXC273_	27,000	K, M	BX	100
M123A22BXC333_	33,000			1
M123A22BXC393_	39,000			
M123A22BXC473_	47,000	\		\
M123A22BXC563_	56,000	K, M	BX	100
M123A22BXB823_	82,000	K, M	BX	50
M123A22BXB104_	100,000			
M123A22BXB124_	120,000			
M123A22BXB154_	150,000	\		\
M123A22BXB184_	180,000	K, M	BX	50

MIL-PRF-123/STYLE CKS57, -/23

Part Number 1/ (1825 Size Chip)	Capacitance pF	Capacitance Tolerance	Voltage- Temperature Limits	Rated Voltage
M123A23BPC392_	3,900	F, J, K	BP	100
M123A23BPC472_	4,700			
M123A23BPC512_	5,100			
M123A23BPC562_	5,600			
M123A23BPC622_	6,200			
M123A23BPC682_	6,800			
M123A23BPC752_	7,500			
M123A23BPC822_	8,200			
M123A23BPC912_	9,100	\		
M123A23BPC103_	10,000	F, J, K	BP	100
M123A23BPB113_	11,000	F, J, K	BP	50
M123A23BPB123_	12,000	1		
M123A23BPB133_	13,000			
M123A23BPB153_	15,000			
M123A23BPB163_	16,000			
M123A23BPB183_	18,000			
M123A23BPB203_	20,000			
M123A23BPB223_	22,000	F, J, K	BP	50

Part Number 1/ (1825 Size Chip)	Capacitance pF	Capacitance Tolerance	Temperature Limits	Rated Voltage
M123A23BXC563_	56,000	K, M	BX	100
M123A23BXC683_	68,000			
M123A23BXC823_	82,000			
M123A23BXC104_	100,000			
M123A23BXC124_	120,000			
		\ \	₩	₩
M123A23BXC154_	150,000	K, M	BX	100
M123A23BXB184_	180,000	K, M	BX	50
M123A23BXB224_	220,000			
M123A23BXB274_	270,000			
M123A23BXB334_	330,000			
M123A23BXB394_	390,000			
		\ \ \	₩	*
M123A23BXB474_	470,000	K, M	BX	50

AT Series - 200°C & 250°C Rated





Present military specifications, as well as a majority of commercial applications, require a maximum operating temperature of 125°C. However, the emerging market for high temperature electronics demands capacitors operating reliably at temperatures beyond 125°C. KYOCERA AVX's high temperature chip capacitor product line, has been extended with the BME COG chip. All AT chips have verified capabilities of long term operation up to 250°C for applications in both military and commercial businesses. These capacitors demonstrate high volumetric efficiency, high insulation resistance and low ESR/ESL for the most demanding applications, such as "down-hole" oil exploration and aerospace programs.

HOW TO ORDER

AT10	3	T	104	K	Α	Т	2	Α
	T	Т	\top	Т	T	T	T	Т
Style	Voltage	Temperature	Capacitance Code	Capacitance	Test Level	Termination	Packaging	Special
AT03 = 0603	Code	Coefficient	(2 significant digits	Tolerance	A = Standard	1 = Pd/Ag	2 = 7" Reel	Code
AT05 = 0805	16V = Y	PME	+ no. of zeros)	$J = \pm 5\%$		T = 100% Sn Plated	4 = 13" Reel	A = Standard
AT06 = 1206	25V = 3	C0G 250°C = A	101 = 100pF	$K = \pm 10\%$		(RoHS Compliant) 9 = Bulk	
AT10 = 1210	50V = 5	C0G 200°C = 2	102 = 1nF	$M = \pm 20\%$		7 = Ni/Au Plated		
AT12 = 1812		VHT 250°C = T	103 = 10nF			(For 250°C BME		
AT14 = 2225		VHT 200°C = 4	104 = 100nF			COG Only)		
		BME	$105 = 1 \mu F$			• ,		
		C0G 250°C = 5	•					
		C0G 200°C = 3						

ELECTRICAL SPECIFICATIONS

Temperature Coefficient

PME COG 0±30ppm/°C, -55C to 250°C BME COG 0±30ppm/°C, -55C to 200°C

See TCC Plot for +250°C

VHT: T ±15%, -55°C to +150°C

See TCC Plot for +250°C

Capacitance Test (MIL-STD-202, Method 305)

25°C, 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

Dissipation factor 25°C

COG: 0.15% Max at 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz VHT: 2.5% Max at 1.0 ± 0.2 Vrms (open circuit voltage) @ 1kHz

Insulation Resistance 25°C (MIL-STD-202, Method 302)

100GΩ or 1000MΩ-uF (whichever is less)

Insulation Resistance 125°C (MIL-STD-202, Method 302)

 $10G\Omega$ or $100M\Omega$ -μF (whichever is less)

Insulation Resistance 200°C (MIL-STD-202, Method 302)

1GΩ or 10MΩ- μ F (whichever is less)

Insulation Resistance 250°C (MIL-STD-202, Method 302)


100MΩ or 1MΩ- μ F (whichever is less)

Direct Withstanding Voltage 25°C (Flash Test)

250% rated voltage for 5 seconds with 50mA max charging current

DIMENSIONS:






AT03 = 0603	AT05= 0805	AT06=1206	AT10=1210	AT12=1812	AT14=2225
1.60 ± 0.15	2.01 ± 0.20	3.20 ± 0.20	3.20 ± 0.20	4.50 ± 0.30	5.72 ± 0.25
(0.063 ± 0.006)	(0.079 ± 0.008)	(0.126 ± 0.008)	(0.126 ± 0.008)	(0.177 ± 0.012)	(0.225 ± 0.010)
0.81 ± 0.15	1.25 ± 0.20	1.60 ± 0.20	2.50 ± 0.20	3.20 ± 0.20	6.35 ± 0.25
(0.032 ± 0.006)	(0.049 ± 0.008)	(0.063 ± 0.008)	(0.098 ± 0.008)	(0.126 ± 0.008)	(0.250 ± 0.010)
1.02	1.30	1.52	1.70	2.54	2.54
(0.040)	(0.051)	(0.060)	(0.067)	(0.100)	(0.100)
0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)
0.75 (0.030)	0.75 (0.030)	0.75 (0.030)	0.75 (0.030)	1.02 (0.040)	1.02 (0.040)
	1.60 ± 0.15 (0.063 ± 0.006) 0.81 ± 0.15 (0.032 ± 0.006) 1.02 (0.040) 0.25 (0.010)	$ \begin{array}{c cccc} 1.60 \pm 0.15 & 2.01 \pm 0.20 \\ (0.063 \pm 0.006) & (0.079 \pm 0.008) \\ 0.81 \pm 0.15 & 1.25 \pm 0.20 \\ (0.032 \pm 0.006) & (0.049 \pm 0.008) \\ 1.02 & 1.30 \\ (0.040) & (0.051) \\ 0.25 & (0.010) & 0.25 & (0.010) \\ \end{array} $	$ \begin{array}{c cccc} 1.60 \pm 0.15 & 2.01 \pm 0.20 & 3.20 \pm 0.20 \\ (0.063 \pm 0.006) & (0.079 \pm 0.008) & (0.126 \pm 0.008) \\ \hline 0.81 \pm 0.15 & 1.25 \pm 0.20 & 1.60 \pm 0.20 \\ (0.032 \pm 0.006) & (0.049 \pm 0.008) & (0.063 \pm 0.008) \\ \hline 1.02 & 1.30 & 1.52 \\ (0.040) & (0.051) & (0.060) \\ \hline 0.25 & (0.010) & 0.25 & (0.010) & 0.25 & (0.010) \\ \hline \end{array} $	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$




PERFORMANCE CHARACTERISTICS


Typical Temperature Coefficient of Capacitance (VHT Dielectric)

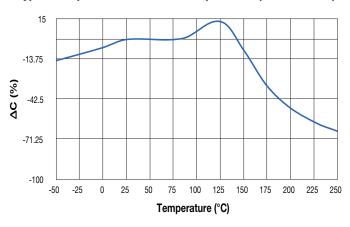


Typical Temperature Coefficient of Capacitance (COG Dielectric)

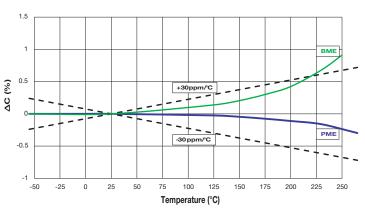


Typical Voltage Coefficient of Capacitance (VHT Dielectric)

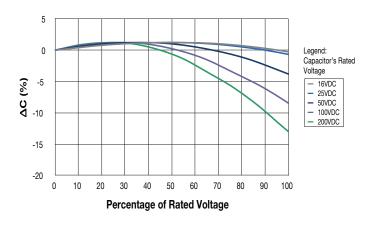


Typical Voltage Coefficient of Capacitance (COG Dielectric)



Typical RC vs Temperature (VHT Dielectric)

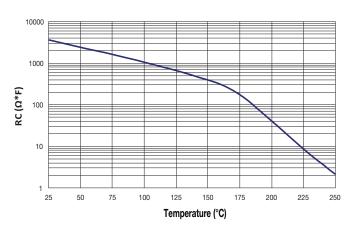

Typical RC vs Temperature (COG Dielectric)




AT Series - 200°C & 250°C Rated



RELIABILITY


250°C Life Test @ 2x Rated Voltage (VHT Dielectric)



VHT - Failure Rate	@ 90% Confidence Lev	nce Level (%/1000 hours)						
Temperature (°C)	50% Rated Voltage	100% Rated Voltage						
200	0.002	0.017						
250	0.026	0.210						

^{*}Typical 1210, 1812, 2225 Failure Rate Analysis based on 250°C testing and voltage ratings specified on the following page.

250°C Life Test @ 2x Rated Voltage (C0G Dielectric)




COG - Failure Rate	COG - Failure Rate @ 90% Confidence Level (%/1000 hours)							
Temperature (°C)	50% Rated Voltage 100% Rated Voltage							
200	0.006	0.047						
250	0.074	0.590						


^{*}Typical 1812 and 2225 Failure Rate Analysis based on 250°C testing and voltage ratings specified on the following page.

FREQUENCY RESPONSE


Impedance Frequency Response (VHT Dielectric)




ESR Frequency Response (VHT Dielectric)



Impedance Frequency Response (COG Dielectric)



ESR Frequency Response (COG Dielectric)



KYDEERa
The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at www.kyocera-avx.com/disclaimer/ by reference and should be reviewed in full before placing any order.





CAPACITANCE RANGE PREFERRED SIZES ARE SHADED

	HT		emp. Coeffi			200°0					
	Case S	ize	AT03 =	ATO			06 =	ı	0 =	AT12 =	AT14 =
			0603	08			206		<u> 10 </u>	1812	2225
Soldering			Reflow/Wave				v/Wave		v Only	Reflow Only 4.50 ± 0.30	Reflow Only
L) I	Length	mm	1.60 ± 0.15	2.01 ± 0.20			±0.20	3.20±0.20 (0.126±0.008)			5.72 ± 0.25
(In.)		(in.)	(0.063 ± 0.006) 0.81 ± 0.15	(0.079±0.008) 1.25±0.20		(0.126±0.008) 1.60±0.20		2.50:		(0.177±0.012) 3.20±0.20	(0.225±0.010 6.35±0.25
W)	Width	mm (in.)	(0.032±0.006)	(0.049 ±			±0.20 ±0.008)		± 0.008)	(0.126±0.008)	(0.250±0.25
		mm	1.02		30	`	52		70	2.54	2.54
T)T	hickness	(in.)	(0.040)	(0.0)		_	060)	(0.0		(0.100)	(0.100)
		min	0.25(0.010)	0.25(0			0.010)	0.25(0.25(0.010)	0.25(0.010)
t) I	erminal	max	0.75 (0.030)	0.75(0			0.030)	0.75(1.02 (0.040)	1.02 (0.040)
Rat	ted Temp	p. (°C)	200	20	00	2	00	20	00	200	200
Ter	np. Coef	ficeint	4		1		4	4	1	4	4
١	/oltage	(V)	25	25	50	25	50	25	50	50	50
	1000	102									
	1200	122									
	1500	152									
	1800	182					\vdash	 	-		
		-					-	\vdash			
	2200	222					 	├─			
`ap	2700	272									
oF)	3300	332						<u> </u>			
	3900	392									
	4700	472						l			
	5600	562									
	6800	682									
	8200	822									
	0.010	103									
		123									
	0.012	<u> </u>						_			
	0.015	153									
	0.018	183									
	0.022	223									
	0.027	273									
	0.033	333									
	0.039	393									
	0.047	473									
	0.056	563									
	0.030										
		683									
`ap	0.082	823									
μF)	0.100	104									
ĺ	0.120	124									
	0.150	154									
	0.180	184									
	0.220	224									
	0.270	274									
	0.330	334									
	0.390	394									
	0.390	474					\vdash		-		
		-					 		-		
	0.560	564					 	<u> </u>	<u> </u>		
	0.680	684					<u> </u>	<u> </u>			
	0.820	824					<u> </u>	<u> </u>			
	1.000	105									
١	/oltage	(V)	25	25	50	25	50	25	50	50	50
Ra	ted Temp	p. (°C)	200	20	00	2	00	20	00	200	200
			AT03 =	ATO)5 =	AT	06 =	AT1	0 =	AT12 =	AT14 =
(Case S	ıze	0603	08	05	12	206	12	10	1812	2225

	C	Ci	AT03 =	AT()5 =	AT()6 =	AT1	0 =	AT12 =	AT14 =
	Case	Size	0603	08	05	12	206	12	10	1812	2225
	Solde	ring	Reflow/Wave	Reflow	/Wave	Reflov	/Wave	Reflov	v Only	Reflow Only	Reflow Only
1)	Length	mm	1.60±0.15		±0.20		±0.20	3.20:		4.50±0.30	5.72±0.25
(In.)		(in.)	(0.063±0.006)	1	±0.008)		±0.008)		±0.008)	(0.177±0.012)	(0.225±0.010 6.35±0.25
(W)	Width	mm (in.)	0.81±0.15 (0.032±0.006)		±0.20 ±0.008)		±0.20 ±0.008)	2.50:	± 0.008)	3.20±0.20 (0.126±0.008)	(0.250±0.010
		mm	1.02		30		52		70	2.54	2.54
(T) T	Thickness	(in.)	(0.040))51)		060)	(0.0		(0.100)	(0.100)
(+) T	erminal	min	0.25 (0.010)	0.25(0.010)	0.25(0.010)	0.25(0.010)	0.25 (0.010)	0.25 (0.010)
		max	0.75 (0.030)	0.75(0.030)	0.75(1.02 (0.040)	1.02 (0.040)
	Rated Ter		250	2	50	2	50	2	50	250	250
_1	emp. Co		T 16	16	0.5	10	0.5	16	0.5	T	T
	Voltag		16	16	25	16	25	16	25	25	25
	1000	102									
	1200	122									
	1500	152									
	1800	182									
	2200	222									
Сар	2700	272									
pF)		332									
	3900	392									
	4700	472									
	5600	562									
	6800	682									
	8200	822									
	0.010	103									
	0.012	123									
	0.015	153									
	0.018	183									
	0.022	223									
	0.027	273									
	0.033	333									
	0.039	393									
	0.047	473									
	0.056	563									
	0.068	683									
	0.082	823									
Сар	0.100	104	 								
μĒ)	0.100	104									
	0.150	154			-						
	0.180	184									
	0.220	224									
	0.270	274									
	0.330	334									
	0.390	394							ldash		
	0.470	474									
	0.560	564							$oxed{oxed}$		
	0.680	684									
	0.820	824									
	1.000	105									
	Voltag	e (V)	16	16	25	16	25	16	25	25	25
I	Rated Ter	np. (°C)	250		50		50		50	250	250
	Case	Cizo	AT03 =	ATO)5 =	AT(06 =	AT1	0 =	AT12 =	AT14 =
	Case	SIZE	0603	08	05	12	.06	12	10	1812	2225

Voltage rating per table. Capacitance values specified at 25°C, derate capacitance value based on TCC and VCC Plots on page 107. NOTE: Contact factory for non-specified capacitance values.

AT Series - 200°C & 250°C Rated



CAPACITANCE RANGE PREFERRED SIZES ARE SHADED

C	ase Si	ze	AT03:	=0603	AT05	=0805	AT06=1206		
_	olderir	-	Reflow			v/Wave	Reflow/Wave		
_	ength.	mm	1.60±			±0.20	3.20±0.20		
(-) -	ciigtii	(in.)	(0.063±			±0.008)		± 0.008)	
(W)	Width	mm	0.81		_	±0.20		±0.20	
. ,		(in.)	(0.032±	0.006)	(0.049	±0.008)	(0.063	±0.008)	
T)T	Thickness mm 1.02		02	1	30	1.	52		
		(in.) (0.040)			051)		060)		
(t) T	erminal	min	0.25(0			0.010)		0.010)	
		max	0.75(0			0.030)		0.030)	
Rate	ed Temp	.(°C)	20	200		00	2	00	
Temp.		Temp. 3			3	3			
	oltage (\neg	25	50	25	50	25	50	
Сар	39	390							
pF)	47	470							
Ī	56	560							
Ì	68	680							
İ	82	820							
Ì	100	101							
İ	120	121							
ŀ	150	151							
Ì	180	181							
ŀ	220	221							
ŀ	270	271							
ŀ	330	331							
ŀ	390	391							
ŀ	470	471							
ŀ	560	561							
ŀ	680	681							
ŀ	820	821							
ŀ	1000	102							
ŀ	1200	122							

Case S	امحند	AT03=0603	AT05=0805	AT06 = 1206
Solde		Reflow/Wave	Reflow/Wave	Reflow/Wave
L) Length		1.60±0.15	2.01 ± 0.20	3.20±0.20
	(in.)	(0.063±0.006)	(0.079±0.008)	(0.126±0.008)
W) Width	$\overline{}$	0.81 ± 0.15	1.25±0.20	1.60±0.20
T)	(in.)	(0.032±0.006)	(0.049±0.008)	(0.063±0.008)
T) 'hickness	mm (in)	1.02	1.30	1.52
_	(in.)	(0.040)	(0.051)	(0.060)
t) ⁻ erminal	min	0.25(0.010)	0.25(0.010)	0.25 (0.010) 0.75 (0.030)
	$\overline{}$	0.75 (0.030) 250	0.75(0.030) 250	250
Rated Ten		230	230	230
Tem Coeffic		5	5	5
		0.5	0.5	05
Voltage		25	25	25
ap 39 F) 47	390			+
4/	470			
56	560			
68	680			
82	820			
100	101			
120	121			
150	151			
180	181			
220	221			
270	271			
330	331			
390	391			
470	471			
560	561			
680	681			
820	821			
1000	102			
1200	122			
1500	152			
1800	182		+	
	_			+
2200	222			
2700	272			
3300	332			+
3900	392			
4700	472		1	
5600	562			
6800	682			
8200	822	<u> </u>		
p 0.010	103			
F) 0.012	123			
0.015	153			1
0.018	$\overline{}$			1
	-			+
0.022	223		+	+
0.027	273			+
0.033	$\overline{}$		+	+
0.039	$\overline{}$			
0.047	473			
0.056	563			
0.068	683			
0.082	823			
0.100	$\overline{}$			
Voltage		25	25	25
Rated Ten		250	250	250
	٠.٠٠		AT05=0805	AT06=1206

Voltage rating per table. Capacitance values specified at 25°C, derate capacitance value based on TCC and VCC Plots on page

AT06=1206

50


AT05=0805

AT03=0603

8200 822 0.010 103 123 0.012 0.015 153 0.018 183 0.022 0.027 273 0.033 333 0.039 0.047 473 0.056 0.068 683 0.082 823 0.100 104

Voltage (V) Rated Temp. (°C)

Case Size





CAPACITANCE RANGE PREFERRED SIZES ARE SHADED

PI	ME	C0	G Temp. 0	Coefficient: 2	200°C Rate	ed		P	ME	CO	G Temp. C	Coefficient: A	250°C Rate	ed	
(Case S	ize	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225	(Case S	Size	AT05 = 0805	AT06 = 1206	AT10 = 1210	AT12 = 1812	AT14 = 2225
;	Solder	ing	Reflow/Wave	Reflow/Wave	Reflow Only	Reflow Only	Reflow Only		Solder	ing	Reflow/Wave	Reflow/Wave	Reflow Only	Reflow Only	Reflow Only
0.11		mm	2.01 ± 0.20	3.20 ± 0.20	3.20 ± 0.20	4.50 ± 0.30	2.75 ± 0.25			mm	2.01 ± 0.20	3.20 ± 0.20	3.20 ± 0.20	4.50 ± 0.30	2.75 ± 0.25
(L) L	ength	(in.)	(0.079 ± 0.008)	(0.126 ± 0.008)	(0.126 ± 0.008)	(0.177 ± 0.012)	(0.225 ± 0.010)	(L) L	ength.	(in.)	(0.079 ± 0.008)	(0.126 ± 0.008)	(0.126 ± 0.008)	(0.177 ± 0.012)	(0.225 ± 0.010)
(140.1	Nidth	mm	1.25 ± 0.20	1.60 ± 0.20	2.50 ± 0.20	3.20 ± 0.20	6.35 ± 0.25	(140.1	M/i al+la	mm	1.25 ± 0.20	1.60 ± 0.20	2.50 ± 0.20	3.20 ± 0.20	6.35 ± 0.25
(w)	wiatn	(in.)	(0.049 ± 0.008)	(0.063 ± 0.008)	(0.098 ± 0.008)	(0.126 ± 0.008)	(0.250 ± 0.010)	(vv)	Width	(in.)	(0.049 ± 0.008)	(0.063 ± 0.008)	(0.098 ± 0.008)	(0.126 ± 0.008)	(0.250 ± 0.010)
(T) T	hielmass	mm	1.30	1.52	1.70	2.54	2.54	(T) T	'hielmeee	mm	1.30	1.52	1.70	2.54	2.54
(1) 1	hickness	(in.)	(0.051)	(0.060)	(0.067)	(0.100)	(0.100)	(1) 1	hickness	(in.)	(0.051)	(0.060)	(0.067)	(0.100)	(0.100)
(t) Ta	erminal	min	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	(t) T	erminal	min	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)	0.25 (0.010)
.,		max	0.75 (0.030)	0.75 (0.030)	0.75 (0.030)	1.02 (0.040)	1.02 (0.040)			max	0.75 (0.030)	0.75 (0.030)	0.75 (0.030)	1.02 (0.040)	1.02 (0.040)
Ra	ted Tem	p. (°C)	200	200	200	200	200	Ra	ted Tem	p. (°C)	250	250	250	250	250
Tei	mp. Coef	ficeint	2	2	2	2	2	Te	mp. Coe	fficeint	Α	Α	A	Α	A
	Voltage	(V)	50	50	50	50	50		Voltage	(V)	25	25	25	25	25
	100	101							100	101					
	120	121							120	121					
	150	151							150	151					
	180	181							180	181					
	220	221							220	221					
	270	271							270	271					
	330	331							330	331					
	390	391							390	391					
	470	471							470	471					
	560	561							560	561					
	680	681							680	681					
Cap (pF)	820	821						Cap	820	821					
(pF)	1000	102						(pF)	1000	102					
	1200	122							1200	122					
	1500	152							1500	152					
	1800	182							1800	182					
	2200	222							2200	222					
	2700	272							2700	272					
	3300	332							3300	332					
	3900	392							3900	392					
	4700	472							4700	472					
	5600	562							5600	562					
	6800 8200	682							6800 8200	682 822					
\vdash	0.010	822 103						\vdash	0.010	_					
	0.010								0.010	123					
	0.012								0.012	+					
	0.013								0.013						
	0.018								0.018	223					
	0.027	273							0.027	273					
Cap (µF)	0.033	_						Cap (µF)	0.033						
(μF)	0.039	393						(μF)	0.039	393					
	0.047	473							0.047	473					
	0.056	_							0.056	+					
	0.068	_							0.068						
	0.082	_							0.082	_					
	0.100								0.100						
١	/oltage		50	50	50	50	50	,	Voltage		25	25	25	25	25
	ed Tem	<u> </u>	200	200	200	200	200		ed Tem	<u> </u>	250	250	250	250	250
-	Case S	<u> </u>		AT06 = 1206					Case S	<u> </u>		AT06 = 1206			
	vase 3	146	MI00 - 0000	A100 - 1200	A110 - 1210	MI 12 - 1012	A1 14 - 2223		case 3	nze	MI00 - 0000	A100 - 1200	A110 - 1210	MI 12 - 1012	MI 14 - 2223

Voltage rating per table. Capacitance values specified at 25°C, derate capacitance value based on TCC and VCC Plots on page


NOTE: Contact factory for non-specified capacitance values.

High Voltage MLC Leaded Chips


For 600V to 5000V Applications




HOW TO ORDER

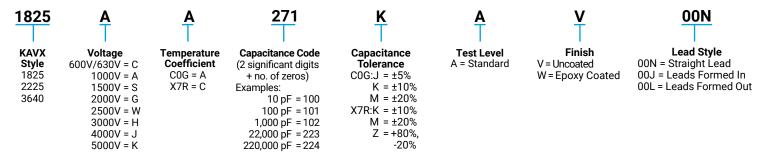


Notes: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations. Capacitors may require protective surface coating to prevent external arcing.





"N" STYLE **LEADS**






"J" STYLE **LEADS**





"L" STYLE **LEADS**



DIMENSIONS

millimeters (inches)

DIIVILIA	010110					minimeters (miches)
Style	A (max.)	B (max.)	C ±.635 (±0.025)	D ±.635 (±0.025)	E (max.)	No. of Leads per side
1825		E #318 0 1 1 1 #58 5: 140 (0455)	5.08 (0.200)	6.35 (0.250)	6.86 (0.270)	3
2225	2.54 (0.100)	For "N" Style Leads, "B" Dimension = 4.19 (0.165) For "J" & "L" Leads, "B" Dimension = 4.58 (0.180)	6.35 (0.250)	6.35 (0.250)	7.62 (0.300)	3
3640		For 5 & L Leads, B Difficultion - 4.38 (0.180)	10.2 (0.400)	10.2 (0.400)	11.2 (0.440)	4

Note: For W (Epoxy Coated) part add 0.127 (0.005) to max. and nominal dimensions A, B, D, & E

Performance of SMPS capacitors can be simulated by downloading SpiCalci software program http://www.kyocera-avx.com/download/software/SpiCalci-AVX.zip Custom values, ratings and configurations are also available.



High Voltage MLC Leaded Chips

For 600V to 5000V Applications



COG Dielectric

Performance Characteristics

Capacitance Range	10 pF to 0.047 μF (25°C, 1.0 ±0.2 Vrms at 1kHz, for ≤ 1000 pF use 1 MHz)
Capacitance Tolerances	±5%, ±10%, ±20%
Dissipation Factor	0.15% max. (+25°C, 1.0 ±0.2 Vrms, 1kHz, for ≤ 1000 pF use 1 MHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	0 ±30 ppm/°C (0 VDC)
Voltage Ratings	600, 630, 1000, 1500, 2000, 2500, 3000, 4000 & 5000 VDC (+125°C)
Insulation Resistance (+25°C, at 500 VDC)	100K M Ω min. or 1000 M Ω - μ F min., whichever is less
Insulation Resistance (+125°C, at 500 VDC)	10K M Ω min. or 100 M Ω - μF min., whichever is less
Dielectric Strength	Minimum 120% rated voltage for 5 seconds at 50 mA max. current

HIGH VOLTAGE COG CAPACITANCE VALUES

VOLTA	GE	1825	2225	3640	
600/630	min.	1000 pF	1000 pF	1000 pF	
	max.	0.012 µF	0.018 µF	0.047 μF	
1000 min.		100 pF	1000 pF	1000 pF	
max.		8200 pF	0.010 µF	0.022 μF	
1500	1500 min. 1		100 pF	100 pF	
	max. 4		5600 pF	0.010 μF	
2000	min.	100 pF	100 pF	100 pF	
	max.	1800 pF	2700 pF	6800 pF	
2500	min.	10 pF	100 pF	100 pF	
	max.	1200 pF	1800 pF	3900 pF	
3000	min.	10 pF	10 pF	100 pF	
	max.	8200 pF	1200 pF	2700 pF	
4000 min.		10 pF	10 pF	100 pF	
max.		330 pF	560 pF	1200 pF	
5000	min.	<u>-</u>	10 pF	10 pF	
	max.	-	270 pF	820 pF	

X7R Dielectric

Performance Characteristics

Capacitance Range	100 pF to 0.56 μF (25°C, 1.0 ±0.2 Vrms at 1kHz)
Capacitance Tolerances	±10%; ±20%; +80%, -20%
Dissipation Factor	2.5% max. (+25°C, 1.0 ±0.2 Vrms, 1kHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	±15% (0 VDC)
Voltage Ratings	600, 630, 1000, 1500, 2000, 2500, 3000, 4000 & 5000 VDC (+125°C)
Insulation Resistance (+25°C, at 500 VDC)	100K M Ω min. or 1000 M Ω - μF min., whichever is less
Insulation Resistance (+125°C, at 500 VDC)	10K M Ω min. or 100 M Ω - μF min., whichever is less
Dielectric Strength	Minimum 120% rated voltage for 5 seconds at 50 mA max. current

HIGH VOLTAGE X7R MAXIMUM CAPACITANCE VALUES


VOLTA	GE	1825	2225	3640
600/630	min.	0.010 μF	0.010 μF	0.010 μF
000/030	max.	0.270 μF	0.330 μF	0.560 μF
1000	min.	1000 pF	1000 pF	0.010 μF
1000	max.	0.100 μF	0.150 μF	0.220 μF
1500	min.	1000 pF	1000 pF	1000 pF
1300	max.	0.056 μF	0.068 μF	0.100 μF
2000	min.	100 pF	1000 pF	1000 pF
2000	max.	0.022 μF	0.033 μF	0.027 μF
2500	min.	100 pF	100 pF	1000 pF
2300	max.	0.015 μF	0.022 μF	0.022 μF
3000	min.	100 pF	100 pF	1000 pF
3000	max.	0.010 μF	0.015 μF	0.018 μF
4000	min.	_	_	100 pF
4000	max.	_	_	6800 pF
5000	min.	_	_	100 pF
3000	max.	_	_	3300 pF

Tip & Ring Chips



KYOCERA AVX "Tip & Ring" or "ring detector" Multilayer Ceramic Chip Capacitors are designed as a standard telecom filter to block -48 Volts DC telephone line voltage and pass subscriber's AC signal pulse (16 to 25Hz, 70 to 90Vrms). The typical ringing signal is seen on figure on page 132. The ringer capacitors replace large leaded film capacitors and are ideal for telecom/modem applications. Using KYOCERA AVX "Tip & Ring" capacitors not only saves valuable real estate on the board and reduces the weight of overall product, but also features standard surface mounting capabilities, so critical to new and compact designs.

The KYOCERA AVX "Tip & Ring" capacitors are offered in standard EIA sizes and standard values. They offer excellent high frequency performance, low ESR and improved temperature performance over film capacitors.

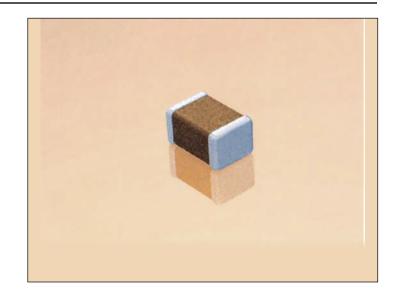


HOW TO ORDER

2225

1812	<u>P</u>	<u>C</u>	<u>104</u>	<u>K</u>	A	Ŧ	1	A
Style 0805 1206 1210 1808 1812 1825 2220	Voltage 250 VDC Telco Rating	Temperature Coefficient X7R	Capacitance Code (2 significant digits + no. of zeros) Examples: 1,000 pF = 102 22,000 pF = 223 220,000 pF = 224 1 μF = 105	Capacitance Tolerance K = ±10% M = ±20%	Test Level A = Standard	Ni and S (RoHS Compliant) Z=F L E X I T E R M		Special Code A = Standard

Contact factory for availability of Termination and Tolerance options for Specific Part Numbers.





DIMENSIONS millimeters (inches)

Style	0805	1206	1210*	1808*	1812*	1825*	2220*	2225*
(L) Length	2.01 ± 0.20	3.20 ± 0.20	3.2 ± 0.20	4.57 ± 0.25	4.50 ± 0.30	4.50 ± 0.30	5.60 ± 0.30	5.60 ± 0.25
(L) Length	(0.079 ± 0.008)	(0.126 ± 0.008)	(0.126 ± 0.008)	(0.180 ± 0.010)	(0.177 ± 0.012)	(0.177 ± 0.012)	(0.220 ± 0.012)	(0.220 ± 0.010)
(W) Width	1.25 ± 0.20	1.60 ± 0.20	2.50 ± 0.20	2.03 ± 0.25	3.2 ± 0.20	6.34 ± 0.30	5.10 ± 0.40	6.35 ± 0.25
(vv) vvidili	(0.049 ± 0.008)	(0.063 ± 0.008)	(0.098 ± 0.008)	(0.080 ± 0.010)	(0.126 ± 0.008)	(0.252 ± 0.012)	(0.200 ± 0.016)	(0.250 ± 0.010)
(T) Thickness.	1.30 max.	1.50 max.	1.78 max.	1.78 max.	2.00 max.	2.00max.	2.00 max.	2.00 max.
(1) Thickness.	(0.051 max.)	(0.059 max.)	(0.070 max.)	(0.070 max.)	(0.080 max.)	(0.080 max.)	(0.080 max.)	(0.080 max.)
(t) tarminal	0.50 ± 0.25	0.50 ± 0.25	0.50 ± 0.25	0.63 ± 0.38	0.63 ± 0.38	0.63 ± 0.38	0.63 ± 0.38	0.63 ± 0.38
(t) terminal	(0.020 ± 0.010)	(0.020 ± 0.010)	(0.020 ± 0.010)	(0.025 ± 0.015)	(0.025 ± 0.015)	(0.025 ± 0.015)	(0.025 ± 0.015)	(0.025 ± 0.015)

^{*}Reflow Soldering Only






CAPACITANCE RANGE (MF)

Size	0805	1206	1210	1808	1812	1825	2220	2225
min.	0.0010	0.0010	0.0010	0.010	0.10	0.33	0.47	0.47
max.	0.027	0.082	0.22	0.27	0.47	1.0	1.0	1.2

"TIP & RING" GRAPH



PERFORMANCE CHARACTERISTICS

Capacitance Range	1000 pF to 1.2 μF (25°C, 1.0 ±0.2 Vrms at 1kHz)
Capacitance Tolerances	±10%, ±20%
Dissipation Factor	2.5% max. (25°C, 1.0 ±0.2 Vrms at 1kHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	X7R ±15% (0 VDC)
Voltage Rating	250 VDC Telco rating
Insulation Resistance	1000 megohm-microfarad min.
Dielectric Strength	Minimum 200% rated voltage for 5 seconds at 50 mA max. current






KYOCERA AVX will support customers for commercial and military Multilayer Ceramic Capacitors with a termination consisting of 5% minimum lead. This termination is indicated by the use of a "B" in the 12th position of the KYOCERA AVX Catalog Part Number. This fulfills KYOCERA AVX's commitment to providing a full range of products to our customers. KYOCERA AVX has provided in the following pages, a full range of values that we are offering in this "B" termination.

KYOCERA AVX "Tip & Ring" or "ring detector" Multilayer Ceramic Chip Capacitors are designed as a standard telecom filter to block -48 Volts DC telephone line voltage and pass subscriber's AC signal pulse (16 to 25Hz, 70 to 90 VRMS). The typical ringing signal is seen on figure on page 134. The ringer capacitors replace large leaded film capacitors and are ideal for telecom/modem applications. Using KYOCERA AVX "Tip and Ring" capacitors not only saves valuable real estate on the board and reduces the weight of the overall product, but also features standard surface mounting capabilities, so critical to new and compact designs.


The KYOCERA AVX "Tip & Ring" capacitors are offered in standard EIA sizes and standard values. They offer excellent high frequency performance, low ESR and improved temperature performance over film capacitors.



HOW TO ORDER

<u>1812</u>	<u>P</u>	Ç	<u>104</u>	K	A	B	1	A
0. 1	Voltage	Temperature	Capacitance Code	Capacitance	Test	Termination	Packaging	Special Code
Style LD05 - 0805	250 VDC	Coefficient X7R	(2 significant digits	Tolerance K = ±10%	Level A = Standard	B = 5% Min Pb X = FI FXITERM	1 = 7" Reel ® 3 = 13" Reel	A = Standard
	Telco	A/K	+ no. of zeros)		A - Standard		9 = Bulk	
LD06 - 1206	Rating		Examples:	$M = \pm 20\%$		5% min. Pb	9 - Dulk	
LD10 - 1210			1,000 pF = 102					
LD08 - 1808			22,000 pF = 223					
LD12 - 1812			220,000 pF = 224					
LD13 - 1825			1 µF =105					
LD20 - 2220			μ					
LD14 - 2225								

Contact factory for availability of Termination and Tolerance options for Specific Part Numbers.



Not RoHS Compliant

DIMENSIONS millimeters (inches)

STYLE (SIZE)	LD05 (0805)	LD06 (1206)	LD10* (1210)	LD08* (1808)	LD12* (1812)	LD13* (1825)	LD20* (2220)	LD14* (2225)
(L) Length	2.01 ± 0.20	3.20 ± 0.20	3.2 ± 0.20	4.57 ± 0.25	4.50 ± 0.30	4.50 ± 0.30	5.60 ± 0.30	5.60 ± 0.25
(L) Length	(0.079 ± 0.008)	(0.126 ± 0.008)	(0.126 ± 0.008)	(0.180 ± 0.010)	(0.177 ± 0.012)	(0.177 ± 0.012)	(0.220 ± 0.012)	(0.220 ± 0.010)
(W) Width	1.25 ± 0.20	1.60 ± 0.20	2.50 ± 0.20	2.03 ± 0.25	3.2 ± 0.20	6.34 ± 0.30	5.10 ± 0.40	6.35 ± 0.25
(VV) VVIULII	(0.049 ± 0.008)	(0.063 ± 0.008)	(0.098 ± 0.008)	(0.080 ± 0.010)	(0.126 ± 0.008)	(0.252 ± 0.012)	(0.200 ± 0.016)	(0.250 ± 0.010)
(T) Thickness.	1.30 max.	1.50 max.	1.78 max.	1.78 max.	2.00 max.	2.00max	2.00 max.	2.00 max.
(1) THICKHESS.	(0.051 max.)	(0.059 max.)	(0.070 max.)	(0.070 max.)	(0.080 max.)	. (0.080 max.)	(0.080 max.)	(0.080 max.)
(t) terminal	0.50 ± 0.25	0.50 ± 0.25	0.50 ± 0.25	0.63 ± 0.38	0.63 ± 0.38	0.63 ± 0.38	0.63 ± 0.38	0.63 ± 0.38
(t) terrillial	(0.020 ± 0.010)	(0.020 ± 0.010)	(0.020 ± 0.010)	(0.025 ± 0.015)	(0.025 ± 0.015)	(0.025 ± 0.015)	(0.025 ± 0.015)	(0.025 ± 0.015)

^{*}Reflow Soldering Only








CAPACITANCE RANGE (MF)

STYLE (SIZE)	LD05 (0805)	LD06 (1206)	LD10 (1210)	LD08 (1808)	LD12 (1812)	LD13 (1825)	LD20 (2220)	LD14 (2225)
min.	0.0010	0.0010	0.0010	0.010	0.10	0.33	0.47	0.47
max.	0.027	0.082	0.22	0.27	0.47	1.0	1.0	1.2

"TIP & RING" GRAPH



PERFORMANCE CHARACTERISTICS

Capacitance Range	1000 pF to 1.2 μF (25°C, 1.0 ±0.2 Vrms at 1kHz)
Capacitance Tolerances	±10%, ±20%
Dissipation Factor	2.5% max. (25°C, 1.0 ±0.2 Vrms at 1kHz)
Operating Temperature Range	-55°C to +125°C
Temperature Characteristic	X7R ±15% (0 VDC)
Voltage Rating	250 VDC Telco rating
Insulation Resistance	1000 megohm-microfarad min.
Dielectric Strength	Minimum 200% rated voltage for 5 seconds at 50 mA max. current






TAPE & REEL QUANTITIES

All tape and reel specifications are in compliance with RS481.

	4mm	8mm	12mm	
Paper or Embossed Carrier		0612, 0508, 0805, 1206, 1210		
Embossed Only	0101		1808	1812, 1825, 2220, 2225
Paper Only		0101, 0201, 0306, 0402, 0603		
Qty. per Reel/7" Reel	4,000	1,000, 2,000, 3,000 or 4,000, 10,000, 15,000, 20,000 Contact factory for exact quantity	3,000	500, 1,000 Contact factory for exact quantity
Qty. per Reel/13" Reel		5,000, 10,000, 50,000 Contact factory for exact quantity	10,000	4,000

REEL DIMENSIONS

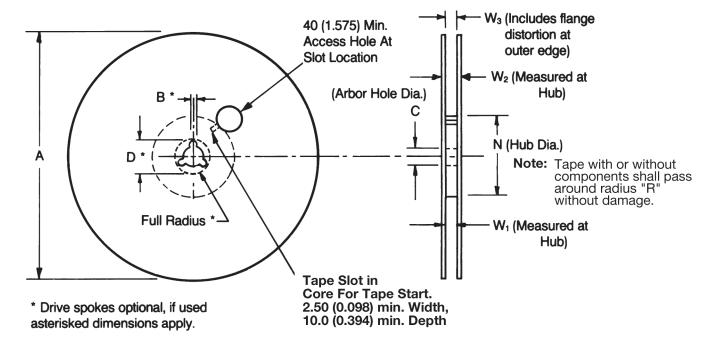

Tape Size(1)	A Max.	B* Min.	С	D* Min.	N Min.	W1	W2 Max.	W3
4mm	1.80 (7.087)	1.5 (0.059)	13.0±0.5 (0.522±0.020)	20.2 (0.795)	60.0 (2.362)	4.35±0.3 (0.171±0.011)	7.95 (0.312)	
8mm	330	1.5	13.0 ^{+0.50}	20.2	50.0	8.40 ^{+1.5} (0.331 ^{+0.059} (0.330)	14.4 (0.567)	7.90 Min. (0.311) 10.9 Max. (0.429)
12mm	(12.992)	(0.059)	13.0 ^{+0.20} _{-0.20} (0.512 ^{+0.020} _{-0.008})	(0.795)	(1.969)	12.4 ^{+2.0} (0.488 ^{+0.079})	18.4 (0.724)	11.9 Min. (0.469) 15.4 Max. (0.607)

Metric dimensions will govern.


English measurements rounded and for reference only.


⁽¹⁾ For tape sizes 16mm and 24mm (used with chip size 3640) consult EIA RS-481 latest revision.











B₁ IS FOR TAPE READER REFERENCE ONLY INCLUDING DRAFT CONCENTRIC AROUND BO

4, 8 & 12mm Embossed Tape **Metric Dimensions Will Govern**

CONSTANT DIMENSIONS

Tape Size	D _o	E ₁	P ₀	P ₂	S₁ Min.	T Max.	T₁ Max.
4	0.80±0.04	0.90±0.05	2.0±0.04	1.00±0.02	1.075	0.26	0.06
4mm	(0.031±0.001)	(0.035±0.001)	(0.078±0.001)	(0.039±0.0007)	(0.042)	(0.010)	(0.002)
8mm	1.25 ± 0.20	1.75 ± 0.10	4.0 ± 0.10	2.0 ± 0.05	0.60	0.60	0.10
& 12mm	(0.049 ± 0.008)	(0.069 ± 0.004)	(0.157 ± 0.004)	(0.079 ± 0.002)	(0.024)	(0.024)	(0.004)


User Direction of Feed

VARIABLE DIMENSIONS


Tape Size	B ₁ Max.	D ₁ Min.	E ₂ Min.	F	P ₁ See Note 5	R Min. See Note 2	T ₂	W Max.	$A_0 B_0 K_0$
8mm	4.35 (0.171)	1.00 (0.039)	6.25 (0.246)	3.50 ± 0.05 (0.138 ± 0.002)	4.00 ± 0.10 (0.157 ± 0.004)	25.0 (0.984)	2.50 Max. (0.098)	8.30 (0.327)	See Note 1
12mm	8.20 (0.323)	1.50 (0.059)	10.25 (0.404)	5.50 ± 0.05 (0.217 ± 0.002)	4.00 ± 0.10 (0.157 ± 0.004)	30.0 (1.181)	6.50 Max. (0.256)	12.3 (0.484)	See Note 1
8mm 1/2 Pitch	4.35 (0.171)	1.00 (0.039)	6.25 (0.246)	3.50 ± 0.05 (0.138 ± 0.002)	2.00 ± 0.10 (0.079 ± 0.004)	25.0 (0.984)	2.50 Max. (0.098)	8.30 (0.327)	See Note 1
12mm Double Pitch	8.20 (0.323)	1.50 (0.059)	10.25 (0.404)	5.50 ± 0.05 (0.217 ± 0.002)	8.00 ± 0.10 (0.315 ± 0.004)	30.0 (1.181)	6.50 Max. (0.256)	12.3 (0.484)	See Note 1

NOTES:

- 1. The cavity defined by A0, B0, and K0 shall be configured to provide the following: Surround the component with sufficient clearance such that:
 - a) the component does not protrude beyond the sealing plane of the cover tape.
 - b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the cover tape has been removed.
 - c) rotation of the component is limited to 20° maximum (see Sketches D & E).
 - d) lateral movement of the component is restricted to 0.5mm maximum (see Sketch F).
- 2. Tape with or without components shall pass around radius "R" without damage.
- 3. Bar code labeling (if required) shall be on the side of the reel opposite the round sprocket holes. Refer
- 4. B₁ dimension is a reference dimension for tape feeder clearance only
- 5. If P₁ = 2.0mm, the tape may not properly index in all tape feeders.




Sketch "D"



Top View, Sketch "F"

Component Lateral Movements



Surface Mount CapGuard™







KYOCERA AVX's surface mount CapGuard™ products are designed to provide both transient voltage protection and EMI/RFI suppression for electronic circuits. CapGuards™ are ideally suited to filter out EMI/RFI noise generated by switch mode power supplies or motors on DC lines or I/O lines in electronic circuits. With multilayer varistor (MLV) utilized in CapGuard™ product, effective transient voltage protection is achieved to protect sensitive electronics from high voltage transients. The capacitor, on the other hand, absorbs high frequency noise on the line. The MLCC capacitors are designed with temperature stable X7R dielectric, allowing for wide temperature use with good capacitance stability. The surface mount CapGuards™ are characterized with a very small form factor to minimize board space. The parts are assembled using high melting point solder (268°C solidus / 290°C liquidus) allowing for standard reflow processing during board level assembly without a risk of reflowing HMP solder.

FEATURES

- · High Capacitance / EMI Filtering
- · Bi-Directional Protection
- · Fast Turn-On Time
- · Multiple Strike Capability
- · HMP Solder Termination
- · 1210 EIA Case Size

TARGET APPLICATIONS

- · Avionics
- Military
- I/O port protection
- · EMI filtering with surge protection

GENERAL CHARACTERISTICS

Storage Temperature: -55°C to +125°C Operating Temperature: -55°C to +125°C

TECHNICAL INFORMATION

For more technical information on surface mount CapGuard™ please visit the Transient Suppression catalog page 96.

Filtered Arrays XD Type



FEATURES

- · To be used beneath a connector
- · Provide an EMI filtered signal line between electronic modules
- Effective insertion loss from 1MHz up to ~ 1GHz
- · Surface mount compatible

HOW TO ORDER













 $J = \pm 5\%$ $K = \pm 10\%$ $J = \pm 5\%$ $K = \pm 10\%$ $M = \pm 20\%$

Not RoHS Compliant



millimeters (inches)

STYLE & DIMENSIONS

TYPES	L	Р	D	d	bm maxi	Thickness maxi
XD07	7.00 ± 0.15	2.54	1.70 ± 0.15	1.00 ± 0.10	0.3	2mm
(4 capacitors)	(0.275 ± 0.006)	(0.100)	(0.067 ± 0.006)	(0.039 ± 0.0039)	0.5	2111111
XD06	6.00 ± 0.15	2.54	1.70 ± 0.15	1.00 ± 0.10	0.3	2mm
(4 capacitors)	(0.236± 0.006)	(0.100)	(0.067 ± 0.006)	(0.039 ± 0.0039)	0.3	2111111
XD03	6.00 x 3.00 ± 0.15	2.54	1.70 ± 0.15	1.0 ± 0.10	0.3	1.5mm
(2 capacitors)	(0.236 x 0.118 ± 0.006)	(0.100)	(0.067 ± 0.006)	(0.039 ± 0.0039)	0.3	1.311111

Terminations: Silver - Palladium - Platinum, on 4 or only 2 sides of the array

CAPACITANCE VS VOLTAGE TABLE

Cap. Range	X	7R	NP0		
(each cap.)	200VDC	500VDC	200VDC	500VDC	
XD07	33nF → 120nF	4.7nF → 18nF	470pF → 1500pF	220pF → 620pF	
XD06	15nF → 68nF	2.2nF → 10nF	220pF → 750pF	120pF → 330pF	
XD03	8.2nF → 39nF	1nF → 4.7nF	180pF → 390pF	82pF → 180pF	

ELECTRICAL CHARACTERISTICS

Dielectric Class	X7R	NP0		
Temperature Coefficient	ΔC/C ≤ ± 15% (-55 +125°C)	0 ± 30ppm/°C		
Climatic Category	55 / 125 / 56	55 / 125 / 56		
Rated Voltage (UR)	200 VDC 500VDC	200VDC 500VDC		
Test Voltage (Ue)	2 x UR 1.5 x UR	2 x UR 1.5 x UR		
Tangent of Loss Angle - DF Insulation Resistance	tg δ ≤ 250(10-4) C ≤ 10nF = Ri ≥ 100 GΩ C > 10nF = Ri x C ≥ 1000s	tg δ≤ 15(10-4) Ri ≥ 100 GΩ		

Baseline Management

A Dedicated Facility / BS9100 Requirements

KYOCERa

Baseline Products -A Selection of Options

As a matter of course, KYOCERA AVX maintains a level of quality control that is sufficient to guarantee whatever reliability specifications are needed. However, KYOCERA AVX goes further. There are over 65 quality control and inspection operations that are available as options to a customer. Any number may be requested and written into a baseline process. The abbreviated list that follows indicates the breadth and thoroughness of available Q.C. services at KYOCERA AVX:

Ultrasonic Scanning Destructive Physical Analysis (DPA) **Bondability Testing** Sorting and Matching to Specification Limits Temperature and Immersion Load/Humidity Life Testing **Dve Penetration Evaluation** 100% Ceramic Sheet Inspection Voltage Conditioning **Termination Pull Testing** Pre-encapsulation Inspection

Within the "specials" area, KYOCERA AVX accommodates a broad variety of customer needs. The KYOCERA AVX facilities are capable of developing and producing the most reliable and advanced MLCs available anywhere in the world today. Yet it is equally adept at making volume "custom" components that may differ only in markings or lead placement from the standard catalog part.

Stretching the Limits

KYOCERA AVX Advanced Products are developed to meet the extraordinary needs of specific applications. Requirements may include: low ESR, low ESL, voltages up to 10's of thousands, advanced decoupling designs for frequencies up to 10's of megahertz, temperatures up to 200°C, extremely high current discharge, ability to perform in high radiation or toxic atmospheres, or minimizing piezoelectric effect in high vibration environments.

In addition, solving customer packaging problems, aside from addressing circuit problems, is available. Special lead frames for high current or special mounting requirements are examples. Multiple ceramic chip package designs per customer requirements are also available.

KYOCERA AVX Advanced Products always begin with a joint development program involving KYOCERA AVX and the customer. In undersea cable components, for example, capacitance and impedance ratings had to be maintained within 1% over the multi-year life of the system. In this case, KYOCERA AVX Advanced Products not only met the parametric requirements of the customer, but accelerated life testing of 3,500 units indicated an average life expectancy of over 100,000 years.

Baseline Program Management

Baseline Program Management has been KYOCERA AVX's forte over the years. This is both a product and a service function designed to provide the customer the full capabilities of KYOCERA AVX in meeting their program requirements. KYOCERA AVX has had Baseline and Program Management in the following major systems:

- -AT&T Undersea Cable
- -Minuteman
- -Peacekeeper
- -STC Undersea Cable
- -CIT Undersea Cable
- -Raytheon-Hawk Missile
- -Trident
- -Small Missile Program
- -Northrop Peacekeeper
- -Sparrow Program
- -Space Station
- -European Space Agency (ESA)
- -Commercial Satellite Program
- -Arianne 4 & 5
- -EuroFighter (Typhoon)
- -EH101 (Merlin)

KYOCERA AVX technical personnel stand ready to answer any questions and provide any information required on your programs from the most exotic Hi-Rel part to the simplest variation on a standard. Put the experience, technology and facilities of the leading company in multilayer ceramics to work for you. No other source offers the unique combination of capability and commitment to advanced application specific components.

PROCUREMENT OF COMPONENTS OF **BS9100 (CH/CV RANGE 50-500V)**

The manufacturing facilities have IS09001 approval. Customers requiring BS9100 approved components are requested to follow these steps:

- 1. The customer shall submit a specification for the required components to KYOCERA AVX for approval. Once agreed a Customer Detail Specification (CDS) number will be allocated by KYOCERA AVX to this specification. This number with its current revision must be quoted at the time of order placement.
- 2. If the customer has no specification, then

KYOCERA AVX will supply a copy of the standard CDS for the customer's approval and signature. As in 1 above, when agreed this CDS number must be quoted at order entry. In the event of agreement not being reached the component cannot be supplied to BS9100.

For assistance contact: EMAP Specification Engineering Dept. KYOCERA

Ltd. Coleraine, Northern Ireland Telephone ++44 (0)28703 44188, Fax ++44 (0)28703 55527


PACKAGING

Unless otherwise stated in the appropriate data sheet parts are supplied in a waffle pack.






Examples of Special Packaging and Custom Lead Configurations from KYOCERA AVX Advanced Products

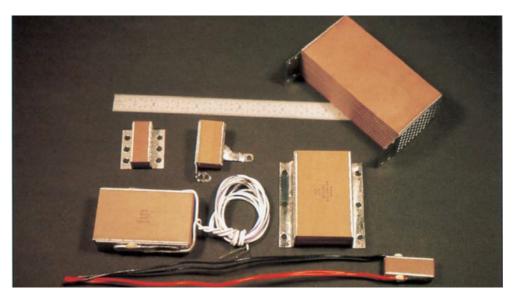

Custom Lead Configurations. . .

optimum 3D packaging, high current applications and high reliability stress relief mounting.

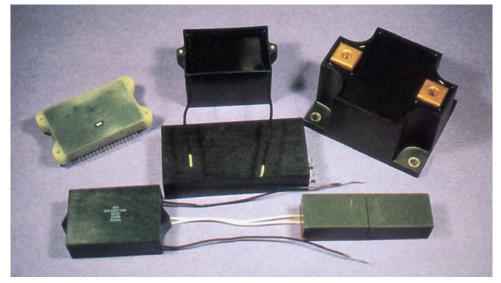

Custom Packaging...

eliminate reliability concerns with multiple component assembly.

Many other innovations are available from KYOCERA AVX Advanced Products. Let them apply these ideas to your application specific programs.



FOLLOW US: O F in D

VISIT US AT WWW.KYOCERA-AVX.COM ▶

North America

Tel: +1 864-967-2150

Central America Tel: +55 11-46881960 **Europe**

Tel: +44 1276-697000

Asia

Tel: +65 6286-7555

Japan

Tel: +81 740-321250

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KYOCERA AVX:

<u>87106-021 87106-083 87106-335 RW 87106-377 87106-455 87106-027 87106-321 87106-268 87106-229 CKR23BX224MP 87106-208 88011-182J 87106-173 87106-197 87106-215 SM942C105MAN270 88011-129 87106-193 RW</u>