


# Automotive MLCC, KAM Series

## General Specifications



### GENERAL DESCRIPTION

KYOCERA AVX has supported the Automotive Industry requirements for Multilayer Ceramic Capacitors consistently for more than 25 years. Products have been developed and tested specifically for automotive applications and all manufacturing facilities are QS9000 and VDA 6.4 approved.

KYOCERA AVX is using AECQ200 as the qualification vehicle for this transition. A detailed qualification package is available on request and contains results on a range of part numbers.

The KAM series are plated with a Nickel/Tin finish. For FLEXITERM® please refer to the KAF series datasheet.

### HOW TO ORDER

KAM	31	G	R7	1H	475	K	U	Packaging
Series	Size	Thickness	Dielectric	Voltage	Capacitance Code Code (in pF)	Capacitance Tolerance		See Table Below
AEC-Q200	03 = 0201	See Cap Chart	CG = COG	0G = 4V	2 Significant Digits	B = ± 0.1pF (<10pF)*		
Tin Nickel Finish	05 = 0402		R7 = X7R	0J = 6.3V	+Number of zeros	C = ± 0.25pF (<10pF)*		
	15 = 0603		S7 = X7S	1A = 10V	eg 10uF = 106	D = ± 0.5pF (<10pF)*		
	21 = 0805		T7 = X7T	1C = 16V	10nF = 103	F = ± 1%*		
	31 = 1206		R8 = X8R	1E = 25V	47pF = 470	G = ± 2%*		
	32 = 1210		L8 = X8L	1H = 50V		J = ± 5%		
	42 = 1808		G8 = X8G	2A = 100V		K = ± 10%		
	43 = 1812			2D = 200V		M = ± 20%		
	55 = 2220			2E = 250V				
				2H = 500V				
				2J = 630V				
				3A = 1000V				
				3N = 1500V				
				3D = 2000V				
				3E = 2500V				
				3U = 3000V				

### PACKAGING CODES

Code	EIA (inch)	IEC(mm)	7" Paper	7" Embossed	13" Paper	13" Embossed
03	0201	0603	H		N	
05	0402	1005	H		N	
15	0603	1608	T	U	M	L
21	0805	2012	T	U	M	L
31	1206	3216	T	U	M	L
32	1210	3225	T	U	M	L
42	1808	4520		Y		K
43	1812	4532		V		S
55	2220	5750		V		S

\*thickness determines paper or plastic embossed packaging

### DIELECTRIC

Dielectric	Operating Temperature (°C)	Capacitance Change Rate
X7R	-55~+125	±15%
X7T	-55~+125	±22/-33%
X8R	-55~+150	±15%
X8L	-55~+125	±15%
X8L	+125~+150	+15/-40%
X8G	-55~+150	0±30ppm/°C
NP0	-55~+125	0±30ppm/°C

### TYPICAL APPLICATIONS

#### X7R KAM

- High capacitance values
- Broadest voltage and cap offering
- Cameras
- Body control modules
- Infotainment
- ECU
- Climate control

#### X7T KAM

- Motor drive
- Door lock

#### NP0 KAM

- Extreme capacitance stability
- Automotive LED Lighting System
- Key fob
- Audio
- Touchscreen
- GPS
- Safety

#### X8G KAM

- Extreme capacitance stability
- High temperature
- Battery Management Systems
- Powertrain Sensors & Actuators
- Engine management
- Transmission control
- Safety

# Automotive MLCC, KAM Series

## General Specifications



### COMMERCIAL VS AUTOMOTIVE MLCC PROCESS COMPARISON

	Commercial	Automotive
<b>Administrative</b>	Standard Part Numbers. No restriction on who purchases these parts.	Specific Automotive Part Number. set to control supply of product to Automotive customers.
<b>Lot Qualification (Destructive Physical Analysis - DPA)</b>	As per EIA RS469	Increased sample plan stricter criteria.
<b>Visual/Cosmetic Quality</b>	Standard process and inspection	100% inspection
<b>Application Robustness</b>	Standard sampling for accelerated wave solder	Increased sampling for accelerated wave solder followed by lot by lot reliability testing.

All Tests have Accept/Reject Criteria 0/1

# Automotive MLCC - C0G


## General Specifications

### TYPICAL APPLICATIONS

- Extreme capacitance stability
- Automotive LED Lighting System
- Key fob
- Audio
- Touchscreen
- GPS
- Safety

### ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support

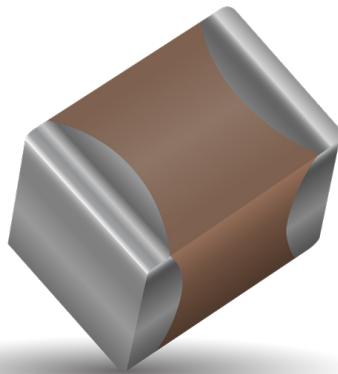

## Automotive MLCC - C0G



## Capacitance Range

Case Size		0402				0603				0805				1206				1210				1812							
Length (L)	mm (in.)	1.00 ± 0.10 (0.040 ± 0.004)				1.60 ± 0.15 (0.063 ± 0.006)				2.01 ± 0.20 (0.079 ± 0.008)				3.20 ± 0.20 (0.126 ± 0.008)				3.20 ± 0.20 (0.126 ± 0.008)				4.5 ± 0.3 (0.177 ± 0.012)							
Width (W)	mm (in.)	0.50 ± 0.10 (0.020 ± 0.004)				0.81 ± 0.15 (0.032 ± 0.006)				1.25 ± 0.20 (0.049 ± 0.008)				1.60 ± 0.20 (0.063 ± 0.008)				2.50 ± 0.20 (0.098 ± 0.008)				3.2 ± 0.2 (0.126 ± 0.008)							
Terminal (t)	mm (in.)	0.25 ± 0.15 (0.010 ± 0.006)				0.35 ± 0.15 (0.014 ± 0.006)				0.50 ± 0.25 (0.020 ± 0.010)				0.50 ± 0.25 (0.020 ± 0.010)				0.50 ± 0.25 (0.020 ± 0.010)				0.61 ± 0.36 (0.024 ± 0.014)							
WVDC		25V	50V	100V	25V	50V	100V	200V	250V	25V	50V	100V	200V	250V	500V	630V	25V	50V	100V	200V	250V	500V	630V	1000V	50V	100V	200V		
Cap (pF) OR5	0.5	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	G	Q	Q	Q	Q	Q	Q	Y	Y	Y		
1R0	1.0	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	Q	Q	Q	Q	Q	Q	Y	Y	Y		
100	10	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
120	12	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
150	15	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
180	18	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
220	22	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
270	27	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
330	33	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
390	39	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
470	47	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
560	56	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
680	68	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	Q	Q	Q	Q	Q	Q	Y	Y	Y	
820	82	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	D	D	D	D	D	D	Y	Y	Y	
101	100	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	D	D	D	D	D	D	Y	Y	Y	
121	120	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	G	G	D	D	D	F	F	F	K	Y	Y	
151	150	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	K	Y	Y	
181	180	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	K	Y	Y	
221	220	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	K	Y	Y	
271	270	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	K	Y	Y	
331	330	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	K	Y	Y	
391	390	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	K	Y	Y	
471	470	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	N	G	D	D	D	F	F	F	K	Y	Y	
561	560	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	Y	Y	Y	
681	680	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	G	G	D	D	D	F	F	F	Y	Y	Y	
821	820	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	N	G	G	D	D	D	F	F	F	Y	Y	Y
102	1000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	N	G	G	D	D	D	F	F	F	K*	Y	Y
122	1200	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	N	D	D	D	D	F	F	C*	C*	Y	Y	Y
152	1500	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	N	N	D	D	D	D	F	F	G*	G*	Y	Y	Y
222	2200	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	D	D	D	F	G*	G*	G*	G*	G*	G*
272	2700	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	B	B	B	G*	G*	G*	G*	G*	G*	G*	G*	G*	G*
332	3300	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	G	G	G	G	G	G	G
392	3900	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	G	G	G	G	G	G	G
472	4700	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	G	G	G	G	G	G	G
562	5600	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	G	G	G	G	G	G	G
682	6800	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	K*	
822	8200	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	K*	
103	10000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	L*	
123	12000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	K*	
153	15000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
183	18000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
223	22000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
273	27000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
333	33000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
393	39000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
473	47000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
563	56000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	L*	L*	L*	L*	L*	L*	
683	68000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	K*	
823	82000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	K*	
104	100000	A	A	A	A	A	A	A	B	B	B	B	B	B	B	B	G	G	G	G	G	G	K*	K*	K*	K*	K*	K*	

\* These dimensions differ from the standard in table above and are:

0603 L = 1.6 ± 0.2 mm , W = 0.8 ± 0.2 mm

1210 L = 3.2 ± 0.4 mm , W = 2.5 ± 0.3 mm

# Automotive MLCC - X7R / X7T

## General Specifications

### TYPICAL APPLICATIONS

#### X7R KAM


- High capacitance values
- Broadest voltage and cap offering
- Cameras
- Body control modules
- Infotainment
- ECU
- Climate control

#### X7T KAM

- Motor drive
- Door lock

### ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support

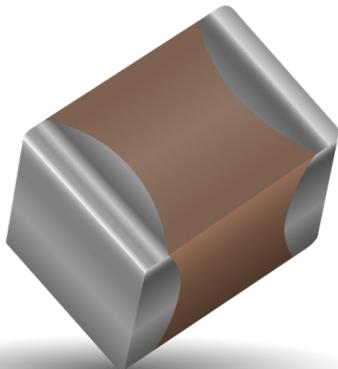

# Automotive MLCC - X7R, 4V to 500V

## Capacitance Range

SIZE		0201		0402		0603		0805		1206		1210		1812		2220									
Soldering		Reflow/Wave		Reflow/Wave		Reflow/Wave		Reflow/Wave		Reflow/Wave		Reflow Only		Reflow Only		Reflow Only									
(L) Length	mm (in.)	0.6 ± 0.09 (0.024 ± 0.004)		1 ± 0.1 (0.04 ± 0.004)		1.6 ± 0.15 (0.063 ± 0.006)		2.01 ± 0.2 (0.079 ± 0.008)		3.2 ± 0.2 (0.126 ± 0.008)		3.2 ± 0.2 (0.126 ± 0.008)		4.5 ± 0.3 (0.177 ± 0.012)		5.7 ± 0.5 (0.224 ± 0.02)									
(W) Width	mm (in.)	0.3 ± 0.09 (0.011 ± 0.004)		0.5 ± 0.1 (0.02 ± 0.004)		0.81 ± 0.15 (0.032 ± 0.006)		1.25 ± 0.2 (0.049 ± 0.008)		1.6 ± 0.2 (0.063 ± 0.008)		2.5 ± 0.2 (0.098 ± 0.008)		3.2 ± 0.2 (0.126 ± 0.016)		5 ± 0.4 (0.197 ± 0.016)									
(t) Terminal	mm (in.)	0.18 ± 0.09 (0.007 ± 0.004)		0.25 ± 0.15 (0.01 ± 0.006)		0.35 ± 0.15 (0.014 ± 0.006)		0.5 ± 0.25 (0.02 ± 0.01)		0.5 ± 0.25 (0.02 ± 0.01)		0.5 ± 0.25 (0.02 ± 0.01)		0.61 ± 0.36 (0.024 ± 0.014)		0.64 ± 0.39 (0.025 ± 0.015)									
WVDC		6.3V	10V	4V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	100V	200V	250V	500V							
101	Cap 100															Q	Q								
221	(pF) 220				A A A	A A A	A A A	A A A	A A A							Q	Q								
271	270				A A A	A A A	A A A	A A A	A A A							Q	Q								
331	330				A A A	A A A	A A A	A A A	A A A							Q	Q								
391	390				A A A	A A A	A A A	A A A	A A A							Q	Q								
471	470				A A A	A A A	A A A	A A A	A A A							Q	Q								
561	560				A A A	A A A	A A A	A A A	A A A							Q	Q								
681	680				A A A	A A A	A A A	A A A	A A A							Q	Q								
821	820				A A A	A A A	A A A	A A A	A A A							Q	Q								
102	1000				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
122	1220				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
152	1500				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
182	1800				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
222	2200				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
272	2700				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
332	3300				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
392	3900				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
472	4700				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
562	5600				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
682	6800				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
822	8200				A A A	A A A	A A A	A A A	A A A	B Q Q Q Q Q Q Q Q Y Y															
103	Cap 0.01				A A A	A A A	A A A	A A A	A A A	B G Q Q Q Q Q Q Q Q Y Y															
123	(μF) 0.012				A F F	A A A	A A A	A A A	A A A	B N Q Q Q Q Q Q G Y Y															
153	0.015				A F F	F F	A A A	A A A	A A A	B N Q Q Q Q Q Q G Y Y															
183	0.018				A F F	F F	A A A	A A A	A A A	B N Q Q Q Q Q Q G Y Y															
223	0.022				A F F	F F	A A A	A A A	A A A	B B B B K K B B B B B G G Q Q Q Q Q Q G Y Y															
273	0.027				A F F	F F	A A A	A B		B B B B K K B B B B B G G Q Q Q Q Q Q G Y Y															
333	0.033				A F F	F F	A A A	A A A	B	B B B K K B B B B B G G Q Q Q Q Q Q G Y Y															
393	0.039				F F	F F	A A A	A A A	B	B B B K K B B B B B G G Q Q Q Q Q Q G Y Y															
473	0.047				F F	F F	A A A	A A A	B	B B B K K B B B B B G G Q Q Q Q Q Q G Y Y															
563	0.056				F F	F F	F F	A A A	A B	B B B B K B B B B B G G Q Q Q Q Q Q C G Y Y															
683	0.068				F F	F F	F F	A A A	A B	B B B B K B B B B B G G Q Q Q Q Q Q C G Y Y															
823	0.082				F F	F F	F F	A A A	A B	B B B K B B B B B G G Q Q Q Q Q Q G G Y Y															
104	0.10	A			F F F F	A A A A	B			B B B B K K B B B B B G G Q Q Q Q Q Q G G Y Y							A								
124	0.12				F F F F	A B B B				B B B K K B B B B B G G Q Q Q Q F G G Y Y															
154	0.15				F F F F	F F	A B B B			B B B K K B B B B B G G Q Q Q Q F K G Y Y															
224	0.22				F F F F	C	A B B B			J K K K B B B B B G G Q Q Q Q F G G Z Z															
334	0.33						B B B B			K K K K B B B B B G G Q Q Q Q G L L G G															
474	0.47	C(X7T) C(X7T)	A A			B B B				N E G G F F F G G G G G G G G															
684	0.68									N G G G F F F G G G G G G G G															
105	1.0	C(X7T)	A C							K K K K K K N G G G F G G G G G G G G															
155	1.5									G G G G G G F G G G G G G G G G G G G G															
225	2.2				C(X7T) C(X7T)	A A				G G G G G G L L L L L L L L L L L L L L															
335	3.3									K L															
475	4.7				C(X7T)	C				G G G G G G J J J J J J J J J J J J J J															
106	10				C(X7T)					H* H* L L L L L L L L L L L L L L L L L L						C C C C									
226	22				C(X7T)										C										
WVDC		6.3V	10V	4V	6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	100V	200V	250V	500V							
Size		0201			0402					0603(KAM15)						1206(KAM31)									
																1210(KAM32)									
																1812(KAM43)									
																2220(KAM55)									
Case Size		0201(KAM03)		0402(KAM05)		0603(KAM15)		0805(KAM21)		1206(KAM31)		1210(KAM32)		1812(KAM43)		2220(KAM55)									
Thickness Letter		A	C	A	F	C	A	B	C	B	J	K	A	B	N	E	G	H	Q	C	F	G	K		
Max Thickness(mm)		0.33	0.39	0.56	0.6	0.70	0.90	0.95	1.00	0.94	1.27	1.40	1.45	0.94	1.27	1.52	1.78	1.9	0.94	1.27	1.52	1.78	2.29	2.80	1.02
Carrier Tape	PAPER	PAPER	PAPER	PAPER	PAPER	PAPER	PAPER	PAPER	PAPER	EMB	EMB	EMB	PAPER	EMB	EMB	EMB	EMB	EMB	PAPER	EMB	EMB	EMB	EMB	EMB	
Packaging Code 7'reel	H	H	H	H	T	T	T	T	U	U	U	T	U	U	U	T	U	U	U	U	U	V	V	V	
Packaging Code 13'reel	N	N	N	N	M	M	M	M	L	L	M	L	L	L	M	L	L	L	L	L	L	L	S	S	
PAPER																			EMBOSSING (EMB)						

\*These dimensions differ from the standard in table above and are:

Length (mm) 3.2 ± 0.4

Width (mm) 1.6 ± 0.3



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at [www.kyocera-avx.com/disclaimer/](http://www.kyocera-avx.com/disclaimer/) by reference and should be reviewed in full before placing any order.

# Automotive MLCC - X7R, 630V to 3000V

## Capacitance Range

### PREFERRED SIZES ARE SHADED

Case Size	1206				1210				1808				1812				2220				
Soldering	Reflow/Wave				Reflow/Wave				Reflow Only				Reflow Only				Reflow Only				
(L) Length mm (in.)	3.2 ± 0.2 (0.126 ± 0.008)				3.2 ± 0.2 (0.126 ± 0.008)				4.57 ± 0.25 (0.18 ± 0.01)				4.5 ± 0.3 (0.177 ± 0.012)				5.7 ± 0.5 (0.224 ± 0.02)				
W) Width mm (in.)	1.6 ± 0.2 (0.063 ± 0.008)				2.5 ± 0.2 (0.098 ± 0.008)				2.03 ± 0.25 (0.08 ± 0.01)				3.2 ± 0.2 (0.126 ± 0.008)				5 ± 0.4 (0.197 ± 0.016)				
(t) Terminal max	0.5 ± 0.25 (0.02 ± 0.01)				0.5 ± 0.25 (0.02 ± 0.01)				0.61 ± 0.36 (0.024 ± 0.014)				0.61 ± 0.36 (0.024 ± 0.014)				0.64 ± 0.39 (0.025 ± 0.015)				
Voltage (V)	630	1000	1500	2000	2500	630	1000	1500	2000	630	1000	1500	2000	2500	3000	630	1000	1500	2000	2500	3000
101 Cap 100 pF	B	B	B	B	B																
121 120 pF	B	B	B	B	B																
151 150	B	B	B	B	B																
181 180	B	B	B	B	B																
221 220	B	B	B	B	B					B	B	B	B	B	B						
271 270	B	B	B	B	B	H	H	H	H	B	B	B	B	B	B						
331 330	B	B	B	B	B	H	H	H	H	B	B	B	B	B	B	E					
391 390	B	B	B	B	B	H	H	H	H	B	B	B	B	B	B	E					
471 470	B	B	B	B	B	H	H	H	H	B	B	B	B	B	B	E	E	E	E	E	E
561 560	B	B	B	B	B	H	H	H	H	B	B	B	B	B	B	E	E	E	E	E	E
681 680	B	B	B	B	B	H	H	H	H	B	B	B	B	B	B	E	E	E	E	E	E
821 820	B	B	B	B	B	H	H	H	H	B	B	C	C	C	C	E	E	E	E	E	E
102 1000	B	B	B	B	B	H	H	H	H	B	B	C	C	C	C	E	E	E	E	Z	Z
122 1220	D	A	A	A		H	H	H	H							F	F	F	F	Z	Z
152 1500	D	A	A	A		H	H	H	H							F	F	F	F	Z	Z
182 1800	D	A	A			H	H	H	H							F	F	F	F	Z	Z
222 2200	D	A	A			H	H	H	H							F	F	F	F	Z	Z
272 2700	D	A	A			H	H	H	H							F	F	F	F	Z	Z
332 3300	D	A				H	H	H	H							F	F	F	F	Z	Z
392 3900	D	A				H	H	H	H							F	F	F	F	Z	Z
472 4700	D	A				H	H	H	H							F	F	J	J	Z	Z
562 5600	D	A				H	H	H	H							F	F	J	J	Z	Z
682 6800	A	A				H	H									F	F	J	J	Z	Z
822 8200	A					H	H									F	F	J	J	C	C
103 Cap 0.01	A					H	H									F	F	J	J	C	C
123 0.012						H	H									F	F	J	J	C	C
153 0.015						H	H									F	F	J	J	C	C
183 0.018						H										F	F			C	C
223 0.022						H										F	F			C	C
273 0.027						H										F	F			C	C
333 0.033																F				C	C
393 0.039																F				C	C
473 0.047																F				C	C
563 0.056																				C	C
683 0.068																				C	C
823 0.082																				C	C
104 0.1																				C	C
124 0.12																				C	
154 0.15																				C	
224 0.22																					
334 0.33																					
474 0.47																					
684 0.68																					
105 1																					
WVDC	630	1000	1500	2000	2500	630	1000	1500	2000	630	1000	1500	2000	2500	3000	630	1000	1500	2000	2500	3000
Size	1206				1210				1808				1812				2220				

NOTE: Contact factory for non-specified capacitance values

Case Size	1206(KAM31)			1210(KAM32)			1808(KAM42)			1812(KAM43)			2220(KAM55)		
Thickness Letter	B	D	A	H	B	C	E	F	J	Z	C				
Max Thickness	0.94	1.45	1.80	1.80	1.80	2.21	1.80	2.21	2.80	2.21	2.80				
Carrier Tape	PAPER	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB			
Packaging Code 7'reel	T	U	U	U	Y	Y	V	V	V	V	V	V			
Packaging Code 13'reel	M	L	L	L	K	K	S	S	S	S	S	S			
PAPER							EMBOSSED (EMB)								



The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at [www.kyocera-avx.com/disclaimer/](http://www.kyocera-avx.com/disclaimer/) by reference and should be reviewed in full before placing any order.

# Automotive MLCC - X8R / X8L


## General Specifications

### TYPICAL APPLICATIONS

- All market sectors with a 150°C requirement
- Automotive on engine applications
- Oil exploration applications
- Hybrid automotive applications
  - Battery control
  - Inverter / converter circuits
  - Motor control applications
  - Water pump
- Hybrid commercial applications
  - Emergency circuits
  - Sensors
  - Temperature regulation


### ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support

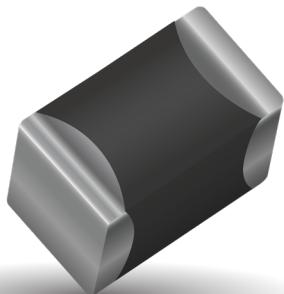

### ADVANTAGES OF X8R AND X8L MLC CAPACITORS

- Both ranges are qualified to the highest automotive AEC-Q200 standards
- Excellent reliability compared to other capacitor technologies
- RoHS compliant
- Low ESR / ESL compared to other technologies
- Tin solder finish
- FLEXITERM® available
- 100V range available

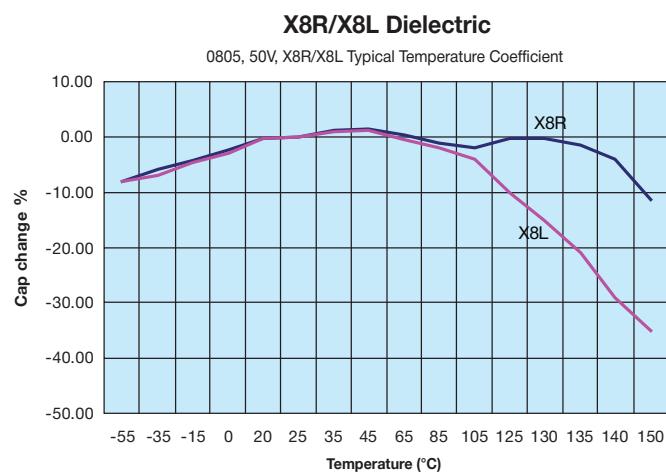

# Automotive MLCC - X8R / X8L

## Capacitance Range

KYOCERA AVX has developed a range of multilayer ceramic capacitors designed for use in applications up to 150°C. These capacitors are manufactured with an X8R and an X8L dielectric material. X8R material has capacitance variation of  $\pm 15\%$  between -55°C and +150°C. The X8L material has capacitance variation of  $\pm 15\%$  between -55°C to 125°C to 125°C and  $+15/40\%$  from +125°C to +150°C.

The need for X8R and X8L performance has been driven by customer requirements for parts that operate at elevated temperatures. They provide a highly reliable capacitor with low loss and stable capacitance over temperature.

They are ideal for automotive under the hood sensors, and various industrial applications. Typical industrial application would be drilling monitoring system. They can also be used as bulk capacitors for high temperature camera modules.

### X8R

SIZE		0402		0603		0805		1206	
Soldering		Reflow/Wave		Reflow/Wave		Reflow/Wave		Reflow/Wave	
(L) Length	mm (in.)	1.0 ± 0.2 (0.04 ± 0.008)		1.6 ± 0.15 (0.063 ± 0.006)		2.0 ± 0.2 (0.079 ± 0.008)		3.2 ± 0.2 (0.126 ± 0.008)	
(W) Width	mm (in.)	0.5 ± 0.2 (0.02 ± 0.008)		0.81 ± 0.15 (0.032 ± 0.006)		1.25 ± 0.2 (0.049 ± 0.008)		1.6 ± 0.2 (0.063 ± 0.008)	
(t) Terminal	mm (in.)	0.25 ± 0.15 (0.01 ± 0.006)		0.35 ± 0.15 (0.014 ± 0.006)		0.5 ± 0.25 (0.02 ± 0.01)		0.5 ± 0.25 (0.02 ± 0.01)	
WVDC		50V	25V	50V	100V	25V	50V	100V	
271	Cap 270	A	A	A	A	B	B	B	
331	(pF) 330	A	A	A	A	B	B	B	
471	470	A	A	A	A	B	B	B	
681	680	A	A	A	A	B	B	B	
102	1000	A	A	A	A	B	B	B	B
152	1500	A	A	A	A	B	B	B	B
182	1800	A	A	A	A	B	B	B	B
222	2200	A	A	A	A	B	B	B	B
272	2700	A	A	A	A	B	B	B	B
332	3300	A	A	A	A	B	B	B	B
392	3900	A	A	A	A	B	B	B	B
472	4700	A	A	A	A	B	B	B	B
562	5600			A	A	B	B	B	B
682	6800			A	A	B	B	B	B
822	8200			A	A	A	B	B	B
103	Cap 0.01			A	A	B	B	B	B
123	(uF) 0.012			A	A	B	B	B	B
153	0.015			A	A	B	B	B	B
183	0.018			A	A	B	B	B	B
223	0.022			A	A	B	B	B	B
273	0.027			A	A	B	B	B	B
333	0.033			A	A	B	B	B	B
393	0.039			A	A	B	B	B	B
473	0.047			A	A	B	B	B	B
563	0.056			A	A	N	N		
683	0.068			A	A	N	N		
823	0.082			A	A	N	N		
104	0.1			A	A	N	N		
124	0.12			A	A	N	N		
154	0.15			A	A	N	N		
184	0.18			A		N	N		
224	0.22			A		N	N		
274	0.27					N	N		
334	0.33					N	N		
394	0.39					E	G		
474	0.47					E	G		
684	0.68					G	G		
824	0.82					G	G		
105	1					G	G		
WVDC		50V	25V	50V	100V	25V	50V	100V	
SIZE		0402	0603	0805	1206				

### X8L


SIZE		0603		0805		1206		1210		2220	
Soldering		Reflow/Wave		Reflow/Wave		Reflow/Wave		Reflow/Wave		Reflow Only	
(L) Length	mm (in.)	1.6 ± 0.15 (0.063 ± 0.006)		2.01 ± 0.2 (0.079 ± 0.008)		3.2 ± 0.2 (0.126 ± 0.008)		3.2 ± 0.2 (0.126 ± 0.008)		5.7 ± 0.5 (0.224 ± 0.02)	
(W) Width	mm (in.)	0.81 ± 0.15 (0.032 ± 0.006)		1.25 ± 0.2 (0.049 ± 0.008)		1.6 ± 0.2 (0.063 ± 0.008)		2.5 ± 0.2 (0.098 ± 0.008)		5 ± 0.4 (0.197 ± 0.016)	
(t) Terminal	mm (in.)	0.35 ± 0.15 (0.014 ± 0.006)		0.5 ± 0.25 (0.02 ± 0.01)		0.5 ± 0.25 (0.02 ± 0.01)		0.5 ± 0.25 (0.02 ± 0.01)		0.64 ± 0.39 (0.025 ± 0.015)	
WVDC		25V	50V	100V	25V	50V	100V	16V	25V	50V	100V
271	Cap 270	A	A	B	B	B	B				
331	(pF) 330	A	A	A	B	B	B				
471	470	A	A	A	B	B	B				
681	680	A	A	A	B	B	B				
102	1000	A	A	A	B	B	B	B	B	B	B
152	1500	A	A	A	B	B	B	B	B	B	B
182	1800	A	A	A	B	B	B	B	B	B	B
222	2200	A	A	A	B	B	B	B	B	B	B
272	2700	A	A	A	B	B	B	B	B	B	B
332	3300	A	A	A	B	B	B	B	B	B	B
392	3900	A	A	A	B	B	B	B	B	B	B
472	4700	A	A	A	B	B	B	B	B	B	B
562	5600	A	A	A	B	B	B	B	B	B	B
682	6800	A	A	A	B	B	B	B	B	B	B
822	8200	A	A	A	B	B	B	B	B	B	B
103	Cap 0.01	A	A	A	B	B	B	B	B	B	B
123	(uF) 0.012	A	A	B	B	B	B	B	B	B	B
153	0.015	A	A	B	B	B	B	B	B	B	B
183	0.018	A	A	B	B	B	B	B	B	B	B
223	0.022	A	A	B	B	B	B	B	B	B	B
273	0.027	A	A	B	B	B	B	B	B	B	B
333	0.033	A	A	B	B	A	B	B	B	B	B
393	0.039	A	A	B	B	A	B	B	B	B	B
473	0.047	A	A	B	B	A	B	B	B	B	B
563	0.056	A	A	B	B	A	B	B	B	B	B
683	0.068	A	A	B	B	A	B	B	B	B	B
823	0.082	A	A	B	B	A	B	B	B	B	B
104	0.1	A	A	B	B	A	B	B	B	N	
124	0.12			B	A			B	B	N	
154	0.15			B	A			B	B	N	
184	0.18			A	A			B	B	G	
224	0.22			A	A			B	B	G	
274	0.27			A	A			B	N	N	
334	0.33			A	A			B	N	E	
394	0.39			A	A			N	N	E	
474	0.47			A	A			N	N	E	
684	0.68			A	A			N	G	G	
824	0.82			A	A			N	G	G	
105	1			A	A			N	G	G	
155	1.5			A				G	G	G	
225	2.2			A				G	G	G	L
475	4.7							G	G		L
106	10									L	L
WVDC		25V	50V	100V	25V	50V	100V	16V	25V	50V	100V
SIZE		0603	0805	1206							2220

# Automotive MLCC - X8G

## General Specifications

### TYPICAL APPLICATIONS

- Extreme capacitance stability
- High temperature
- Battery Management Systems
- Powertrain Sensors & Actuators
- Engine management
- Transmission control
- Safety

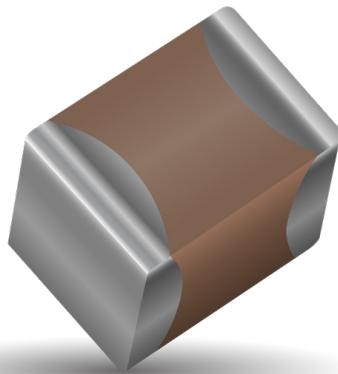

### ENGINEERING TOOLS

- Samples
- Technical Articles
- Application Engineering
- Application Support



# Automotive X8G (-55°C to 150°C , ±30ppm/°C)

## Capacitance Range

SIZE		0402		0603		0805	
Soldering		Reflow/Wave		Reflow/Wave		Reflow/Wave	
(L) Length	mm (in.)	1 ± 0.1 (0.04 ± 0.004)		1.6 ± 0.15 (0.063 ± 0.006)		2.01 ± 0.2 (0.079 ± 0.008)	
(W) Width	mm (in.)	0.5 ± 0.1 (0.02 ± 0.004)		0.81 ± 0.15 (0.032 ± 0.006)		1.25 ± 0.2 (0.049 ± 0.008)	
(t) Terminal	mm (in.)	0.25 ± 0.15 (0.01 ± 0.006)		0.35 ± 0.15 (0.014 ± 0.006)		0.5 ± 0.25 (0.02 ± 0.01)	
WVDC		25V	50V	25V	50V	50V	100V
0R5	0.5			A	A	B	B
1R0	1.0			A	A	B	B
1R2	1.2			A	A	B	B
1R5	1.5			A	A	B	B
1R8	1.8			A	A	B	B
2R2	2.2			A	A	B	B
2R7	2.7			A	A	B	B
3R3	3.3			A	A	B	B
3R9	3.9			A	A	B	B
4R7	4.7			A	A	B	B
5R0	5			A	A	B	B
5R6	5.6			A	A	B	B
6R8	6.8			A	A	B	B
8R2	8.2			A	A	B	B
100	10			A	A	B	B
120	12			A	A	B	B
150	15			A	A	B	B
180	18			A	A	B	B
220	22			A	A	B	B
270	27			A	A	B	B
330	33			A	A	B	B
390	39			A	A	B	B
470	47	A	A	A	A	B	B
510	51	A	A	A	A	B	B
560	56	A	A	A	A	B	B
680	68	A	A	A	A	B	B
820	82	A	A	A	A	B	B
101	100	A	A	A	A	B	B
121	120			A	A	B	B
151	150			A	A	B	B
181	180			A	A	B	B
221	220			A	A	B	B
271	270			A	A		
331	330			A	A		
391	390			A	A		
471	470			A	A		
561	560			A	A		
681	680			A	A		
821	820						
102	1000						
122	1200						
152	1500						
182	1800						
222	2200						
272	2700						
332	3300						
392	3900						
472	4700						
562	5600						
682	6800						
103	10nF						
WVDC		25V	50V	25V	50V	50V	100V
Size		0402		0603		0805	

Case Size	0402(KAM05)	0603(KAM15)	0805(KAM21)
Letter	A	A	B
Max Thickness mm	0.56	0.90	0.94
Carrier Tape	Paper	Paper	Paper
Packaging Code 7"reel	H	T	T
Packaging Code 13"reel	N	M	M
PAPER			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## KYOCERA AVX:

<a href="#">KAM15CT70J106KT</a>	<a href="#">KAM05CT70J225KH</a>	<a href="#">KAM21AT70J226KU</a>	<a href="#">KAM03CT70J105KH</a>	<a href="#">KAM05CT70J475KH</a>
<a href="#">KAM15CT70J226KT</a>	<a href="#">KAM32HR73A332KU</a>	<a href="#">KAM32LCG2J223JU</a>	<a href="#">KAM15BR71E224KT</a>	<a href="#">KAM21KR71H225KU</a>
<a href="#">KAM31GCG2J103JU</a>	<a href="#">KAM32LCG2J333JU</a>	<a href="#">KAM32LCG3A103JU</a>	<a href="#">KAM32LL81E106KU</a>	<a href="#">KAM32LL81H475KU</a>
<a href="#">KAM15ACG1E103JT</a>	<a href="#">KAM31GR71C106KU</a>	<a href="#">KAM32GCG3A472JU</a>	<a href="#">KAM32KCG3A102JU</a>	<a href="#">KAM05ACG1H0R5CH</a>
<a href="#">KAM05ACG1H100FH</a>	<a href="#">KAM05ACG1H100FN</a>	<a href="#">KAM05ACG1H100JH</a>	<a href="#">KAM05ACG1H101KH</a>	<a href="#">KAM05ACG1H120FH</a>
<a href="#">KAM05ACG1H120JH</a>	<a href="#">KAM05ACG1H150FH</a>	<a href="#">KAM05ACG1H150FN</a>	<a href="#">KAM05ACG1H150JH</a>	<a href="#">KAM05ACG1H180FH</a>
<a href="#">KAM05ACG1H180JH</a>	<a href="#">KAM05ACG1H1R0BH</a>	<a href="#">KAM05ACG1H1R0CH</a>	<a href="#">KAM05ACG1H220FH</a>	<a href="#">KAM05ACG1H220FN</a>
<a href="#">KAM05ACG1H220JH</a>	<a href="#">KAM05ACG1H270FH</a>	<a href="#">KAM05ACG1H270JH</a>	<a href="#">KAM05ACG1H330FH</a>	<a href="#">KAM05ACG1H330JH</a>
<a href="#">KAM05ACG1H390FH</a>	<a href="#">KAM05ACG1H390FN</a>	<a href="#">KAM05ACG1H390JH</a>	<a href="#">KAM05AR71C103JH</a>	<a href="#">KAM05AR71C103KH</a>
<a href="#">KAM05AR71C103KN</a>	<a href="#">KAM05AR71C103MH</a>	<a href="#">KAM05AR71C153KH</a>	<a href="#">KAM05AR71C183KH</a>	<a href="#">KAM05AR71C223KH</a>
<a href="#">KAM05AR71C273JH</a>	<a href="#">KAM05AR71C273KH</a>	<a href="#">KAM05AR71C333KH</a>	<a href="#">KAM05AR71C472KH</a>	<a href="#">KAM05AR71C472KN</a>
<a href="#">KAM05AR71C682KH</a>	<a href="#">KAM05AR71C682KN</a>	<a href="#">KAM05AR71E103KH</a>	<a href="#">KAM05AR71E103KN</a>	<a href="#">KAM05AR71H102JH</a>
<a href="#">KAM05AR71H102KH</a>	<a href="#">KAM05AR71H102KN</a>	<a href="#">KAM05AR71H102MH</a>	<a href="#">KAM05AR71H103KH</a>	<a href="#">KAM05AR71H122JH</a>
<a href="#">KAM05AR71H122KH</a>	<a href="#">KAM05AR71H152JH</a>	<a href="#">KAM05AR71H152KH</a>	<a href="#">KAM05AR71H152KN</a>	<a href="#">KAM05AR71H182JH</a>
<a href="#">KAM05AR71H182KH</a>	<a href="#">KAM05AR71H182KN</a>	<a href="#">KAM05AR71H221JH</a>	<a href="#">KAM05AR71H221KH</a>	<a href="#">KAM05AR71H221MH</a>
<a href="#">KAM05AR71H222JH</a>	<a href="#">KAM05AR71H222JN</a>	<a href="#">KAM05AR71H222KH</a>	<a href="#">KAM05AR71H222KN</a>	<a href="#">KAM05AR71H271JH</a>
<a href="#">KAM05AR71H271KH</a>	<a href="#">KAM05AR71H272JH</a>	<a href="#">KAM05AR71H272KH</a>	<a href="#">KAM05AR71H331JH</a>	<a href="#">KAM05AR71H331KH</a>
<a href="#">KAM05AR71H332JH</a>	<a href="#">KAM05AR71H332KH</a>	<a href="#">KAM05AR71H332KN</a>	<a href="#">KAM05AR71H391JH</a>	<a href="#">KAM05AR71H391KH</a>
<a href="#">KAM05AR71H392JH</a>	<a href="#">KAM05AR71H392KH</a>	<a href="#">KAM05AR71H471JH</a>	<a href="#">KAM05AR71H471KH</a>	<a href="#">KAM05AR71H471KN</a>
<a href="#">KAM05AR71H472JH</a>	<a href="#">KAM05AR71H472KH</a>	<a href="#">KAM05AR71H472KN</a>	<a href="#">KAM05AR71H472MH</a>	<a href="#">KAM05AR71H561JH</a>